




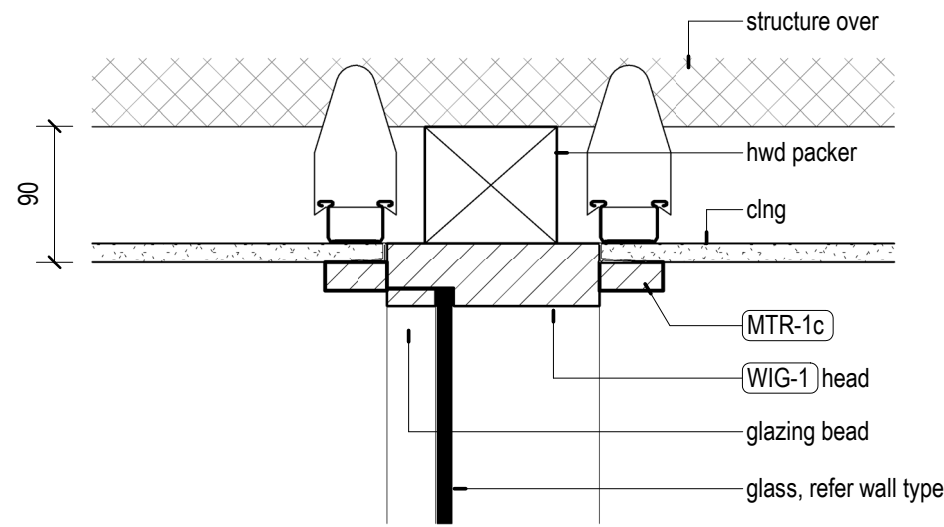


3 WIG-1 Head
1 : 5

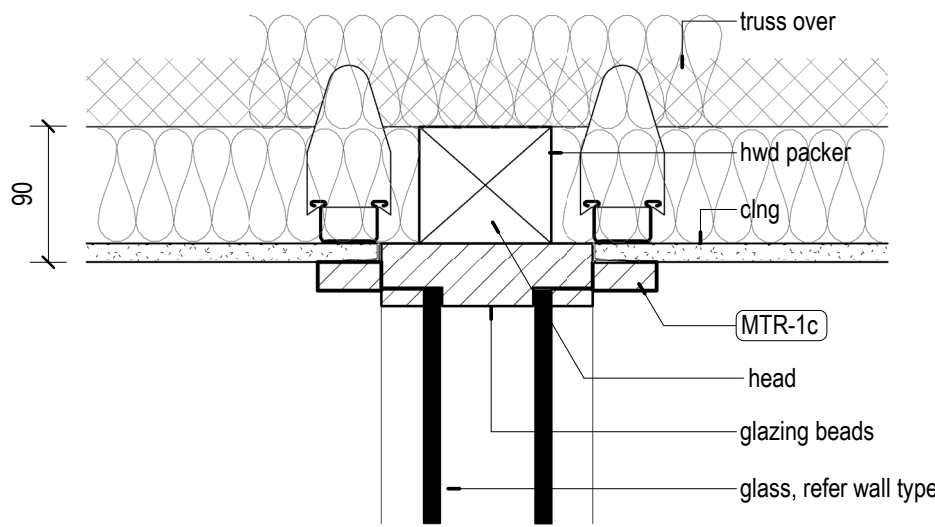


6 WIG-2 Head
1 : 5

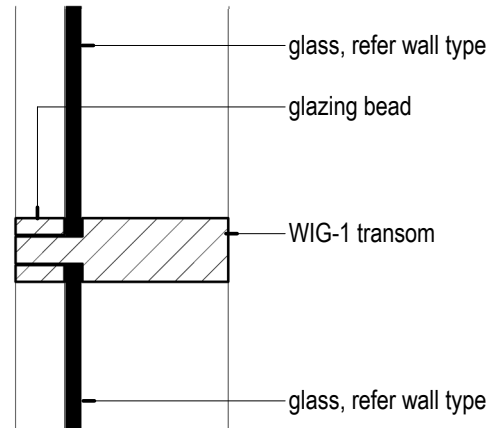


2 WIG-1 Transom Detail
1 : 5

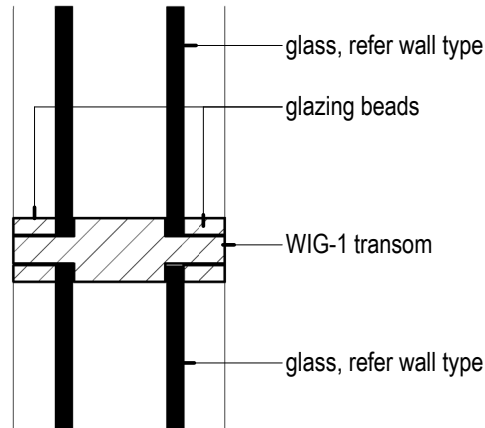

5 WIG-2 Transom Detail
1 : 5

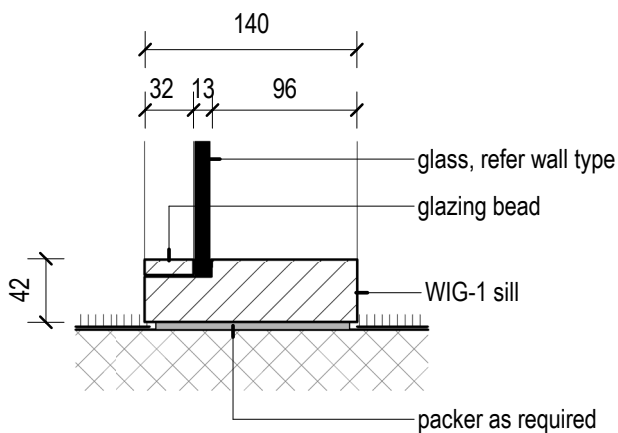

1 WIG-1 Sill Detail
1 : 5

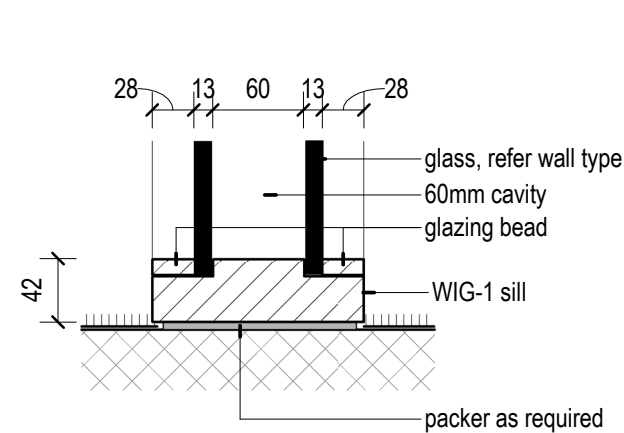

4 WIG-2 Sill Detail
1 : 5

DETAILS NOTES

- All aluminium flashings @ floor level to be min. 1.6 thick. Flashings to be installed with end dams at each end and fully sealed at the corners and vertical framing junctions. Flashings must be continuous and wrap around steel columns where they exist. Water hose test required for weatherproofing validation and flood test required for sub-sill after installation of sub-jamb & sub-sill.
- For all screw fixings between timber or aluminium framed cladding and the substrate, apply a blob of sealant before installation and seal screw heads after. Use stainless steel screws/anchors only.
- Install separation tape between dissimilar materials to prevent corrosion.

FACADE LEGEND

- WP-2 Ext. bonded membrane
- Folded aluminium flashing
- WP-1 or 3 Floor Waterproof Membrane
- WP-4 Ext. non-bonded membrane
- Roof sarking

Drawings include colour information. A black & white copy may not have all the information. This background is coloured blue.

brian hooper**architect**
m3architecture

ph: +61 7 3831 4644
11 saint james street petrie tce q 4000
info@m3architecture.com
www.m3architecture.com



project Stanwell New Projects Office
Switchyard Road,
Stanwell, QLD, 4702

title Section Details - Int Glazed
Partitions

drawn bg
checked jb
date March 2026
scale 1 : 5 at A1
drawing 25010 / cd A-720011 / T1

copyright ©
These designs, plans, specifications and the copyright herein are the property of the architect and must not be used, reproduced, or copied wholly or in part without the written permission of m3architecture Pty Ltd abn 23 079 044 545. Use figured dimensions in preference to scale. If there are any questions contact the architect.

1:5 at A1
0 50 100 150 200 250mm