

GENERAL ABBREVIATIONS

APPROX.	APPROXIMATE
AS.	AUSTRALIAN STANDARD
AT or -	AT (USE OF @ ONLY PERMITTED IN TITLE BLOCK SCALE)
AVE.	AVERAGE
BEL	BULK EXCAVATION LEVEL
BTM	BOTTOM
CL	CENTRE LINE
CONT.	CONTINUOUS
CTS.	CENTRES
DIA.	DIAMETER
DL	DEAD LOAD
DRG.	DRAWING
EF	EACH FACE
EMBED.	EMBEDMENT
EQ	EQUAL
EW	EACH WAY
FF	FAR FACE
FFL	FINISHED FLOOR LEVEL
HORIZ.	HORIZONTAL
kg/m³	KILOGRAM/CUBIC METRE
kg/m²	KILOGRAM/SQUARED METRE
KN	KILONEWTON
KPa	KILOPASCAL
LL	LIVE LOAD
LG	LONG
MAX.	MAXIMUM
Mpa	MEGAPASCAL
m	METRE
m²	SQUARED METRE
m³	CUBIC METRE
MIN.	MINIMUM
mm	MILLIMETRE
mm²	SQUARED MILLIMETRE
N	NEWTON
NF	NEAR FACE
NGL or EGL	NATURAL/EXISTING GROUND LEVEL
No.	NUMBER OF
NOM.	NOMINAL
NSOP.	NOT SHOWN ON PLAN
NTS	NOT TO SCALE
OA	OVERALL
OPP	OPPOSITE
Pa	PASCAL
PC	PRECAST CONCRETE
PT	POST TENSIONED
RC	REINFORCED CONCRETE
REO/REINF.	REINFORCEMENT
SDL	REDUCED/RELATIVE LEVEL
SIM.	SIMILAR
SMP	SURVEY MONITOR POINT
SSL	STRUCTURAL SLAB LEVEL
TBC	TO BE CONFIRMED
TOT	TOP OF CONCRETE
TOF	TOP OF FOOTING
TOP	TOP
TOS	TOP OF STEEL
TYPICAL.	TYPICAL
UIS	UNDERSIDE
UDL	UNFORMED DISTRIBUTED LOAD
UNO	UNLESS NOTED OTHERWISE
VARIES	VARIES
VERT.	VERTICAL
&	AND

RETENTION

BP	BORED PIER
CB	CAPPING BEAM
P	MAIN PILE
RW	RETAINING WALL
SP	SOLDIER PILE
SW	SHOTCRETE WALL

FOOTINGS

EB	EDGE BEAM
GB	GROUND BEAM
IB	INTERNAL BEAM
PC	PILECAP
PF	PAD FOOTING
RF	RAFT FOUNDATION
SF	STRIP FOOTING

CONCRETE COLUMNS

C	GENERAL COLUMN
CC	IN-SITU COLUMN
MC	MEGA COLUMN
PCC	PRECAST COLUMN
ST	STEEL CONCRETE FILLED TUBE COLUMN
TC	TOWER COLUMN

STRUCTURAL WALL

CW	IN-SITU CORE WALL
CPW	PRECAST CORE WALL
RC	GENERAL IN-SITU WALL
HB	HEADER BEAM
MW	LOADBEARING MASONRY WALL
NLB	NON-LOADBEARING WALL
OW	OUTRIGGER WALL
PW	PRECAST WALL
TW	LOADBEARING TIMBER WALL

STEELWORK

BASE	BASEPLATE
BR	HORIZONTAL BRACING
CAP	CAPPING PLATE
CFW	BACK TO BACK MEMBERS
CL	CONTINUOUS FILLET WELD
DP	CLEAT PLATE
END	STEEL DROPPER
FB	END PLATE
FF	FLY BRACE
FLG	FAR FACE
FSBW	FLANGE.
FW	FULL STRENGTH BUTT WELD
FT	FILLET WELD
G	FASCIA TRUSS
HD	GIRTS
LG	HEAVY DUTY
MG	LONG
MS	MILD STEEL
NF	NEAR FACE
OR	OUTRIGGERS
P	PURLINS
PF	PORTAL FRAME
PL	PLATE
PSB	PRIMARY BEAM
RP	FASCIA PURLIN
RSB	ROOF/RAFTER STEEL BEAM
S	STRUT
SB	GENERAL STEEL PRIMARY BEAM
SC	STEEL COLUMN
SJ	STEEL JOISTS
SS	STAIR STRINGER
SSB	SECONDARY BEAM
TB	TIE BEAM
TR	TRUSS
UIS	UNDERSIDE
VB	VERTICAL BRACING
?? BASE PL.	?mm THICK BASE PLATE
??CAP PL.	?mm THICK CAPPING PLATE
?CFW SITE	?mm CONTINUOUS SITE WELD
?CFW	?mm CONTINUOUS SHOP WELD

BOLT NOTATIONS

2M20 4.6/S BOLTS	2No. 20mm DIAMETER COMMERCIAL BOLTS TIGHTENED, SNUG TIGHT
2M20 8.8/S BOLTS	2No. 20mm DIAMETER HIGH STRENGTH BOLTS TIGHTENED, SNUG TIGHT
2M20 8.8/S BOLTS	2No. 20mm DIAMETER HIGH STRENGTH BOLTS TIGHTENED, SNUG TIGHT
2M20 8.8/TF BOLTS	2No. 20mm DIAMETER HIGH STRENGTH BOLTS TIGHTENED, FULLY TENSIONED IN FRICTION
2M20 8.8/TB BOLTS	2No. 20mm DIAMETER HIGH STRENGTH BOLTS TIGHTENED, FULLY TENSIONED IN BEARING MODE

STEEL SIZE NOTATION

16 Ø ROD	ROUND BAR
75x6 PL	FLAT/RECTANGULAR BAR
75x8 EA	EQUAL ANGLE
75x50x8 UA	UNEQUAL ANGLE
100x50x4.0 RHS	RECTANGULAR HOLLOW SECTION
125TFB	TAPERED FLANGE BEAM
150x9.0 SHS	SQUARE HOLLOW SECTION
165x5.0 CHS	CIRCULAR HOLLOW SECTION
200 PFC	PARALLEL FLANGE CHANNEL
250UC72.9	UNIVERSAL COLUMN
400WC361	WELDED COLUMN
610UB125	UNIVERSAL BEAM
1000WB258	WELDED BEAM
C15015	C-SECTION
EC15015	EXACTASUPER C-SECTION
EZ15015	EXACTASUPER Z-SECTION
MODIFIED	MODIFIED STEEL SECTION
Z15015	Z-SECTION

SLABS

BND	BONDEK
CJ	CONSTRUCTION JOINT
CND	CONDEK
DJ	DOWEL JOINT
EJ	EXPANSION JOINT
HC	HOLLOWCORE
HOB	HOB/PLINTH
IJ	ISOLATION JOINT
KJ	KEYED JOINT
MJ	MOVEMENT JOINT
PT	POST TENSIONED
RC	IN-SITU
SCJ	SAW CUT JOINT
TMJ	TEMPORARY MOVEMENT JOINT
UP	UPSTAND

RETENTION SYMBOLS

	TEMPORARY GROUND/ROCK ANCHOR (PLAN/SECTION)
	PERMANENT GROUND/ROCK ANCHOR (PLAN/SECTION)
	GROUND/ROCK ANCHOR (ELEVATION)
	DENOTES TEMPORARY BATTER LOCATION. REFER TO GEOTECHNICAL REPORT/ENGINEER FOR REQUIREMENTS & CONSTRAINTS.

STEELWORK POSITIONING

MEMBER SIZE OR MARK SUFFIXED WITH THE FOLLOWING	
/B	MEMBER IS BELOW
/BB	BACK TO BACK MEMBERS
/F	MEMBER IS ON FLAT (WEB HORIZONTAL)
/O	MEMBER IS OVER
/R	MEMBER IS RAKING OR SLOPED
/SK	STACKED MEMBERS
/U	MEMBER IS UNDERNEATH

STEELWORK FUNCTION

MEMBER SIZE OR MARK PREFIXED WITH THE FOLLOWING	
AN-	ANCHOR
B-	BEAM
PB-	PRIMARY OR TRANSFER BEAM
C-	COLUMN
D-	DROPPER
G-	GIRTS
H-	HEAD
HA-	HAUNCH
HB-	HORIZONTAL BRACING
J-	JOISTS
M-	MULLION
OB-	OPERABLE WALL SUPPORT BEAM
OR-	OUTRIGGER
P-	PURLINS
FP-	FASCIA PURLIN
R-	RAFTER
RA-	RAKING ANGLE
RC-	RAKING CHANNEL
S-	STRUT
SD-	STUD
ST-	STUB COLUMN
VB-	VERTICAL BRACE
XB-	CROSS BRACING
WB-	WALER BEAM


REINFORCEMENT

GRADE NOTATION

N	D500N DEFORMED BAR TO AS/NZS 4671
R	R250N PLAIN ROUND BAR TO AS/NZS 4671
SL OR RL	D500L DEFORMED BAR WELDED WIRE MESH TO AS/NZS 4671
W	D500L WIRE TO AS/NZS 4671

ADDITIONAL REINFORCEMENT NOTATION

B	BOTTOM
L	L SHAPED BAR
T	TOP
U	U SHAPED BAR
Z	Z SHAPED BAR
LIGS	LIGATURES
SEC	SECONDARY LAYER
3rd LAYER	3rd LAYER
4th LAYER	4th LAYER
ADD.	ADDITIONAL
LV	LENGTH VARIES
STAG	STAGGERED BARS

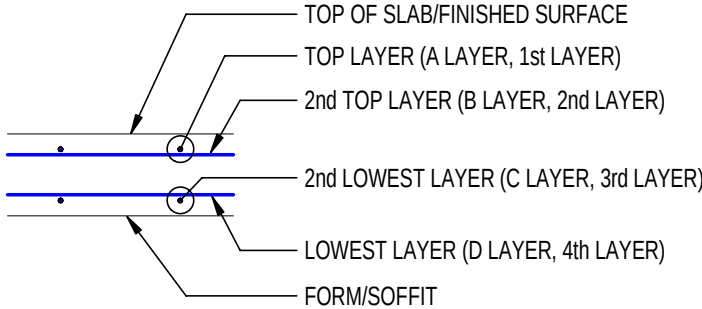

REINFORCEMENT NOTATION

10N10-275	NUMBER OF BARS, GRADE, DIAMETERS, CENTRES (CENTRES or number dropped where not required)
N10-300 LIGS	GRADE, SIZE – LIGS

CONCRETE PROFILE SYMBOLS

	SLAB THICKNESS
	DENOTES SLAB STEP (V=VARIES)
	DENOTES SLAB FOLD (V=VARIES)
	CRANK IN STRUCTURAL SLAB
	RAMP UP IN SLAB
	RAMP DOWN IN SLAB
	STAIR UP
	STAIR DOWN
	SLAB SPAN
	SLAB FALL
	SETDOWN AREA WET AREAS: XXmm MAX. TERRACES: XXmm MAX.
	PENETRATION FORMED
	PENETRATION ZONE. EXACT LOCATIONS & SIZES OF PENETRATIONS TO BE CONFIRMED/COORDINATION WITH SERVICES ENGINEER

REINFORCEMENT SYMBOLS

POST TENSION SYMBOLOGY

	POST TENSION LIVE END ANCHORAGE
	POST TENSION DEAD END ANCHORAGE
	POST TENSION SWAGED DEAD END ANCHORAGE
	POST TENSION PANNED LIVE END ANCHORAGE
	POST TENSION COUPLED ANCHORAGE
	POST TENSION UNCOUPLED ANCHORAGE
	POST TENSION DRAPE HEIGHT

REINFORCEMENT PLAN SYMBOLOGY

	REINFORCEMENT BARS AS/NZS 1100.501:2002 - SHAPE CODE 'S'
	REINFORCEMENT MESH AS/NZS 1100.501:2002 - SHAPE CODE 'M'
	REINFORCEMENT CLOSED LIGATURES AS/NZS 1100.501:2002 - SHAPE CODE 'HT'
	REINFORCEMENT CLOSED LIGATURES AS/NZS 1100.501:2002 - SHAPE CODE 'SH'

REINFORCEMENT PLAN/SECTION SYMBOLOGY

	REINFORCEMENT 'U' BAR AS/NZS 1100.501:2002 - SHAPE CODE 'U'
	REINFORCEMENT 'HOOK' BAR AS/NZS 1100.501:2002 - SHAPE CODE 'H'
	REINFORCEMENT 'DOUBLE HOOK' BAR AS/NZS 1100.501:2002 - SHAPE CODE 'HH'
	REINFORCEMENT 'Z' BAR AS/NZS 1100.501:2002 - SHAPE CODE 'RC'
	REINFORCEMENT 'L' BAR AS/NZS 1100.501:2002 - SHAPE CODE 'L'
	REINFORCEMENT 'DOUBLE L' BAR AS/NZS 1100.501:2002 - SHAPE CODE 'LL'
	REINFORCEMENT CRANKED BAR AS/NZS 1100.501:2002 - SHAPE CODE 'CC'
	REINFORCEMENT 'BENT UP' BAR AS/NZS 1100.501:2002 - SHAPE CODE 'J'
	REINFORCEMENT 'V' BAR REPRESENTATION (BEND LESS THEN 90°) AS/NZS 1100.501:2002 - SHAPE CODE 'V'
	REINFORCEMENT 'TRUSS' BAR AS/NZS 1100.501:2002 - SHAPE CODE 'JJ'
	REINFORCEMENT 'RIGHT ANGLED TRUSS' BAR AS/NZS 1100.501:2002 - SHAPE CODE 'RR'
	REINFORCEMENT LAP LOOP. REINFORCEMENT ON EACH SIDE OF LOOP IS IDENTICAL SIZE. REFER LAP TABLE FOR LAP LENGTHS
	REINFORCEMENT COUPLER. REINFORCEMENT ON EACH SIDE OF COUPLER IS IDENTICAL SIZE

REINFORCEMENT SECTION SYMBOLOGY

	REINFORCEMENT 'HELIX/SPIRAL' TIE AS/NZS 1100.501:2002 - SHAPE CODE 'SP'
	REINFORCEMENT 'LINK' TIE AS/NZS 1100.501:2002 - SHAPE CODE 'LH'
	REINFORCEMENT 'C' TIE AS/NZS 1100.501:2002 - SHAPE CODE 'LH'
	REINFORCEMENT 'DIAMOND' TIE AS/NZS 1100.501:2002 - SHAPE CODE 'DT'
	REINFORCEMENT 'CIRCULAR' TIE AS/NZS 1100.501:2002 - SHAPE CODE 'CT'

GENERAL SYMBOLS

	CENTER LINE OF ELEMENT
	SET OUT POINT OF ELEMENT
	RELATIVE LEVEL OF ELEMENT
	TOP OF STEEL ELEMENT
	DENOTES STRUCTURAL SLAB LEVEL
	DENOTES BULK EXCAVATION LEVEL
	DENOTES TOP OF FOOTING LEVEL
	DENOTES INDICATIVE NATURAL GROUND LEVEL
	DENOTES INDICATIVE EXISTING BUILDING FLOOR LEVEL
	DENOTES INDICATIVE BOTTOM OF FOUNDATION LEVEL TO BE CONFIRMED BY CONTRACTOR
	DENOTES GROUND ANCHOR LOCATION & REFERENCE. REFER SCHEDULE.

SHEET SYMBOLS

COORDINATION

ENGINEER TO REVIEW

TO BE CONFIRMED

TO BE REVIEWED

ON HOLD

	SECTION MARK
	DETAIL CALL OUT

STEEL SYMBOLS

STEEL CONNECTION SYMBOLOGY

	MOMENT CONNECTION
	MOMENT SPLICE CONNECTION
	WEB SPLICE CONNECTION
	WEB CONNECTION
	BASE PLATE CONNECTION

STEEL FIXING SYMBOLOGY

	FILLET WELD
	BUTT WELD
	STITCH/HIT AND MISS WELD EACH SIDE
	STITCH/HIT AND MISS WELD
	CHEMSET FIXING
	DYNABOLT FIXING
	FERRULE FIXING
	EXPANSION BOLT FIXING
	BOLT FIXING
	CARRIAGE BOLT FIXING
	TAPTITE SCREW FIXING
	ANCHOR BOLT FIXING
	ANCHOR HOOK FIXING
	SHEAR STUD FIXING

INFORMATION REFLECTED ON THIS DRAWING REPRESENTS STRUCTURAL DESIGN DEVELOPED FOR D&C TENDER ADVICE ONLY, AND SHOULD NOT BE REGARDED AS COMPLETE. THE D&C CONTRACTOR SHOULD REFER TO ALL ASSOCIATED ARCHITECTURAL AND OTHER DISCIPLINE DRAWINGS, PROJECT BRIEFS AND CLIENT REQUIREMENTS AND MAKE ADEQUATE ALLOWANCES FOR ALL NECESSARY STRUCTURAL WORKS TO MEET THESE REQUIREMENTS, EQUIPMENT SCHEDULES AND COMPLIANCE WITH THE NCC & APPROPRIATE AUSTRALIAN STANDARDS

A	12.02.2026	MSB	ISSUED FOR D&C TENDER	BM	DG
P1	30.03.2026	P3H	DRAFT 60% DD ISSUE FOR REVIEW	BM	DG
REV	DATE	BY	DESCRIPTION	CHK	APP
DRAWING STATUS: DESIGN DEVELOPMENT					



CLIENT:	
ARCHITECT:	THOMSON ADSETT + PEDDLE THORP

PROJECT:	CQU ROCKHAMPTON TAFE CONSOLIDATION - STAGE 2
TITLE:	BuildingName LEGEND SYMBOLOGY AND ABBREVIATIONS

SCALE @ A1:	N/A	CHECKED:	APPROVED:
PROJECT NUMBER:	PS2229518	DRAWN:	DATE:
DRAWING No:	00-ST-DR-A00-020-00-01	REV:	A
© WSP Australia Pty Ltd			