

MOHAMED ISFAQ M





SCENARIO 1:

ESTABLISH A LAN NETWORK FOR TWO COMPUTER

Step 1 :

Assign 50.0.0.10 ip in system 1

Go to Start – Run – ncpa.cpl — (Nic properties)

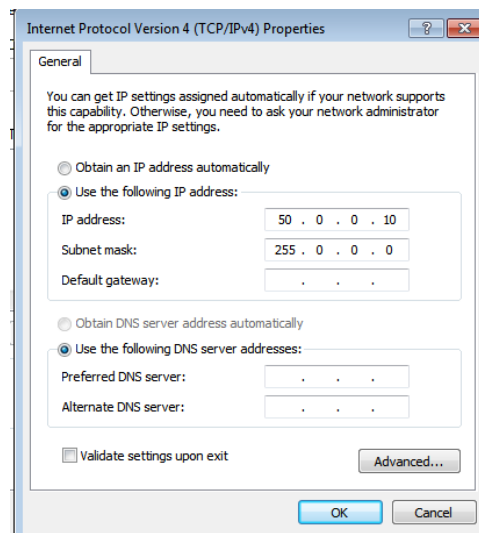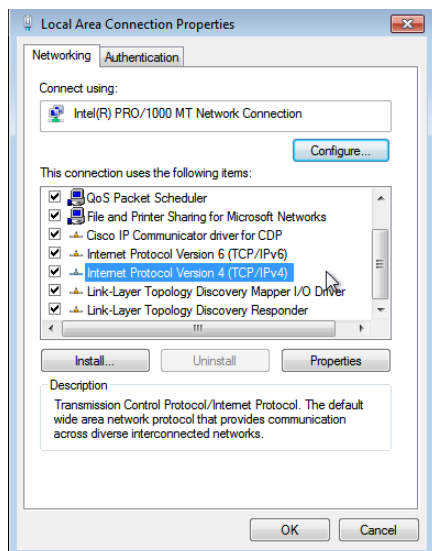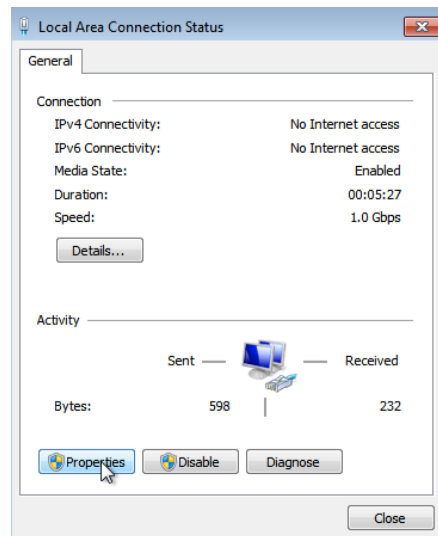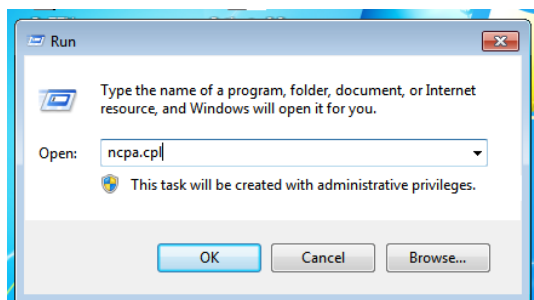

Step 2 :

Once assigned ip check its taken or not by using ipconfig command in cmd

```
C:\Users\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    Link-local IPv6 Address . . . . . : fe80::2ceb:ccb5:788:1e35%11
    IPv4 Address. . . . . : 50.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . :
```

Step 3 :

Assign 50.0.0.20 ip in system 2

```
C:\Users\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    Link-local IPv6 Address . . . . . : fe80::35fd:cc8:9b31:c87e%11
    IPv4 Address. . . . . : 50.0.0.20
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . :
```

Step 4 :

Check network reachability using ping cmd

```
C:\Users\user>ping 50.0.0.20

Pinging 50.0.0.20 with 32 bytes of data:
Reply from 50.0.0.20: bytes=32 time=2ms TTL=128
Reply from 50.0.0.20: bytes=32 time=2ms TTL=128
Reply from 50.0.0.20: bytes=32 time=2ms TTL=128
Reply from 50.0.0.20: bytes=32 time=1ms TTL=128

Ping statistics for 50.0.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Users\user>_
```


Step 5 :




Set hostname for two computers

Computer1 — sys1

Computer2 — sys2

Go to run and type sysdm.cpl

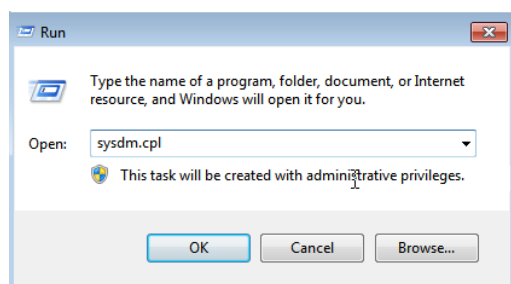

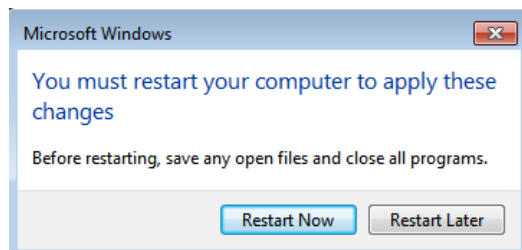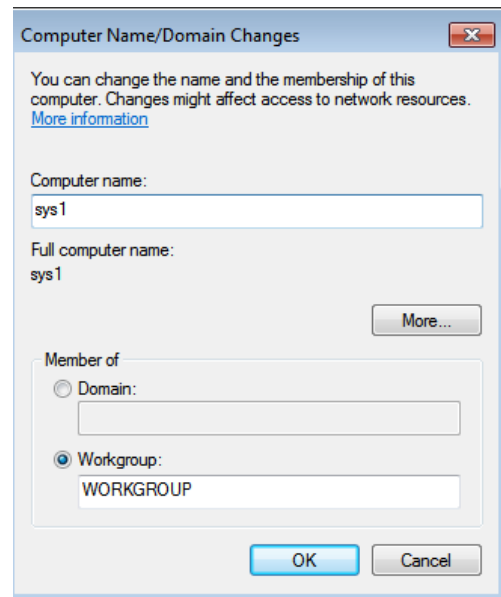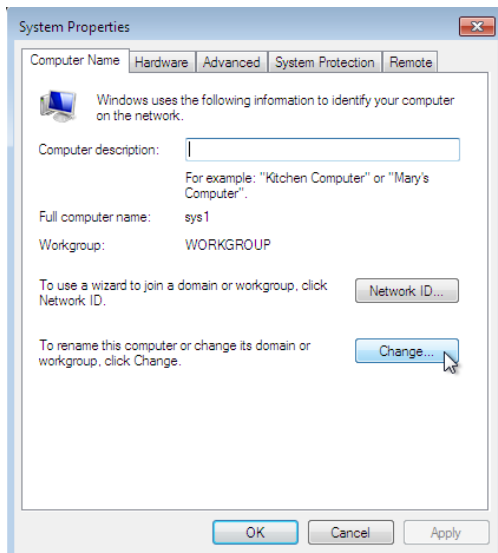

Step 6 :

Change computer2 name as sys2

Step 7 :

Now we can ping using system name with the help of (Netbios) protocol


```
C:\Users\user>ping sys2

Pinging sys2 [fe80::35fd:cc8:9b31:c87e%11] with 32 bytes of data:
Reply from fe80::35fd:cc8:9b31:c87e%11: time<1ms
Reply from fe80::35fd:cc8:9b31:c87e%11: time=1ms
Reply from fe80::35fd:cc8:9b31:c87e%11: time<1ms
Reply from fe80::35fd:cc8:9b31:c87e%11: time=1ms

Ping statistics for fe80::35fd:cc8:9b31:c87e%11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

Step 8 :


Create folder in sys2 and share that resource through network

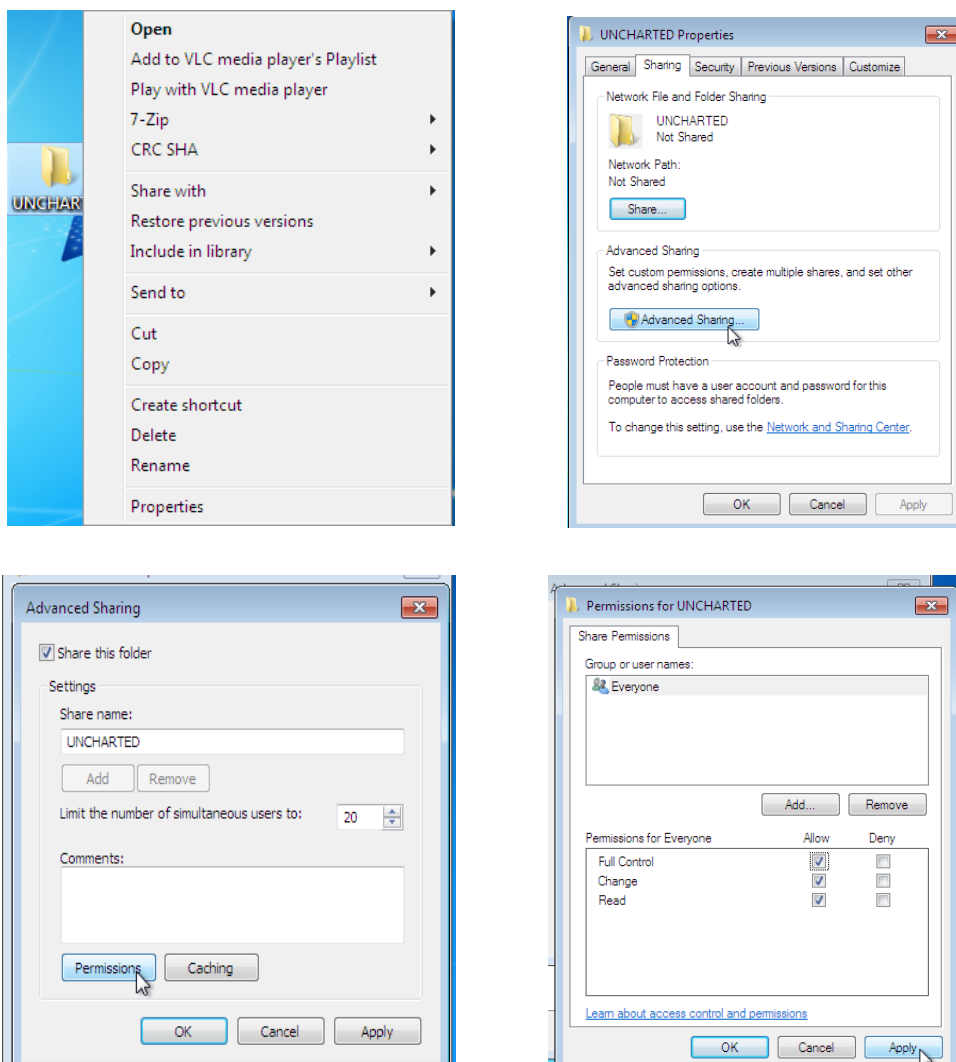

Step 9 :



Access shared folder from system 1

Go to run and type \\50.0.0.20 or sys2

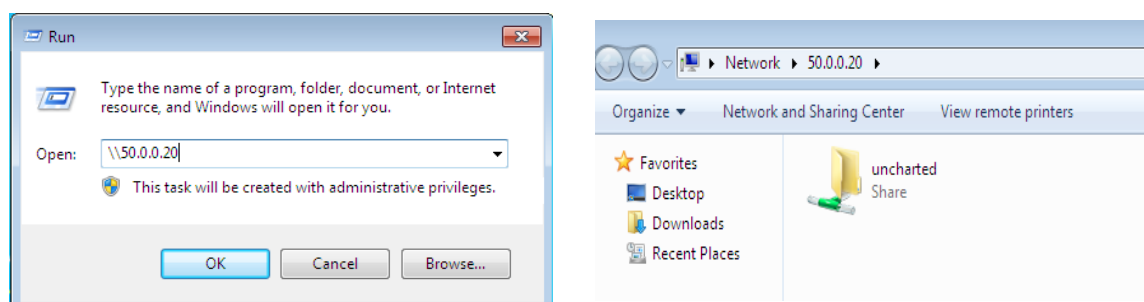

Step 10 :

Enable RDP in system 2

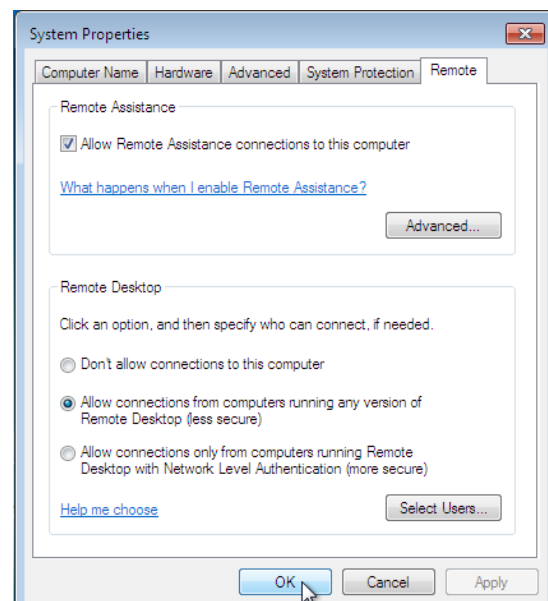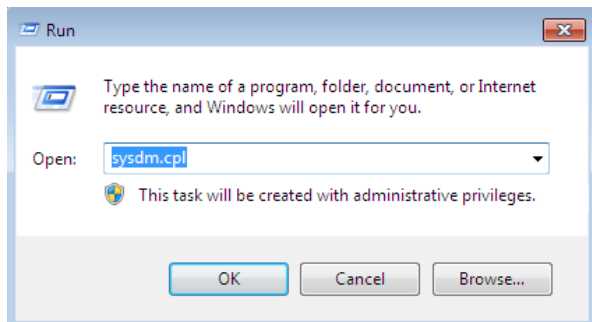

Step 11 :

Take RDP connection of second system from system one

Go to run and type mstsc

