



The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.


1/498149

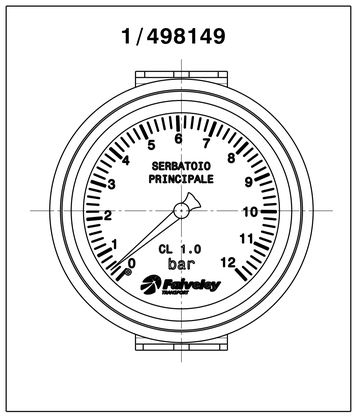

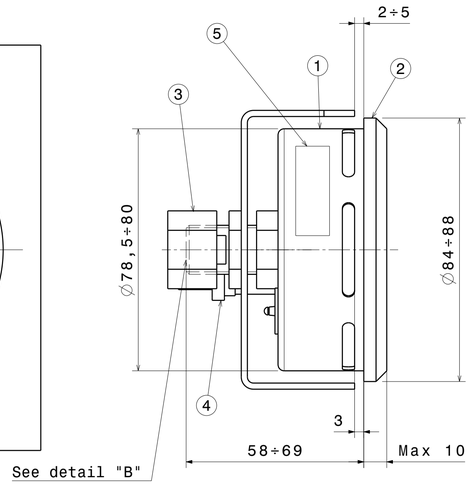

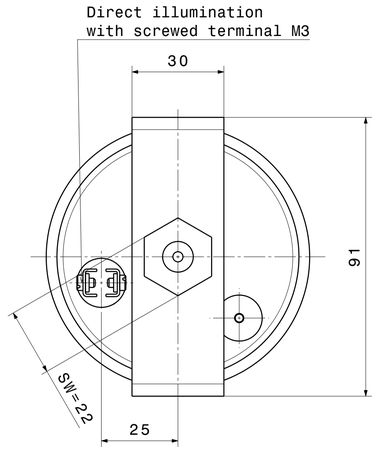


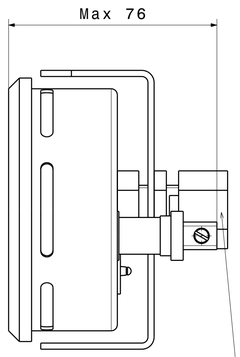




1set=1x cutting ring + union nut L10
acc. to DIN EN ISO 8434-1

FT0129531-100

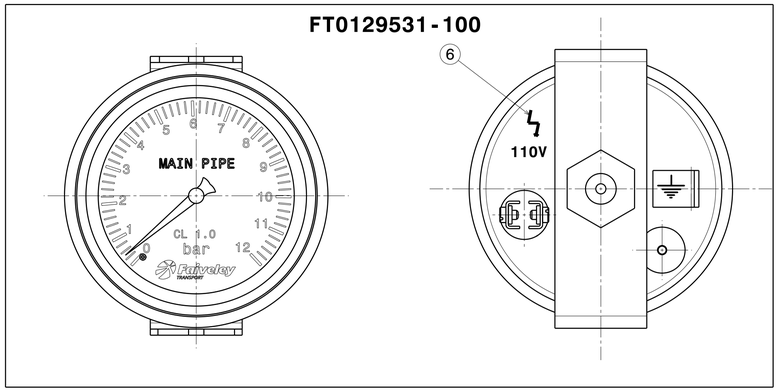

FT0129531-101

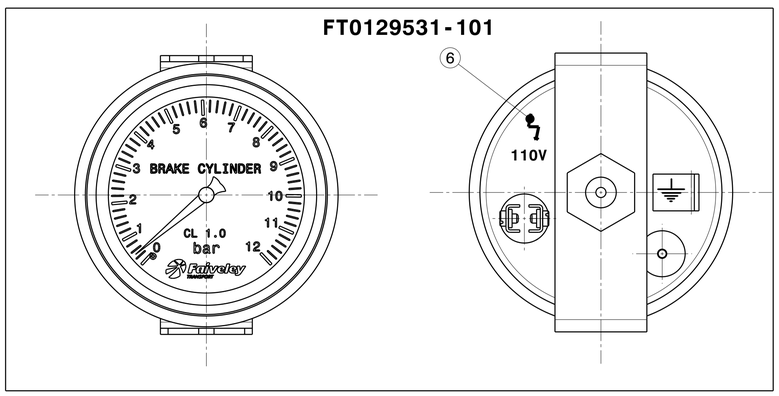

TECHNICAL SPECIFICATIONS:

- Case (1) : stainless steel, not painted
- Ring (2) : black anodized crimped on-ring
- Process connection (3) : brass M16x1,5 L10 (acc. to DIN EN ISO 8434-1)
- Mounting: U-clamp for panel mounting
- Illumination (4) : - directly: see table, isolated two-pole screw-socket
- indirectly: through lighting apertures light conducting ring.
- Tube: 1xburdon tube CuSn8 12bar
- Dial: aluminium, black RAL 9005, scale and figures white
- Pointer: DIN-aluminium l=28,5mm, color white RAL 9010
- Installation position: 70-90° (position of adjustment 80° acc. to DIN 38030)
- Accuracy class: 1,0 (acc. to DIN EN 837-1)
- Lens: reflex-reduced laminated safety glass
- IP-code: IP 54 in front of the panel (acc. to EN 60529)
- Restrictor screw: M4, orifice 0,8mm
- Adhesive label (5) : carrying Faiveley P/N and manufacturing month/year
- The pressure gauge is suitable to operate with compressed air quality 3-4-3 according to ISO 8573-1
- Operating temperature : -50 °C to +60 °C

CODE	DIAMETER ∅ mm	FULL SCALE bar	INSCRIPTION	INSCRIPTION COLOR	LABEL VOLTAGE (6)	ILLUMINATION TYPE BA9s (4)	No OF POINTERS	CLASS	FITTING	NOTES
FT0129531-101	80	12	BRAKE CYLINDER	WHITE RAL 9010	110V	LED LAMP WHITE 60-150V AC/DC	1	1	One M16x1,5	
FT0129531-100	80	12	MAIN PIPE	WHITE RAL 9010	110V	LED LAMP WHITE 60-150V AC/DC	1	1	One M16x1,5	
1/498149	80	12	SERBATOIO PRINCIPALE	WHITE RAL 9010	-	INCANDESCENT LAMP 24V/2W	1	1	One M16x1,5	

ISO SYMBOL

Rev.	Change description
B03	AGGIORNAMENTO GRAFICO / GRAPHIC UPDATE
B02	AGGIORNAMENTO SPECIFICHE TECNICHE / TECHNICAL SPECIFICATIONS UPDATE
B01	AGGIORNAMENTO GRAFICO / GRAPHIC UPDATE

Rev.	Change	Date	Name	Approved
B03	EC026PSC0571	05/05/26	DFC	SIA
B02	EC025PSC0963	19/08/25	LGI	SIA
B01	EC024PSC0802	03/09/24	HBE	PRN
B00	EC022PSC0836	20/04/23	MCU	SIA
A00	EC021PSC0647	03/08/21	ACA	PRN

Application .
General tolerances .
Weight 0,3
Responsible site PSC
BOM .
Size A1
Status RELEASED
Doc.Class. MTB006
Fire/smoke Class .
Safety Class CF2
Wear piece .
Based on .
Customer name .
Approved by Customer .
Replacement .
Replaced .
Customer revision indexes
Customer reference number .

Scale 1:1
Prepared 11/01/06 SPI1
Checked .
Approved 11/01/06 RENGRUBER
Date
Name
en mm

Main title subtitle
PRESSURE GAUGE
DIAMETER 80 mm
MANOMETRO
DIAMETRO 80 mm

Faiveley Transport a Wabtec Company
FAIVELEY TRANSPORT Piossasco S.p.A.
Via Silvorella 37 – 10045 Piossasco (TO)
Italy

Drawing identification number 1/498149
Revision B03
Sheet 1 / 1
Sheets

Proprietà FAIVELEY TRANSPORT Italia S.p.A. - E' severamente vietato copiare o riprodurre senza autorizzazione scritta questo documento e comunicarne il contenuto a terzi senza nostra autorizzazione scritta. La società proprietaria tutela i propri diritti a norma di legge. © 2005