

Duraflex. The name says it all

Duraflex, the name says all, it is durable and flexible besides being compressible and light weight the qualities which make duraflex popular among contactors for air conditioning and ventilation systems for commercial, industrial and residential applications. Resilience of Duraflex retains its dimensional stability under pressure or when fully stretched and proves to be highly efficient when correctly installed. Duraflex provides maintenance - free service under normal operating conditions. Prior to installation Duraflex flexible duct need to be fully extended and bends formed with adequate radius to prevent corrugation as the interior may otherwise cause excessive resistance to airflow.



duraflex
FLEXIBLE DUCT

Products from




Tel: +971 4 3409614, Fax : +971 4 3409613
P.O Box: 60270, Dubai, United Arab Emirates
E mail: sales.flexibleduct@cmsglobal.com

cmsglobal.com

Engineering ideas | cmsglobal.com | Duraflex Flexible Duct

duraflex
FLEXIBLE DUCT
engineering ideas | cmsglobal.com

Innovative & Antimicrobial Flexible Designs

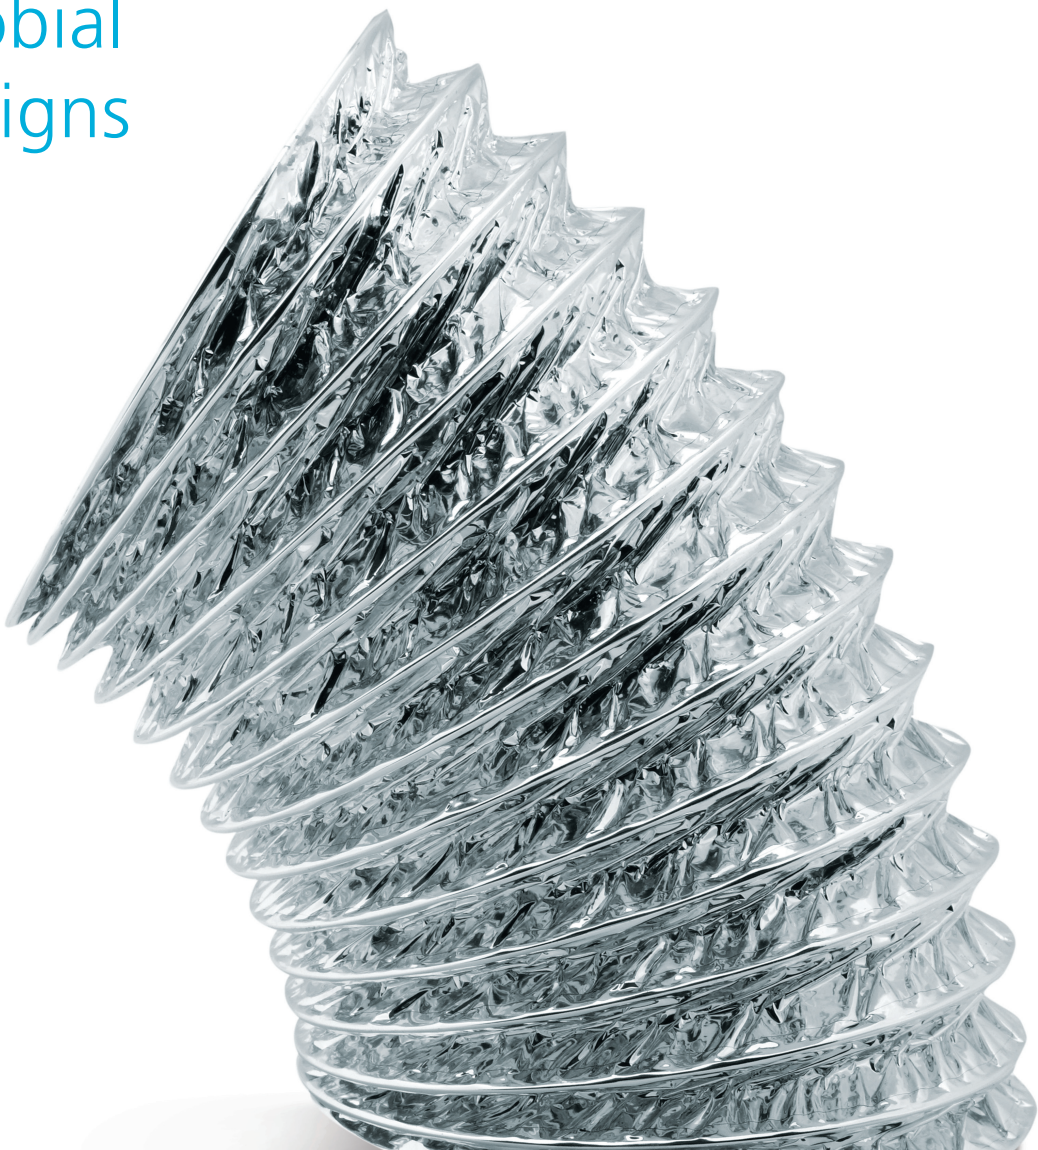

Applications & Benefits

Ideal for all Air Conditioning/Ventilating Systems including those in Hospitals, Hotels, Commercial and Office Buildings and many other Industrial and Residential applications.

- Available in bare form as well as pre – insulated with fiberglass insulation.
- Offers a high degree of flexibility, which allows it to be easily connected to any desired contour.
- A quick and economical means of correcting misalignment between system components.
- Allows ducting around obstacles where fabricated and fitted ducts would be difficult and costly to install.

Features & Characteristics

Duraflex offers a smooth inner core when correctly installed ensures reduction in friction loss.

- Tear and puncture resistant construction.
- Highly resistant to corrosion and micro organisms.
- Able to withstand medium air pressure.
- Low operating cost.
- Compressed ducts reduce freight and storage costs.
- No Air leakage
- Spring Steel wire helix assures dimensional stability, resists mechanical abuse and provides efficient air distribution.

Duraflex® M1B

duraflex M1B is made of tough polyester, permanently bonded to a spring wire helix and colored black.

Thermal efficiency is provided by wrapping the exterior with a blanket of fiberglass insulation. The strong outer insulation jacket/vapour barrier is made of fiberglass reinforced metalized polyester film laminate.

Standard Length	25 Ft
Standard Diameters	4" to 20"
Velocity	5,000 fpm maximum
Temperature Range	32 – 200oF
Pressure	8" maximum working pressure
Insulation Thickness	25mm
Insulation Density	16 Kg/m3
Insulation R Value	4.2 (oF-hr/BTU)
Packing	1 piece (25ft) per Carton

Duraflex® 13APMD

Duraflex 13APMD is uninsulated duct made of triple lamination of aluminium foil, polyester and metalized polyester films permanently bonded to coated spring steel wire helix.

Standard Length	25 Ft
Standard Diameters	4" to 20"
Velocity	5,000 fpm maximum
Temperature Range	32 – 200°F
Recommended	6" w.g Pos, all dia.
Operating Pressure	1/2" w.g neg all dia.
Packing	1 piece (25ft) per carton

Duraflex® 13APM

Duraflex 13APM is made of triple lamination Aluminum Foil, Polyester and Metalized Polyester film permanently bonded to a coated spring steel wire helix. Thermal efficiency is provided by wrapping the exterior with a blanket of fiberglass insulation. The strong outer insulation jacket/vapour barrier is made of fiberglass reinforced metalized polyester film laminate.


Duraflex 13APM is a high quality, fully flexible acoustic ducting with an acoustically transparent interliner between the inner core and fiberglass layer. It is ideal for use in low and medium pressure ventilation and air conditioning system where attenuation of duct borne noise required.

Standard Length	25 Ft
Standard Diameters	4" to 20"
Velocity	5,000 fpm maximum
Temperature Range	32 – 200°F
Pressure	8" maximum working pressure
Insulation Thickness	25mm
Insulation Density	16/24 Kg/m3
Insulation R Value	4.2 (oF-hr/BTU)
Packing	1 piece (25ft) per Carton



Duraflex is a very strong, fully flexible, compressible, light weight duct which is widely used in air conditioning and ventilation systems for commercial, industrial and residential applications. Duraflex is extremely durable and will maintain dimensional stability when fully extended. Highly efficient when correctly installed. Duraflex provides a maintenance free service under normal operating conditions.

Flexible Duct | Friction Loss Diagram

Flexible Duct - Straight Run
Friction Loss per 100ft

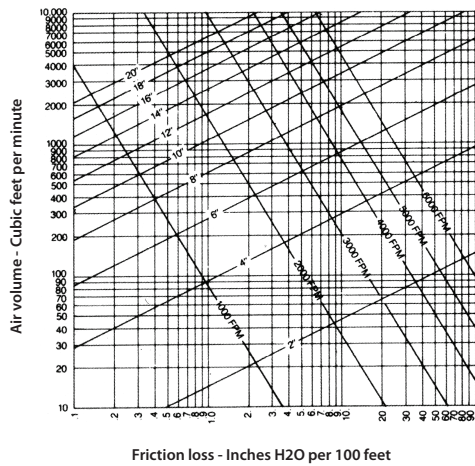

Flexible Duct - Straight Run
Friction Loss per 100ft

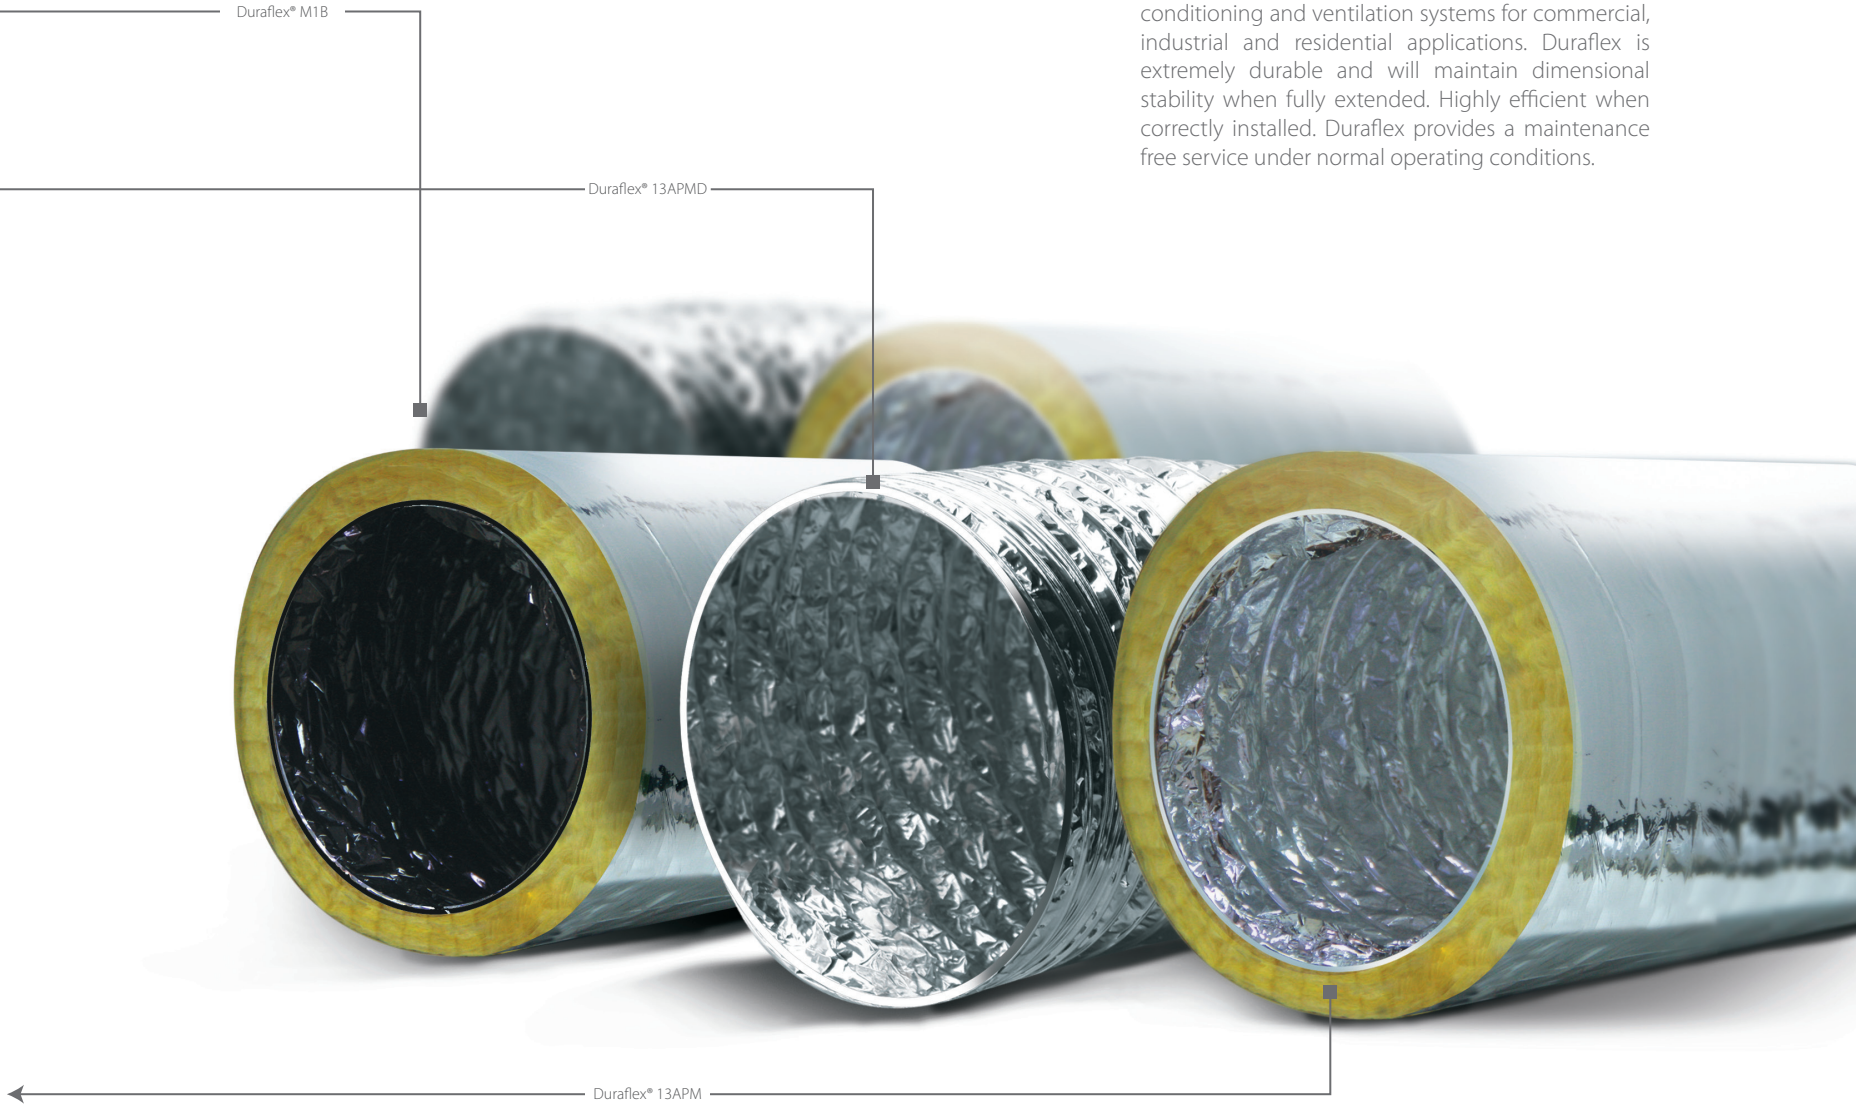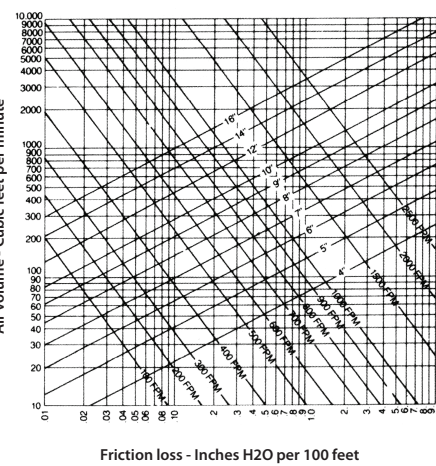

Note: Ducting must always be installed fully extended to produce best results ■ Ensure that duct is not in contact with sharp objects which may puncture the duct when the system is commissioned ■ We also manufacture insulated ducts with 24kg density 25mm thick insulation.