

# Benefit Distribution in Climate Investment: Allocation Architecture and a Techno-Economic Assessment of Distributed Biomass-to-Hydrogen Pathways

Mohsen Dirbaz

Department of Chemical and Biomedical Engineering  
University of Missouri–Columbia, MO 65211  
md8w7@umsystem.edu

July 21, 2026

## Abstract

This analysis integrates institutional economics, policy architecture, and techno-economic modeling to examine how the design of climate investment structures can shape the distribution of their benefits and, in turn, decarbonization effectiveness. We examine three converging concerns for which the evidence is, respectively, strong, moderate, and suggestive: (1) clean energy subsidies have concentrated among higher-income quintiles despite nominal equity objectives; (2) categorical technology framing can obscure lifecycle emission dependencies and align incentives in ways that favor incumbents; and (3) constraints on foundational institutional capacity—educational systems, digital infrastructure, economic opportunity—are associated with reduced capacity of disadvantaged populations to participate in energy transitions. We treat the first concern as well documented and the third as an associational hypothesis rather than an established causal mechanism.

The analysis proceeds in three integrated parts. Part I establishes the institutional and fiscal context, reviewing the decline in the dollar’s reserve-currency share, middle-class income compression, strain on educational capacity, and contested resource-allocation choices such as the proposed Golden Dome missile-defense program. These constraints frame the feasible policy space. Part II presents a comparative techno-economic analysis of biomass-to-hydrogen pathways, indicating that modular gasification clusters can approach—though, on our base-case assumptions, not reach—cost competitiveness (modeled levelized costs of \$9.57–\$10.87/kg at 100-unit scale, contingent on the financing and reference-plant assumptions detailed in Part II) while enabling distributed rural participation. Part III synthesizes policy architecture guardrails: parliament-based allocation resistant to incumbent capture, reusable capital structures enabling multiple project cycles from single appropriations, performance-based accountability requiring demonstration rather than assumption of benefits, and mandatory lifecycle transparency eliminating categorical framing advantages.

The electric vehicle case study illustrates the mechanism. “Zero emission” classification allows vehicles manufactured with fossil-intensive processes and charged on fossil-dominated grids to receive the same subsidies and environmental credit as vehicles with lower lifecycle emissions. This categorical framing tends to benefit incumbent utilities (increased electricity demand regardless of generation mix), natural gas producers (marginal generation), and established manufacturers. It also reduces the salience of manufacturing-stage emissions—on the order of 8–12 tonnes CO<sub>2</sub>e per vehicle, a substantial fraction of which is in principle reducible through renewable-powered battery production, lower-carbon steel, and responsible mining—because all three actor classes (commercial, policy, civic) can satisfy their objectives through classification rather than measured performance.

Biomass-derived hydrogen offers a contrasting pathway: its lifecycle emissions depend directly on feedstock sourcing and process energy rather than on external grid composition, which makes lifecycle accounting more transparent and less susceptible to categorical framing. Infrastructure requirements create barriers but also opportunities for distributed

ownership models serving rural feedstock sources. The policy challenge lies not in technical feasibility—demonstrated through detailed process modeling—but in allocation mechanisms that counteract incumbent advantages and benefit concentration.

The analysis concludes that equitable decarbonization requires institutional innovations targeting benefit distribution rather than aggregate investment levels: mandatory lifecycle labeling eliminating categorical framing, subsidy scaling tied to demonstrated emission reductions rather than technology classification, infrastructure investment parity across pathways to enable comparative assessment, and deliberative allocation processes incorporating stakeholder representatives rather than technocratic optimization. Without these structural countermeasures, climate investment will replicate rather than remediate the systematic inequities documented across broadband deployment, educational infrastructure, and existing clean energy programs.

**Keywords:** Climate policy architecture; Lifecycle carbon accounting; Biomass gasification; Electric vehicle emissions; Incumbent rent-seeking; Reusable capital structures; Distributed energy systems; Institutional capacity; Categorical framing; Technology assessment

# Contents

|                                                                                        |           |
|----------------------------------------------------------------------------------------|-----------|
| <b>Scope and Epistemic Status</b>                                                      | <b>6</b>  |
| <b>1 Introduction</b>                                                                  | <b>6</b>  |
| 1.1 Fiscal Context and Institutional Capacity                                          | 7         |
| 1.1.1 Monetary Currency Erosion                                                        | 7         |
| 1.1.2 Economic Middle Compression                                                      | 7         |
| 1.1.3 Institutional Capacity Collapse                                                  | 7         |
| 1.1.4 Mitigation Underinvestment and Adaptation Cost Escalation                        | 8         |
| 1.2 Digital Infrastructure and Rural Economic Participation                            | 9         |
| 1.2.1 The Digital Divide: Magnitude and Distribution                                   | 9         |
| 1.2.2 Economic Returns and Multiplier Effects                                          | 9         |
| 1.2.3 Policy Failures and Structural Design                                            | 9         |
| 1.2.4 Sectoral Spillovers and Cumulative Disadvantage                                  | 10        |
| 1.3 Opportunity Cost and Strategic Investment Priorities                               | 10        |
| 1.3.1 Technical and Strategic Assessment                                               | 11        |
| 1.3.2 Opportunity Cost Analysis                                                        | 11        |
| 1.3.3 Security Redefined: Infrastructure as Strategic Asset                            | 12        |
| 1.4 Educational Infrastructure and Economic Competitiveness                            | 12        |
| 1.4.1 The Teacher Certification Deficit: Scale and Distribution                        | 12        |
| 1.4.2 Economic Consequences: The Diet-Health-Productivity Nexus                        | 12        |
| 1.4.3 International Comparisons and Policy Trajectory                                  | 13        |
| 1.4.4 Opportunity Cost Framework Applied                                               | 14        |
| 1.5 Grid Composition and the Electric Vehicle Decarbonization Gap                      | 14        |
| 1.5.1 The Categorical Framing Problem                                                  | 14        |
| 1.5.2 Marginal versus Average Grid Composition                                         | 14        |
| 1.5.3 The Public Discourse Gap and Incumbent Advantage                                 | 15        |
| 1.5.4 Market Structure Effects and Rent Distribution                                   | 15        |
| 1.5.5 The Manufacturing Emissions Gap: Quantifying Avoided Reductions                  | 16        |
| 1.6 Institutional Resources Beyond the Public Sector: Scale and Potential Roles        | 17        |
| 1.6.1 Enlightened Self-Interest: Institutional Vulnerability to System Failure         | 17        |
| 1.6.2 Resource Scale Relative to Documented Needs                                      | 17        |
| 1.6.3 Connection to Climate Investment Policy                                          | 18        |
| 1.6.4 Accountability Framework and Metrics                                             | 18        |
| <b>2 Part 1: Policy and Regulatory Architecture</b>                                    | <b>19</b> |
| 2.1 Misaligned Incentives: How Categorical Framing Can Slow Achievable Decarbonization | 19        |
| 2.1.1 Actor I: Manufacturing Emissions Loophole                                        | 20        |
| 2.1.2 Actor II: Symbolic Achievement Mechanism                                         | 20        |
| 2.1.3 Actor III: Premature Satisfaction Dynamic                                        | 21        |
| 2.2 Breaking the Trap: Policy Architecture for Forced Transparency                     | 22        |
| 2.2.1 Mandatory Lifecycle Carbon Labeling                                              | 22        |
| 2.2.2 Performance-Based Incentive Scaling                                              | 22        |
| 2.2.3 Hydrogen Pathway Parity Funding                                                  | 22        |
| 2.3 Parliament-Based Allocation and Reusable Capital                                   | 23        |
| 2.3.1 State-Level Parliament Structure                                                 | 23        |
| 2.3.2 Reusable Capital Structures                                                      | 23        |
| 2.3.3 Guardrail Framework                                                              | 24        |
| <b>3 Part 2: Techno-Economic Analysis of Biomass-to-Hydrogen Pathways</b>              | <b>25</b> |

|          |                                                                                 |           |
|----------|---------------------------------------------------------------------------------|-----------|
| 3.1      | Analytical Framework and Viability Measures . . . . .                           | 25        |
| 3.2      | Technical Overview: Gasification Process and Scale Economics . . . . .          | 25        |
| 3.2.1    | Scaling Strategy: Clustering versus Single Large Units . . . . .                | 26        |
| 3.3      | Methodology: Cost Categories, Scaling Formulas, and Assumptions . . . . .       | 26        |
| 3.3.1    | Cost Category Definitions . . . . .                                             | 26        |
| 3.3.2    | Reference System Specifications . . . . .                                       | 27        |
| 3.3.3    | Scaling Laws and Economic Metrics . . . . .                                     | 27        |
| 3.3.4    | Labor Treatment for Small Units . . . . .                                       | 28        |
| 3.4      | Results: Scaled CAPEX/OPEX and Levelized Costs . . . . .                        | 28        |
| 3.4.1    | Key Findings . . . . .                                                          | 28        |
| 3.5      | Feedstock Scenarios and Comparative Analysis . . . . .                          | 29        |
| 3.5.1    | Feedstock Selection Criteria . . . . .                                          | 29        |
| 3.6      | Economies of Dispersion: Clustering Strategy . . . . .                          | 30        |
| 3.6.1    | Shared Services and By-Product Utilization . . . . .                            | 30        |
| 3.7      | Comparative Assessment: Biomass versus Fossil Pathways . . . . .                | 31        |
| 3.7.1    | Competitiveness Analysis . . . . .                                              | 31        |
| 3.7.2    | Network Architecture and System Resilience . . . . .                            | 32        |
| 3.7.3    | Policy Implications for Pathway Selection . . . . .                             | 32        |
| <b>4</b> | <b>Discussion: Integrating Policy Architecture with Technical Viability</b>     | <b>33</b> |
| 4.1      | The Financing Regime as Determinative Factor . . . . .                          | 33        |
| 4.2      | Category-Level Elasticities and Pathway Optimization . . . . .                  | 33        |
| 4.3      | Transport Sector Application: Volumetric Constraints and Infrastructure Density | 34        |
| 4.3.1    | The Volumetric Energy Density Problem . . . . .                                 | 34        |
| 4.3.2    | Mechanisms Offsetting Volumetric Disadvantages . . . . .                        | 34        |
| 4.3.3    | The Infrastructure Void as Binding Constraint . . . . .                         | 35        |
| 4.3.4    | Freight Primacy and the Serving-the-Masses Imperative . . . . .                 | 35        |
| 4.4      | The Comparative Assessment Framework: What Matters for Pathway Selection .      | 36        |
| 4.4.1    | Lifecycle Transparency versus Categorical Framing . . . . .                     | 36        |
| 4.4.2    | Incumbent Advantage versus Market Entry Barriers . . . . .                      | 37        |
| 4.4.3    | Cost Competitiveness versus Systemic Benefits . . . . .                         | 37        |
| <b>5</b> | <b>Limitations</b>                                                              | <b>37</b> |
| <b>6</b> | <b>Conclusion: Toward Equitable Decarbonization Architecture</b>                | <b>38</b> |
| 6.1      | Policy Architecture Imperatives . . . . .                                       | 38        |
| 6.2      | The Institutional Capacity Imperative . . . . .                                 | 39        |
| 6.3      | Reinforcement versus Remediation: A Framing . . . . .                           | 40        |
| <b>A</b> | <b>Supplementary Technical Details</b>                                          | <b>42</b> |
| A.1      | Detailed Scaling Calculations . . . . .                                         | 42        |
| A.2      | Feedstock Specifications and Regional Availability . . . . .                    | 43        |
| A.3      | Sensitivity Analysis: Key Parameters . . . . .                                  | 43        |
| <b>B</b> | <b>Heatmap Analysis and Discretization Framework</b>                            | <b>44</b> |
| <b>C</b> | <b>Transport Sector Viability: Extended Analysis</b>                            | <b>48</b> |
| C.1      | C.1 Operational Utilization: The 24-Hour Continuous Operation Benchmark . . .   | 48        |
| C.1.1    | Calculation Parameters . . . . .                                                | 48        |
| C.1.2    | Operational Outcomes . . . . .                                                  | 48        |
| C.1.3    | Economic Implications . . . . .                                                 | 49        |

|       |                                                                                             |    |
|-------|---------------------------------------------------------------------------------------------|----|
| C.2   | C.2 Gravimetric Versus Volumetric Constraints: Scale-Dependent Crossover Analysis . . . . . | 49 |
| C.2.1 | Energy Density Fundamentals . . . . .                                                       | 49 |
| C.2.2 | Storage System Mass Scaling . . . . .                                                       | 49 |
| C.2.3 | Volumetric Constraint Context . . . . .                                                     | 50 |
| C.3   | C.3 Electrochemical and Mass Limits: Where Battery Storage Becomes Impractical . . . . .    | 50 |
| C.3.1 | Theoretical Maximum Energy Density . . . . .                                                | 50 |
| C.3.2 | Distance-Dependent Viability Hierarchy . . . . .                                            | 51 |
| C.3.3 | The Extreme-Range Energy-Density Boundary . . . . .                                         | 51 |
| C.4   | C.4 Engineering Conclusions and Application Boundaries . . . . .                            | 52 |
| C.4.1 | Three Quantitative Findings . . . . .                                                       | 52 |
| C.4.2 | Application-Specific Deployment Boundaries . . . . .                                        | 52 |
| C.4.3 | The Energy-Density Argument: Bounds . . . . .                                               | 53 |

## Scope and Epistemic Status

This paper combines a normative policy argument with a quantitative techno-economic assessment. To keep claims proportionate to their evidence, we state at the outset what is and is not being asserted.

**What we claim.** (i) Clean-energy subsidy benefits have, historically, concentrated among higher-income households (well documented). (ii) Categorical “zero-emission” framing can create incentive misalignments that de-emphasize lifecycle and manufacturing emissions. (iii) Modular, clustered biomass gasification is technically credible, and under favorable financing and our stated reference-plant assumptions can reach *modeled* levelized costs of \$9.57–10.87/kg at 100-unit scale—above fossil baselines, but potentially within reach of fossil+CCS under moderate carbon pricing. (iv) Hydrogen is *advantaged* in specific high-utilization, payload-constrained, return-to-base transport segments.

**What we do *not* claim.** (i) A demonstrated causal chain from educational capacity through diet and health to disability or welfare dependency—these are reported as correlations with substantial confounding, not as an identified mechanism. (ii) That the categorical-framing outcome requires intentional collusion—it can arise as an equilibrium of independently rational actors. (iii) That the absolute levelized costs are precise: they inherit a large-scale reference plant and a wide scaling extrapolation, and part of the cluster advantage reflects a financing assumption rather than engineering (both are quantified in the Limitations). (iv) That hydrogen is the “only” viable transport carrier, or that biomass is automatically “carbon-neutral.” (v) Any specific institutional prescription for tax-exempt entities; that material is raised as a question with legal and constitutional dimensions beyond our scope. Current-events figures are stated as of mid-2026 and cited accordingly.

## 1 Introduction

Public decarbonization funds operate within constraints that conventional climate policy analysis systematically underestimates. Three converging pressures frame the allocation challenge: deteriorating fiscal capacity, compressed economic middle, and eroded institutional infrastructure. These are not temporary disruptions amenable to technocratic optimization but structural conditions that determine which populations can participate in energy transitions and how investment benefits distribute.

The evidence is quantifiable and disturbing. Analysis by Borenstein et al. reveals that U.S. households received over \$47 billion in clean energy tax credits since 2006 for heat pumps, solar panels, and electric vehicles, yet the bottom three income quintiles captured only 10% of these credits while the top quintile received 60%.<sup>[1]</sup> For electric vehicle credits specifically, the top quintile claimed more than 80%. This pattern frames clean energy adoption as an upper-income activity, with average credits per tax return below \$15 for the bottom three adjusted gross income categories compared to \$27, \$51, and \$83 for the three highest categories.

This concentration is not accidental nor primarily a function of technology costs. It reflects systematic program design features that privilege populations already possessing advantages: sufficient tax liability to utilize credits, home ownership enabling installation, access to capital for upfront costs, and sophistication to navigate incentive programs. The parallel pattern appears across infrastructure categories—rural broadband deployment, educational quality, economic opportunity—suggesting that benefit concentration stems from common structural causes rather than domain-specific failures.

This analysis examines two critical competitions through integrated policy and technical lenses: hydrogen versus battery-electric vehicles in transportation, and renewables (biomass-derived

hydrogen) versus fossil fuels (natural gas, coal) in production. The approach separates policy architecture in Part 2 from pathway techno-economics in Part 3, reuniting them in synthesis. The central argument advanced here is that allocation mechanisms can matter as much as aggregate investment levels for distributional outcomes. Programs that concentrate benefits among incumbents and higher-income households will fail equity objectives regardless of total expenditure, while structures enabling capital recycling, expanding market entry, and requiring performance demonstration can achieve decarbonization and equity simultaneously within severe fiscal constraints.

## **1.1 Fiscal Context and Institutional Capacity**

### **1.1.1 Monetary Currency Erosion**

The dollar's share of global foreign exchange reserves declined from approximately 71% around 2000 to 59% by Q4 2020, marking a twenty-five year low. This trajectory continued through late 2024, with the dollar's share near 57–58% of allocated reserves in IMF COFER data.[2] Some analysts project further decline over coming decades, but such long-horizon projections are uncertain and not universally shared.

The macroeconomic implications extend beyond currency markets. Weakened reserve currency status constrains federal capacity to finance large-scale infrastructure programs at favorable rates while increasing sensitivity to inflation and foreign creditor preferences. Climate investment programs operating within this environment face tighter fiscal constraints than those designed under assumptions of sustained dollar dominance.

The policy significance proves direct: programs requiring sustained multi-decade appropriations face increasing probability of funding disruptions from borrowing cost increases or foreign creditor concerns about fiscal sustainability. This elevates the importance of capital-efficient structures that maximize returns per dollar and enable recycling of funds through multiple project cycles rather than single deployments.

### **1.1.2 Economic Middle Compression**

Parallel to financial decline runs equally consequential social transformation. The share of adults living in middle-class households contracted from 61% in 1971 to 50% in 2021. More revealing: the share of aggregate income earned by the middle class shrank from 62% in 1970 to 42% in 2021.[3]

This compression directly impacts the political economy of climate policy. Clean energy tax credits designed to incentivize household-level adoption inherently assume a consumer base with sufficient disposable income and tax liability to utilize these instruments. When the economic middle contracts, the pool of households capable of accessing benefits narrows, concentrating uptake among higher-income cohorts as documented in the Borenstein analysis.

The momentum of this decline compounds over time. Households excluded from wealth accumulation opportunities in one generation possess fewer resources to participate in emerging opportunities in subsequent generations. The result: climate investment programs nominally targeting broad adoption actually reinforce existing economic stratification by creating new wealth-building opportunities accessible primarily to those already possessing advantages.

### **1.1.3 Institutional Capacity Collapse**

The erosion of foundational institutional capacity presents perhaps the most immediate constraint. Current estimates indicate over 365,000 teaching positions filled by teachers lacking full certification, with an additional 45,500 positions remaining entirely unfilled—totaling at

least 411,500 impacted positions nationwide, representing approximately one in eight teaching roles.[4]

Instruction by under-certified teachers is associated in the education literature with weaker student outcomes, with plausible long-run implications for workforce skills. One recent policy signal is the March 2025 executive order directing the Secretary of Education to take steps toward closing the Department of Education[11]; because a cabinet department can be abolished only by Congress, the order’s ultimate effect remains uncertain, but it reflects a contested choice about federal institutional capacity.

Several correlational relationships have been proposed linking educational capacity to downstream economic and health outcomes; we present them as associations rather than an established causal chain. Educational attainment correlates inversely with added-sugar consumption in dietary surveys: individuals holding bachelor’s degrees or higher consume approximately 29 kg annually, while those without high school diplomas consume approximately 40 kg.[5] Such cross-sectional differences reflect many confounded factors (income, geography, food environment, culture) and should not be read as a single mechanistic pathway.

To the extent these associations reflect causal channels, they would imply compounding social costs from under-investment in educational capacity that could exceed near-term fiscal savings; rigorously quantifying that present value is beyond this analysis and would require causal identification we do not attempt here.

#### **1.1.4 Mitigation Underinvestment and Adaptation Cost Escalation**

The fiscal constraint discussion above acquires sharper definition when comparing mitigation investment to documented climate damage costs. The Joint Committee on Taxation estimated in December 2022 that Section 45Q carbon capture tax expenditures would total less than \$50 million annually through 2026—approximately \$0.2 billion over the five-year period from 2022 to 2026.

For scale, property-damage estimates for Hurricane Helene (2024)—which made landfall in Florida but caused its most severe damage across the inland Southeast, particularly western North Carolina—were reported at roughly \$47 billion, with broader economic-loss estimates ranging considerably higher.[12] Juxtaposing a multi-year carbon-capture tax expenditure against a single extreme-weather event is illustrative rather than a like-for-like comparison, but it points to a broad asymmetry between prevention and adaptation spending.

The geographic distribution of impacts compounds the allocation challenge. Climate damages transcend origin points—hurricane damage in Florida cascades through insurance markets, federal disaster relief budgets, and supply chains affecting communities nationwide. The recognition that major disruptions do not respect geographic boundaries, recently reflected in political rhetoric emphasizing interconnected vulnerabilities, applies equally to climate impacts. Yet mitigation programs remain constrained by political jurisdiction boundaries and short electoral time horizons that systematically discount prevention investment.

Read cautiously, the comparison suggests current mitigation incentives are small relative to realized adaptation costs. The policy question is less whether climate investment is affordable in the abstract than how prevention and adaptation spending are balanced over time—recognizing that single-event damage figures and multi-year tax-expenditure figures are not directly comensurable.

These four trends converge to create a fiscal and institutional environment fundamentally different from that prevailing during earlier energy policy development waves. The Inflation Reduction Act and Infrastructure Investment and Jobs Act authorize substantial clean energy



investments, yet implementation occurs within tightening fiscal constraints, compressed middle-class purchasing power, and deteriorating institutional capacity in foundational sectors. This context demands that climate investment policy maximize productivity of each public dollar through mechanisms enabling capital recycling, expanding rather than concentrating benefits, and building institutional capacity rather than assuming its availability.

## **1.2 Digital Infrastructure and Rural Economic Participation**

The fiscal and institutional constraints outlined above acquire concrete form when examined through specific infrastructure deficits. Rural broadband access represents a particularly instructive case, both for the scale of the gap and for policy choices that have widened rather than closed it. The patterns observed in broadband deployment illuminate broader issues in infrastructure investment allocation that directly parallel clean energy credit concentration.

### **1.2.1 The Digital Divide: Magnitude and Distribution**

Rural America faces a stark digital divide. More than 22% of rural Americans lack access to basic broadband service, compared to 1.5% in urban areas—a fifteen-fold disparity translating into measurable economic disadvantage across multiple dimensions.[6] Geographic patterns reveal systematic underinvestment: eight of the bottom ten states for broadband access lie west of the Mississippi River, with Alaska ranking last at only 0.2% affordable broadband access. Missouri alone records approximately 200,000 locations without broadband access.

The challenge extends beyond simple availability. The affordability gap exceeds 30% in multiple rural states, meaning service infrastructure exists but remains financially out of reach for substantial population portions. This mirrors precisely the clean energy credit pattern where benefits concentrate among higher-income households not due to lack of interest but structural barriers to access.

### **1.2.2 Economic Returns and Multiplier Effects**

The economic returns from broadband investment are well-documented and substantial. Research demonstrates that a 10% increase in broadband access generates a 1.2% increase in GDP per capita.[7] Rural areas achieving over 80% broadband adoption experience:

- 213% higher business growth rates
- 44% higher GDP growth
- 18% higher per capita income growth

compared to areas with lower adoption.

These multipliers suggest that broadband investment operates as genuine economic infrastructure rather than mere amenity provision. The comparison to clean energy investment proves instructive: both represent enabling infrastructure unlocking subsequent economic activity rather than end consumption in themselves. Both generate returns through expanded participation and enhanced productivity rather than direct provision of goods or services.

### **1.2.3 Policy Failures and Structural Design**

Recent policy shifts in the \$42.45 billion Broadband Equity, Access, and Deployment (BEAD) program have actually reduced rather than expanded coverage. Administrative changes under the Trump Administration disqualified hundreds of thousands of locations from receiving internet access by shifting preference away from fiber infrastructure toward lower-cost options including fixed wireless and satellite systems that may prove less reliable over program time horizons.[8]

The rationale centers on cost containment and accelerated deployment timelines. The practical effect reverses the program’s equity mandate by privileging speed of initial connection over quality and durability of service. This pattern repeats across infrastructure programs where nominal investment occurs but structural design choices concentrate benefits or compromise long-term effectiveness.

The temporal dynamics illuminate further policy design challenges. Current program timelines fail to account for the four years required for permitting processes in many jurisdictions. This mismatch between administrative expectations and ground-level reality creates perverse incentives for deployers to select easier locations and technologies rather than tackle the most underserved areas with the most robust solutions. The result resembles clean energy credit patterns where program design features interact with existing structural advantages to amplify rather than reduce disparities.

#### 1.2.4 Sectoral Spillovers and Cumulative Disadvantage

The implications extend beyond telecommunications policy. Rural broadband access affects:

- **Telehealth:** Remote medical consultation and monitoring
- **Education:** Online learning resources and remote instruction
- **Agriculture:** Precision farming technology adoption
- **Economic Development:** Small business formation and market access

These represent the actual fabric of economic opportunity and quality of life in rural communities. When policy choices systematically underinvest in this infrastructure, effects compound across multiple sectors. A farmer cannot adopt precision agriculture without reliable data connectivity. A rural student cannot access online educational resources without stable broadband. A telehealth provider cannot serve remote patients without sufficient bandwidth for video consultation. Each deficit reinforces others, creating cumulative disadvantage.

The comparison to clean energy investment patterns becomes direct when examining allocation mechanisms. Both broadband programs and clean energy tax credits nominally target underserved populations and economic development objectives. Both fail to achieve stated equity goals due to structural design features that concentrate benefits among those already possessing advantages. In broadband, these advantages include proximity to existing infrastructure, favorable terrain, and local government capacity to navigate federal programs. In clean energy, they include sufficient income to generate tax liability, home ownership, access to capital for upfront costs, and sophistication to navigate incentive programs.

The parallel suggests that equity failures in public investment stem not from lack of good intentions but systematic underattention to how program structure interacts with existing disparities. The opportunity cost framework becomes unavoidable: the \$42.45 billion BEAD appropriation represents substantial investment, yet policy choices have reduced rather than expanded coverage and effectiveness through incremental design choices privileging cost containment over equity objectives.

### 1.3 Opportunity Cost and Strategic Investment Priorities

The fiscal constraints and infrastructure deficits outlined in preceding subsections acquire sharper definition when examined against competing claims on federal resources. The Golden Dome initiative, announced by President Trump in January 2025, provides a revealing case study in resource allocation priorities.

### 1.3.1 Technical and Strategic Assessment

This proposed multi-layered, partly space-based missile-defense system carried initial (2025) cost estimates of \$75–175 billion; a May 2026 Congressional Budget Office analysis subsequently estimated up to \$1.2 trillion over a twenty-year horizon, far above the initial figures.[9, 13] The system envisions a global constellation of satellites equipped with sensors and space-based interceptors, marking the first sustained deployment of space weapons in U.S. orbit.

Technical feasibility assessments present the first dimension of analysis. Experts at the Center for Strategic and International Studies characterize Golden Dome as an engineering and integration challenge rather than fundamental science challenge, suggesting theoretical feasibility but acknowledging extraordinary complexity. The program structure echoes President Reagan’s Strategic Defense Initiative, which after years of substantial investment never produced a workable system and was eventually canceled.

Current timelines project only a demonstration under ideal conditions by the end of 2028, despite initial claims of full operational capability within that timeframe. This temporal pattern of optimistic initial projections followed by extended development timelines and capability reductions appears consistently across major defense technology programs. The technical risk profile suggests probability-weighted expected costs substantially exceeding nominal estimates.

Strategic implications extend beyond technical considerations. Russian and Chinese officials have characterized the initiative as deeply destabilizing, warning that it could trigger a new arms race and incentivize deployment of space-based weapons in an environment that remains dangerously under-regulated. This represents a qualitative shift from defending against rogue nation threats to a posture that could destabilize relations with nuclear peer competitors.

### 1.3.2 Opportunity Cost Analysis

The resource allocation implied by Golden Dome funding would dwarf broadband investment by factors of two to four based on initial estimates alone. The comparison becomes more striking when examining program effectiveness per dollar invested:

- **Broadband infrastructure** generates measurable economic returns through enhanced business formation, improved educational access, and expanded telehealth availability benefits materializing in rural communities facing systematic disadvantage.
- **Missile defense systems** generate security benefits that remain fundamentally uncertain, depend heavily on adversary response patterns, and accrue as abstract deterrence rather than concrete economic activity.

The clean energy investment comparison follows similar logic. The Inflation Reduction Act authorizes approximately \$390 billion in energy security and climate investment over ten years roughly \$40 billion annually. Golden Dome initial deployment costs of \$75–175 billion would exceed two to four years of total IRA climate investment.

The comparison extends beyond dollar amounts to consideration of benefit incidence and distribution. Climate investment failures documented in the Borenstein analysis reveal benefits concentrate among higher-income households due to structural program features—a correctable policy design problem rather than inherent limitation of the investment category. Missile defense benefits, by contrast, accrue as collective security goods that cannot be targeted to disadvantaged populations.

### **1.3.3 Security Redefined: Infrastructure as Strategic Asset**

A recurring question in allocation debates is how to weigh capabilities with uncertain, deferred, and hard-to-measure returns (such as strategic missile defense) against investments with more directly measurable near-term economic returns (such as infrastructure). Reasonable analysts weigh these differently; our narrower point is that benefit measurability and distribution, not only headline cost, belong in the comparison.

When clean energy credits flow overwhelmingly to wealthy households, when hundreds of thousands of rural locations lose eligibility for broadband funding despite documented connectivity deficits, when teacher certification rates decline across hundreds of thousands of positions, these represent strategic vulnerabilities that no missile shield can address. The question facing policymakers is not whether Golden Dome offers any security value, but whether that value justifies opportunity costs measured against alternative investments with more certain returns and more progressive benefit distribution.

The allocation of potentially hundreds of billions toward space-based interceptors while fundamental infrastructure crumbles represents a choice about national identity and priorities, suggesting valuation of theoretical protection of existing assets over actual cultivation of national capacity and human capital. This pattern extends beyond any single program to reflect systematic features of federal resource allocation: defense programs with uncertain technical prospects and speculative security benefits attract sustained funding at levels dwarfing investments in infrastructure with documented returns and measurable impacts on economic opportunity.

## **1.4 Educational Infrastructure and Economic Competitiveness**

The infrastructure deficits examined in preceding subsections extend beyond physical capital to encompass human capital formation systems. Educational institutional capacity represents foundational infrastructure determining workforce quality, innovation capacity, and long-term economic competitiveness. Current deficits in this domain carry consequences compounding over decades, creating path dependencies extraordinarily difficult to reverse.

### **1.4.1 The Teacher Certification Deficit: Scale and Distribution**

Current estimates indicate over 365,000 teaching positions filled by teachers lacking full certification, with an additional 45,500 positions remaining entirely unfilled, totaling at least 411,500 impacted positions nationwide—approximately one in eight teaching roles. The geographic and demographic distribution exhibits systematic patterns: rural schools, schools serving predominantly low-income populations, and schools in districts with constrained fiscal capacity experience disproportionate concentrations of under-certified teachers.

This distribution creates a stratified educational system where access to qualified instruction correlates with existing economic and geographic advantages. The parallel to clean energy credit concentration and broadband deployment patterns proves direct: in each case, program structure or institutional capacity constraints concentrate benefits or services among populations already possessing advantages while systematically underserving populations facing greatest need.

### **1.4.2 Economic Consequences: The Diet-Health-Productivity Nexus**

The economic consequences of educational quality deficits operate through multiple channels, several exhibiting quantifiable magnitudes. Evidence from U.S. dietary pattern research reveals that educational attainment correlates inversely with added sugar consumption:

- Individuals holding bachelor’s degrees or higher: ~29 kg sugar annually

- Those without high school diplomas:  $\sim 40$  kg sugar annually
- Representing a 38% differential driven substantially by constrained household budgets prioritizing inexpensive, calorie-dense processed foods

The health consequences materialize predictably. Elevated sugar consumption associates strongly with dental problems, obesity, diabetes, and related chronic conditions reducing work capacity and increasing medical expenditures. The disability rate in the United States reaches 13.4% of total population, approximately double the rate observed in China at 6.3–6.5%.

The feedback dynamics merit careful examination:

1. Reduced educational quality  $\rightarrow$  diminished earning capacity
2. Constrained earnings  $\rightarrow$  limited food budgets
3. Budget constraints  $\rightarrow$  consumption patterns toward cheaper, sugar-dense options
4. Health consequences  $\rightarrow$  reduced workforce participation and increased medical costs
5. Further household budget constraints  $\rightarrow$  children face educational disadvantages
6. Cycle perpetuates across generations

This represents a compounding negative externality where initial educational deficits generate cascading economic and health costs accumulating over decades. The present value of these life-time costs substantially exceeds immediate fiscal savings from tolerating under-certified teachers or unfilled positions.

### 1.4.3 International Comparisons and Policy Trajectory

Chinese per capita sugar consumption reaches 5.76 kg annually compared to the U.S. figure of 33.7 kg—a nearly six-fold differential. While multiple factors contribute (cultural dietary preferences, agricultural policy, food processing industry structure), systematic differences in educational attainment and economic security play material roles. The welfare coverage differential proves particularly striking: 3–4% of U.S. population receives welfare coverage compared to 0.7% in China.

These statistics require careful interpretation given definitional differences and measurement approaches across national systems. Nevertheless, directional patterns suggest that educational quality deficits generate downstream economic and health consequences manifesting as elevated disability rates and welfare dependency.

The policy response trajectory under the Trump administration moves in the opposite direction from what evidence would suggest. The executive order to eliminate the Department of Education represents not merely symbolic opposition to federal bureaucracy but a structural choice to reduce institutional capacity for educational quality oversight, research, and interstate coordination. The rationale centers on returning control to states and localities while reducing federal expenditure.

The practical effect eliminates mechanisms for addressing systematic quality deficits and interstate disparities in educational resources. States with weakest fiscal capacity and greatest educational challenges lose access to federal technical assistance and supplemental funding precisely when facing most acute need. This policy direction parallels broadband deployment patterns where nominal devolution of authority actually reduces capacity to address systematic deficits.

#### 1.4.4 Opportunity Cost Framework Applied

The Department of Education operates on an annual budget of approximately \$80 billion, representing roughly 0.3% of federal outlays. This expenditure supports Title I grants to schools serving low-income students, special education services, student loan programs, educational research, and interstate coordination functions. The fiscal savings from elimination amount to rounding error relative to defense spending or major entitlement programs.

The long-term economic costs from reduced educational quality will substantially exceed any near-term fiscal savings. Human capital formation exhibits high returns to investment with particularly strong effects for populations facing greatest initial disadvantage. Reducing investment in this domain while simultaneously directing hundreds of billions toward speculative defense programs represents an inversion of cost-benefit logic.

### 1.5 Grid Composition and the Electric Vehicle Decarbonization Gap

The policy framework developed across preceding subsections establishes that resource allocation decisions must evaluate claimed benefits against empirical evidence rather than accepting them as inherent attributes of particular technologies. This principle proves particularly salient when examining electric vehicle deployment as a decarbonization strategy.

#### 1.5.1 The Categorical Framing Problem

Public discourse surrounding transportation electrification frequently characterizes battery-electric vehicles as “zero-emission technology,” creating perception that adoption inherently advances climate objectives. This characterization obscures a fundamental dependency relationship that substantially reduces claimed environmental benefits while reinforcing the competitive position of incumbent energy producers.

Electric vehicles operate as zero-emission at point of use, generating no direct tailpipe emissions during operation. This engineering fact proves technically accurate and environmentally meaningful for local air quality in urban environments where vehicle operation concentrates. However, system-level emission profiles depend entirely on generation mix supplying electricity to charging infrastructure.

U.S. electricity generation in 2024 derives approximately 60% from fossil fuel sources:

- Natural gas: ~40%
- Coal: ~20%
- Nuclear + renewables: ~40% (aggregated low-carbon)

Generation mix varies substantially across regions, with some states exceeding 80% fossil fuel dependency while others approach majority renewable generation. The implication for electric vehicle emission profiles proves direct: an EV charged on a grid deriving 60% of electricity from fossil fuels exhibits an emission profile roughly proportional to that fossil fuel generation, adjusted for transmission losses and charging efficiency.

#### 1.5.2 Marginal versus Average Grid Composition

Emission accounting becomes more precise when examining marginal versus average grid composition. *Marginal generation* refers to power plants that increase or decrease output to meet demand fluctuations, including new demand from EV charging. In most U.S. grid regions, natural gas plants provide marginal generation during typical operating hours, while coal plants may contribute during peak demand.

This means incremental electricity demand from new EV adoption typically draws power from fossil fuel sources even in regions where average grid composition includes substantial renewable capacity. System-level emission reduction from EV adoption therefore depends critically on both average grid composition and the marginal generation source serving incremental demand.

Calculations using marginal emission factors typically yield lower emission reductions from EV adoption than calculations using average grid factors, though both approaches demonstrate net reductions compared to internal combustion vehicles under most current grid conditions. The magnitude varies substantially:

- **Light-duty passenger vehicles** operating primarily in urban environments with moderate annual mileage: 30–50% emission reductions even on fossil-heavy grids compared to efficient gasoline vehicles
- **Heavy-duty vehicles, long-haul applications:** smaller emission advantages or net increases depending on grid composition and vehicle efficiency assumptions

The volumetric energy density constraint of current battery technology necessitates larger battery packs for equivalent range, increasing vehicle weight and reducing efficiency. These engineering tradeoffs limit emission advantage in applications requiring maximum range or payload capacity.

### 1.5.3 The Public Discourse Gap and Incumbent Advantage

The public discourse gap emerges from systematic underemphasis of grid composition dependency in policy discussion and technology promotion. Federal tax credits, state incentives, and manufacturer marketing materials characterize EVs as clean technology without consistently acknowledging that environmental benefits scale directly with renewable penetration in serving grid.

This framing creates public perception of EVs as categorically emission-free rather than vehicles whose emission profile depends entirely on electricity generation sources. The practical effect suppresses recognition that substantial EV adoption without corresponding grid decarbonization achieves limited climate benefit while potentially increasing electricity demand that existing fossil fuel plants serve. The technology occupies political and cultural space designated for climate solutions while delivering substantially smaller emission reductions than public perception suggests.

### 1.5.4 Market Structure Effects and Rent Distribution

The competitive implications extend beyond misleading environmental claims to include market structure effects reinforcing incumbent positions. Electric utilities, including those operating primarily fossil fuel generation, benefit directly from increased electricity demand that EV adoption generates. Revenue enhancement occurs regardless of generation mix, creating financial incentives for utilities to promote EV adoption independent of emission considerations. Natural gas producers benefit similarly, as gas-fired generation typically serves marginal demand increases in most grid regions.

This creates alignment of interests between EV manufacturers, electric utilities, and natural gas producers around transportation electrification that does not depend on achieving advertised emission reductions. Policy subsidies flowing to EV adoption effectively subsidize increased electricity consumption that existing generators serve, transferring public resources to incumbent energy producers while generating smaller emission reductions than alternative investments might achieve.

### 1.5.5 The Manufacturing Emissions Gap: Quantifying Avoided Reductions

The magnitude of avoided emissions from manufacturer non-deployment of available cleaner pathways proves substantial relative to claimed EV climate benefits. Consider the arithmetic:

#### U.S. BEV Manufacturing Emissions (2024 basis):

- Light-duty BEV sales:  $\sim 1.2$  million vehicles
- Average manufacturing footprint:  $\sim 10\text{--}12$  tonnes CO<sub>2e</sub> per vehicle (fossil-grid battery production; strongly dependent on pack size and grid intensity)
- Total manufacturing emissions: 14.4 million tonnes CO<sub>2e</sub> annually

#### Achievable Reduction Through Existing Pathways:

- Renewable-powered battery production:  $-9$  tonnes CO<sub>2e</sub> per vehicle ( $-75\%$  reduction)
- Green steel sourcing:  $-1.2$  tonnes CO<sub>2e</sub> per vehicle
- Responsible mining practices:  $-0.8$  tonnes CO<sub>2e</sub> per vehicle
- **Illustrative achievable reduction: up to  $\sim 11$  tonnes CO<sub>2e</sub> per vehicle under favorable sourcing assumptions (a large fraction of the manufacturing footprint)**

#### Aggregate Avoided Emission Reduction (2024 sales basis):

- $1.2 \text{ million vehicles} \times 11 \text{ tonnes CO}_2\text{e} = \mathbf{13.2 \text{ million tonnes CO}_2\text{e annually}}$

#### Comparison to Claimed Operational Benefits:

- Average U.S. grid intensity: 400 g CO<sub>2e</sub>/kWh
- Efficient gasoline vehicle: 180 g CO<sub>2e</sub>/km
- BEV on average U.S. grid: 110 g CO<sub>2e</sub>/km
- Annual operational emission reduction (15,000 km/year average): 1.05 tonnes CO<sub>2e</sub> per vehicle
- Fleet operational reduction (1.2 million vehicles): 1.26 million tonnes CO<sub>2e</sub> annually

**Interpreting the comparison:** the manufacturing-side reduction (a one-time  $\sim 11$  tonnes CO<sub>2e</sub> per vehicle) is large relative to the *annual* operational difference ( $\sim 1.05$  tonnes/year). These quantities are not directly comparable: operational savings recur over the vehicle’s life, so on a lifetime basis ( $\sim 15$  years) operational and manufacturing reductions are of the same order of magnitude. The defensible claim is therefore not that manufacturing dominates by “10.5 $\times$ ” but that manufacturing-stage emissions are of comparable importance to operational differences on current grids, while receiving far less policy attention.

The cost analysis proves revealing. Renewable-powered battery production adds \$19/kWh (\$2,850 per 150 kWh pack), representing 6% of \$45,000 vehicle cost—well within manufacturer profit margins (8–12% for established OEMs). Green steel sourcing adds \$180–240 per vehicle (0.4% cost increment). The aggregate cleaner-pathway cost increase of \$3,200 per vehicle (7% of base cost) compares favorably to the \$7,500 federal tax credit. Full lifecycle decarbonization could be mandated as precondition for subsidy eligibility without net cost increase to consumers.

Why this optimization doesn’t occur: zero-emission framing eliminates market mechanism for consumer differentiation. Buyers cannot identify cleaner-manufactured vehicles, cannot comparison shop on lifecycle emissions, and experience satisfaction from categorical classification regardless of actual manufacturing pathway. Manufacturers therefore optimize production cost



rather than lifecycle emissions, systematically selecting fossil-intensive pathways while maintaining identical environmental marketing claims.

## **1.6 Institutional Resources Beyond the Public Sector: Scale and Potential Roles**

The institutional capacity erosion documented across preceding subsections operates at a scale demanding mobilization of all major institutional actors possessing resources and presence. Religious institutions in the United States control estimated wealth exceeding \$1.2 trillion across property holdings, endowments, and annual contributions.[10] They operate extensive educational networks, maintain physical facilities in virtually every rural community where secular institutions have withdrawn, and command regular participation from millions of active members.

Given the scale of the constraints reviewed above, the substantial resources held by these institutions are potentially relevant to community capacity-building. How such resources are deployed is ultimately a matter for those institutions; we note the scale here only to identify an under-discussed pool of potential capacity, without prescribing its use.

### **1.6.1 Enlightened Self-Interest: Institutional Vulnerability to System Failure**

Religious institutions themselves face direct vulnerability to cascading failures documented in this analysis. Church facilities experience power outages from grid failures, flooding from extreme weather events intensified by climate change, and reduced congregation capacity when members face economic distress from health costs or educational deficits limiting employment.

Examples quantify the exposure:

- Hurricane Katrina aftermath: hundreds of churches destroyed or severely damaged across Gulf Coast, many never rebuilding
- 2021 Texas grid failure: churches without power during winter storms, compromising emergency shelter capacity
- Western wildfire events: church properties valued in hundreds of millions destroyed in California, Colorado, and other states

Beyond physical damage, congregational capacity declines when members struggle with diabetes, obesity, and chronic conditions driven by education-diet-health feedback loops documented in Section 1.4. Medical costs consuming household budgets reduce capacity for religious giving. Economic marginalization of rural communities depletes membership bases and necessitates church consolidations that further reduce institutional presence precisely where need intensifies.

The enlightened self-interest argument thus extends beyond abstract moral obligation to immediate operational sustainability. Climate adaptation, grid resilience, educational quality, and community economic capacity directly affect religious institutional viability. Churches in communities experiencing systematic decay face declining membership, reduced financial capacity, and eventual closure regardless of theological vitality or program quality.

### **1.6.2 Resource Scale Relative to Documented Needs**

Annual religious giving in the United States approaches \$140 billion, exceeding the entire Inflation Reduction Act climate investment authorization on an annualized basis. Religious institutions operate thousands of private schools serving predominantly middle and upper-income families, yet possess institutional capacity and certified teaching staff that could directly address the 411,549 public school positions remaining unfilled or under-certified.

Church facilities exist in rural communities experiencing acute broadband deficits, educational quality collapse, and economic withdrawal of market-based services. These facilities could serve as community anchor institutions providing:

- Broadband access points
- Telehealth service locations
- Educational support centers
- Climate resilience hubs during extreme weather events

Religious institutional endowments could capitalize rural broadband cooperatives, teacher retention programs, community health initiatives addressing diet-related chronic disease, and distributed renewable energy systems enhancing grid resilience. None of these deployment options would require new infrastructure construction or institutional capacity development—they represent reallocation of existing resources toward measurable community outcomes in geographic areas where religious institutions claim explicit service mission and face direct vulnerability to continued deterioration.

### 1.6.3 Connection to Climate Investment Policy

The connection to climate investment policy operates through multiple channels:

**First:** Religious institutional mobilization could address capacity deficits constraining rural community participation in emerging clean energy economies. Communities facing educational quality collapse, broadband access barriers, and economic marginalization possess limited capacity to adopt clean energy technologies or participate as developers in distributed energy systems regardless of subsidy availability.

**Second:** Religious institutional capital represents substantial pool potentially available for climate investment if appropriate structures align institutional incentives with measurable community outcomes. The reusable capital framework proposed in Section 2 could incorporate religious endowments structured as revolving funds for biomass gasification clusters, rural hydrogen refueling cooperatives, or distributed renewable generation enhancing community resilience against grid failures affecting church operations.

**Third:** Religious institutional accountability for measurable social outcomes could provide models for performance-based evaluation applicable to public climate investment programs.

### 1.6.4 Accountability Framework and Metrics

The accountability framework requires explicit metrics linking religious institutional tax-exempt status to demonstrated community benefit in service areas. Institutional-strain indicators provide candidate measures of institutional effectiveness:

- Teacher certification rates
- Student educational outcomes
- Health indicators including sugar consumption patterns and chronic disease prevalence
- Economic mobility rates
- Community cohesion measures

One question this raises is whether the tax-exempt status of institutions claiming a social mission might, in principle, be linked to demonstrated community benefit, as an extension of the performance-accountability principle in Section 2. We raise this as a policy question rather than

a recommendation; it would involve significant legal and constitutional considerations (including First Amendment constraints) well beyond the scope of this paper.

Integration with climate policy frameworks occurs through conditionality. Religious institutional participation in parliament-based allocation processes should require demonstrated performance on institutional strain prevention in their communities. Institutions seeking seats at policy tables should show measurable contributions toward addressing educational, health, and economic deficits documented in this analysis.

The resource mobilization question cannot be dismissed as secondary to public policy design. Climate investment operates under severe fiscal constraints documented in Section 1.1. The dollar’s declining reserve currency status, middle-class economic compression, and accumulated infrastructure deficits limit public sector capacity to finance comprehensive decarbonization. The scale of required adaptation and mitigation investment measured in trillions over coming decades exceeds feasible public sector capacity under current fiscal trajectories.

Ignoring \$1.2 trillion in religious institutional resources plus \$140 billion annual contribution flows represents a deployment failure that climate mitigation timelines cannot afford. Effective mobilization requires accountability mechanisms aligning institutional incentives with measurable community outcomes and creating consequences for resource hoarding that permits community deterioration while institutions face mounting vulnerability to system failures they possess capacity to address.

More broadly, institutions with substantial resources and community presence are one of several potential participants in the capacity-building this analysis describes. Whether and how to engage them is a normative and legal question outside the scope of this techno-economic assessment.

## 2 Part 1: Policy and Regulatory Architecture

Part 1 examines how scarce public decarbonization funds can be structured to finance multiple project cycles rather than single deployments. We critique allocation policies that concentrate clean energy credits among incumbent actors and propose guardrails prioritizing capital-access instruments to expand entry for new developers and increase market contestability.

Unilateral executive orders, while expedient, exhibit limited effectiveness and uncertain durability, distorting investment decisions toward short time horizons. Guardrails must therefore target instruments that widen access, reduce structural barriers, require transparency, and match risk-sharing to asset learning curves.

### 2.1 Misaligned Incentives: How Categorical Framing Can Slow Achievable Decarbonization

The electric vehicle case study reveals a systematic failure mechanism extending beyond EV deployment to characterize broader patterns in climate policy. “Zero emission vehicle” branding creates a three-actor policy failure that systematically prevents achievable decarbonization:

1. **Commercial interests** exploit categorical framing to avoid deploying available low-carbon manufacturing methods (renewable-powered battery production, green steel sourcing, responsible mineral extraction)
2. **Policymakers** claim climate progress without mandating full lifecycle accountability, satisfying political constituencies through symbolic achievement while deferring actual emission reductions

3. **Citizens** experience consumer complacency—the conviction that purchasing an EV constitutes sufficient climate engagement—thereby eliminating political pressure necessary to demand that manufacturers employ cleaner production pathways existing today

The result: tailpipe-only metrics satisfy all three actors prematurely, allowing fossil-intensive manufacturing, coal-dominated grids, and extractive mining practices to persist unchallenged while genuine climate engagement evaporates into transactional consumer identity.

### 2.1.1 Actor I: Manufacturing Emissions Loophole

Battery-electric vehicle production generates on the order of 8–12 tonnes CO<sub>2</sub>e per vehicle in embodied emissions for a typical light-duty vehicle, concentrated in battery cell production and steel/aluminum sourcing. Estimates vary widely with pack size and grid intensity: at ~100 kg CO<sub>2</sub>e/kWh under fossil-grid manufacturing, a large 150 kWh pack alone can approach or exceed the upper end of this range, whereas typical 60–80 kWh packs imply substantially less. We therefore use the 8–12 tonne range for a representative vehicle rather than a single point value.

This manufacturing burden means an EV must operate 50,000–80,000 km before lifecycle emissions fall below those of an efficient internal combustion vehicle—the “carbon payback distance.”

#### Existing Cleaner Pathways:

- Renewable-powered battery manufacturing reduces cell production emissions by 65–75%, achieving 35–40 kg CO<sub>2</sub>e per kWh
- Prior to its 2025 bankruptcy, Swedish manufacturer Northvolt reported figures on the order of 8.7 kg CO<sub>2</sub>e per kWh using hydroelectric power (illustrating what low-carbon electricity can achieve in principle, notwithstanding the firm’s subsequent commercial failure)
- Green steel sourcing (hydrogen-direct-reduced iron replacing coal-based blast furnaces) cuts steel embodied emissions from 2.1 to 0.4 tonnes CO<sub>2</sub>e per tonne

These pathways exist commercially today. Northvolt operates at gigawatt-hour scale, HYBRIT demonstrates green steel at industrial volumes, and responsible mineral sourcing certifications (IRMA, RMI) provide supply chain verification mechanisms.

**The Evasion:** Zero-emission categorical framing eliminates manufacturer incentive to deploy these pathways. If vehicles receive environmental credit based solely on tailpipe emissions, manufacturers optimize production cost rather than lifecycle emissions. Fossil-grid manufacturing in China (producing 70% of global battery cells at 650 g CO<sub>2</sub>e/kWh grid intensity) costs \$87/kWh versus \$106/kWh for renewable-powered European production. The \$19/kWh differential (\$2,850 per 150 kWh pack) directly rewards manufacturers for choosing fossil-intensive production while maintaining identical zero-emission marketing claims.

Consumer purchasing decisions, shaped by categorical framing, cannot distinguish between vehicles with 15-tonne versus 5-tonne manufacturing footprints—both carry identical “zero emission” labels.

### 2.1.2 Actor II: Symbolic Achievement Mechanism

Federal and state governments claim transportation decarbonization progress through EV adoption targets without mandating manufacturing emission standards. California’s 2035 ban on new internal combustion sales and federal infrastructure investments exceeding \$42 billion for charging networks create political credit for symbolic action while deferring regulatory confrontation with manufacturing interests that comprehensive lifecycle standards would require.

**Avoided Regulation:** No jurisdiction requires disclosed manufacturing emissions, renewable energy sourcing in production, or lifecycle carbon accounting as precondition for EV incentives. The federal \$7,500 tax credit applies uniformly regardless of manufacturing pathway. California’s Advanced Clean Cars II regulation establishes zero-emission vehicle sales mandates without corresponding manufacturing emission limits.

This regulatory gap need not be intentional to be consequential; it can persist as an equilibrium even absent deliberate coordination. Comprehensive lifecycle standards would require supply chain verification mechanisms, cross-border enforcement coordination, and potential trade disputes with manufacturing-dominant nations—all politically costly compared to claiming credit for deployment targets.

The policy convenience extends to grid composition dependencies. Politicians announce EV charging infrastructure deployment (\$7.5 billion in Infrastructure Investment and Jobs Act) without corresponding mandates for grid decarbonization. A fossil-dominated grid (60% U.S. average, 80%+ in Wyoming and West Virginia) means new EV charging load draws power from marginal generators, typically natural gas plants contributing 400 g CO<sub>2</sub>e/kWh.

Yet policymakers claim “zero emission transportation” progress while electricity demand increases serve fossil generation. This allows simultaneous credit-claiming with electric utilities (increased revenue from charging load), automotive manufacturers (expanded EV sales), and environmental constituencies (visible climate action symbolism).

### 2.1.3 Actor III: Premature Satisfaction Dynamic

Consumer psychology research demonstrates that symbolic environmental actions reduce subsequent engagement with more demanding behavioral changes—a phenomenon termed “moral licensing” in behavioral economics literature. Purchasing a \$45,000–65,000 battery-electric vehicle represents substantial financial commitment, creating powerful psychological motivation to perceive this action as sufficient climate contribution.

The zero-emission framing validates this perception, allowing purchasers to experience environmental identity satisfaction without investigating manufacturing supply chains, demanding renewable charging infrastructure, or maintaining political pressure for comprehensive grid decarbonization.

**Evidence and caveats:** the broader “moral licensing” literature documents that some symbolic pro-environmental actions can reduce subsequent engagement, but we are not aware of definitive vehicle-specific longitudinal evidence establishing this substitution for EV purchasers; we advance it as a plausible hypothesis rather than a demonstrated effect. If present, such an effect could be more consequential among higher-income households (the top quintile captured the large majority of EV tax credits in the Borenstein–Davis analysis).

Instead, the purchasing act terminates the engagement cycle: the consumer has “done their part” through market transaction, eliminating the political constituency pressure that might compel manufacturers to deploy available cleaner production pathways.

This dynamic creates systemic lock-in:

- Manufacturers face no consumer pressure for cleaner manufacturing (purchasers satisfied by categorical framing)
- No regulatory requirements (policymakers claiming credit for deployment rather than life-cycle standards)
- Active financial incentives to minimize production costs through fossil-intensive pathways

The result: achievable emissions reductions in battery production, steel sourcing, and mineral extraction remain systematically undeployed while all three actors claim environmental progress.

## 2.2 Breaking the Trap: Policy Architecture for Forced Transparency

Disrupting the three-actor incentive dynamic requires institutional mechanisms that make life-cycle emissions unavoidably visible, eliminate categorical framing advantages, and create stakeholder constituencies with direct interests in comprehensive decarbonization. Three design interventions address distinct components of the coordination equilibrium.

### 2.2.1 Mandatory Lifecycle Carbon Labeling

All vehicles sold in U.S. markets must display prominently (window sticker, marketing materials, point-of-sale disclosure) three emission metrics:

1. **Manufacturing footprint:** Total embodied emissions in production (tonnes CO<sub>2</sub>e), broken down by battery cells, steel/aluminum sourcing, and assembly energy
2. **Operational intensity:** Emission rate per kilometer on serving regional grid (g CO<sub>2</sub>e/km), updated quarterly based on actual marginal generation data
3. **Lifecycle break-even:** Distance required before lifecycle emissions fall below equivalent efficient internal combustion vehicle (km)

**Mechanism:** This disclosure eliminates categorical framing advantages. Consumers can compare vehicles on actual emission performance rather than technology classification. Market pressure emerges for cleaner manufacturing pathways—manufacturers deploying renewable-powered battery production gain competitive differentiation. The reform creates consumer constituency with direct interest in manufacturing decarbonization.

### 2.2.2 Performance-Based Incentive Scaling

Federal tax credits and state incentives scale based on demonstrated lifecycle emission reductions rather than technology classification:

- Full \$7,500 credit requires < 4 tonnes CO<sub>2</sub>e manufacturing footprint AND operation on < 30% fossil grid OR use of certified renewable electricity
- Credits decline linearly: \$5,000 for 4–8 tonnes manufacturing footprint, \$2,500 for 8–12 tonnes, \$0 for > 12 tonnes
- No categorical “zero emission” eligibility—all pathways evaluated on measured performance

**Mechanism:** This creates manufacturer financial incentive to deploy cleaner production pathways. The \$19/kWh cost increment for renewable-powered batteries becomes economically advantageous when enabling \$7,500 versus \$2,500 credit eligibility. Green steel sourcing (\$180–240 cost) proves profitable when protecting full credit access. The reform eliminates manufacturer advantage from categorical framing evasion.

### 2.2.3 Hydrogen Pathway Parity Funding

Establish infrastructure investment parity between battery-electric and hydrogen pathways, targeting \$8 billion for 2,000-station national hydrogen refueling network (versus \$42 billion committed to EV charging). Station design prioritizes distributed small-operator ownership (350 kg/day standardized modules) rather than utility monopolization.

**Mechanism:** This creates competitive alternative pathway that cannot hide behind categorical framing. Hydrogen vehicles require explicit emission accounting (production pathway determines performance), forcing lifecycle transparency that battery-electric categorical framing systematically avoids. The alternative pathway presence creates comparison baseline revealing EV manufacturing and grid composition opacity.

## 2.3 Parliament-Based Allocation and Reusable Capital

We distinguish *capital-access instruments*, which expand opportunities for potential entrants, from *direct production credits* that primarily reward existing actors. Public narratives often assign unconditional benefits to domestic clean-energy manufacturing across jobs, decarbonization, resilience, affordability, and equity. We treat each benefit as contingent and requiring substantiation under explicit conditions. Until those conditions are met, claimed benefits function as scenario variables in policy design.

### 2.3.1 State-Level Parliament Structure

We propose a state-level parliament-based route that prevents exclusion of stakeholder representatives closest to implementation for major allocation decisions. The structure differs fundamentally from technocratic optimization or incumbent-dominated advisory boards:

**Composition:**

- Rural feedstock aggregator representatives (biomass, agricultural residues)
- Small-scale energy producer representatives (municipal utilities, cooperatives)
- Environmental justice organization representatives
- Labor union representatives (construction, operations, maintenance)
- Academic/technical experts (non-voting advisory capacity)
- State energy office staff (facilitators, non-voting)

**Explicitly Excluded:**

- Incumbent utility representatives (conflict of interest in distributed generation)
- Large-scale project developer representatives (concentration risk)
- Equipment manufacturer representatives (technology lock-in risk)

**Deliberation Requirements:**

- Transparent proceedings with recorded rationales for allocation decisions
- Public comment periods before final authorization
- Periodic reauthorization (3-year cycles) against measurable outcomes
- Explicit documentation of how allocation decisions address benefit distribution and capacity-building rather than merely deployment targets

### 2.3.2 Reusable Capital Structures

The design objective centers on capacity-building—expanding the pool of bankable entrants rather than merely increasing disbursements. Reusable capital enables multiple project cycles from single appropriations:

**Revolving Loan Fund Structure:**

1. Initial public appropriation capitalizes state-level fund (\$50–200 million depending on state)
2. Parliament allocates loans to qualifying projects at below-market rates (2–4% vs. commercial 6–10%)
3. Loan repayments over 15–20 year terms replenish fund
4. Replenished capital finances subsequent project cohorts
5. Public dollar finances 3–5 project generations rather than single deployment

**Qualification Criteria:**

- Projects must demonstrate lifecycle emission reductions through ISO-consistent LCA
- Supply chain transparency documenting minerals and refining diversification
- Local hiring commitments with wage floors
- Community benefit agreements with measurable outcomes
- Feedstock sustainability certification (for biomass pathways)

**Risk Allocation:**

- Technology risk (performance below specification): developer absorbs through lower returns
- Market risk (price volatility): shared through price collar agreements
- Policy risk (regulatory change): state absorbs through loan restructuring authority
- Catastrophic risk (facility loss): insurance requirements

### 2.3.3 Guardrail Framework

The guardrail framework requires programs to:

1. **Publish ISO-consistent LCAs:** All projects must disclose lifecycle emissions using standardized methodologies (ISO 14040/44 series), enabling comparative assessment rather than categorical claims
2. **Document minerals and refining diversification:** Supply chain transparency requirements reveal concentration risks and enable targeted interventions to reduce dependencies
3. **Disclose award durability and counterparty risk:** Contract terms, termination conditions, and developer financial capacity must be public to enable informed assessment of program sustainability
4. **Adopt traceable procurement:** Feedstock and component sourcing must be verifiable to prevent greenwashing and ensure claimed sustainability benefits materialize

The structure aims to build partisan immunity and inter-electoral buffering into allocation mechanisms. By requiring demonstrated performance rather than accepting categorical claims, incorporating diverse stakeholder representation rather than relying on technocratic optimization, and enabling capital recycling rather than single-deployment grants, the framework resists incumbent capture and survives electoral transitions.



### 3 Part 2: Techno-Economic Analysis of Biomass-to-Hydrogen Pathways

Part 2 presents detailed techno-economic analysis demonstrating that modular biomass gasification offers technically credible and economically viable pathways for distributed hydrogen production. The analysis establishes cost competitiveness under realistic feedstock and energy price scenarios while revealing how clustering strategies and financing structures determine pathway viability.

#### 3.1 Analytical Framework and Viability Measures

TEA viability is evaluated through net present value (NPV), internal rate of return (IRR), and levelized cost of hydrogen (LCOH, \$/kg). We customize operating-cost structures for three scales:

1. Single gasifier (50 kg/d H<sub>2</sub> capacity)
2. Medium cluster (10 units, 500 kg/d aggregate capacity)
3. Large cluster (100 units, 5,000 kg/d aggregate capacity)

Analysis incorporates category-specific elasticities, shared services, and by-product credit utilization, applying broadly relevant U.S. inflation and interest rates across the project lifecycle (30-year horizon, 10% discount rate).

#### 3.2 Technical Overview: Gasification Process and Scale Economics

We evaluate two primary gasifier configurations:

- **Fixed-bed (FB):** Lower capital intensity, higher operating labor requirements
- **Entrained-flow bed (EFB):** Higher capital intensity, lower operating labor requirements

Both produce hydrogen from biomass through thermochemical conversion; we treat biomass carbon as biogenic but not automatically “carbon-neutral,” since net lifecycle emissions depend on feedstock sourcing, land-use effects, and process energy (see the comparative assessment and limitations). The process schematic (Figure 1) shows:

1. **Feed preparation:** Drying and pulverizing biomass feedstock
2. **Gasification:** Thermochemical conversion at elevated temperature and pressure
3. **Syngas cooling:** Temperature management for downstream processing
4. **Water-gas shift (WGS):**  $\text{CO} + \text{H}_2\text{O} \rightarrow \text{CO}_2 + \text{H}_2$
5. **Clean-up:** Particulate, tar, and contaminant removal
6. **Acid gas removal:** CO<sub>2</sub> and H<sub>2</sub>S separation
7. **Pressure swing adsorption (PSA):** Final hydrogen purification
8. **By-product management:** Ash disposal, sulfur recovery

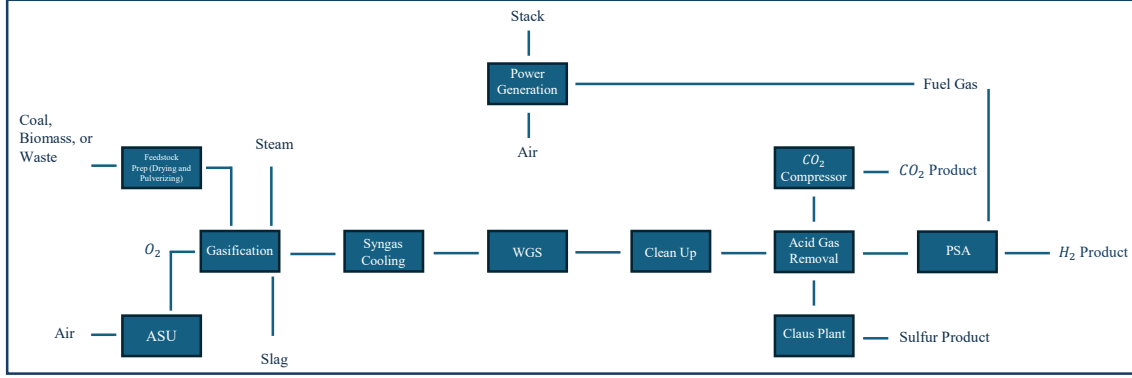


Figure 1: Process flow diagram for biomass gasification to hydrogen production, showing feedstock preparation, gasification, syngas cleanup, CO<sub>2</sub> management, hydrogen separation, and energy integration.

### 3.2.1 Scaling Strategy: Clustering versus Single Large Units

Multiple small-scale units can capture scale economies comparable to single large plants through clustering. The strategy recognizes that different cost categories exhibit different scaling exponents:

- **Variable operating costs (VOC):** Scale approximately proportionally with throughput (exponent  $\approx 0.9$ )
- **Fixed operating costs (FOC):** Scale sub-linearly with capacity (exponent  $\approx 0.5$ )
- **Capital expenditures (CAPEX):** Scale with exponent  $\approx 0.7$  (classical “six-tenths rule”)

By sharing administrative functions, maintenance capabilities, and by-product handling across cluster members, small units achieve costs approaching large centralized facilities while maintaining geographic distribution enabling feedstock mobilization and rural participation.

## 3.3 Methodology: Cost Categories, Scaling Formulas, and Assumptions

### 3.3.1 Cost Category Definitions

We partition total operating costs into four categories, detailed in Table 1:

1. **Variable Operating Costs (VOC):** Feedstock, water, electricity, operating/maintenance supplies
2. **Operator Expenses (OPE):** Direct operating labor, maintenance labor, supervision
3. **Administrative Costs (ADM):** Property taxes, insurance, overhead
4. **By-Product Credits (By-P):** Ash disposal costs (negative), sulfur revenue (positive)

Table 1: Operating cost categories for fixed-bed (FB) and entrained-flow bed (EFB) gasifiers across scales.

| Category/Component             | Description                 | 1 Unit              | 10-Unit           | 100-Unit             |
|--------------------------------|-----------------------------|---------------------|-------------------|----------------------|
| <i>Variable Operating Cost</i> |                             |                     |                   |                      |
| Feedstock                      | Total tonnes $\times$ price | Normal <sup>a</sup> | Bulk <sup>b</sup> | Special <sup>c</sup> |
| Water                          | \$0.60/1,000 gal            | 0.60                | 0.50              | 0.30                 |
| Electricity                    | \$/kWh                      | 0.03                | 0.025             | 0.015                |
| Supplies (oper.)               | 30% $\times$ Op. labor      | 30%                 | 30%               | 30%                  |
| Supplies (maint.)              | 1.5% of TPI                 | 1.5%                | 1.5%              | 1.5%                 |
| <i>Operators</i>               |                             |                     |                   |                      |
| Direct labor                   | \$/person                   | 50,000              | 50,000            | 50,000               |
| Operating labor                | Personnel count             | 1 <sup>d</sup>      | FB:5, EFB:10      | FB:25, EFB:40        |
| Maintenance                    | 2% of TPI                   | 2%                  | 2%                | 2%                   |
| Supervision <sup>e</sup>       | 15% of (Op+Maint.)          | Local               | Shared            | Centralized          |
| <i>Administrative</i>          |                             |                     |                   |                      |
| Property tax & insurance       | 2.7% of TPI                 | 2.7%                | 2.7%              | 2.7%                 |
| Overhead                       | 0.60 $\times$ direct labor  | Full                | Reduced           | Reduced              |
| <i>By-product</i>              |                             |                     |                   |                      |
| Ash disposal                   | \$/ton                      | N/A                 | Partial           | Full                 |
| Sulfur credit                  | \$/ton                      | N/A                 | Partial           | Full                 |

<sup>a</sup> Feedstock at market rates, inflation-adjusted

<sup>b</sup> Bulk rates, discounted dynamically

<sup>c</sup> Bulk rates protected against inflation and capped

<sup>d</sup> Owner-operated single unit (operations, maintenance, supervision)

<sup>e</sup> Shared/centralized efficiencies in clusters

### 3.3.2 Reference System Specifications

Two reference systems each produce 1,500,000 kg/d H<sub>2</sub> (equivalent to 200 $\times$ 10<sup>9</sup> BTU/d):

- **FB unit:** CAPEX \$300M, annual OPEX \$130M, 70 personnel
- **EFB unit:** CAPEX \$500M, annual OPEX \$110M, 20 personnel

These large-scale reference systems represent mature industrial hydrogen production technology. Our analysis scales down to small modular units suitable for distributed deployment.

### 3.3.3 Scaling Laws and Economic Metrics

#### Capital Scaling:

$$C_2 = C_1 \left( \frac{S_2}{S_1} \right)^n \quad (1)$$

where  $C$  is capital cost,  $S$  is capacity, and  $n \in [0.2, 0.7]$  reflects category-dependent elasticities.

#### Operating Expense Scaling:

$$\text{OPEX}_2 = m \cdot C_{\text{VOC}} \left( \frac{R_2}{R_1} \right)^{n_1} + k \cdot C_{\text{OPE}} \left( \frac{R_2}{R_1} \right)^{n_2} + n \cdot C_{\text{ADM}} \left( \frac{R_2}{R_1} \right)^{n_3} + q \cdot C_{\text{By-P}} \left( \frac{R_2}{R_1} \right)^{n_4} \quad (2)$$

with constants  $m, n, k, q$  and exponents  $n_i$  chosen per category (Table 2).

Table 2: Scaling exponents by cost category.

| Cost Category                  | 10-Unit Scale | 100-Unit Scale |
|--------------------------------|---------------|----------------|
| Variable Operating Costs (VOC) | 0.9           | 0.7            |
| By-Products (By-P)             | 0.9           | 0.7            |
| Operating Expenses (OPE)       | 0.5           | 0.2            |
| Administrative Costs (ADM)     | 0.5           | 0.2            |

### Net Present Value:

$$\text{NPV} = -\text{CAPEX} + \sum_{t=1}^T \frac{\text{Revenue}_t - \text{OPEX}_t - \text{Fixed OPEX}_t}{(1+r)^t} \quad (3)$$

with discount rate  $r = 10\%$  and horizon  $T = 30$  years unless noted. Internal rate of return (IRR) reported when meaningful; levelized cost of hydrogen (LCOH, \$/kg) provided throughout for comparability.

#### 3.3.4 Labor Treatment for Small Units

For small units, we assume owner-operator control to avoid unrealistic labor cost vanishing under naïve scaling. Personnel counts derived via:

$$\text{Personnel} = \max [n_0 \cdot c^{0.7}, 1] \quad (4)$$

where  $c$  is capacity scale factor and  $n_0$  the baseline headcount. FB and EFB intraclass differences reinstated for clusters.

### 3.4 Results: Scaled CAPEX/OPEX and Levelized Costs

Table 3 presents scaled capital and operating costs across three deployment scales for both gasifier types, along with resulting levelized hydrogen costs.

Table 3: Scaled CAPEX/OPEX and hydrogen prices across scenarios.

| Scenario                        | CAPEX<br>(M\$) | OPEX<br>(M\$) | Capacity<br>( $10^3$ kg/d) | $n_{\text{CAPEX}}$ | $n_{\text{OPEX}}$ | H <sub>2</sub> Price<br>(\$/kg) |
|---------------------------------|----------------|---------------|----------------------------|--------------------|-------------------|---------------------------------|
| <i>Fixed Bed (FB)</i>           |                |               |                            |                    |                   |                                 |
| Original Unit                   | 300            | 130           | 1500                       | 1.0                | 1.0               | 0.34                            |
| 1 Unit                          | 0.81           | 0.144         | 0.05                       | 0.7                | complex           | 24.69                           |
| 10 Units                        | 4.14           | 0.943         | 0.50                       | 0.7                | complex           | 15.05                           |
| 100 Units                       | 20.37          | 3.354         | 5.00                       | 0.7                | complex           | 9.57                            |
| <i>Entrained-Flow Bed (EFB)</i> |                |               |                            |                    |                   |                                 |
| Original Unit                   | 500            | 110           | 1500                       | 1.0                | 1.0               | 0.54                            |
| 1 Unit                          | 1.35           | 0.130         | 0.05                       | 0.7                | complex           | 27.82                           |
| 10 Units                        | 6.90           | 1.049         | 0.50                       | 0.7                | complex           | 15.04                           |
| 100 Units                       | 33.95          | 3.596         | 5.00                       | 0.7                | complex           | 10.87                           |

#### 3.4.1 Key Findings

##### Cost Reduction Through Clustering:

- Single units exhibit high costs (\$24.69–27.82/kg) reflecting diseconomies of scale

- 10-unit clusters achieve substantial reductions to \$15.04–15.05/kg through shared services
- 100-unit clusters reach a modeled \$9.57–10.87/kg on our base-case and (favorable) cluster-financing assumptions—closer to, but still above, fossil pathways; read together with the reference-plant and financing caveats in the Limitations

#### Technology Comparison:

- FB exhibits lower initial capital intensity but higher operating labor requirements
- EFB shows opposite pattern: higher CAPEX, lower OPEX
- At 100-unit scale, cost difference narrows to \$1.30/kg, suggesting technology choice depends on local factors (labor availability, financing access) rather than inherent superiority

**Financing Impact:** To isolate scaling effects, we protect clusters against inflation with capped interest at 5%, while single units reflect dynamic discounting. The resulting gap in hydrogen prices of approximately \$5/kg underscores that financing regimes and inflation protection significantly influence economics independent of engineering improvements. This finding carries direct policy implications: public co-finance reducing effective interest rates can enable project viability without requiring technology breakthroughs.

### 3.5 Feedstock Scenarios and Comparative Analysis

Table 4 presents levelized hydrogen costs across fifteen biomass feedstock types, demonstrating pathway sensitivity to feedstock price and hydrogen content.

Table 4: Biomass feedstock scenarios and implied levelized hydrogen costs.

| Feedstock       | H%  | Price<br>(\$/t) | Tonnes | Total<br>(\$) | FB    |       | EFB   |       |
|-----------------|-----|-----------------|--------|---------------|-------|-------|-------|-------|
|                 |     |                 |        |               | Base  | Adj.  | Base  | Adj.  |
| Wood Pellet     | 6.5 | 200             | 346    | 69,231        | 20.27 | 24.69 | 23.80 | 28.30 |
| Rice Husk       | 5.5 | 75              | 409    | 30,682        | 13.10 | 16.15 | 12.21 | 15.32 |
| Sawdust         | 6.0 | 75              | 375    | 28,125        | 12.95 | 16.01 | 12.06 | 15.18 |
| Verge Grass     | 6.0 | 45              | 375    | 16,875        | 12.32 | 15.38 | 11.43 | 14.55 |
| Paper Sludge    | 6.0 | 35              | 375    | 13,125        | 12.12 | 15.18 | 11.23 | 14.35 |
| Pine/Spruce Mix | 8.0 | 45              | 281    | 12,656        | 12.09 | 15.15 | 11.20 | 14.32 |

Baseline assumes 18,000 kg H<sub>2</sub> production at 80% conversion efficiency. Prices reflect representative 2020s quotations adjusted for inflation and delivery. “Base” = baseline labor; “Adj.” = adjusted labor for single owner-operated unit.

#### 3.5.1 Feedstock Selection Criteria

The analysis reveals several patterns guiding feedstock selection:

**Hydrogen Content:** Higher hydrogen content (7–8% by mass) reduces feedstock tonnage required per kg H<sub>2</sub> produced, directly lowering costs. Pine/spruce mix (8% H) shows notably lower costs than wood pellets (6.5% H) despite similar price per tonne.

**Price Sensitivity:** Feedstock cost dominates total operating expenses for biomass pathways. The range from paper sludge (\$35/t) to wood pellets (\$200/t) generates cost spread of \$12.09–20.27/kg for FB baseline, demonstrating extreme sensitivity to feedstock procurement strategy.

**Residue versus Purpose-Grown:** Low-cost feedstocks (paper sludge, verge grass, agricultural residues) represent waste streams with minimal alternative value. Purpose-grown biomass (wood pellets) faces competition from alternative uses (heating, pelleted fuel) that establish price floors.

This suggests distributed gasification pathways should prioritize residue aggregation rather than dedicated biomass cultivation.

**Geographic Distribution:** Feedstock availability exhibits strong spatial clustering. Forest residues concentrate in Pacific Northwest, Northern tier states, and Appalachia. Agricultural residues concentrate in Midwest. Mill wastes cluster near timber processing facilities. This geographic specificity implies pathway viability depends on local feedstock access rather than universal applicability.

### 3.6 Economies of Dispersion: Clustering Strategy

Table 5 summarizes the cost trajectory across scales, demonstrating how clustering captures scale economies while maintaining geographic distribution.

| Table 5: Economy of scale for biomass-gasification networks. |                         |                              |
|--------------------------------------------------------------|-------------------------|------------------------------|
| Scenario                                                     | Capacity ( $10^3$ kg/d) | H <sub>2</sub> Price (\$/kg) |
| <i>Fixed Bed</i>                                             |                         |                              |
| Original (industrial-scale)                                  | 1500                    | 0.34                         |
| 1 Unit                                                       | 0.05                    | 24.69                        |
| 10-Unit Cluster                                              | 0.50                    | 15.05                        |
| 100-Unit Cluster                                             | 5.00                    | 9.57                         |
| <i>Entrained-Flow Bed</i>                                    |                         |                              |
| Original (industrial-scale)                                  | 1500                    | 0.54                         |
| 1 Unit                                                       | 0.05                    | 27.82                        |
| 10-Unit Cluster                                              | 0.50                    | 15.04                        |
| 100-Unit Cluster                                             | 5.00                    | 10.87                        |

The progression demonstrates:

- ~40% cost reduction moving from single unit to 10-unit cluster
- Additional ~36% reduction moving from 10-unit to 100-unit cluster
- Diminishing returns as cluster size increases, suggesting optimal scale in 50–150 unit range

#### 3.6.1 Shared Services and By-Product Utilization

Category-level analysis clarifies where scale delivers greatest advantage:

**Administration and Supervision:** Benefit strongly from shared services. A single administrative team can oversee 10–100 units with minimal incremental cost increase. Supervision costs scale with exponent 0.2 at 100-unit scale, representing near-complete sharing.

**Variable Costs:** Track approximately proportionally with throughput (exponent 0.7–0.9), offering limited scale economies. Feedstock procurement, water consumption, and electricity use scale nearly linearly with production.

**Labor:** Requires explicit treatment at micro-scale to avoid unrealistic erosion under power-law scaling. Our owner-operator assumption for single units recognizes that very small plants cannot reduce labor below one full-time equivalent. Clusters enable specialization and efficiency gains but not labor elimination.

**By-Product Credits:** Improve substantially with scale. Single units face prohibitive logistics for ash disposal and sulfur marketing. Clusters achieve economies in by-product handling:

centralized ash disposal reduces per-unit cost; sulfur accumulation reaches critical mass for industrial sale. This creates positive feedback where larger clusters become disproportionately more attractive.

### 3.7 Comparative Assessment: Biomass versus Fossil Pathways

The levelized costs achieved at 100-unit cluster scale (\$9.57–10.87/kg) warrant comparison against fossil-based hydrogen production:

#### Steam Methane Reforming (SMR):

- Baseline cost: \$1.50–2.50/kg (depending on natural gas price)
- With carbon price (\$50/tonne CO<sub>2</sub>): \$2.50–3.50/kg
- With CCS addition: \$2.00–3.00/kg before carbon price; \$2.50–4.00/kg with carbon price

#### Coal Gasification:

- Baseline cost: \$1.80–2.80/kg (depending on coal price and efficiency)
- With carbon price (\$50/tonne CO<sub>2</sub>): \$3.00–4.50/kg
- With CCS addition: \$2.50–3.50/kg before carbon price; \$3.50–5.00/kg with carbon price

#### Biomass Gasification (100-unit cluster):

- Baseline cost: \$9.57–10.87/kg (this analysis)
- Lifecycle emissions: 0.5–2.5 kg CO<sub>2e</sub>/kg H<sub>2</sub> (residue-based feedstock)
- Low carbon-price exposure *if* residue-based feedstock and sustainable sourcing are verified (lifecycle emissions 0.5–2.5 kg CO<sub>2e</sub>/kg H<sub>2</sub>; not automatically zero)

#### 3.7.1 Competitiveness Analysis

Direct cost comparison reveals biomass pathways remain 3–5× more expensive than fossil baselines without carbon pricing. However, several factors narrow the effective gap:

**Carbon Pricing:** At \$50/tonne CO<sub>2</sub>, fossil pathway costs increase \$1.00–2.00/kg, reducing biomass premium to 2–3×.

**Infrastructure Costs:** Fossil pathways assume existing natural gas pipeline networks or coal delivery infrastructure. Greenfield development in rural areas lacking this infrastructure would add \$0.50–1.50/kg to fossil pathway costs, further narrowing the gap.

**Price Volatility:** Fossil feedstocks exhibit high price volatility (natural gas prices ranging 3–15\$/MMBTU over recent years). Biomass residues show lower volatility as waste streams, providing price stability advantages.

**Rural Economic Development:** Biomass pathways create local employment and feedstock revenue in rural areas. These benefits do not appear in \$/kg comparison but represent real economic value to communities facing systematic decline.

**Energy Security:** Domestic, geographically dispersed feedstocks reduce exposure to concentrated foreign suppliers and mineral refiners. Supply risk shifts from geopolitical concentration to logistics and aggregation challenges, manageable through clustering and contracting strategies.

### 3.7.2 Network Architecture and System Resilience

Individual gasification nodes, while economically viable at cluster scale, achieve maximum strategic value through network interconnection. The evolution from self-contained production sites to integrated infrastructure transforms distributed generation from isolated capacity additions into resilient energy systems.

Production sites function initially as self-contained nodes for energy conversion and storage. As deployment matures, these evolve into dense, distributed networks where hydrogen and CO<sub>2</sub> are transported via tanker and pipelines connecting multiple storage and consumption hubs. The proximity of nodes to key energy demand centers reduces energy and resource requirements for transportation, creating operational efficiencies that compound as network density increases.

Network interconnectedness enables system capabilities unavailable to isolated facilities:

- **Dynamic load management:** Demand fluctuations absorbed across multiple nodes rather than requiring oversized single-site capacity. Peak shaving at network level reduces aggregate overcapacity investment while maintaining supply reliability.
- **Reduced vulnerability:** Localized facility failures do not compromise system-wide supply. Network redundancy provides resilience against equipment malfunction, feedstock disruption, or weather events affecting individual sites.
- **Transportation optimization:** Proximity to demand centers minimizes delivery energy and cost. Regional hub-and-spoke architectures position production clusters within economic transport distance of consumption nodes, reducing last-mile hydrogen transport challenges.
- **CO<sub>2</sub> infrastructure sharing:** Pipeline and storage infrastructure for carbon management amortized across multiple production sites. Centralized CO<sub>2</sub> handling achieves economies unavailable to single facilities while enabling potential carbon utilization or sequestration at scale.

This network architecture illustrates one option for renewable-energy infrastructure that is decentralized and potentially resilient; the benefits described here are qualitative and would require system-level modeling to quantify. The combined system—distributed production nodes interconnected through shared infrastructure—provides flexibility for rapid scalability while maintaining resilience against disruptions that would compromise centralized alternatives.

The policy implication proves direct: infrastructure investment should prioritize enabling network formation rather than merely subsidizing individual facility deployment. Shared pipeline rights-of-way, coordinated storage development, and standardized interconnection protocols create value exceeding sum of individual projects while reducing per-unit deployment costs through infrastructure amortization.

### 3.7.3 Policy Implications for Pathway Selection

The cost comparison demonstrates that biomass-to-hydrogen pathways cannot compete on pure economics absent either:

1. Substantial carbon pricing (\$100+/tonne CO<sub>2</sub>) making fossil pathways significantly more expensive
2. Public co-finance reducing effective interest rates and enabling project financing at below-market terms
3. Regulatory mandates requiring lifecycle emission accounting that eliminates categorical advantages for fossil pathways



However, the pathway offers advantages beyond costs that merit policy consideration:

- Grid-independent emission profile (unlike electrolysis dependent on grid composition)
- Distributed deployment model enabling rural participation
- Waste stream utilization addressing residue disposal challenges
- Technology readiness (commercially demonstrated at scale)
- Network resilience through interconnected infrastructure

The policy choice is not whether biomass-hydrogen costs less than fossil alternatives (it does not) but whether advantages in emission profile, distribution, rural development, and system resilience justify public investment to close cost gaps.

## 4 Discussion: Integrating Policy Architecture with Technical Viability

The analysis across Parts 2 and 3 establishes complementary findings: (1) existing policy structures concentrate benefits among incumbents and higher-income households while obscuring lifecycle emission dependencies through categorical framing, and (2) alternative pathways exist with superior emission profiles and distribution potential but face systematic disadvantages from incumbent capture and strategic technology framing. This section synthesizes implications for climate investment design.

### 4.1 The Financing Regime as Determinative Factor

Operating-cost structures for single units and clusters reveal material impacts from macroeconomic parameters. To isolate scaling effects, we protected clusters against inflation with capped interest at 5%, while single units reflect dynamic discounting. The resulting gap in hydrogen prices of approximately \$5/kg underscores that financing regimes and inflation protection significantly influence economics independent of engineering improvements.

This finding carries direct policy implications. The technical analysis demonstrates pathway viability at 100-unit cluster scale (\$9.57–10.87/kg) approaches fossil+CCS ranges with moderate carbon pricing (\$50/tonne CO<sub>2</sub>). However, achieving this scale requires sustained investment over 10–20 year buildout periods. Current market financing at 8–12% interest rates makes projects non-viable. Public co-finance enabling effective rates of 3–5% transforms economics without requiring technology breakthroughs.

The reusable capital structure proposed in Section 2.3 addresses this directly. Initial public appropriation capitalizes revolving funds offering below-market rates (2–4%). Loan repayments over 15–20 years replenish funds for subsequent project cohorts. This structure enables single appropriation to finance multiple deployment generations while providing financing advantage that closes cost gaps.

### 4.2 Category-Level Elasticities and Pathway Optimization

Category-level elasticities clarify where scale delivers greatest advantage, informing optimal cluster design:

**Administration and Supervision:** Benefit strongly from shared services. Exponents of 0.2 at 100-unit scale represent near-complete cost sharing. Policy implication: incentivize cooperative ownership structures enabling administrative consolidation.

**Variable Costs:** Track proportionally with throughput (exponent 0.7–0.9), offering limited scale economies. Feedstock procurement represents largest cost component and shows little improvement with scale—negotiating power provides small discounts but fundamental mobilization costs remain. Policy implication: support feedstock aggregation infrastructure (collection networks, preprocessing facilities) as public goods rather than expecting market solutions.

**Labor:** Requires explicit treatment at micro-scale. Our owner-operator assumption for single units recognizes institutional reality: very small energy facilities operate as small businesses with owner-managers wearing multiple hats. Clusters enable specialization but cannot reduce labor below technical minimums. Policy implication: accept that distributed generation creates employment rather than viewing labor intensity as inefficiency.

**By-Product Credits:** Improve substantially with scale through logistics optimization. Policy implication: cluster planning should consider by-product handling infrastructure from inception rather than treating as afterthought.

The utility-to-feedstock ratio comparison (47% versus 5.6% in scaled FB versus EFB using TPI-derived auxiliaries) demonstrates why category-specific analysis surpasses uniform surrogates. Lumping all costs into single scaling exponent obscures optimization opportunities.

### 4.3 Transport Sector Application: Volumetric Constraints and Infrastructure Density

The transport sector analysis (based on project documents) reveals that hydrogen adoption faces acute volumetric challenges but infrastructure density strategies can partially offset disadvantages:

#### 4.3.1 The Volumetric Energy Density Problem

At 700 bar compression (current passenger vehicle standard), gaseous hydrogen achieves approximately 5.6 MJ/L versus gasoline’s 34.2 MJ/L—an 84% volumetric disadvantage. This creates the central constraint: hydrogen storage systems must be 4–6 $\times$  larger than gasoline tanks for equivalent range, or vehicles must accept proportionally reduced range.

Tank-to-vehicle volume ratios contextualize the challenge:

- Light passenger vehicles: 0.3–0.4% conventional ICE fuel tank volume (50–60 L typical sedan)
- Hydrogen passenger vehicles (current): 2–3% vehicle volume required for equivalent range (140–180 L compressed gas systems)
- Heavy-duty trucks: Conventional diesel tanks 1.5–2.5% of vehicle volume; hydrogen systems require 8–12% for comparable range

The volumetric penalty therefore increases proportionally across vehicle classes unless compensatory mechanisms intervene.

#### 4.3.2 Mechanisms Offsetting Volumetric Disadvantages

**Vehicle Architecture Optimization:** Purpose-built hydrogen vehicles redistribute volume allocation. Chassis integration places cylindrical tanks between frame rails. Underfloor packaging in commercial vehicles utilizes height clearance beneath cargo floors. Modular tank arrays fill irregular spaces more efficiently than single large tanks. Observed outcomes: Toyota Mirai (2021) achieves 647 km range with 5.6 kg hydrogen in 142.2 L tank volume. Hyundai Xcient fuel cell trucks carry 32.09 kg achieving 400 km range while maintaining payload capacity.

**Infrastructure Density and Operational Patterns:** Higher station density enables reduced onboard storage. California case study: 55 functional hydrogen stations for 15,000 fuel cell vehicles—station-to-vehicle ratio of 1:270 versus 1:2,000 for gasoline. Hub-and-spoke logistics for commercial fleets with predictable routes; strategic placement for return-to-base operations.

However, station density alone cannot overcome physics—it changes operational patterns rather than energy density. The volumetric disadvantage persists; infrastructure compensates for consequences.

**Application-Specific Viability:** The fundamental relationship: *battery weight penalty scales with vehicle size and range requirements*, not hydrogen’s volumetric penalty. For long-haul heavy-duty applications, mass constraints dominate because payload capacity is legally limited by GVW. Each kg of battery reduces revenue-generating payload. Hydrogen advantage is *gravimetric* (mass-based), not volumetric.

Current market segmentation:

- Urban delivery (<200 km/day): Battery electric dominant
- Regional haul (200–500 km/day): Contested space
- Long-haul (>500 km/day): Hydrogen shows theoretical advantages, but infrastructure void prevents deployment

#### 4.3.3 The Infrastructure Void as Binding Constraint

Natural gas pipeline repurposing faces limitations: hydrogen embrittlement affects steel pipelines; blending limitations constrain mixtures to  $\leq 20\%$  hydrogen; compression energy requirements exceed natural gas by 3–5 $\times$ . New hydrogen pipeline infrastructure costs \$1–2 million/km for distribution, \$2–4 million/km for high-pressure transmission. Total U.S. buildout estimate: \$200–300 billion for comprehensive network.

The coordination problem exhibits path dependency: vehicles won’t deploy without stations; stations won’t build without vehicles; first-mover disadvantage creates stranded asset risk. Observed pattern: hydrogen deployment succeeds primarily in captive fleets with central refueling (port drayage, transit buses), policy-mandated markets (California ZEV mandate), and industrial clusters with existing hydrogen production.

This suggests infrastructure “solves” the problem only within bounded operational contexts, not as universal transport solution. Policy implication: prioritize applications where infrastructure requirements prove manageable (return-to-base fleets, specific freight corridors) rather than attempting universal deployment competing directly with gasoline infrastructure ubiquity.

#### 4.3.4 Freight Primacy and the Serving-the-Masses Imperative

The application hierarchy established above carries direct implications for infrastructure prioritization. Heavy-duty freight—transporting food, medicine, building materials, and other essential goods serving mass populations—exhibits the strongest technical case for hydrogen adoption due to payload constraints and utilization requirements documented in Appendix C.

This freight focus reveals two strategic considerations obscured by passenger vehicle emphasis:

**First:** Distributed hydrogen production networks directly counter utility monopolization tendencies inherent in centralized electricity generation. While EV charging infrastructure reinforces utility control (increased demand regardless of generation mix benefits incumbent generators as documented in Section 1.5), hydrogen refueling from local biomass gasification enables community ownership and rural economic participation. The network architecture described in

Section 3.7.2 creates infrastructure controlled by feedstock aggregators and small-scale producers rather than incumbent utilities, fundamentally altering power dynamics in energy system governance.

**Second:** Passenger vehicle electrification, while technically viable for urban/suburban applications, has absorbed policy attention disproportionate to its emission reduction potential. The incentive misalignment discussed in Section 2.1 may also shape attention: consumer vehicle choices receive substantial policy focus, while freight decarbonization—where hydrogen shows clearer advantages in long-haul applications—arguably receives less infrastructure investment and attention relative to its emissions significance.

The competitive landscape therefore stratifies by mission criticality:

- **Essential goods transport (freight):** Hydrogen-dependent due to mass constraints documented in Appendix C.2; serves populations unable to absorb supply disruptions from inadequate transport capacity
- **Personal mobility:** Battery-viable for most urban patterns where overnight charging aligns with usage; competitive choice between technologies acceptable for discretionary travel

Conflating these categories—treating all transportation as equivalent policy challenge—enables resource misallocation toward visible consumer technologies (passenger EVs capturing political attention through \$7,500 tax credits and charging infrastructure subsidies) while underinvesting in infrastructure serving essential economic functions. Freight corridors connecting agricultural production regions to population centers, port drayage operations moving containerized imports to distribution networks, and long-haul logistics maintaining just-in-time supply chains represent transportation applications where supply reliability directly affects food availability, medical supply distribution, and economic stability.

In the payload- and utilization-constrained segments identified here, hydrogen is better matched than current battery systems to the relevant requirements; this is a segment-specific claim, not a judgment that one technology is superior across transportation. Policy frameworks that overlook this stratification—allocating resources based on vehicle count rather than cargo tonnage or societal criticality—will systematically underinvest in decarbonizing the transportation segments most resistant to grid-dependent alternatives while overinvesting in segments where multiple viable pathways exist.

## 4.4 The Comparative Assessment Framework: What Matters for Pathway Selection

The analysis across policy and technical dimensions reveals that pathway selection depends less on inherent technology superiority than on structural factors shaping competition:

### 4.4.1 Lifecycle Transparency versus Categorical Framing

Battery-electric vehicles benefit from categorical “zero emission” classification obscuring manufacturing emissions (11 tonnes CO<sub>2</sub>e per vehicle reducible by 92% through available pathways) and grid composition dependencies (60% fossil U.S. average). This enables three-actor incentive where manufacturers, policymakers, and citizens satisfy objectives through symbolic classification rather than measured performance.

Biomass-hydrogen resists categorical framing because emission profile depends directly on feedstock sustainability and process energy—production pathway determines performance independent of external grid composition. This forced transparency prevents incentive dynamics but

creates competitive disadvantage when incumbent interests benefit from opacity.

#### 4.4.2 Incumbent Advantage versus Market Entry Barriers

Electric vehicle deployment benefits established automotive manufacturers, existing utilities generating revenue regardless of generation mix, and natural gas producers serving marginal generation. These actors possess lobbying capacity and political relationships to shape subsidy structures.

Biomass-hydrogen pathways would benefit potential new entrants: rural feedstock aggregators, small-scale gasification operators, distributed refueling station developers. These actors lack comparable political influence, creating systematic bias in allocation decisions absent explicit countermeasures (parliament-based deliberation, performance-based subsidy criteria).

#### 4.4.3 Cost Competitiveness versus Systemic Benefits

Direct cost comparison shows biomass-hydrogen 3–5 $\times$  more expensive than fossil baselines absent carbon pricing. However, advantages in emission profile certainty (not grid-dependent), distributed deployment enabling rural participation, domestic feedstock security, and network resilience represent systemic benefits not captured in \$/kg metrics.

The policy choice is whether these systemic benefits justify public investment to close cost gaps. Current structures privilege technologies with lower direct costs but higher systemic risks (grid dependency, benefit concentration, incumbent entrenchment). Alternative structures emphasizing lifecycle performance and benefit distribution would favor pathways with higher direct costs but superior systemic characteristics.

## 5 Limitations

Several limitations bound the strength of the conclusions and should guide interpretation.

**Reference-plant and absolute-cost uncertainty.** The techno-economic results are generated by scaling *down* from a large reference system. The absolute levelized costs therefore inherit the reference-plant assumptions; the base-case figures should be read as internally consistent *modeled* values under stated assumptions rather than validated market prices, and the headline \$9.57–10.87/kg carries corresponding uncertainty. Independent bottom-up costing of a small modular unit would strengthen the absolute claims.

**Scaling-exponent extrapolation.** Applying fixed scaling exponents (e.g., the “six-tenths” rule) across several orders of magnitude in capacity is an approximation whose validity degrades far from the reference scale. Results are best interpreted as relative trends across scales rather than precise point estimates.

**Financing versus engineering.** A material portion of the modeled cluster advantage—on the order of several \$/kg—reflects a favorable financing assumption (capped low-interest terms for clusters versus dynamic discounting for single units) rather than engineering economies. We report this explicitly; the two effects should not be conflated when attributing cost reductions.

**Carbon accounting and 45Q.** Biomass carbon is biogenic but not automatically carbon-neutral; net lifecycle emissions depend on feedstock sourcing, land use, and process energy. We do not model the Section 45Q carbon-capture credit here; because the gasification pathway produces a concentrated CO<sub>2</sub> stream, a properly specified 45Q analysis could materially improve the pathway’s competitiveness and is identified as a priority extension rather than a claimed result.

**Associational, not causal, social claims.** The institutional-capacity relationships (education, diet, health, welfare, cross-national comparisons) are cross-sectional correlations with substantial confounding and definitional heterogeneity across jurisdictions. They are offered as context and hypotheses, not as identified causal effects, and no causal present-value cost is asserted.

**Segment-specific transport claims.** Hydrogen’s advantages are established here only for specific high-mass, long-range, high-utilization segments; the analysis does not support a general superiority claim, and deployment in those segments remains constrained by the infrastructure “void” the paper documents.

**Behavioral and current-events evidence.** The “moral licensing” substitution among EV purchasers is advanced as a hypothesis rather than a demonstrated effect. Rapidly evolving policy facts (Golden Dome cost, the Department of Education order, BEAD, reserve-currency shares) are stated as of mid-2026 with citations and may change.

## 6 Conclusion: Toward Equitable Decarbonization Architecture

This analysis establishes three core findings that jointly characterize the climate investment allocation challenge:

**Finding 1: Benefit Concentration as Structural Feature.** Clean energy investment systematically concentrates benefits among incumbent actors and higher-income households through program design features rather than technology characteristics. The top income quintile captured 60% of \$47 billion in clean energy tax credits since 2006 despite nominal equity objectives. This pattern repeats across infrastructure categories (broadband, education, economic opportunity), suggesting common structural causes: program requirements privilege populations possessing tax liability, home ownership, upfront capital access, and institutional sophistication.

**Finding 2: Categorical Framing Enables Evasion.** “Zero emission vehicle” classification creates coordination equilibrium where manufacturers avoid deploying available cleaner production pathways (renewable-powered batteries, green steel, responsible mining reducing embodied emissions by 11 tonnes CO<sub>2</sub>e per vehicle—92% of manufacturing footprint), policymakers claim climate progress without mandating lifecycle accountability, and citizens experience satisfaction from consumer transactions rather than sustained civic engagement. This three-actor incentive dynamic produces symbolic achievement while systematically preventing emission reductions within technical and economic reach.

**Finding 3: Alternative Pathways Exist But Face Systematic Disadvantages.** Biomass-to-hydrogen gasification reaches modeled levelized costs of \$9.57–10.87/kg at 100-unit cluster scale on our base-case and cluster-financing assumptions—above fossil baselines but potentially within reach of fossil+CCS ranges under moderate carbon pricing and favorable financing (subject to the reference-plant and financing caveats in Part II). Pathways exhibit superior characteristics: lifecycle emissions independent of grid composition (0.5–2.5 kg CO<sub>2</sub>e/kg H<sub>2</sub> for residue-based feedstock), distributed deployment model enabling rural participation, domestic feedstock reducing geopolitical exposure. However, incumbent advantages in policy access, strategic technology framing, and infrastructure inheritance create barriers that technical merit alone cannot overcome.

### 6.1 Policy Architecture Imperatives

The evidence demands institutional innovations targeting benefit distribution rather than aggregate investment levels:

**Mandatory Lifecycle Labeling:** All vehicles display manufacturing footprint (tonnes CO<sub>2</sub>e), operational intensity (g CO<sub>2</sub>e/km on serving regional grid), and lifecycle break-even distance. Eliminates categorical framing advantages; enables consumer differentiation; creates market pressure for cleaner manufacturing.

**Performance-Based Subsidy Scaling:** Credits tied to demonstrated emission reductions rather than technology classification. Full \$7,500 requires <4 tonnes CO<sub>2</sub>e manufacturing footprint AND operation on <30% fossil grid OR certified renewable electricity. Creates manufacturer financial incentive to deploy cleaner production pathways currently ignored.

**Infrastructure Investment Parity:** \$8 billion for 2,000-station hydrogen refueling network (versus \$42 billion for EV charging) with distributed small-operator ownership priority. Enables competitive alternative pathway that cannot hide behind categorical framing; creates comparison baseline revealing EV manufacturing and grid composition opacity.

**Parliament-Based Allocation:** State-level deliberative bodies incorporating rural feedstock representatives, small-scale producers, environmental justice organizations, labor unions. Explicitly excludes incumbent utilities, large developers, equipment manufacturers. Transparent proceedings with recorded rationales; periodic reauthorization against measurable outcomes. Resists capture by concentrated interests; survives electoral transitions.

**Reusable Capital Structures:** Revolving loan funds offering below-market rates (2–4% vs. commercial 8–12%). Loan repayments replenish funds for subsequent project cohorts. Single appropriation finances multiple deployment generations; closes cost gaps through financing advantage rather than requiring technology breakthroughs.

## 6.2 The Institutional Capacity Imperative

The analysis documents systematic erosion of foundational capacity—411,500 teaching positions unfilled or under-certified, 22% rural broadband access gap, middle-class income share declining from 62% (1970) to 42% (2021), \$1.2 trillion religious institutional resources largely unmobilized. These deficits prevent disadvantaged populations from participating in energy transitions regardless of nominal program access.

Climate investment cannot succeed while ignoring institutional capacity collapse. Programs designed assuming functional educational systems, ubiquitous digital infrastructure, economic middle with resources to participate, will replicate existing inequities by creating opportunities accessible primarily to those already possessing advantages.

Addressing capacity deficits requires:

- Public investment in broadband as enabling infrastructure (not amenity)
- Educational quality restoration through teacher certification, facility investment, curriculum development
- Religious institutional accountability through metrics linking tax exemption to demonstrated community benefit
- Rural economic development as precondition for (not consequence of) clean energy participation

These investments appear orthogonal to climate mitigation in conventional analysis. The evidence establishes they constitute prerequisites: populations facing educational collapse, infrastructure withdrawal, and economic marginalization cannot meaningfully participate in emerging energy economies regardless of technology characteristics or subsidy levels.

### 6.3 Reinforcement versus Remediation: A Framing

Federal programs will allocate hundreds of billions of dollars over coming decades for decarbonization, infrastructure, and economic development. Current trajectories—categorical technology framing, incumbent-dominated allocation, single-deployment grants, assumption rather than demonstration of equity benefits—will concentrate advantages among populations already possessing them while generating symbolic achievement masking limited actual emission reduction.

The alternative exists: lifecycle transparency eliminating categorical advantages, performance-based criteria requiring demonstrated benefits, reusable capital enabling multiple project cycles, deliberative allocation resistant to capture, explicit attention to foundational capacity enabling participation. These structural interventions can achieve decarbonization and equity simultaneously despite severe fiscal constraints.

The technical analysis in Part 3 demonstrates that viable pathways exist. The policy analysis in Part 2 demonstrates that allocation mechanisms determine whether these pathways serve equity objectives or replicate concentration patterns. The institutional analysis throughout demonstrates that foundational capacity restoration constitutes prerequisite rather than luxury.

The choice is whether climate investment strengthens or further erodes the fiscal position, economic distribution, and institutional capacity of the nation undertaking it. Current structures point toward erosion. The guardrails proposed here point toward strengthening. The difference lies not in technology characteristics or aggregate spending but in institutional architecture governing how investment decisions are made and benefits distributed.

Absent structural attention to benefit distribution, lifecycle transparency, and incumbent capture, climate investment may reproduce rather than reduce the distributional patterns observed across broadband, educational infrastructure, and existing clean energy programs. The analysis here suggests that allocation architecture—not only aggregate spending or technology choice—is a consequential and under-examined lever, and one amenable to concrete design responses.

## Acknowledgments

This work was supported by the Department of Chemical and Biomedical Engineering at the University of Missouri–Columbia. The author thanks colleagues for discussions informing the policy framework and technical modeling approaches.

## References

- [1] Borenstein, S. and Davis, L.W. (2023). *The Distributional Effects of U.S. Clean Energy Tax Credits*. *Tax Policy and the Economy*, 37: 171–214.
- [2] International Monetary Fund (2024). *Currency Composition of Official Foreign Exchange Reserves (COFER)*. IMF Data, Q4 2024.
- [3] Pew Research Center (2022). *The American Middle Class Is Stable in Size, But Losing Ground Financially to Upper-Income Families*. Pew Research Center Report, April 2022.
- [4] Carver-Thomas, D. and Darling-Hammond, L. (2023). *Teacher Shortages in 2022-23: The Pandemic Legacy and the Uncertain Road Ahead*. Learning Policy Institute, August 2023.
- [5] U.S. Department of Agriculture (2020). *Dietary Guidelines for Americans 2020-2025*. USDA and HHS, 9th Edition.



- [6] Federal Communications Commission (2023). *Fourteenth Broadband Deployment Report*. FCC 23-30, December 2023.
- [7] Koutroumpis, P. (2020). *The Economic Impact of Broadband: Evidence from OECD Countries*. Telecommunications Policy, 44(8): 102030.
- [8] National Telecommunications and Information Administration (2024). *Broadband Equity, Access, and Deployment (BEAD) Program: NOFO and State Allocations*. NTIA, Department of Commerce, January 2024.
- [9] Center for Strategic and International Studies (2025). *Golden Dome: Technical Feasibility and Strategic Implications*. CSIS Aerospace Security Project, January 2025.
- [10] Crabtree, S. (2018). *Faith Among Black Americans*. Gallup Report on Religion, February 2018.
- [11] The White House (2025). *Executive Order directing steps toward closing the U.S. Department of Education*. March 2025; final effect subject to congressional action.
- [12] Property-damage reporting (2024). *Hurricane Helene damage estimates*. Reported property-damage figures  $\approx$ \$47 billion (October 2024); total economic-loss estimates range considerably higher. Landfall in Florida; most severe damage across the inland Southeast, particularly western North Carolina.
- [13] Congressional Budget Office (2026). *Cost estimate for a Golden Dome-style missile-defense architecture*. CBO analysis, May 2026 (up to  $\approx$ \$1.2 trillion over 20 years).

## A Supplementary Technical Details

### A.1 Detailed Scaling Calculations

The scaling methodology proceeds in three steps, detailed in Tables 6–8.

**Step 1:** Scale reference system (1,500,000 kg/d) down to small unit (50 kg/d) using exponent  $n = 0.7$  for capital and complex category-specific exponents for operating costs.

**Step 2:** Introduce modified labor assumptions for owner-operated single units to avoid unrealistic cost vanishing.

**Step 3:** Apply category-specific exponents (Table 2) to scale from single unit to 10-unit and 100-unit clusters.

Table 6: Scaling Step 1: 1,500,000 kg/d capacity to 50 kg/d using exponent  $n = 0.7$ .

| Category                | Cost Component             | Fixed Bed (USD) |        | Entrained Bed (USD) |        |
|-------------------------|----------------------------|-----------------|--------|---------------------|--------|
|                         |                            | Original        | Scaled | Original            | Scaled |
| Variable Operating Cost |                            |                 |        |                     |        |
|                         | Feedstock Cost             | 75,000,000      | 55,456 | 75,000,000          | 55,456 |
|                         | Water and Electricity      | 36,654,000      | 26,380 | 5,294,000           | 3,191  |
|                         | Supplies (Op + Maint.)     | 4,836,000       | 3,375  | 7,596,000           | 5,617  |
|                         | Subtotal (VOC)             | 116,490,000     | 85,411 | 87,890,000          | 64,264 |
| Operators               |                            |                 |        |                     |        |
|                         | Maintenance Labor          | 6,000,000       | 4,437  | 10,000,000          | 7,394  |
|                         | Operating Labor            | 1,120,000       | 828    | 320,000             | 236    |
|                         | Supervision                | 1,068,000       | 790    | 1,548,000           | 1,145  |
|                         | Subtotal (OPE)             | 8,188,000       | 6,055  | 11,868,000          | 8,775  |
| Administrative          |                            |                 |        |                     |        |
|                         | Property Taxes & Insurance | 8,100,000       | 5,989  | 13,500,000          | 9,982  |
|                         | Overhead                   | 672,000         | 497    | 192,000             | 142    |
|                         | Subtotal (ADM)             | 8,772,000       | 6,486  | 13,692,000          | 10,124 |
| By-Product              |                            |                 |        |                     |        |
|                         | Ash Disposal               | 300,000         | 225    | 300,000             | 225    |
|                         | Sulfur Credit              | −3,750,000      | −2,811 | −3,750,000          | −2,811 |
|                         | Subtotal (By-P)            | −3,450,000      | −2,586 | −3,450,000          | −2,586 |
|                         | Total OPEX                 | 130,000,000     | 94,538 | 110,000,000         | 80,341 |

Table 7: Scaling Step 2: Individual producer OPEX and modified labor values (all scales).

| Category                       | Component              | Fixed Bed (USD) |         |           | Entrained Bed (USD) |         |           |
|--------------------------------|------------------------|-----------------|---------|-----------|---------------------|---------|-----------|
|                                |                        | 1               | 10      | 100       | 1                   | 10      | 100       |
| <i>Variable Operating Cost</i> |                        |                 |         |           |                     |         |           |
|                                | Feedstock              | 55,456          | –       | –         | 55,456              | –       | –         |
|                                | Water & electricity    | 26,380          | –       | –         | 3,191               | –       | –         |
|                                | Supplies               | 3,375           | –       | –         | 5,617               | –       | –         |
|                                | <b>Subtotal (VOC)</b>  | <b>85,411</b>   | –       | –         | <b>64,264</b>       | –       | –         |
| <i>Operators</i>               |                        |                 |         |           |                     |         |           |
|                                | Maintenance labor      | 4,437           | –       | –         | 7,394               | –       | –         |
|                                | Operating labor        | 50,000          | 250,000 | 1,250,000 | 50,000              | 500,000 | 2,000,000 |
|                                | Supervision            | 790             | –       | –         | 1,145               | –       | –         |
|                                | <b>Subtotal (OPE)</b>  | <b>55,227</b>   | –       | –         | <b>58,539</b>       | –       | –         |
| <i>Administrative</i>          |                        |                 |         |           |                     |         |           |
|                                | Property & insurance   | 5,989           | –       | –         | 9,982               | –       | –         |
|                                | Overhead               | 497             | –       | –         | 142                 | –       | –         |
|                                | <b>Subtotal (ADM)</b>  | <b>6,486</b>    | –       | –         | <b>10,124</b>       | –       | –         |
| <i>By-Product</i>              |                        |                 |         |           |                     |         |           |
|                                | Ash disposal           | 225             | –       | –         | 225                 | –       | –         |
|                                | Sulfur credit          | –2,811          | –       | –         | –2,811              | –       | –         |
|                                | <b>Subtotal (By-P)</b> | <b>–2,586</b>   | –       | –         | <b>–2,586</b>       | –       | –         |
|                                | <b>Total OPEX</b>      | <b>144,538</b>  | –       | –         | <b>130,341</b>      | –       | –         |

Table 8: Scaling Step 3: Category-exponent updates across scales.

| Category                       | Component              | Fixed Bed (USD) |                |                  | Entrained Bed (USD) |                  |                  |
|--------------------------------|------------------------|-----------------|----------------|------------------|---------------------|------------------|------------------|
|                                |                        | 1               | 10             | 100              | 1                   | 10               | 100              |
| <i>Variable Operating Cost</i> |                        |                 |                |                  |                     |                  |                  |
|                                | Feedstock              | 55,456          | 440,503        | 1,392,992        | 55,456              | 440,503          | 1,392,992        |
|                                | Water & electricity    | 26,380          | 209,544        | 662,636          | 3,191               | 25,364           | 80,104           |
|                                | Supplies               | 3,375           | 26,809         | 84,776           | 5,617               | 44,606           | 141,079          |
|                                | <b>Subtotal (VOC)</b>  | <b>85,411</b>   | <b>676,855</b> | <b>2,140,404</b> | <b>64,264</b>       | <b>510,473</b>   | <b>1,614,175</b> |
| <i>Operators</i>               |                        |                 |                |                  |                     |                  |                  |
|                                | Maintenance labor      | 4,437           | 14,031         | 11,145           | 7,394               | 23,418           | 18,599           |
|                                | Operating labor        | 50,000          | 250,000        | 1,250,000        | 50,000              | 500,000          | 2,000,000        |
|                                | Supervision            | 790             | 2,498          | 1,984            | 1,145               | 3,617            | 2,873            |
|                                | <b>Subtotal (OPE)</b>  | <b>55,227</b>   | <b>266,529</b> | <b>1,263,129</b> | <b>58,539</b>       | <b>527,035</b>   | <b>2,021,472</b> |
| <i>Administrative</i>          |                        |                 |                |                  |                     |                  |                  |
|                                | Property & insurance   | 5,989           | 18,939         | 15,044           | 9,982               | 31,582           | 25,082           |
|                                | Overhead               | 497             | 1,572          | 1,248            | 142                 | 449              | 356              |
|                                | <b>Subtotal (ADM)</b>  | <b>6,486</b>    | <b>20,511</b>  | <b>16,292</b>    | <b>10,124</b>       | <b>32,031</b>    | <b>25,438</b>    |
| <i>By-Product</i>              |                        |                 |                |                  |                     |                  |                  |
|                                | Ash disposal           | 225             | 1,787          | 5,652            | 225                 | 1,787            | 5,652            |
|                                | Sulfur credit          | −2,811          | −22,329        | −70,609          | −2,811              | −22,329          | −70,609          |
|                                | <b>Subtotal (By-P)</b> | <b>−2,586</b>   | <b>−20,541</b> | <b>−64,957</b>   | <b>−2,586</b>       | <b>−20,541</b>   | <b>−64,957</b>   |
|                                | <b>Total OPEX</b>      | <b>144,538</b>  | <b>943,354</b> | <b>3,354,868</b> | <b>130,341</b>      | <b>1,048,998</b> | <b>3,596,128</b> |

## A.2 Feedstock Specifications and Regional Availability

Table ?? provides detailed specifications for biomass feedstock types analyzed, including moisture content, ash content, heating value, and typical geographic distribution.

## A.3 Sensitivity Analysis: Key Parameters

We conducted sensitivity analysis on three categories of parameters:

**Feedstock Price:** Varying \$50–250/tonne reveals that LCOH changes approximately \$0.08/kg per \$10/tonne feedstock price change. This high sensitivity underscores importance of stable

feedstock procurement contracts.

**Capacity Factor:** Reducing from 90% to 70% increases LCOH by approximately 25%. This demonstrates criticality of operational reliability and maintenance practices.

**Interest Rate:** Varying 3–12% reveals \$4–6/kg LCOH swing. This sensitivity justifies public co-finance as enabling mechanism rather than technology subsidy.

## B Heatmap Analysis and Discretization Framework

**Methodological Note on Grid Discretization:** The heatmap visualizations represent discretized samplings of time-evolving, multivariate fields. Axis bounds and increment sizes were fixed ex ante using subject-matter judgment and historical operating regimes (typical feedstock/energy price envelopes, financing conditions). Grid coordinates serve as representative anchors of controlled discretization rather than privileged locations with unwarranted point precision. Results should be interpreted as ranges (bin-averaged values, percentile bands across adjacent cells) to convey robustness. This note calibrates expectations about the grid structure and complements the substantive, dynamics-focused interpretations that follow.

The heatmap visualizations in Figures 2–4 represent discretized samples of time-evolving, multivariate fields across feedstock prices, energy costs, and capacity scales. These provide intuitive visualization of pathway competitiveness under varying market conditions.

### Interpretation Guidelines:

- Axes spanning feedstock and energy prices were fixed ex ante to capture dominant regimes
- Interpret slope and banded ranges rather than single cells
- Coal panels provide useful anchors given smoother exogenous price behavior compared to biomass or natural gas
- High-cost financing dominates variability in some panels, reflecting sensitivity findings above

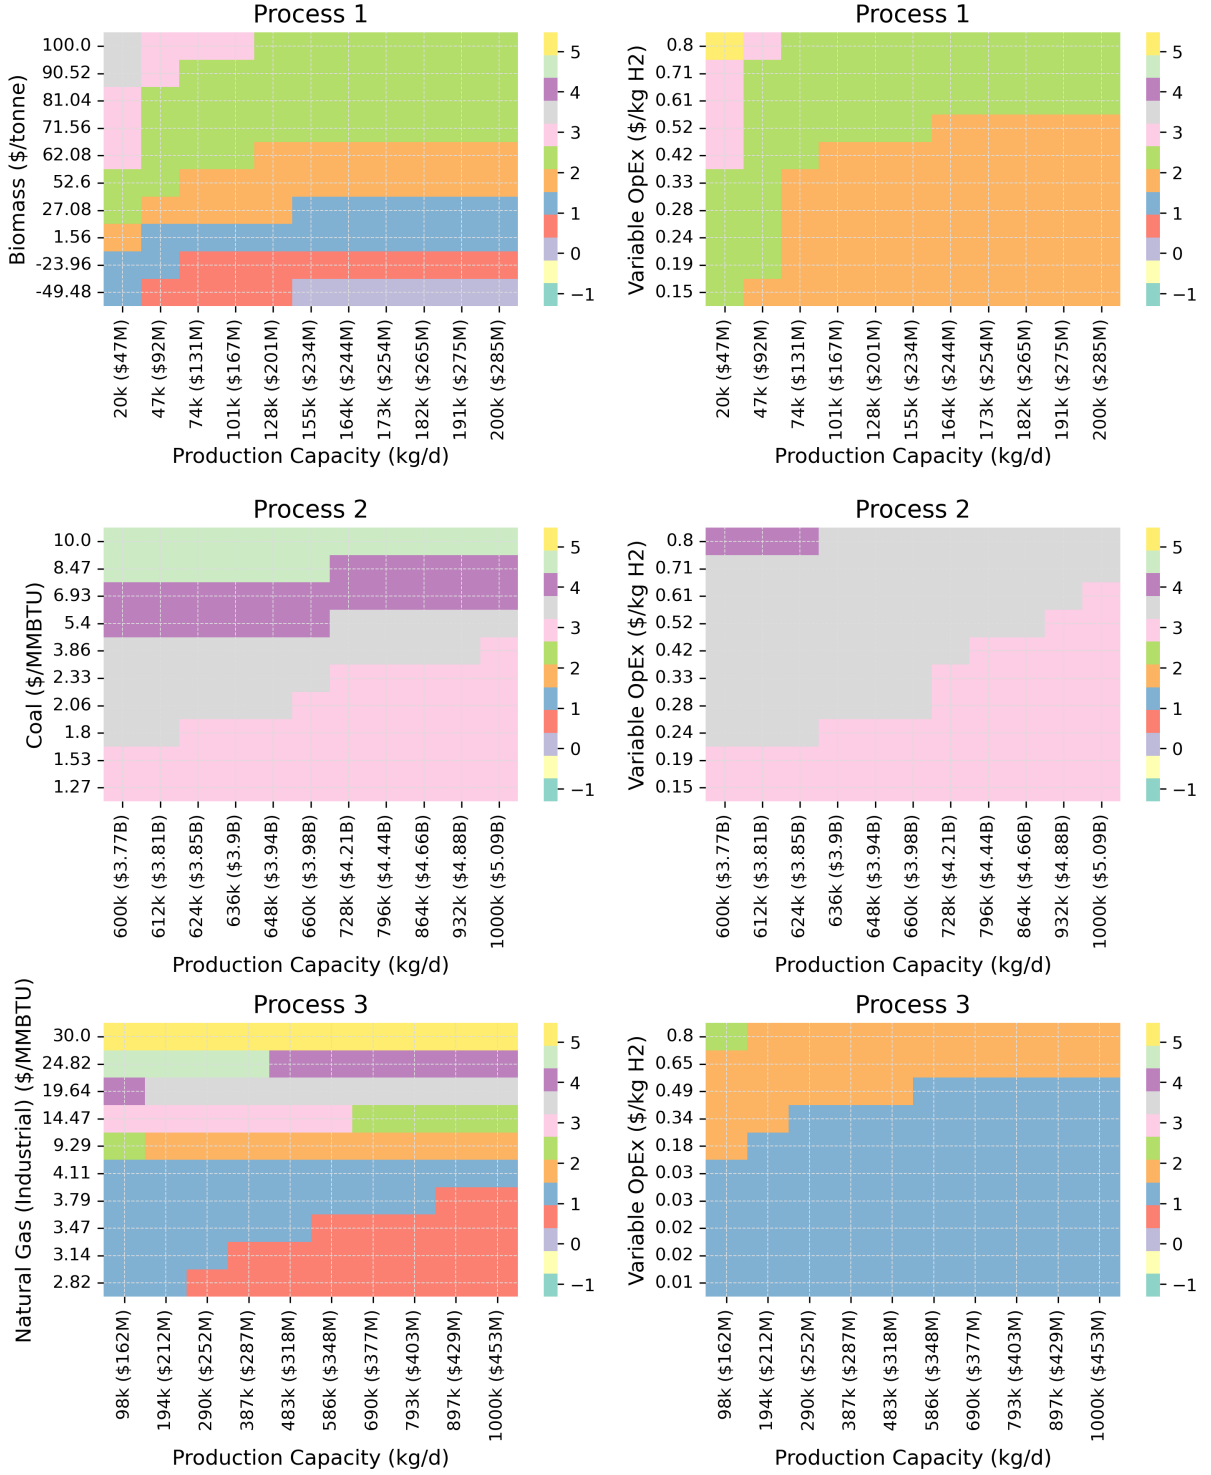


Figure 2: **Left:** Feedstock cost trends. Coal (middle-left) offers reliable magnitudes versus biomass (top-left) and natural gas (bottom-left), which embed stronger variability. **Right:** Variable OPEX per kg H<sub>2</sub>. Coal exhibits smoother fields; biomass and natural gas show sharper transitions as scaling interacts with energy and feedstock dependencies.

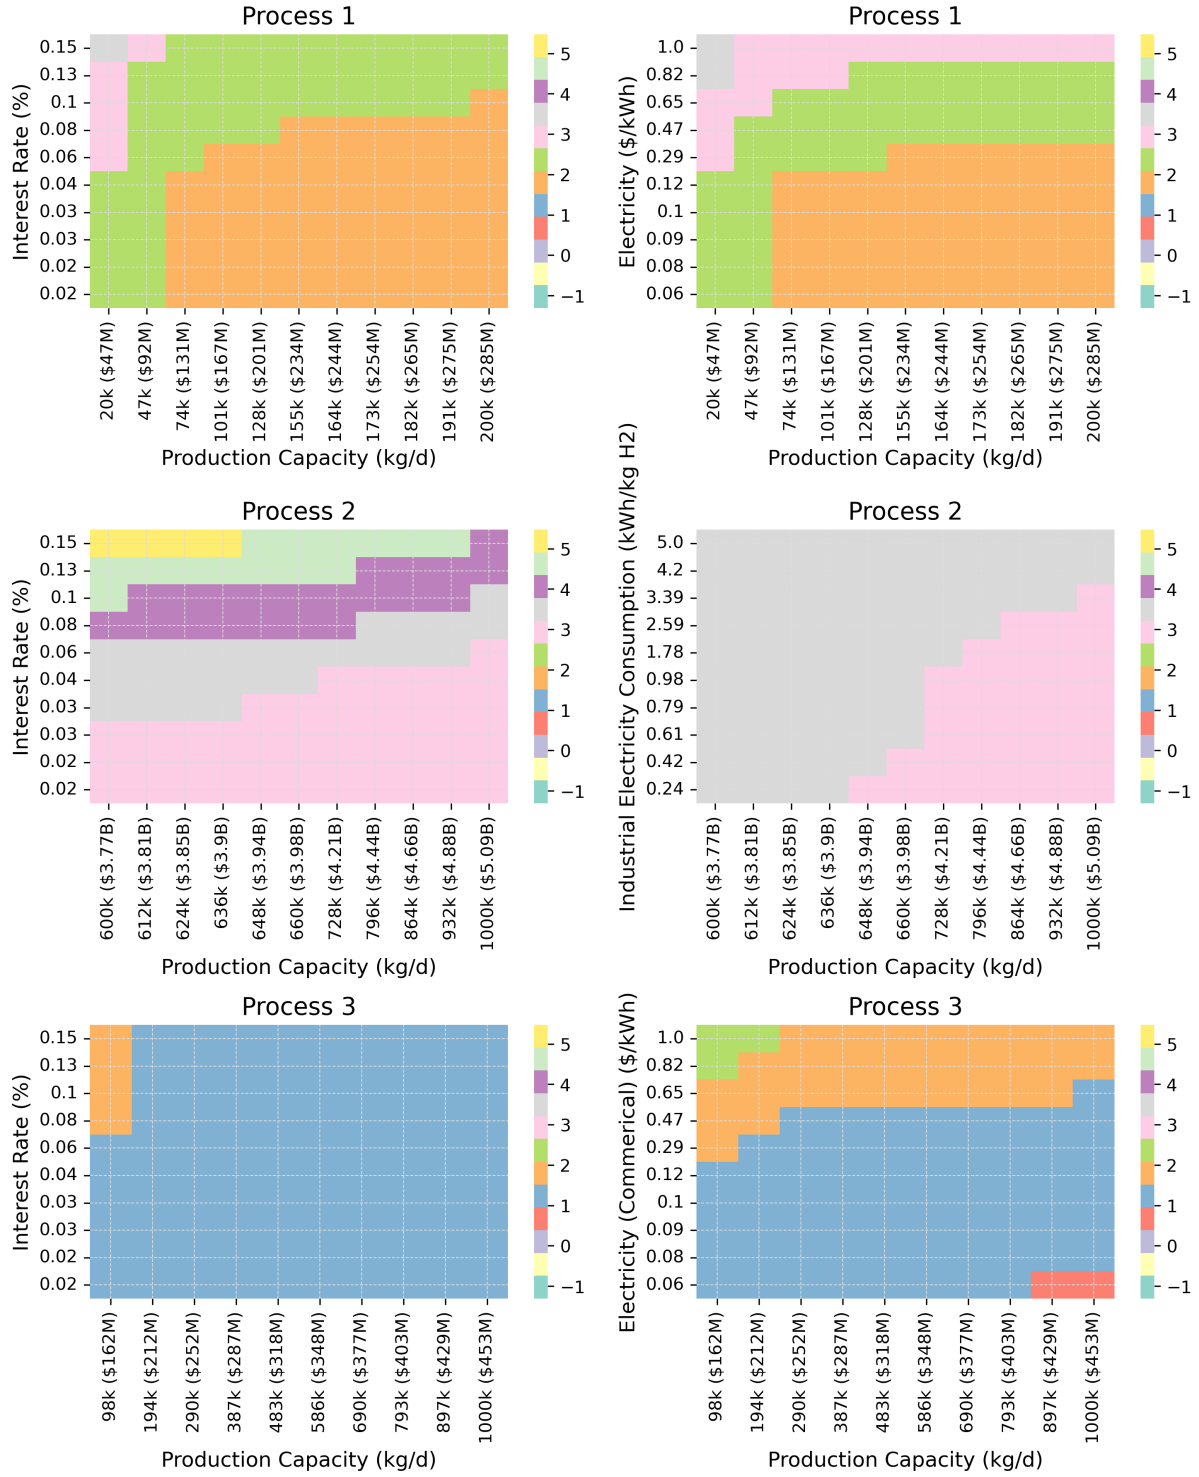


Figure 3: **Left:** Natural gas base-case limitations relative to biomass and coal under scaling. **Right:** Slopes reflect both scale economies and timestep granularity for the second variable; high-cost financing dominates variability in these panels.

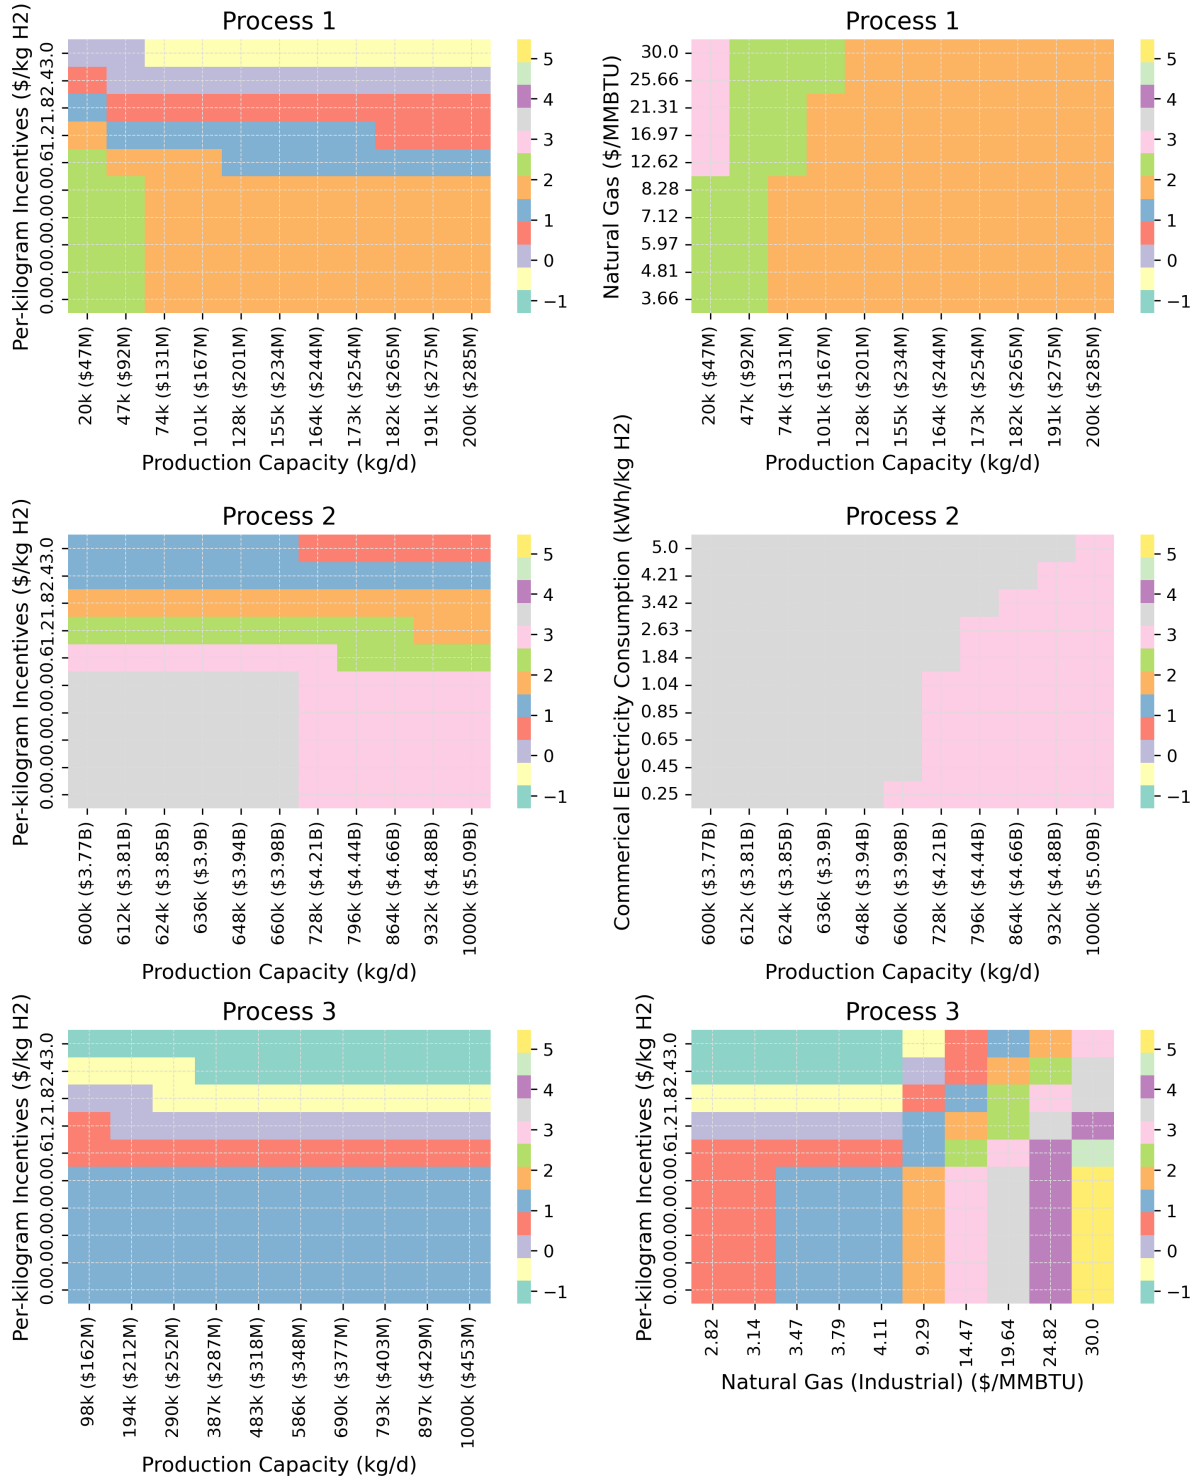


Figure 4: **Left:** Price behavior under scaling (H2FAST-style modeling). Coal regions below doubling and quadrupling lines are notable. **Right:** Cross-process metrics: consumption for coal versus cost for biomass and natural gas. Increased commercial electricity use (kWh/kg H<sub>2</sub>) maps directly to higher utility costs.

## C Transport Sector Viability: Extended Analysis

This appendix presents engineering calculations characterizing the vehicle segments in which hydrogen is *advantaged* relative to batteries. The analysis addresses three questions: (1) what utilization penalties result from energy-transfer time requirements, (2) how volumetric and gravimetric constraints scale across vehicle classes and operational ranges, and (3) in which high-mass, long-range applications battery mass becomes prohibitive. We do not claim hydrogen is the only viable carrier; the conclusion is one of segment-specific suitability.

### C.1 C.1 Operational Utilization: The 24-Hour Continuous Operation Benchmark

#### C.1.1 Calculation Parameters

Consider continuous 24-hour operation at 80 km/h highway speed, representative of long-haul freight or intercity bus service requiring maximum asset productivity.

##### Hydrogen Fuel Cell Vehicle:

- Storage capacity: 60 kg H<sub>2</sub> at 700 bar (Class 8 truck standard)
- Consumption rate: 8 kg H<sub>2</sub>/100 km (typical fuel cell efficiency)
- Operational range per tank: 750 km
- Refueling time: 10-15 minutes per cycle (commercial station standard)
- Refueling cycles in 24 hours: 2.56 cycles
- Total refueling time: 38 minutes (2.6% of operational period)

##### Battery Electric Vehicle:

- Battery capacity: 600 kWh (proposed long-haul configuration)
- Consumption rate: 1.6 kWh/km (heavy-duty efficiency including payload)
- Operational range per charge: 375 km
- Charging time: 45 minutes to 80% (350 kW DC fast charging)
- Charging cycles in 24 hours: 5.12 cycles
- Total charging time: 230 minutes (16.0% of operational period)

#### C.1.2 Operational Outcomes

Table 9: 24-Hour Continuous Operation Comparison

| <b>Metric</b>          | <b>Hydrogen FCEV</b> | <b>Battery BEV</b>      |
|------------------------|----------------------|-------------------------|
| Available driving time | 23.36 hours          | 20.17 hours             |
| Energy delivery time   | 0.64 hours           | 3.83 hours              |
| Distance covered       | 1,869 km             | 1,614 km                |
| Productive utilization | 97.4%                | 84.0%                   |
| <b>Differential</b>    | <b>Baseline</b>      | <b>-255 km (-13.6%)</b> |



### C.1.3 Economic Implications

At \$2.50/km freight rates (representative of containerized long-haul), the 255 km daily distance differential generates \$638 revenue gap per vehicle per day. Across 300 annual operating days:

- Annual revenue differential: \$191,400 per vehicle
- 100-vehicle fleet impact: \$19.14 million annual capacity loss
- Break-even analysis: Even if hydrogen costs  $2\times$  electricity per energy-equivalent kilometer, utilization advantage generates net positive return

The battery vehicle surrenders 16% of operational time to energy transfer. This is not marginal inefficiency amenable to optimization—it is structural capacity absence resulting from fundamental energy transfer rate constraints. Electricity transfer via conductor cable exhibits maximum power density limits determined by resistive heating and connector mechanical stress. Hydrogen transfer via pressurized flow exhibits power density exceeding electrical conductor limits by order of magnitude.

## C.2 C.2 Gravimetric Versus Volumetric Constraints: Scale-Dependent Crossover Analysis

### C.2.1 Energy Density Fundamentals

Table 10: Energy Carrier Density Comparison

| Energy Carrier            | Gravimetric (MJ/kg) | Volumetric (MJ/L) | Ratio (G/V) |
|---------------------------|---------------------|-------------------|-------------|
| Hydrogen (700 bar, gas)   | 120                 | 5.6               | 21.4        |
| Hydrogen (liquid, -253°C) | 120                 | 8.5               | 14.1        |
| Gasoline                  | 46                  | 34.2              | 1.3         |
| Diesel                    | 45.5                | 38.6              | 1.2         |
| Lithium-ion (cell level)  | 0.72                | 1.30              | 0.55        |
| Lithium-ion (pack level)  | 0.54                | 0.98              | 0.55        |

Hydrogen exhibits  $2.6\times$  gravimetric advantage over hydrocarbons but  $4\text{-}6\times$  volumetric disadvantage depending on storage pressure. Battery systems exhibit both gravimetric *and* volumetric disadvantages relative to chemical fuels—lower energy per kilogram *and* per liter.

### C.2.2 Storage System Mass Scaling

**Battery systems:** Energy storage mass scales linearly with energy requirements. A vehicle requiring 900 kWh capacity must carry:

- Cell mass: 5,000 kg at 180 Wh/kg (current production technology)
- Structural/thermal/BMS overhead:  $+20\% = 6,000$  kg total
- Proportion of Class 8 tractor mass (15,000 kg): 40%
- Payload penalty: Each kg of battery directly reduces revenue-generating capacity

**Hydrogen pressure vessels:** Storage mass scales sublinearly due to geometric principles. Vessel mass grows with surface area ( $r^2$ ) while fuel capacity grows with volume ( $r^3$ ). Larger tanks achieve better mass-to-capacity ratios.

At 60 kg capacity (750 km range), hydrogen system represents 5.2% of tractor mass versus 40% for equivalent-range battery system. The crossover occurs around 400 km operational

Table 11: Hydrogen Storage System Scaling

| <b>H<sub>2</sub> Capacity</b><br><b>(kg)</b> | <b>Range</b><br><b>(km)</b> | <b>Vessel Mass</b><br><b>(kg)</b> | <b>Total System</b><br><b>(kg)</b> | <b>% Tractor Mass</b><br><b>(15,000 kg)</b> |
|----------------------------------------------|-----------------------------|-----------------------------------|------------------------------------|---------------------------------------------|
| 30                                           | 375                         | 320                               | 420                                | 2.8%                                        |
| 60                                           | 750                         | 580                               | 780                                | 5.2%                                        |
| 90                                           | 1,125                       | 820                               | 1,120                              | 7.5%                                        |

range—below this threshold, battery mass penalty remains manageable; above this threshold, battery mass compounds exponentially while hydrogen mass increases linearly.

### C.2.3 Volumetric Constraint Context

The volumetric disadvantage proves relevant only when volume is the binding constraint. For commercial freight:

- **Trailer capacity:** Typically volume-limited ("cubed out") before reaching gross vehicle weight limits
- **Tractor capacity:** Mass-limited by GVW regulations (36,000 kg total in U.S.)
- **Binding constraint:** Tractor mass determines maximum payload capacity; trailer volume is abundant

A 60 kg hydrogen system occupying 780 liters can be integrated into tractor chassis geometry (between frame rails, underfloor mounting) without compromising trailer volume. A 6,000 kg battery system consuming 40% of tractor mass allocation directly reduces payload capacity by up to 6,000 kg—equivalent to eliminating 20-25% of revenue-generating freight capacity.

The volumetric penalty becomes irrelevant when storage volume exists but mass allocation does not.

## C.3 C.3 Electrochemical and Mass Limits: Where Battery Storage Becomes Impractical

### C.3.1 Theoretical Maximum Energy Density

Current lithium-ion technology approaches practical limits:

Table 12: Battery Technology Energy Density Progression

| <b>Technology</b>         | <b>Cell Level</b><br><b>(Wh/kg)</b> | <b>Pack Level</b><br><b>(Wh/kg)</b> | <b>Deployment Status</b>   |
|---------------------------|-------------------------------------|-------------------------------------|----------------------------|
| Current Li-ion (NMC)      | 250-280                             | 180-200                             | Production (2024)          |
| Advanced Li-ion           | 350-400                             | 250-280                             | Lab demonstration          |
| Lithium-sulfur            | 400-500                             | 280-350                             | Research phase             |
| Lithium-air (theoretical) | 800-1,000                           | 560-700                             | Fundamental research       |
| <b>Hydrogen (LHV)</b>     | <b>33,000</b>                       | <b>33,000</b>                       | <b>Operational (1960s)</b> |

Even theoretical next-generation battery chemistries project maximum 700 Wh/kg at pack level—accounting for structural components, thermal management, and battery management systems. This represents 2.1% of hydrogen's lower heating value energy density.

The gap is not incremental—it is categorical difference between:

- **Electrochemical storage:** Electrons stored in chemical bonds within solid/liquid electrolyte matrix; energy density limited by atomic bonding energies and electrolyte molecular weights
- **Chemical fuel storage:** Energy released via exothermic oxidation reactions; energy density determined by molecular bond energies in fuel molecules themselves

This is fundamental physics distinction, not engineering optimization challenge.

### C.3.2 Distance-Dependent Viability Hierarchy

Table 13: Energy Carrier Viability Across Distance Scales

| Distance Scale                                            | Technical Viability Assessment                                                                                                                                                                                            |
|-----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Urban delivery<br>(50-150 km/day)                         | Battery: Mass penalty manageable (800-1,200 kg). Home charging eliminates infrastructure downtime. <b>Battery viable.</b>                                                                                                 |
| Regional freight<br>(400-600 km/day)                      | Battery: Mass penalty 3,000-4,000 kg; charging downtime 8-12% of operational period. Hydrogen: Mass penalty 600-800 kg; refueling downtime <3%. <b>Contested domain.</b>                                                  |
| Long-haul freight<br>(800-1,200 km/day)                   | Battery: Mass penalty 6,000-8,000 kg (40-53% tractor mass); charging downtime 16-20%. Hydrogen: Mass penalty 800-1,100 kg (5-7%); refueling downtime 3-4%. <b>Hydrogen decisive.</b>                                      |
| Intercontinental surface<br>(5,000-20,000 km, unrefueled) | Battery: without en-route recharging, required mass would exceed vehicle mass. <b>Battery infeasible unrefueled.</b>                                                                                                      |
| Earth-Moon transit<br>(384,400 km)                        | Battery: energy density insufficient to reach escape velocity under any foreseeable chemistry. Chemical propulsion required (Saturn V used liquid hydrogen; many vehicles use hydrocarbons). <b>Batteries infeasible.</b> |

### C.3.3 The Extreme-Range Energy-Density Boundary

For missions requiring >10,000 km range without refueling or recharging (intercontinental aviation, maritime shipping, space launch), battery systems are not merely inferior; they are infeasible under any known electrochemistry, on energy-density grounds alone.

Consider Earth-Moon transit requirements:

- Delta-v requirement: 11.2 km/s escape velocity + 3.2 km/s lunar orbit insertion = 14.4 km/s total
- Tsiolkovsky rocket equation:  $\Delta v = v_e \ln(m_0/m_f)$
- Even at theoretical 1,000 Wh/kg battery density, mass ratio required for 14.4 km/s delta-v exceeds  $10^{40}:1$

- Physical impossibility: Vehicle would require mass exceeding observable universe

Hydrogen systems achieve this mission routinely. Saturn V (1967-1973), Space Shuttle (1981-2011), current operational launch vehicles demonstrate not theoretical possibility but six decades of operational precedent.

This establishes that *battery* systems cannot meet extreme-range or space-launch energy requirements; a chemical fuel is required. Hydrogen is one such fuel—historically important for high-performance rocketry—but not the only chemical option, since hydrocarbons such as kerosene and methane are widely used. The firm conclusion here is the exclusion of batteries, not the exclusivity of hydrogen.

## C.4 C.4 Engineering Conclusions and Application Boundaries

### C.4.1 Three Quantitative Findings

#### Finding 1: Utilization Penalty Threshold

Battery electric systems exhibit 16% operational capacity loss in continuous-duty applications requiring >400 km daily range. This translates to \$191,400 annual revenue void per vehicle at representative freight rates. The penalty is difficult to eliminate—it stems from energy-transfer-rate differences between electrical charging and pressurized-fluid refueling, though emerging megawatt-charging systems may narrow it.

#### Finding 2: Mass-Constrained Crossover

Hydrogen storage mass penalty (5-7% of vehicle mass) remains constant across range requirements due to sublinear scaling of pressure vessel mass. Battery storage mass penalty (40-50% of vehicle mass) scales linearly with range requirements. Crossover occurs at 400 km operational range—above this threshold, hydrogen exhibits decisive mass advantage in payload-sensitive applications.

#### Finding 3: Electrochemical Impossibility Boundary

For unrefueled missions requiring >10,000 km range (intercontinental aviation, maritime shipping, space launch), battery systems are infeasible under any foreseeable electrochemistry on energy-density grounds. The gap between theoretical maximum battery specific energy ( $\sim 700$  Wh/kg) and hydrogen ( $\sim 33,000$  Wh/kg lower heating value) is roughly  $47\times$ —a categorical difference between electrochemical storage and chemical fuel storage rather than an optimization gap. This argument excludes batteries; it does not by itself single out hydrogen among chemical fuels.

### C.4.2 Application-Specific Deployment Boundaries

#### Battery-optimal applications:

- Urban delivery (<200 km daily range) where home/depot charging eliminates infrastructure downtime
- Light passenger vehicles where overnight charging aligns with usage patterns
- Applications where mass penalty <15% of vehicle mass remains economically acceptable

#### Hydrogen-optimal applications:

- Long-haul freight (>800 km daily range) where utilization penalty and payload preservation create immediate returns
- Continuous-duty operations (port drayage, transit buses, delivery fleets) where 24/7 utilization requirements cannot accommodate multi-hour charging

- Marine and aviation applications where energy-density requirements approach battery electrochemical limits

#### **Contested applications:**

- Regional freight (400-600 km daily range) where utilization requirements and payload sensitivity determine optimal pathway
- Medium-duty commercial vehicles where operational patterns vary substantially across use cases

#### **C.4.3 The Energy-Density Argument: Bounds**

The engineering calculations indicate approximate boundaries:

1. Below 400 km daily operational range: Battery systems viable due to overnight charging capability offsetting energy transfer time penalty
2. 400-1,000 km daily range: Hydrogen advantages (utilization, payload capacity) become progressively more decisive as range increases
3. Above  $\sim 10,000$  km unrefueled mission range: battery systems infeasible on energy-density grounds; a chemical fuel is required (hydrogen among them)
4. Space launch: chemical propulsion is required and batteries are infeasible; hydrogen has a long heritage here, alongside hydrocarbon fuels

This is not advocacy for universal hydrogen adoption—it is engineering constraint analysis establishing where each technology proves viable. Battery systems excel in applications where their mass penalty remains manageable and infrastructure supports overnight charging. Hydrogen systems excel in applications where energy density requirements approach or exceed battery electrochemical limits.

The expectation that batteries will eventually match the energy density of chemical fuels is not supported by known electrochemical limits: the  $\sim 47\times$  gap reflects a categorical difference between energy-storage mechanisms that incremental improvement is unlikely to bridge.

For extreme-range missions—maritime shipping, aviation, and space launch—hydrogen is essentially the only *non-combustion* energy carrier with sufficient energy density; more generally these missions require chemical fuels rather than batteries. This is an energy-density bound, not a claim of hydrogen’s superiority across transportation.