



MSi2500

Mirics FlexiTV™ USB Interface IC

Overview

The MSi2500 converts the analogue baseband outputs from a broadcast silicon tuner to a digital form, performs essential signal processing on those signals and streams them to a PC host over a USB2.0(HS) interface. It is designed for use with the Mirics family of poly-band tuners such as the MSi001 as part of a complete digital TV and radio receiver known as Mirics FlexiTV™.

This approach enables software demodulation on a host CPU, minimizing system cost and maximizing flexibility. The following TV and radio standards can be supported with this approach:

- DVB-T, ISDB-T_{13-seg}, DTMB and ATSC terrestrial TV
- T-DMB, CMMB, DVB-H, ISDB-T_{1-seg} & ATSC-M/H mobile TV
- AM & FM analog radio
- DAB, DRM & HD digital radio

Designed in a low-cost CMOS process, the MSi2500 integrates: on-chip analog to digital converters, baseband signal processing, microcontroller, embedded memory, power management and high-speed USB2.0 interface.

Applications

- Notebook PCs
- Desktop & media centre PCs
- Net books
- Mobile Internet Devices ("MIDs")

Features

- Highly integrated device featuring
 - Dual-channel ADC and clock PLL
 - IQ signal processing
 - 8051 microcontroller
 - USB2.0 (HS) interface
 - 24 MHz crystal oscillator and buffer
 - External EEPROM support
 - IR Remote Control support
- Small footprint package
 - 5 x 5 x 0.9 mm 32 pin QFN
- Compliant with all appropriate standards, including:
 - Norig, EICTA MBRAI, ETSI, ARIB
 - USB2.0(TID=40000840)
- RoHS compliant

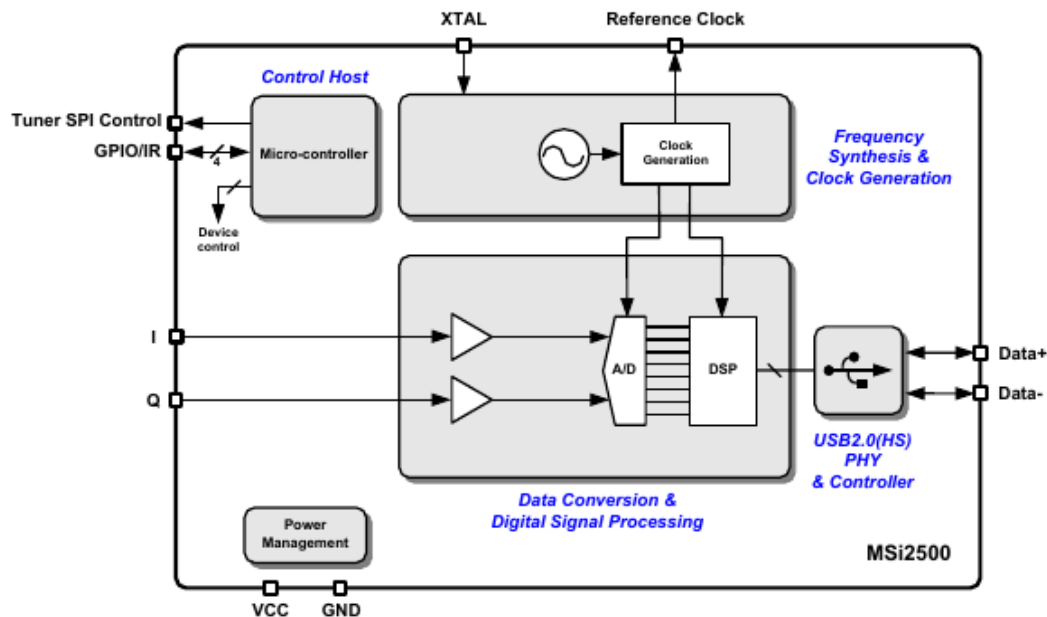


Figure 1: MSi2500 Top Level Block Diagram

MSi2500

Contents

1 Functional Block Description 3

1.1 Dual ADC..... 3

1.2 Clock Generation 3

1.3 DSP Subsystem 3

1.4 USB 2.0 (HS)..... 3

1.5 Microcontroller..... 3

1.6 Power Management 3

1.7 Infra-Red Remote Control Support..... 4

2 Device Pin-Out..... 5

3 Electrical Specification..... 6

3.1 Absolute Maximum Ratings..... 6

3.2 Recommended Operation 6

3.3 Electrical Characteristics 6

4 Application Circuit Guidelines..... 8

4.1 Crystal Oscillator 8

4.2 External EEPROM..... 9

4.3 IR Remote Control Support 9

5 Ordering and Package Information 10

5.1 Package Drawing 10

5.2 Marking information 10

5.3 Ordering Information..... 11

Legal Information..... 12

