

Peter Waldert* and Sonja Langthaler

Improving runtime of the A549 electrophysiological cancer cell model from X to Y and live simulation dashboard

<https://doi.org/10.1515/>

Abstract: Through a reimplementation in Rust and numerical optimization approaches we were able to reduce the runtime of the A549 electrophysiological cancer cell model [1] from X to Y.

Keywords: Please insert your keywords here, separated by commas.

1 Introduction

Lung cancer is one of the most widespread pathologies worldwide and its internal workings, specifically those of individual A549 cells, are not well understood. Computational techniques can help with a better understanding of the behaviour of these cancer cells. We work with the A549 model introduced in [1], together with a calcium channel extension introduced in [2], reimplementing the model in Rust and performing a number of numerical optimizations such as adaptive timestepping. We also verify the model's performance in *Floating* mode, as compared to an individual simulation of the estimated number of channels. We introduce a visualisation approach of the entire model in the form of a live simulation dashboard¹. The entire source code behind this simulation is freely available on GitHub², and reusable through three different channels: the simulation interface (powered by WebAssembly), the Rust linkable library implementation and a Python package. These three interfaces all originate from the same source code and our aim behind a distribution in this ways is to make the simulation as accessible as possible. In order to find appropriate parameters for the model, an optimization procedure is performed. Multiple optimization approaches for the solution of the corresponding inverse problem (fitting model parameters

to measurement data) are put in comparison. The measurements are obtained using a *Patch-Clamp System*

2 Methods

The computational model is as follows: A cell's membrane consists of multiple ion channels, categorized into $M \in \mathbb{N}$ different types (and therefore, sub-models). Each ion channel is represented in one of $N_{s,x} \in \mathbb{N}$ states, which, in physical terms, is related to a positional configuration of a protein within the ion channel. Only some states can be observed directly, and progress only depends on the one previous state. Hence, we are working with a Hidden Markov Model (HMM) where transitions between states are modelled probabilistically. For many ion channel categories, their transition probabilities are voltage or ion-concentration dependent.

The whole cell current $I : T \rightarrow \mathbb{R}$ over time $t \in T \subset \mathbb{R}^+$ is then obtained as the sum of all individual channel contributions $I_x, x \in \{1, \dots, M\}$ over $M \in \mathbb{N}$ channel types

$$I(t) := \sum_{x=1}^M N_x I_x(t) = \sum_{x=1}^M N_x g_x p_{o,x}(V(t) - E_x), \quad (1)$$

where N_x is the number of channels of type $x \in \{1, \dots, M\}$, g_x is the respective ion channel's conductivity, $p_{o,x} \in [0, 1]$ is the probability of observing the channel in a state where an ion current can flow ("open states"), $V : T \rightarrow \mathbb{R}$ is the voltage across the membrane and $E_x \in \mathbb{R}^+$ the reversal potential.

Within the simulation, we sample the state and current at discrete time points $T_{\text{meas}} \subset T$, for example

$$T_{\text{meas}} := \{n(\Delta t)_n | n \in \mathbb{N}_0 | n < N_t\}$$

for N_t measurements with step size $(\Delta t)_n$, which may be chosen equally large for all $n \in \{0, \dots, N_t - 1\}$. We will later adapt this time interval $(\Delta t)_n \in \mathbb{R}^+$ per simulation step based on a state change heuristic.

The current measurements are then simply $I := (I(t_0), I(t_1), \dots, I(t_{N_t}))^T \in \mathbb{R}^{N_t}$.

¹ <https://in-silico-cancer-cell.waldert.at/>

² <https://github.com/MrP01/InSilicoCancerCell>

*Corresponding author: Peter Waldert, Institute of Health Care Engineering with European Testing Center for Medical Devices, Graz University of Technology, Graz, Austria, e-mail: peter.waldert@tugraz.at

Sonja Langthaler, Institute of Health Care Engineering with European Testing Center for Medical Devices, Graz University of Technology, Graz, Austria

Tab. 1: Ion Channel Types

Channel Type	Reference
Kv13	[3]
Kv31	[3]
Kv34	[3]
Kv71	[3]
KCa11	[3]
KCa31	[3]
Task1	[3]
CRAC1	[3]
TRPC6	[3]
TRPV3	[3]
CLC2	[3]

2.1 Inverse Problem

When regarding the cell model as a whole, the number of ion channels N_x per type x may be put into a configuration vector $\mathbf{N} := (N_1, \dots, N_M)^T \in \mathbb{N}^M$ and then the total simulated current I sampled at measurement points T_{meas} can be expressed as a matrix-vector product

$$\mathbf{I} = \sum_{x=1}^M N_x \mathbf{I}_x = \mathbf{A} \mathbf{N}, \quad (2)$$

where $\mathbf{A} \in \mathbb{R}^{N_t \times M}$ is the matrix of all current measurements per channel type.

Given the individual ion channel type models' parameters, which we know from literature Table 1, the question that remains is how many channels there are of each type to fit the measurements. This problem can be solved using a number of optimization approaches.

However, the formulation Equation (2) also gives rise to a least-squares formulation.

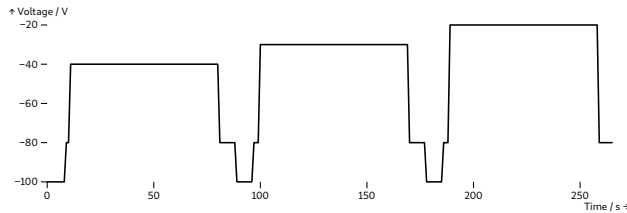


Fig. 1: Please insert your figure caption here.

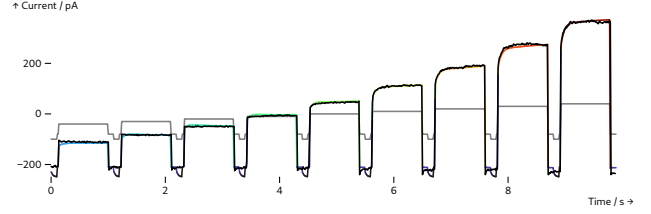


Fig. 2: Please insert your figure caption here.

3 Results

4 Future Perspectives

Author Statement

Research funding: This work was funded through a BioTechMed-Grax Lab Rotation Research Fellowship. **Conflict of interest:** Authors state no conflict of interest. **Informed consent:** Informed consent has been obtained from all individuals included in this study. **Ethical approval:** The research related to human use complies with all the relevant national regulations, institutional policies and was performed in accordance with the tenets of the Helsinki Declaration, and has been approved by the authors' institutional review board or equivalent committee.

References

- Langthaler, Sonja, Theresa Rienmüller, Susanne Scheruebel, Brigitte Pelzmann, Niroj Shrestha, Klaus Zorn-Pauly, Wolfgang Schreibmayer, Andrew Koff, and Christian Baumgartner (June 2021). "A549 in-silico 1.0: A first computational model to simulate cell cycle dependent ion current modulation in the human lung adenocarcinoma." In: *PLoS Comput. Biol.* 17.6, e1009091. ISSN: 1553-7358. DOI: 10.1371/journal.pcbi.1009091.
- Langthaler, Sonja, Christian Zumpf, Theresa Rienmüller, Niroj Shrestha, Julia Fuchs, Rui Zhou, Brigitte Pelzmann, Klaus Zorn-Pauly, Eleonore Fröhlich, Seth H. Weinberg, and Christian Baumgartner (May 2024). "The bioelectric mechanisms of local calcium dynamics in cancer cell proliferation: an extension of the A549 in silico cell model." In: *Front. Mol. Biosci.* 11, p. 1394398. ISSN: 2296-889X. DOI: 10.3389/fmolb.2024.1394398.
- Pusch, Michael, Raffaella Magrassi, Bernd Wollnik, and Franco Conti (Aug. 1998). "Activation and Inactivation of Homomeric KvLQT1 Potassium Channels." In: *Biophys. J.* 75.2, pp. 785–792. ISSN: 0006-3495. DOI: 10.1016/S0006-3495(98)77568-X.