



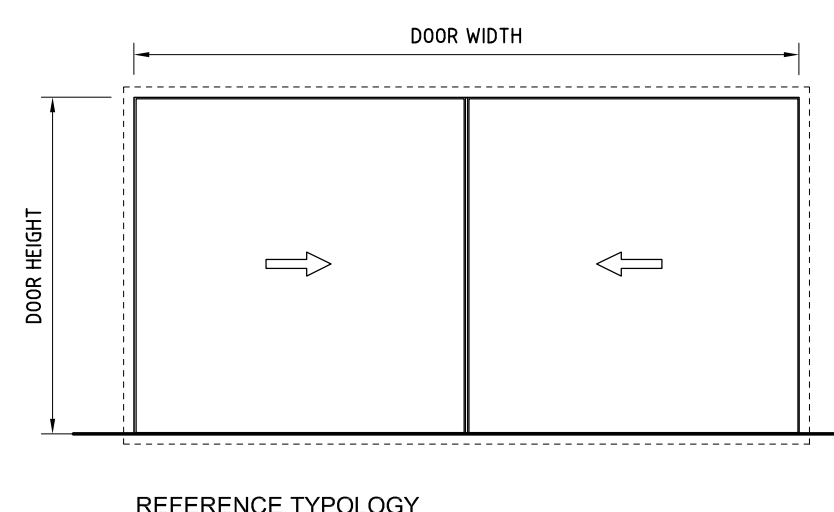

CERTIFICATIONS


- Air Infiltration & Exfiltration (EN 1026, EN 12207) CLASS 4
- Water Penetration (EN 1027, EN 12208) CLASS E750
- Wind Resistance Serviceability (EN 12210, EN 12211) CLASS C2
- Maximum Glass Thickness that can be accommodated is 53mm

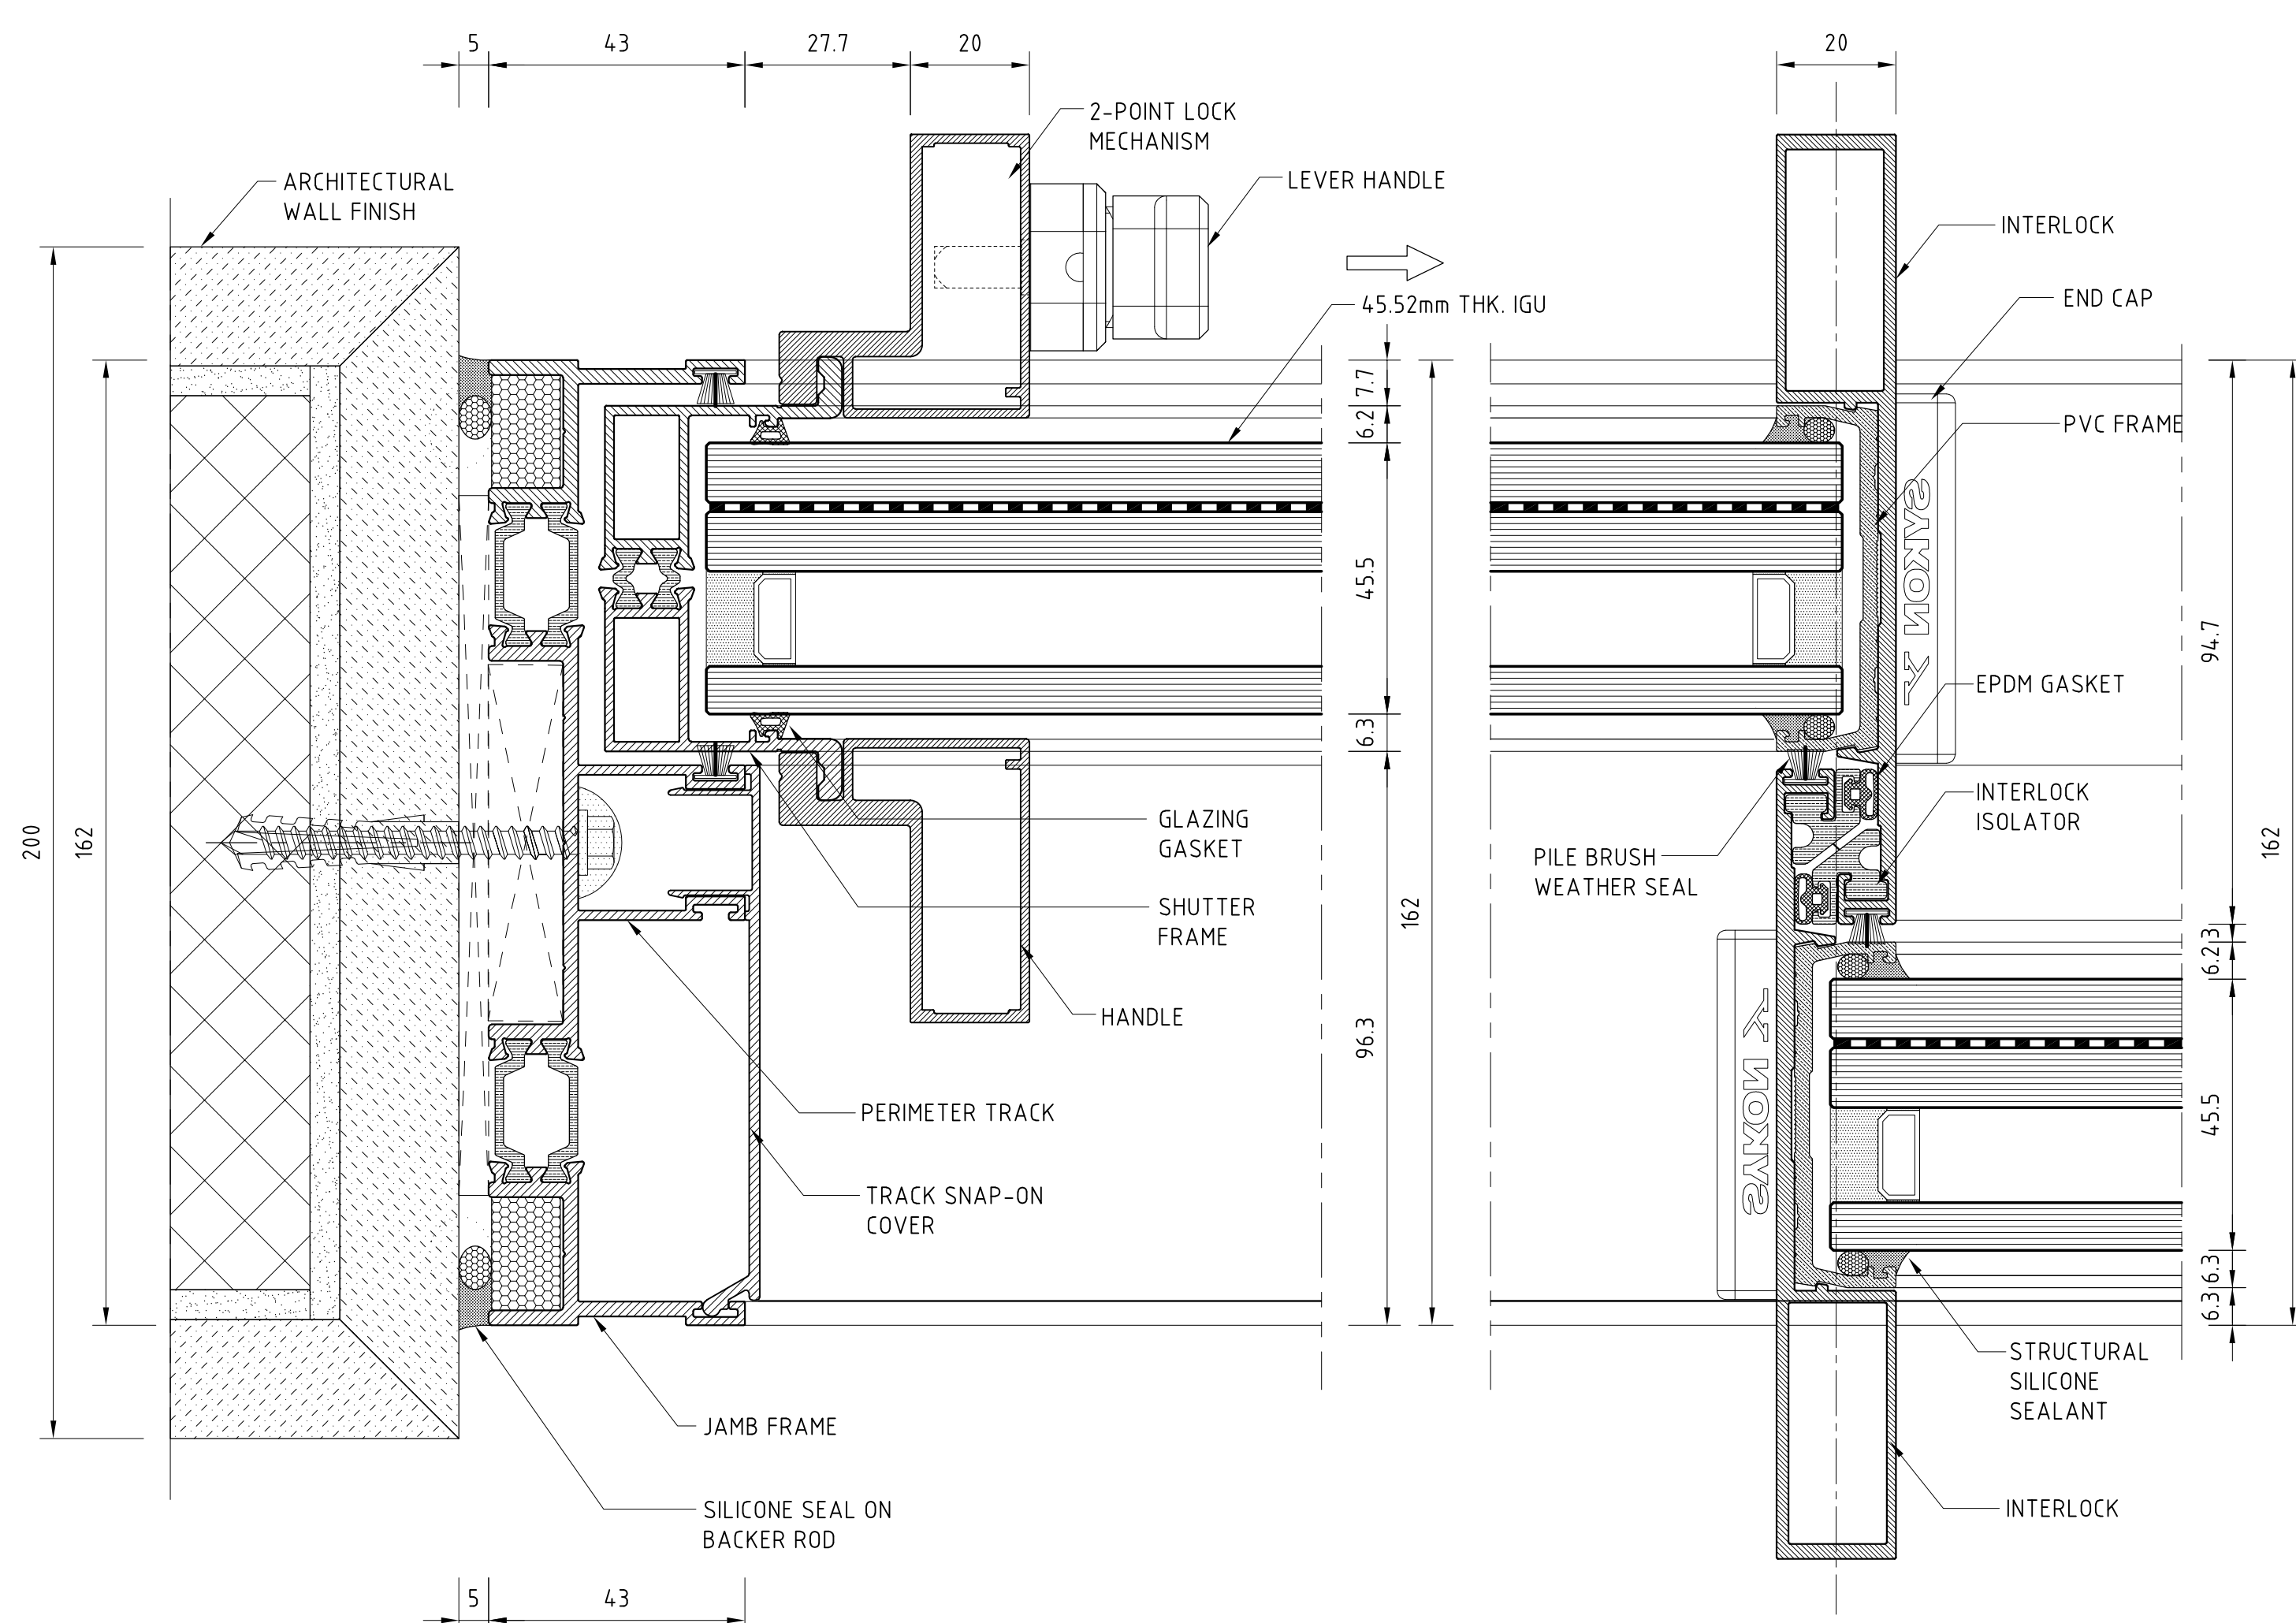


JAMB DETAIL

INTERLOCK DETAIL

TYPICAL DETAILS w/ EMBEDDED SILL AND EXPOSED TOP & JAMB FRAMES

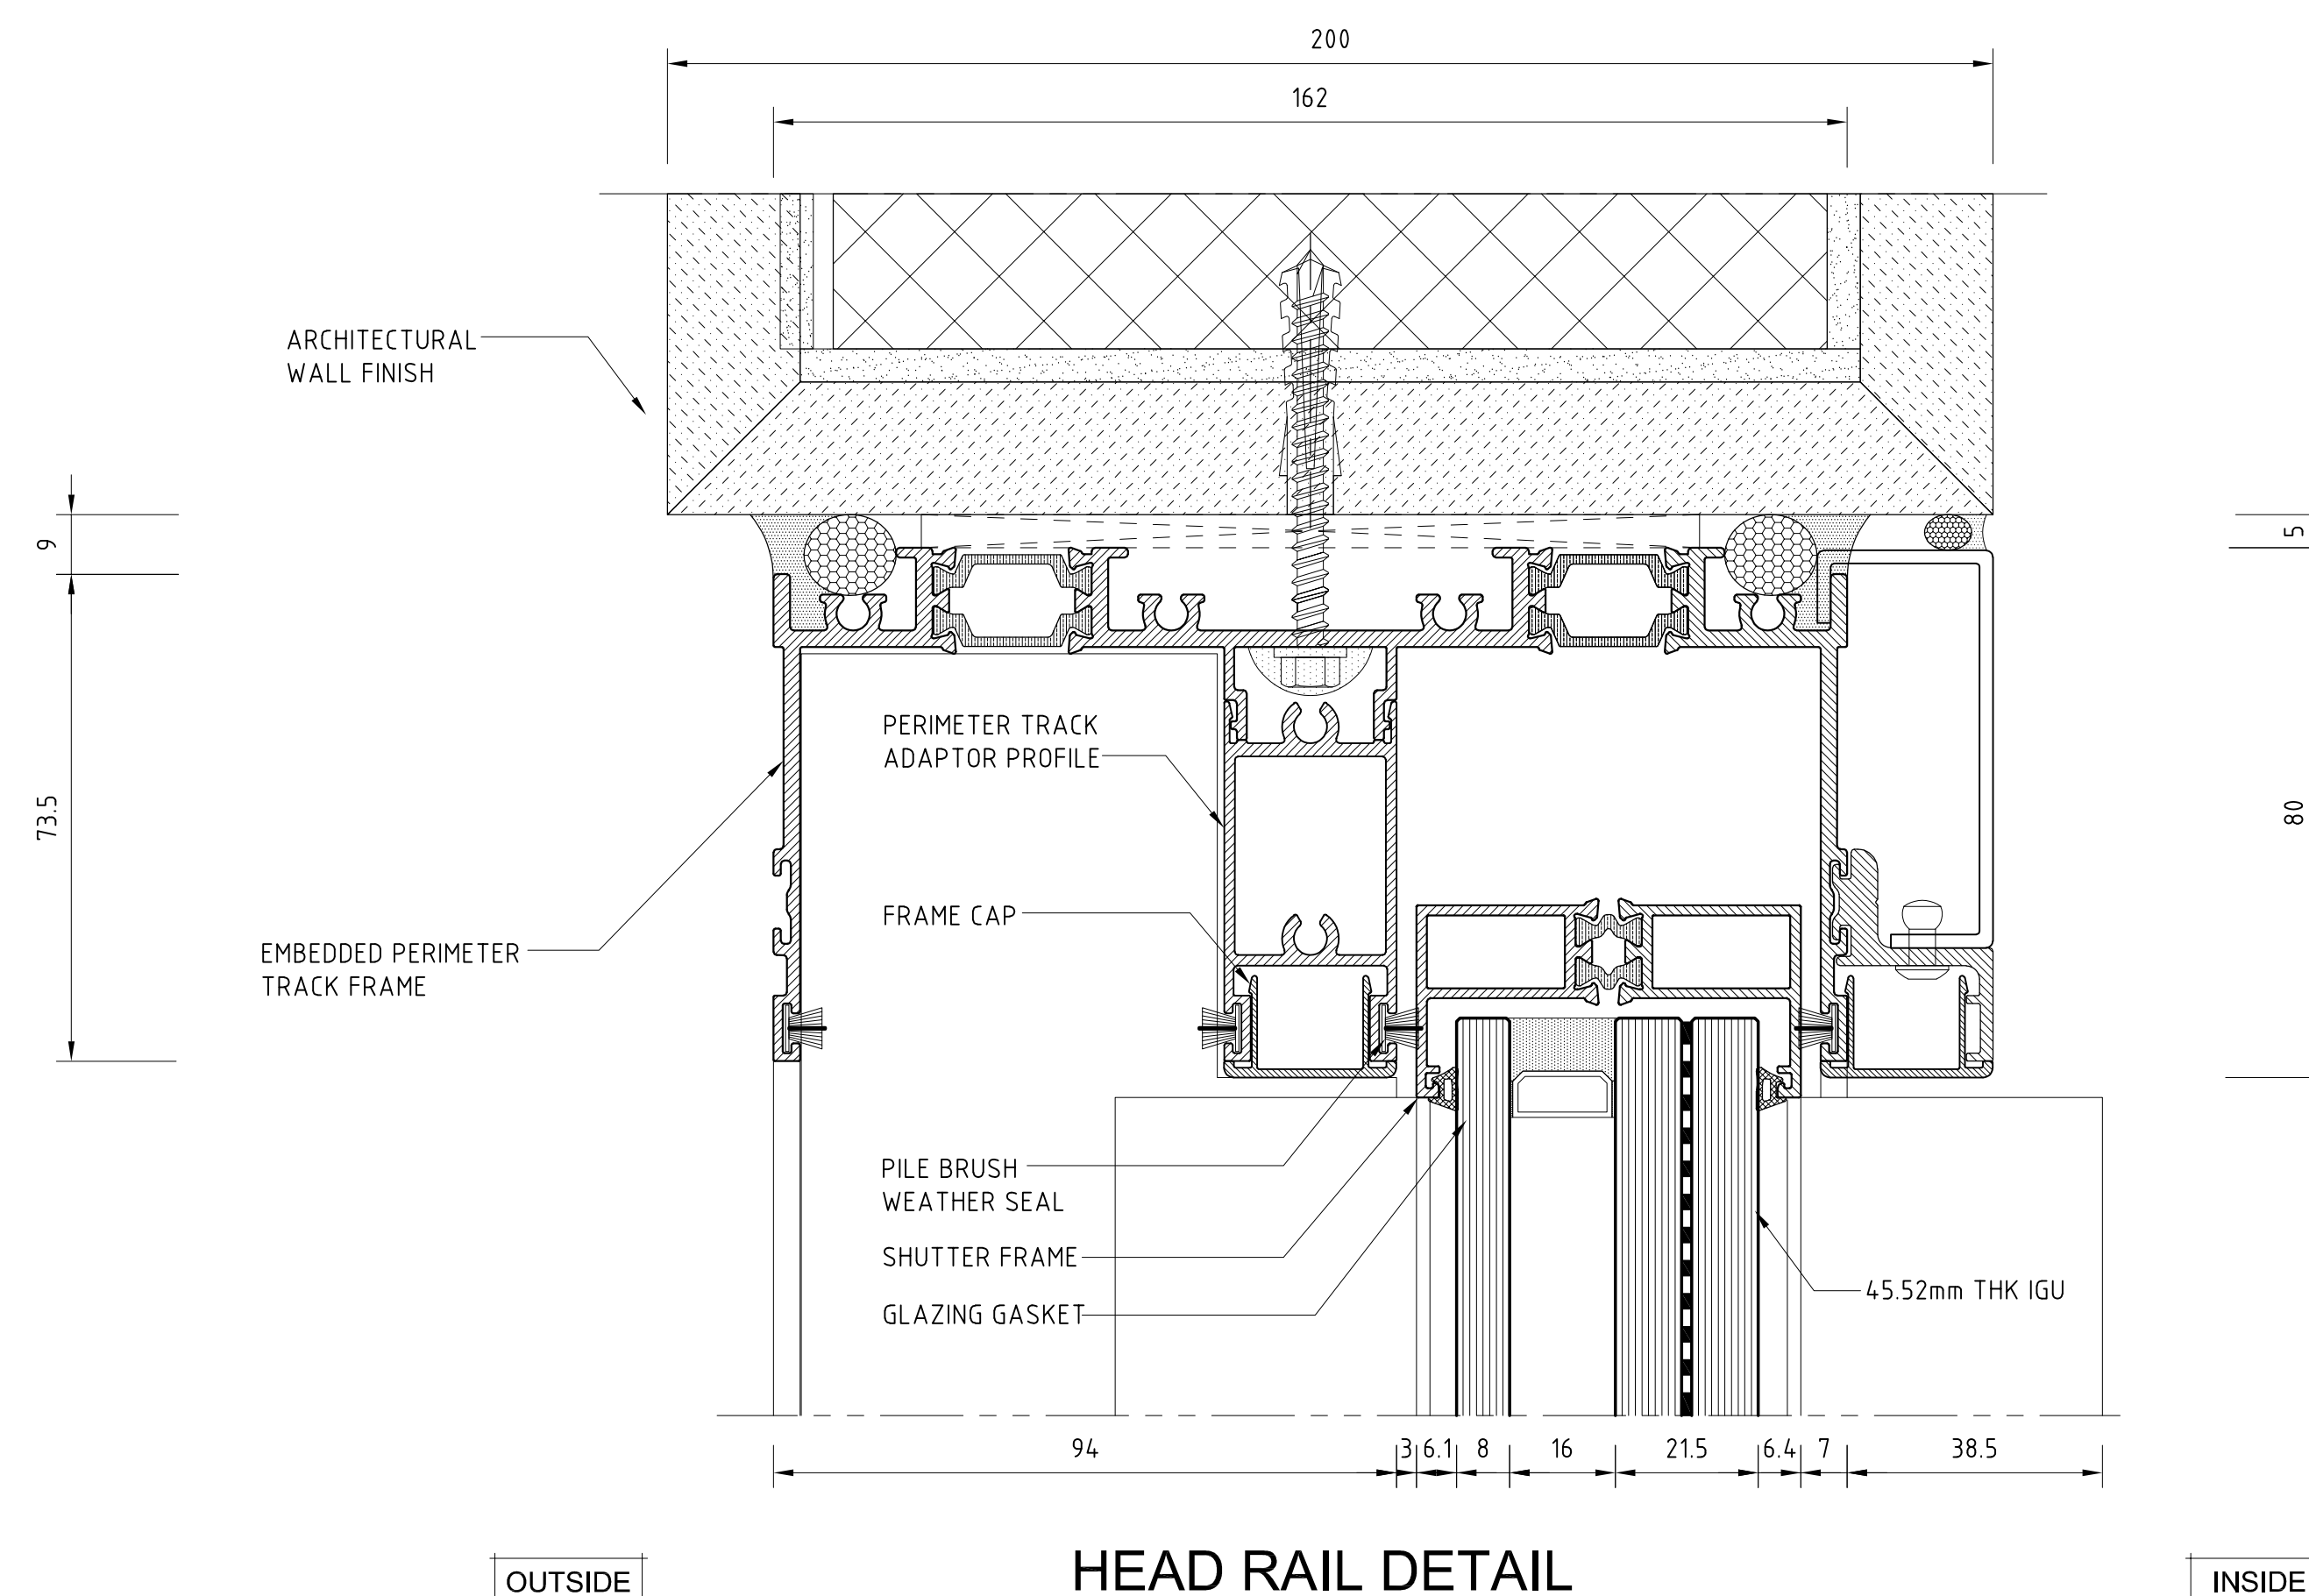

HEAD RAIL DETAIL

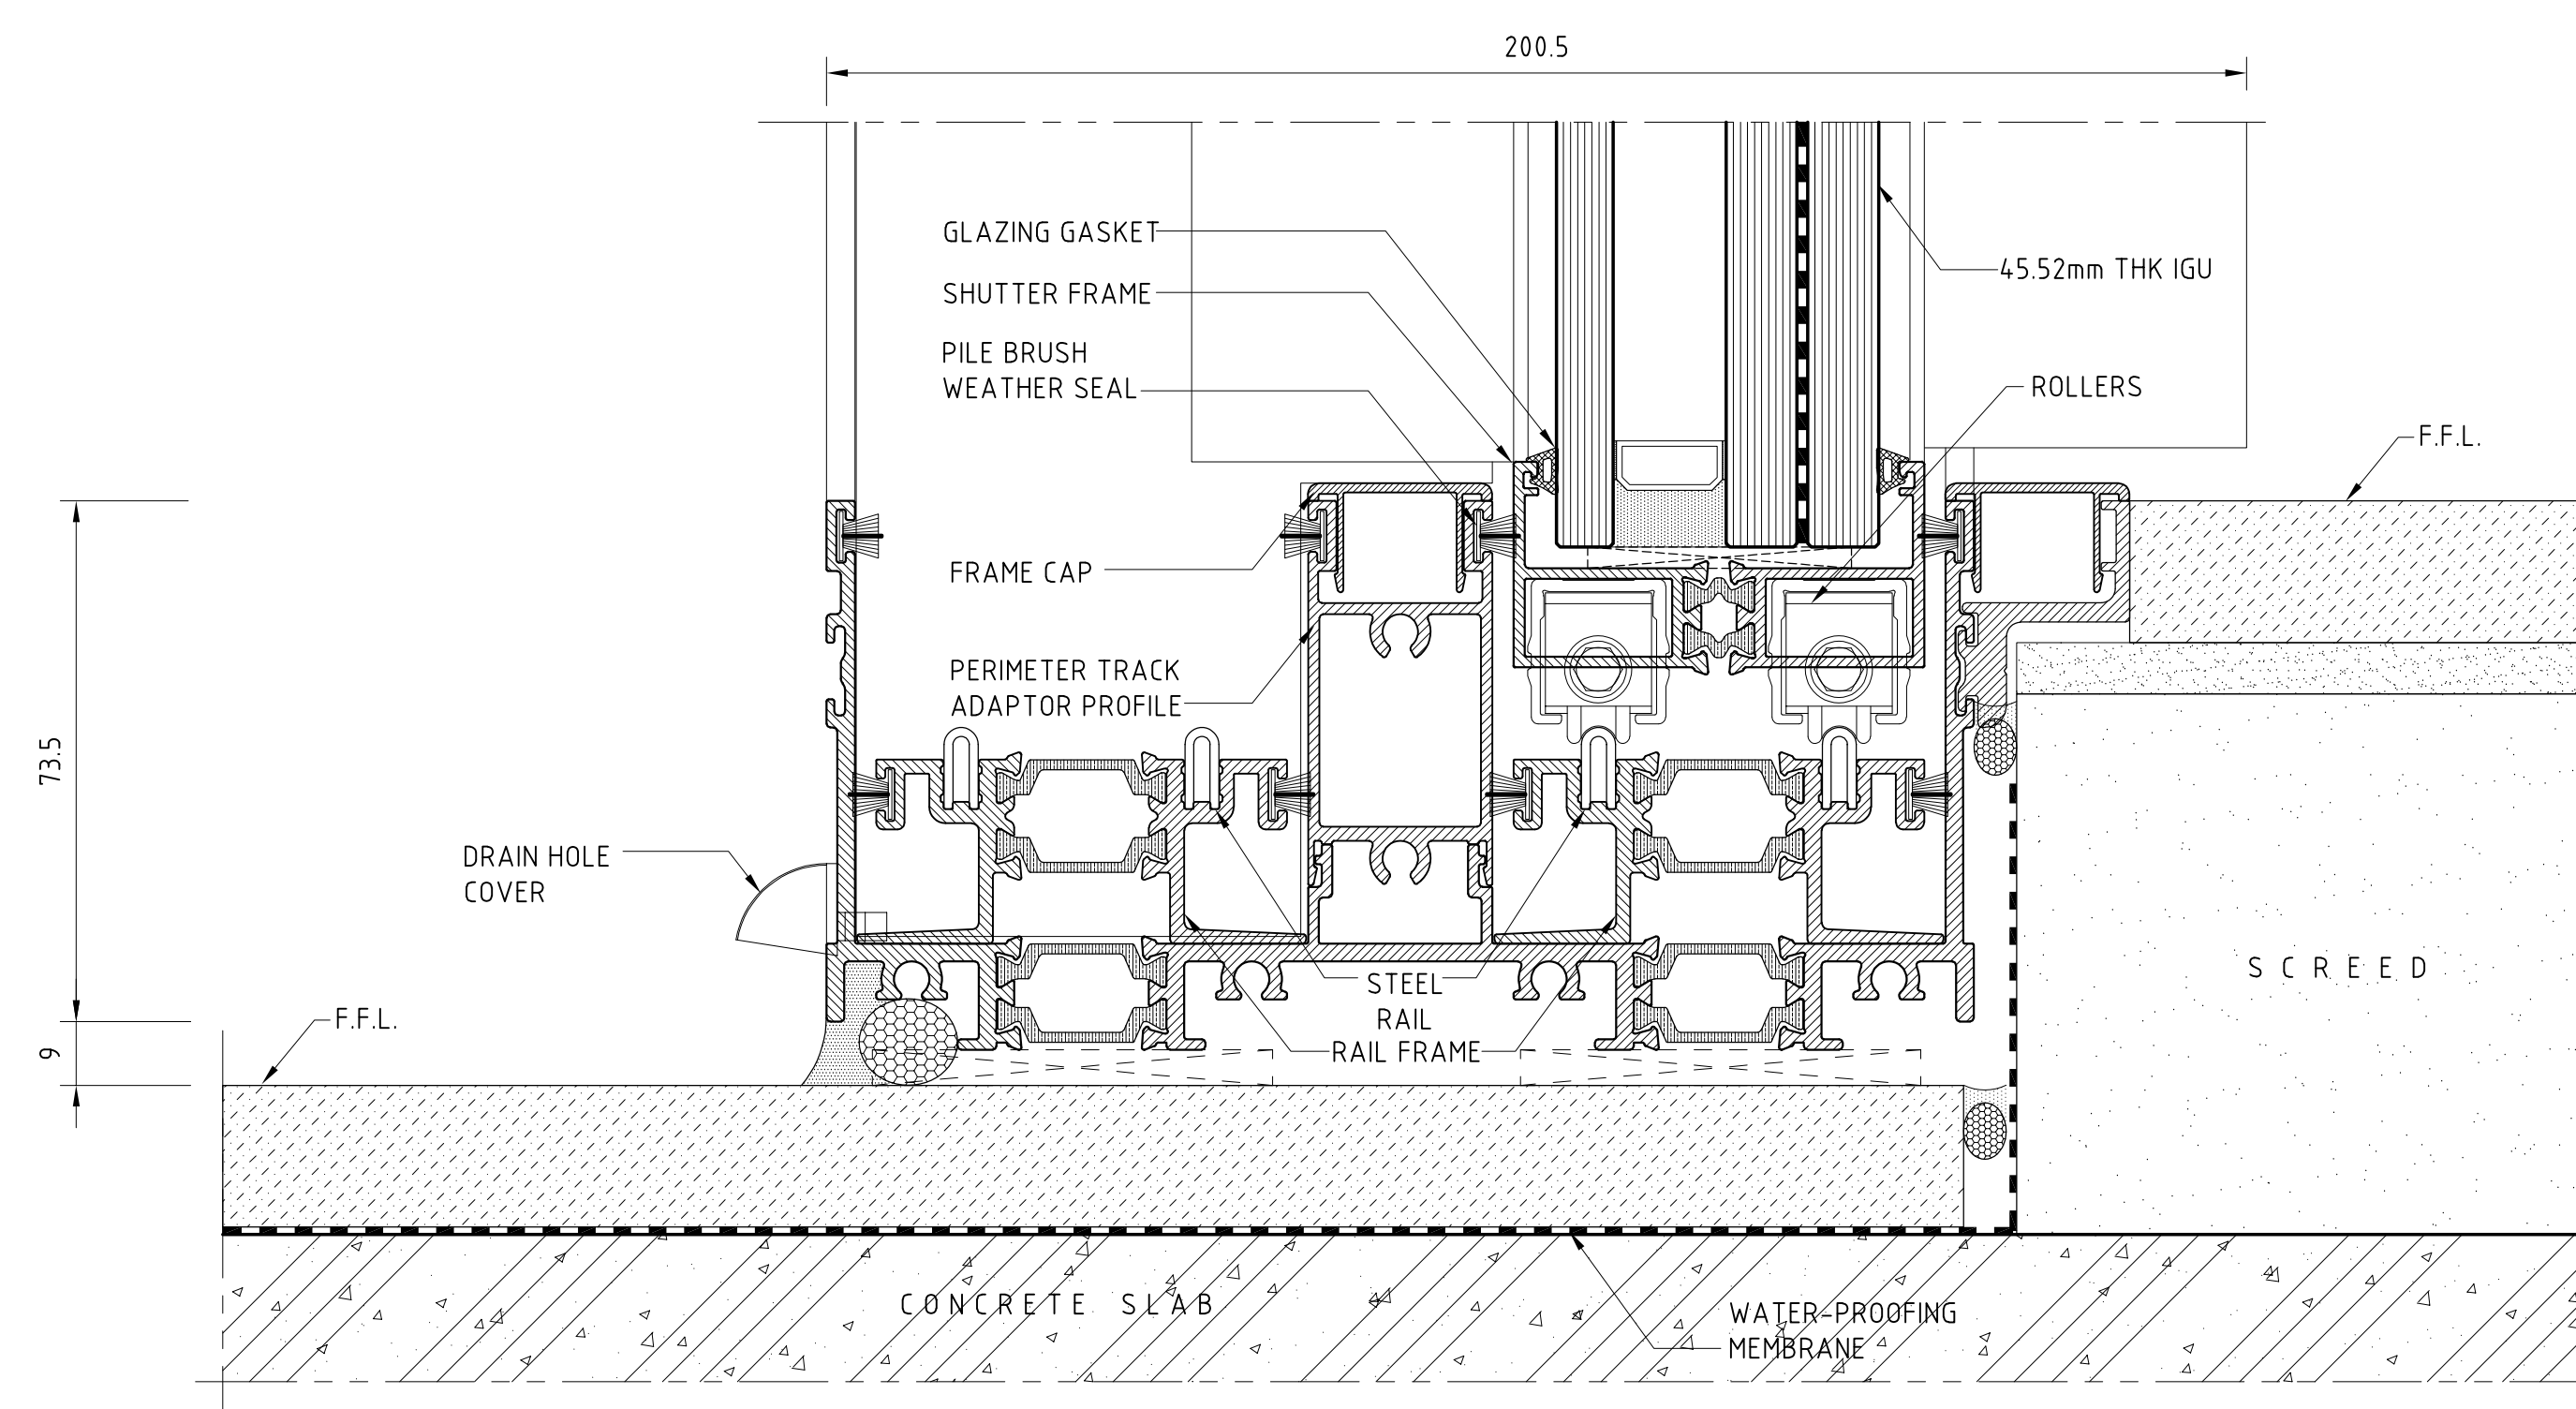

BOTTOM RAIL DETAIL