

SL 580

Sliding Door System


Monorail



Project :


SL580 SLIDER SYSTEM TYPICAL DETAILS

Aluminum Fabricator :

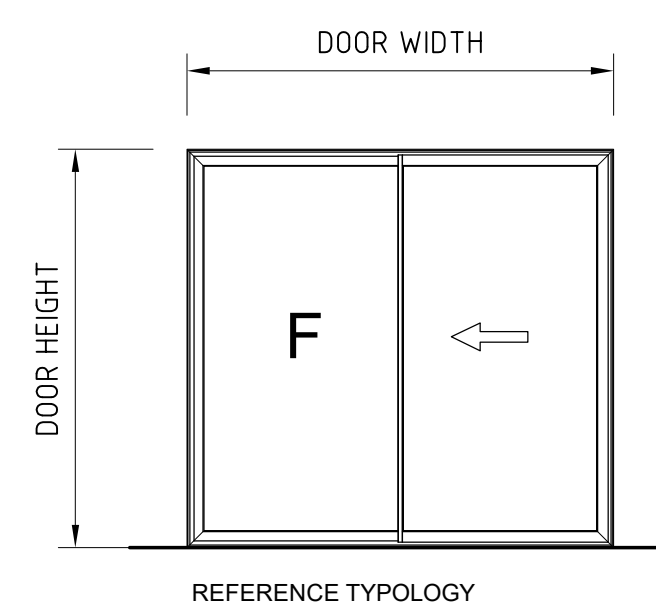


CERTIFICATIONS as LIFT & SLIDE


- Air Infiltration & Exfiltration (ASTM E283/E283M-19) 600 Pa
- Water Penetration (ASTM E331-00 Reapproved 2016) 750 Pa
- Wind Resistance Serviceability (ASTM E330/E330M-14) 1920 Pa
- Wind Resistance Safety (ASTM E330/E330M-14) 2130 Pa
- Maximum Panel Weight up to 400 kg
- Single Lock Point or Multi-lock points can be used
- Maximum Glass Thickness that can be accommodated is 42mm

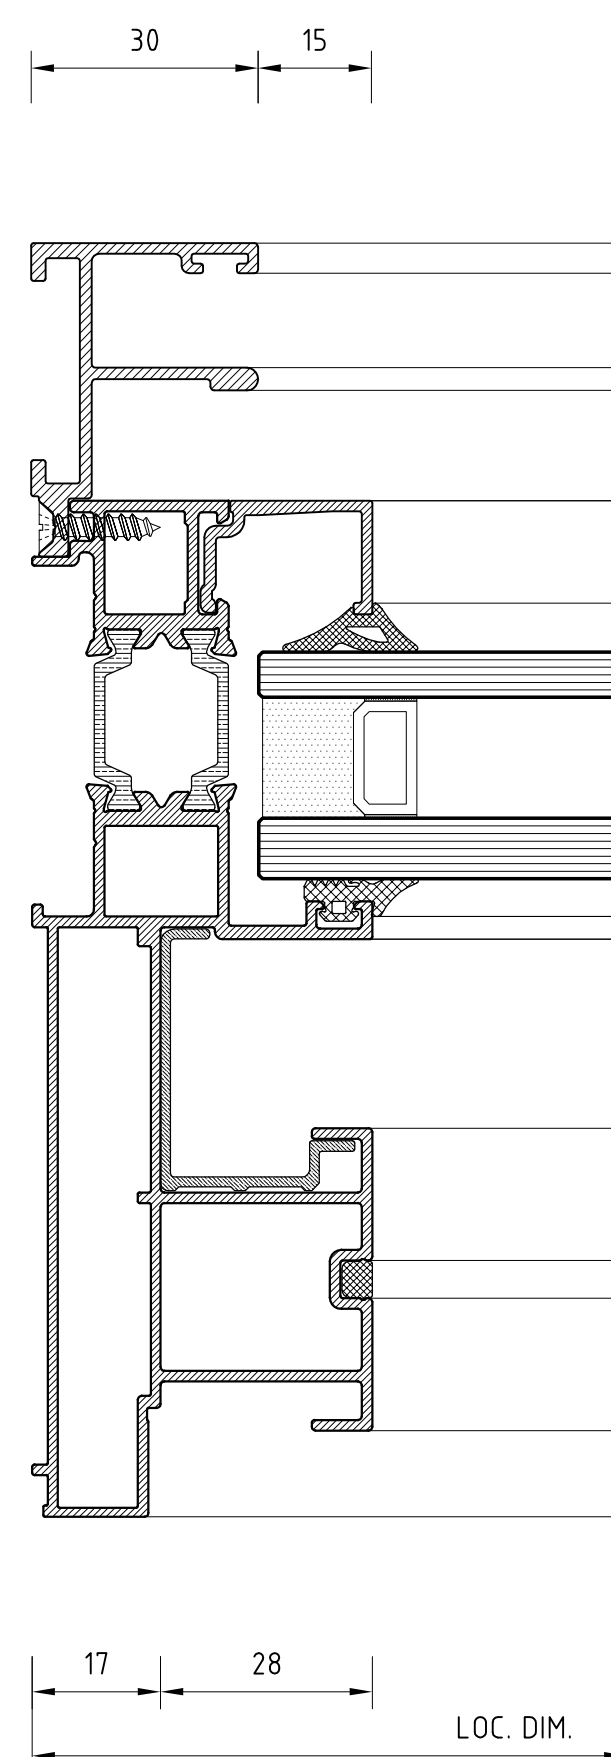


JAMB DETAIL
(FIXED PANEL)

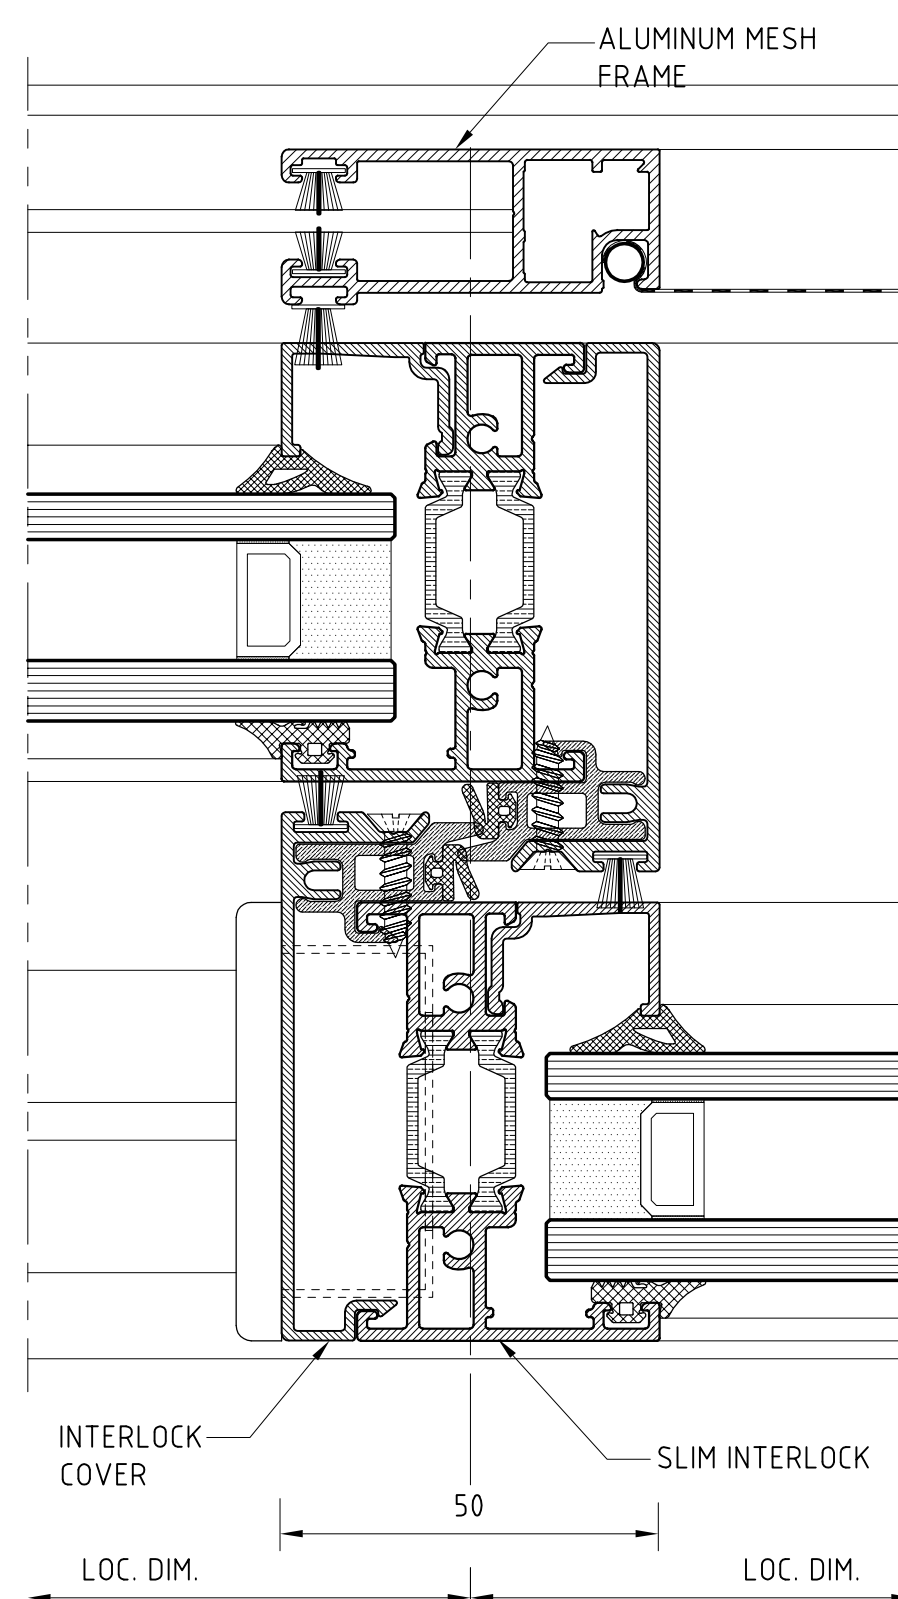


SLIM INTERLOCK
DETAIL

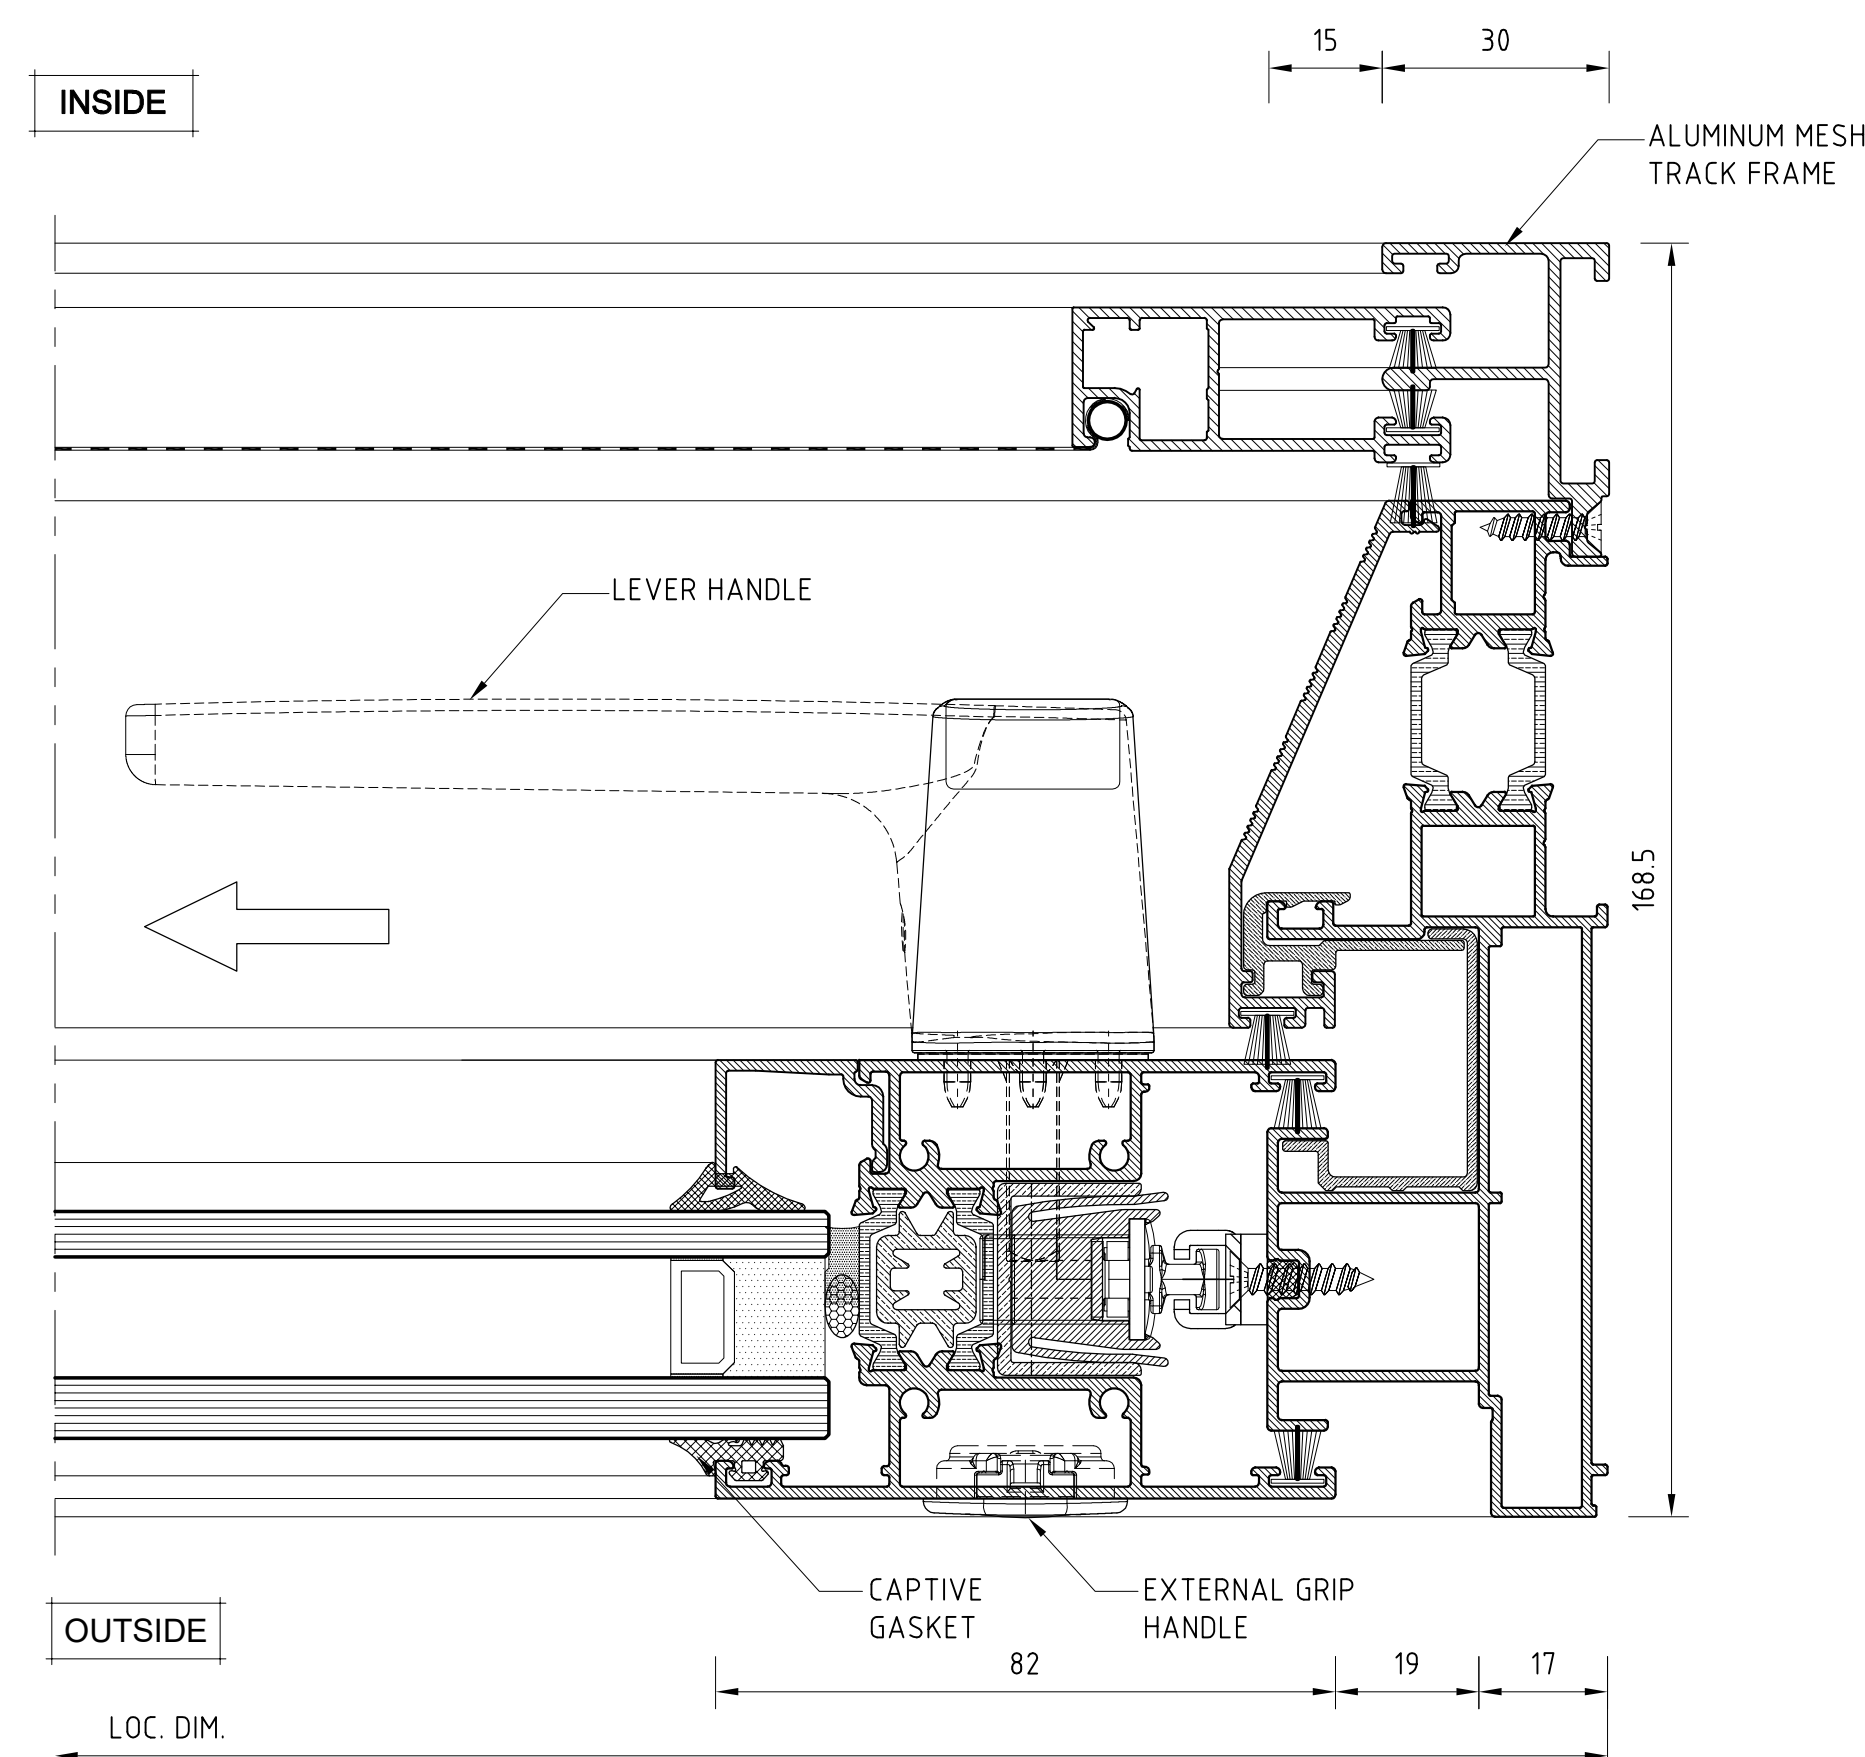

JAMB DETAIL
(SLIDING PANEL)

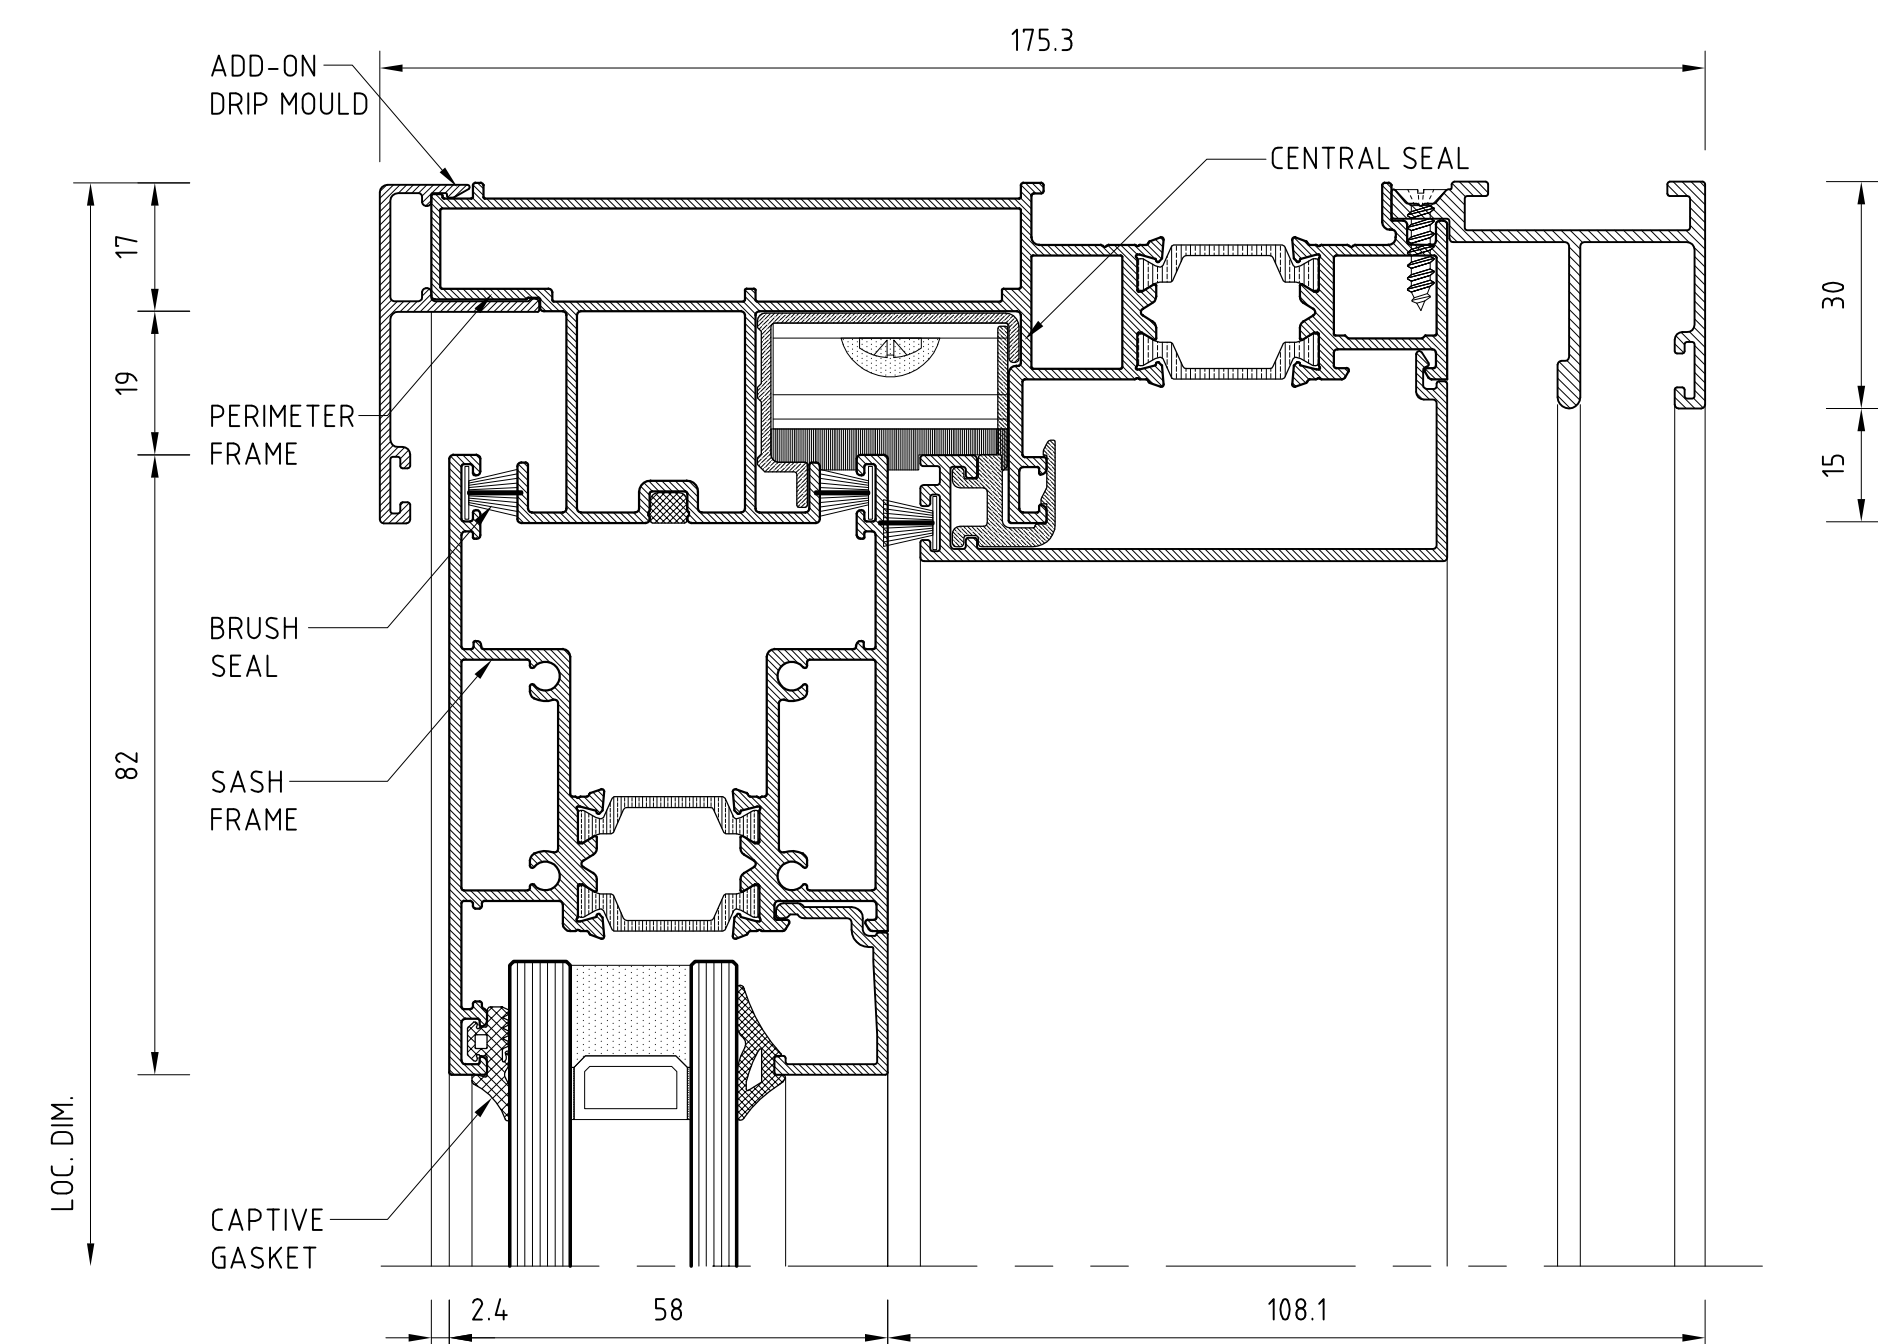

HEAD RAIL DETAIL

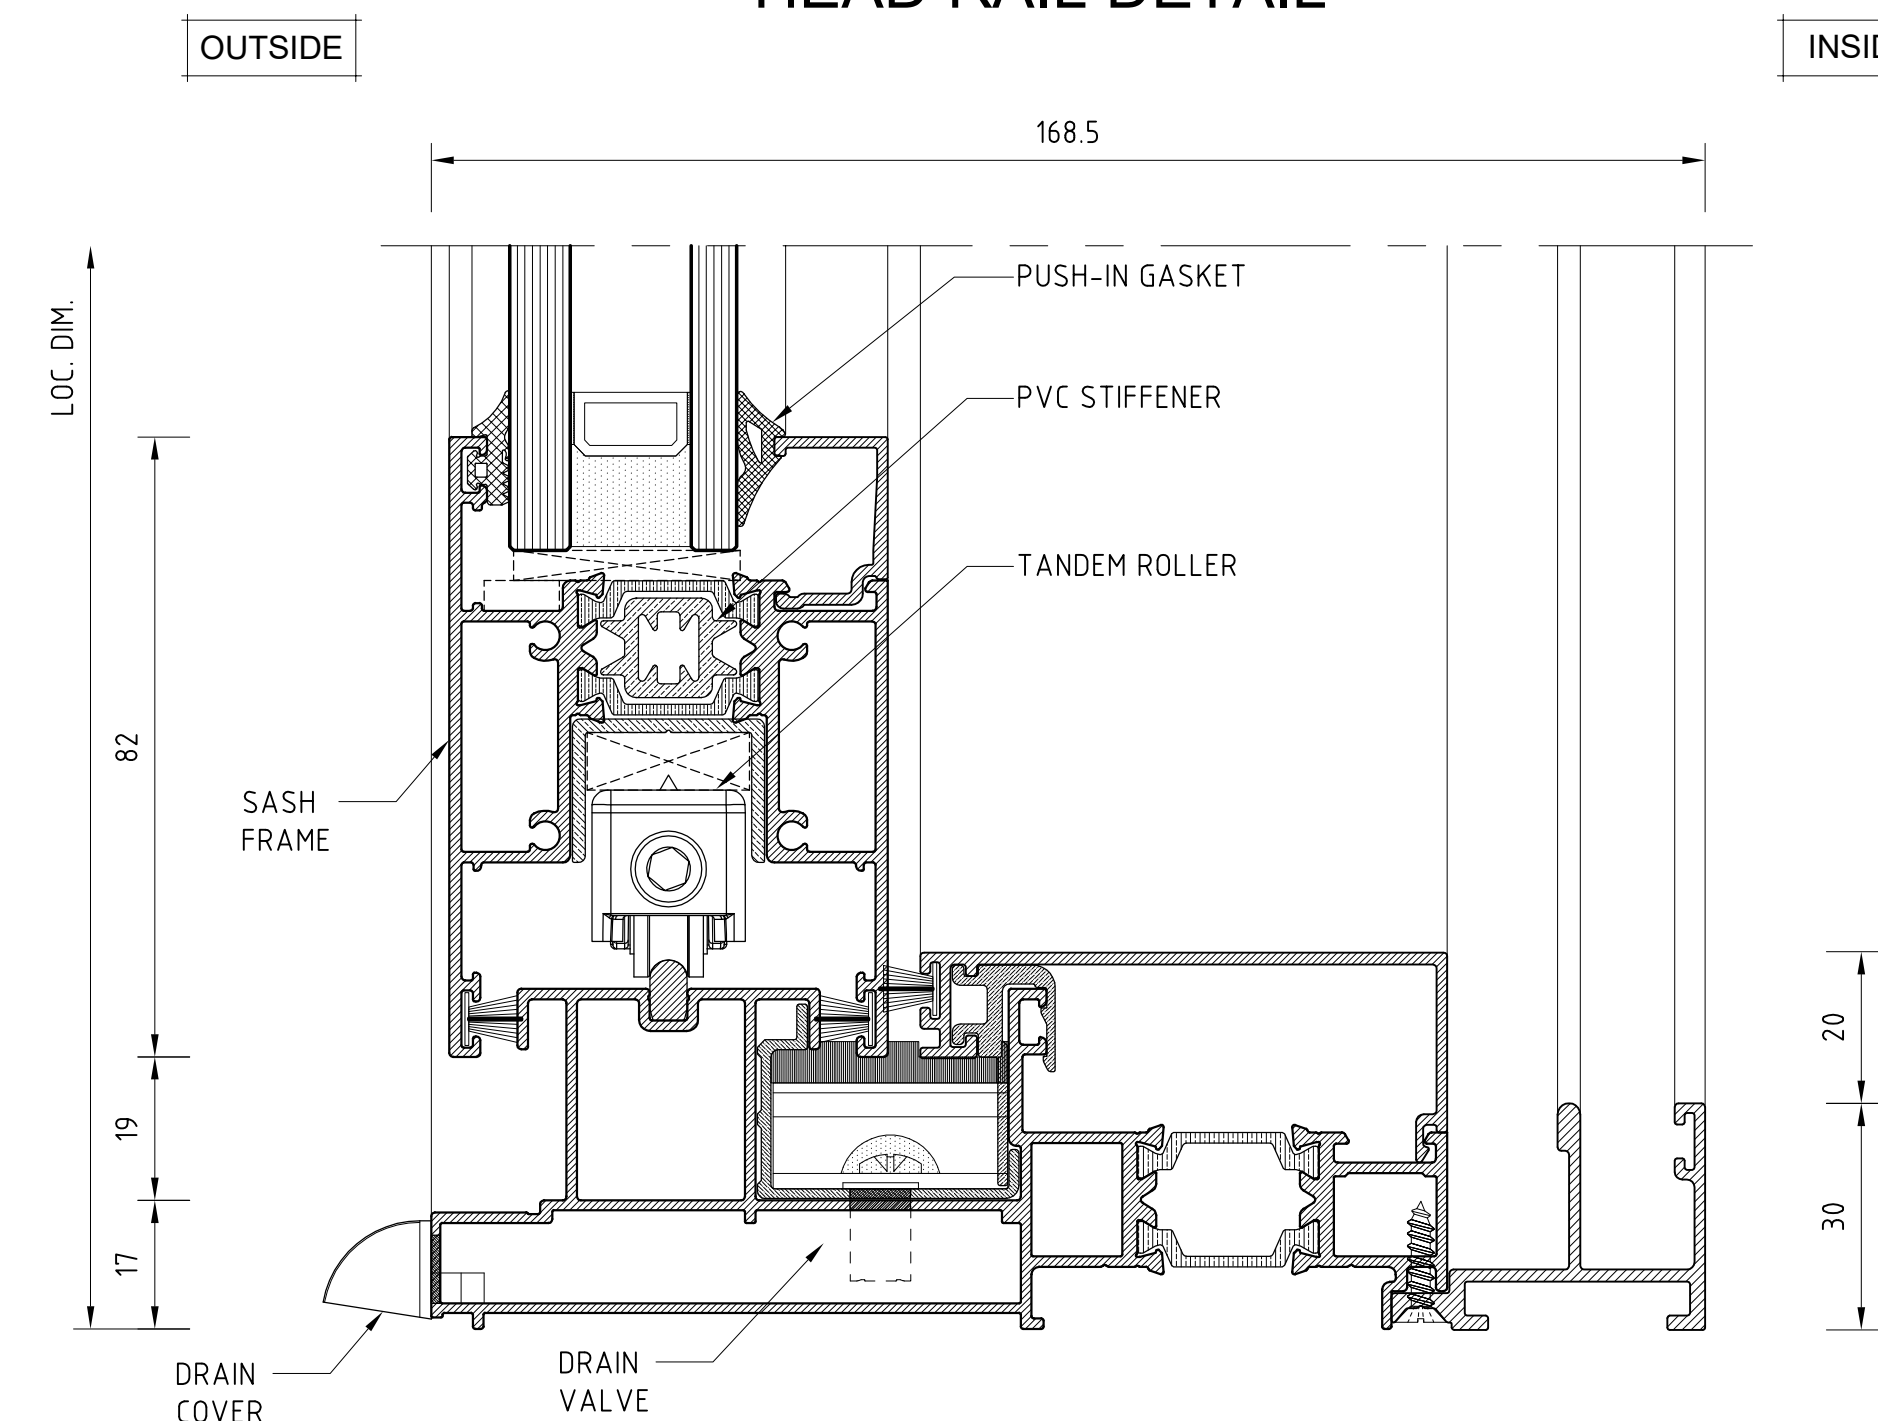

BOTTOM RAIL DETAIL