



Maintenance Schedule

Diesel Engine

12V4000T95

12V4000T95L

12V4000T95R

16V4000T95

Application group 4D

MS50172/06E

Engine model	kW/cyl.	Application group
12V4000T95	155 kW/cyl.	4D, Frac-operation (continuous operation with low load)
12V4000T95L	162 kW/cyl.	4D, Frac-operation (continuous operation with low load)
12V4000T95R	140 kW/cyl.	4D, Frac-operation (continuous operation with low load)
16V4000T95	140 kW/cyl.	4D, Frac-operation (continuous operation with low load)

Table 1: Applicability

Rolls-Royce Solutions refers to Rolls-Royce Solutions GmbH or an affiliated company pursuant to § 15 AktG (German Stock Corporation Act) or a controlled company (joint venture), and Rolls-Royce Solutions Ruhstorf GmbH.

© Copyright Rolls-Royce Solutions

This publication is protected by copyright and may not be used in any way, whether in whole or in part, without the prior written consent of Rolls-Royce Solutions. This particularly applies to its reproduction, distribution, editing, translation, microfilming and storage and/or processing in electronic systems including databases and online services.

All information in this publication was the latest information available at the time of going to print. Rolls-Royce Solutions reserves the right to change, delete or supplement the information provided as and when required.

Table of contents

1	Maintenance Schedule		1.9	Maintenance Schedule Matrix 18000 HRS	21
1.1	Preface	4	1.10	Cyclical maintenance tasks 18000 HRS	25
1.2	Maintenance task tolerances	5	1.11	Maintenance Schedule Matrix 15000 HRS	27
1.3	Allocation matrix application group 4D	6	1.12	Cyclical maintenance tasks 15000 HRS	31
1.4	Noncyclical maintenance tasks	8	1.13	Maintenance Schedule Matrix 12000 HRS	33
1.5	Maintenance Schedule Matrix 24000 HRS	9	1.14	Cyclical maintenance tasks 12000 HRS	35
1.6	Cyclical maintenance tasks 24000 HRS	13	1.15	Maintenance Schedule Matrix 6000 HRS	37
1.7	Maintenance Schedule Matrix 21000 HRS	15	1.16	Cyclical maintenance tasks 6000 HRS	39
1.8	Cyclical maintenance tasks 21000 HRS	19			

1 Maintenance Schedule

1.1 Preface

This manual provides instructions for your product from the manufacturer Rolls-Royce Solutions.

Maintenance concept

The maintenance system for Rolls-Royce Solutions products is based on a preventive maintenance concept. Preventive maintenance facilitates advance operational planning and ensures a high level of equipment availability. The maintenance intervals as well as the required scopes of maintenance tasks are based on operational experience and therefore to be considered as recommendations. Additional maintenance work and/or changes to the maintenance intervals may be required in the case of difficult operational and ambient conditions.

Adherence to the specified maintenance intervals is essential to maintain product safety.

The intervals according to which the maintenance tasks have to be carried out are specified as operating hours and time limits. Whichever value is reached first shall apply.

The maintenance intervals are determined and verified by the load profile. Load profiles can be evaluated by the Service Partner of Rolls-Royce Solutions. Reading out load profile data is recommended for the first time after between 500 and 1000 operating hours depending on the application concerned, or after changing the duty profile or operating area.

The individual maintenance intervals are assigned to the qualification levels QL1 to QL4.

QL1: Operational monitoring and maintenance work which does not require disassembly of the product.

QL2: Exchange of components and parts in case of repair (corrective only, not part of the maintenance schedule).

QL3: Maintenance work which requires partial disassembly of the product.

QL4: Maintenance work which requires complete disassembly of the product.

Additional notes on maintenance and preservation:

The relevant component manufacturer's instructions apply with respect to the maintenance of any components which do not appear in this maintenance schedule.

For the change intervals of fluids and lubricants, refer to the corresponding Fluids and Lubricants Specifications.

If the product is to remain out of service for a longer time period, Rolls-Royce Solutions recommends to carry out a monthly test run until engine operating temperature is reached. If the engine is scheduled to remain out of service for > 1 month, carry out engine preservation procedures in accordance with the Preservation and Represervation Specifications

The latest version of the specifications is available at <http://www.mtu-solutions.com>.

1.2 Maintenance task tolerances

Maintenance tasks shall be completed within certain tolerances comprising a percentage and a maximum value, whereby the smaller value shall apply. Taking full advantage of such tolerances does not influence the scheduled timing of the ensuing maintenance task.

Interval (HRS)/limit	Limit in %	Limit max.
Operating hours	± 10%	± 500 hrs
Years	± 10%	± 30 days
Example 1	Task every 1000 hrs	Between 900 hrs and 1100 hrs (10% of 1000 hrs)
Example 2	Task every 30000 hrs	Between 29500 hrs and 30500 hrs (10% of 30000 hrs, but max. 500 hrs)

1.3 Allocation matrix application group 4D

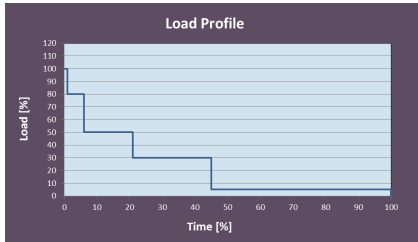
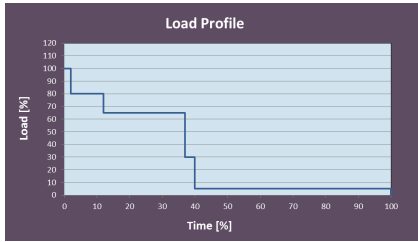
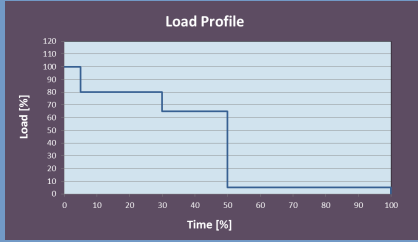
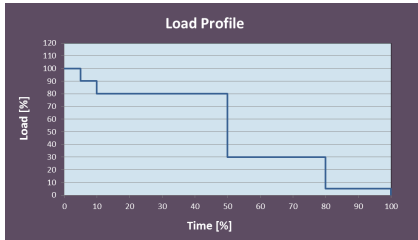
Load profile		12V/16V4000T95 / 12V4000T95x						
Load %	Time %	Load factor %	Load indicator %	121 to 140 kW/cyl.	141 to 163 kW/cyl.			
110 ₍₁₀₀₋₁₁₀₎	—	0 to 22	≤ 2	24,000	18,000	—	—	
100 ₍₉₀₋₁₀₀₎	1							
90 ₍₈₀₋₉₀₎	—							
80 ₍₆₅₋₈₀₎	5							
65 ₍₅₀₋₆₅₎	—							
50 ₍₃₀₋₅₀₎	15							
30 ₍₅₋₃₀₎	24							
Idle Speed ₍₀₋₅₎	55							
110 ₍₁₀₀₋₁₁₀₎	—	23 to 30	≤ 4	21,000	15,000	—	—	
100 ₍₉₀₋₁₀₀₎	2							
90 ₍₈₀₋₉₀₎	—							
80 ₍₆₅₋₈₀₎	10							
65 ₍₅₀₋₆₅₎	25							
50 ₍₃₀₋₅₀₎	—							
30 ₍₅₋₃₀₎	3							
Idle Speed ₍₀₋₅₎	60							
110 ₍₁₀₀₋₁₁₀₎	—	31 to 41	≤ 9	18,000	15,000	—	—	
100 ₍₉₀₋₁₀₀₎	5							
90 ₍₈₀₋₉₀₎	—							
80 ₍₆₅₋₈₀₎	25							
65 ₍₅₀₋₆₅₎	20							
50 ₍₃₀₋₅₀₎	—							
30 ₍₅₋₃₀₎	—							
Idle Speed ₍₀₋₅₎	50							
110 ₍₁₀₀₋₁₁₀₎	—	42 to 52	≤ 12	15,000	12,000	—	—	
100 ₍₉₀₋₁₀₀₎	5							
90 ₍₈₀₋₉₀₎	5							
80 ₍₆₅₋₈₀₎	40							
65 ₍₅₀₋₆₅₎	—							
50 ₍₃₀₋₅₀₎	—							
30 ₍₅₋₃₀₎	30							
Idle Speed ₍₀₋₅₎	20							

Table 2: Allocation matrix application group 4D

TIM-ID: 0000054291 - 003

12V/16V4000T95 / 12V4000T95x							
Load profile		Load factor %	Load indicator %	121 to 140 kW/cyl.	141 to 163 kW/cyl.		
Load %	Time %						
110 ₍₁₀₀₋₁₁₀₎	—	53 to 61	≤ 20	12,000	—	—	—
100 ₍₉₀₋₁₀₀₎	10						
90 ₍₈₀₋₉₀₎	15						
80 ₍₆₅₋₈₀₎	35						
65 ₍₅₀₋₆₅₎	—						
50 ₍₃₀₋₅₀₎	—						
30 ₍₅₋₃₀₎	30						
Idle Speed ₍₀₋₅₎	10						

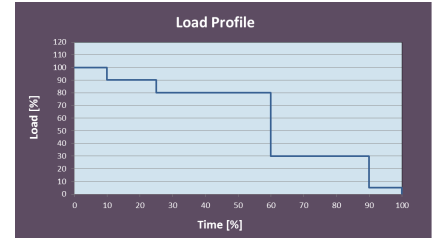


Table 3: Allocation matrix application group 4D

1.4 Noncyclical maintenance tasks

No.	Qualification	Task	Maintenance tasks	Reference task	Offset	Value	Unit	Option
0010	QL1	WM00094	Check valve clearance, adjust if necessary. ATTENTION! First adjustment after 1,000 operating hours on a new engine and after 1,000 operating hours following each cylinder head overhaul.		0	1000	HRS	
Reference task: Name of the maintenance task the offset refers to Offset: Interval of a maintenance task which depends on another interval Value: Fixed value for binding execution of a maintenance task								

1.5 Maintenance Schedule Matrix 24000 HRS

500 to 15000 Operating hours

Task	Limit	Operating hours [HRS]																													
		500	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000	6500	7000	7500	8000	8500	9000	9500	10000	10500	11000	11500	12000	12500	13000	13500	14000	14500	15000
WM00233	1 DAY																														
WM00285	1 DAY																														
WM00286	1 DAY																														
WM00287	1 DAY																														
WM00289	1 DAY																														
WM00290	1 DAY																														
WM00174	1 WK																														
WM00288	1 WK																														
WM00136	1 YR																														
WM00067	2 YR																														
WM00063	2 YR	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
WM00084	2 YR		X		X		X		X		X		X		X		X		X		X		X		X		X		X		X
WM00085	2 YR		X		X		X		X		X		X		X		X		X		X		X		X		X		X		X
WM00086	2 YR		X		X		X		X		X		X		X		X		X		X		X		X		X		X		X
WM00170	2 YR		X		X		X		X		X		X		X		X		X		X		X		X		X		X		X
WM00050	1 YR						X					X						X							X						X
WM00076	3 YR						X					X						X							X						X
WM00664	3 YR						X					X						X							X						X
WM00094	18 YR		X				X					X						X							X						X
WM00776	3 YR								X								X								X						
WM00150	6 YR											X													X						
WM00151	6 YR											X													X						
WM00089	18 YR																X														
WM00090	18 YR																X														
WM00098	18 YR																X														
WM00110	18 YR																X														
WM00093	18 YR																X														
WM00054	18 YR																								X						
WM00056	18 YR																								X						
WM00062	18 YR																								X						
WM00091	18 YR																								X						
WM00096	18 YR																								X						
WM00164	18 YR																								X						
WM00283	18 YR																								X						
WM00921	18 YR																								X						
WM00970	18 YR																								X						
WM00971	18 YR																								X						
WM00973	18 YR																								X						
WM00974	18 YR																								X						
WM00976	18 YR																								X						
WM00986	18 YR																								X						

DAY = Days

WK = Weeks

YR = Years

HRS = Hours

Task	Limit	Operating hours [HRS]																													
		500	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000	6500	7000	7500	8000	8500	9000	9500	10000	10500	11000	11500	12000	12500	13000	13500	14000	14500	15000
WM00006	6 YR																														
WM00011	18 YR																														
WM00080	18 YR																														
WM00087	18 YR																														
WM00160	18 YR																														
WM00439	18 YR																														
WM00925	18 YR																														
WM00945	18 YR																														
WM00980	18 YR																														
WM00001	18 YR																														
WM00002	18 YR																														
WM00070	18 YR																														
WM00072	18 YR																														
WM00088	18 YR																														
WM00092	18 YR																														
WM00095	18 YR																														
WM00099	18 YR																														
WM00100	18 YR																														
WM00103	18 YR																														
WM00104	18 YR																														
WM00108	18 YR																														
WM00111	18 YR																														
WM00127	18 YR																														
DAY = Days																															
WK = Weeks																															
YR = Years																															
HRS = Hours																															

15500 to 24000 Operating hours

Task	Limit	Operating hours [HRS]																			
		15500	16000	16500	17000	17500	18000	18500	19000	19500	20000	20500	21000	21500	22000	22500	23000	23500	24000		
WM00233	1 DAY																				
WM00285	1 DAY																				
WM00286	1 DAY																				
WM00287	1 DAY																				
WM00289	1 DAY																				
WM00290	1 DAY																				
WM00174	1 WK																				
WM00288	1 WK																				
WM00136	1 YR																				
WM00067	2 YR																				
WM00063	2 YR	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		
WM00084	2 YR		X		X		X		X		X		X		X		X		X		
WM00085	2 YR		X		X		X		X		X		X		X		X		X		
DAY = Days WK = Weeks YR = Years HRS = Hours																					

TIM-ID: 0000000000 - 000