

Removal Spaces & Weights

Diesel engine

16 V 396 TE 54

16 V 396 TE 74

16 V 396 TE 74K

16 V 396 TE 74L

16 V 396 TE 84K

16 V 396 TE 94

MS68004/00E



Power. Passion. Partnership.

Printed in Germany

© 2012 Copyright MTU Friedrichshafen GmbH

This Publication is protected by copyright and may not be used in any way whether in whole or in part without the prior written permission of MTU Friedrichshafen GmbH. This restriction also applies to copyright, distribution, translation, micro-filming and storage or processing on electronic systems including data bases and online services.

This handbook is provided for use by maintenance and operating personnel in order to avoid malfunctions or damage during operation.

Subject to alterations and amendments.


Table of Contents

1 General Information		3 Appendix B	
1.1 Removal clearances and weights	4	3.1 Index	10
2 Appendix A			
2.1 MTU contact persons/service partners	9		

1 General Information


1.1 Removal clearances and weights

Engine – Main dimensions

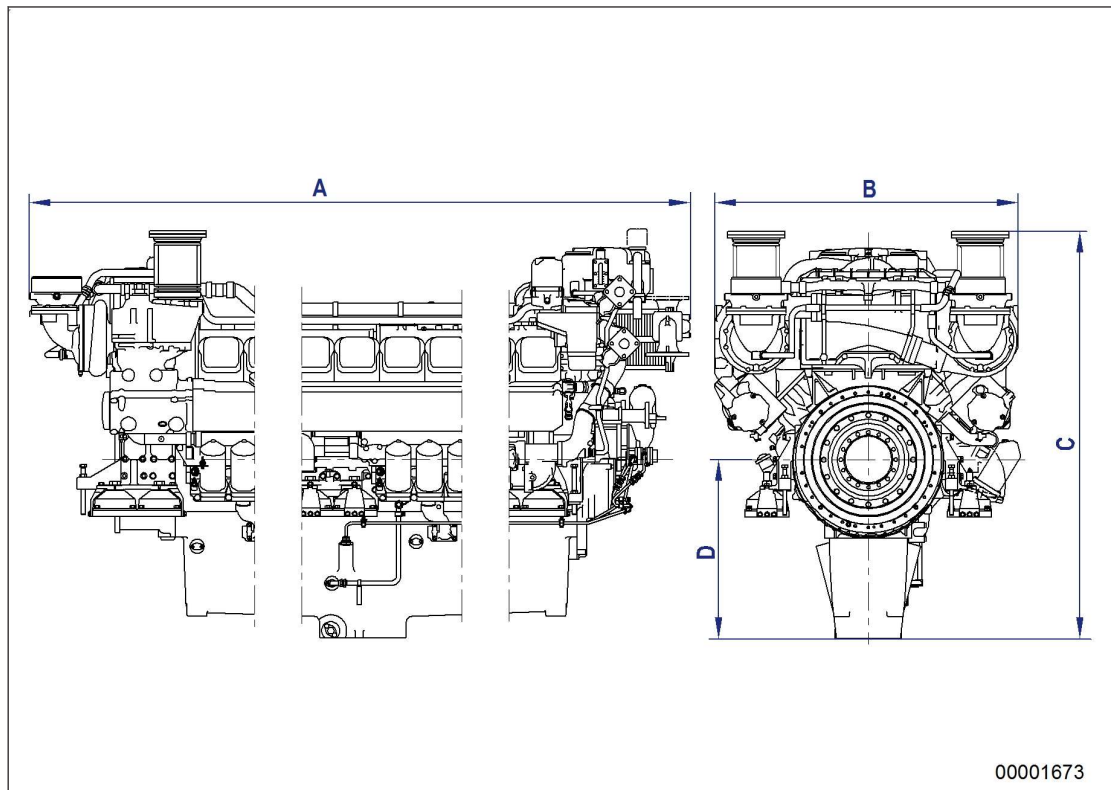

Engine model	Length (A)	Width (B)	Height (C)	Height (D)
16 V 396 TE 54	approx. 3348 mm	approx. 1541 mm	approx. 2048 mm	approx. 900 mm
16 V 396 TE 74	approx. 3409 mm	approx. 1541 mm	approx. 2048 mm	approx. 900 mm
16 V 396 TE 84	approx. 3409 mm	approx. 1541 mm	approx. 2048 mm	approx. 900 mm
16 V 396 TE 94	approx. 3409 mm	approx. 1541 mm	approx. 2048 mm	approx. 900 mm

Removal clearances of components, view on right engine side

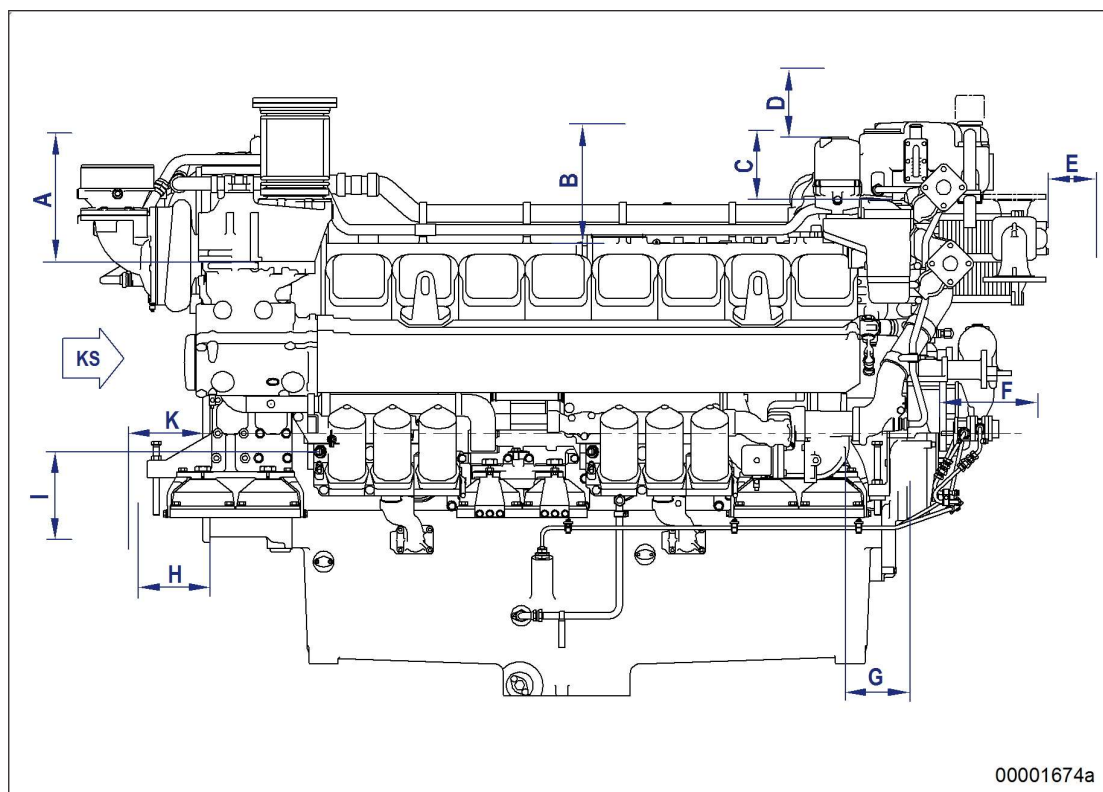

No.	Designation	Removal clearance* (mm)	Dimension (mm)	Weight (kg)
–	Engine dry weight	–	–	6742
A	Exhaust turbocharger A (ZR170)	190	Ø370x330	63.0
	Exhaust turbocharger B (ZR170)	190	Ø370x330	63.0
B	HP pump	450	145x560x340	40.0
C	Oil separator with cover	160	244x180x230	3.4 / 0.425
D	Centrifugal oil filter	110-285	Ø167x284	5.10
E	Coolant cooler	495	735x322x370	65.0
F	Vibration damper	200	Ø412x190	88.0
G	Coolant pump	160	Ø210x300	19.0
H	Flywheel housing	300	Ø711x300	183.0
I	Oil cooler	160	420x370x340	42.0
K	Flywheel	330	Ø640x280	248.0

* Dimensions of assembly devices and lifting gear are included in calculations.