




TYPICAL ELEVATIONS DETAIL

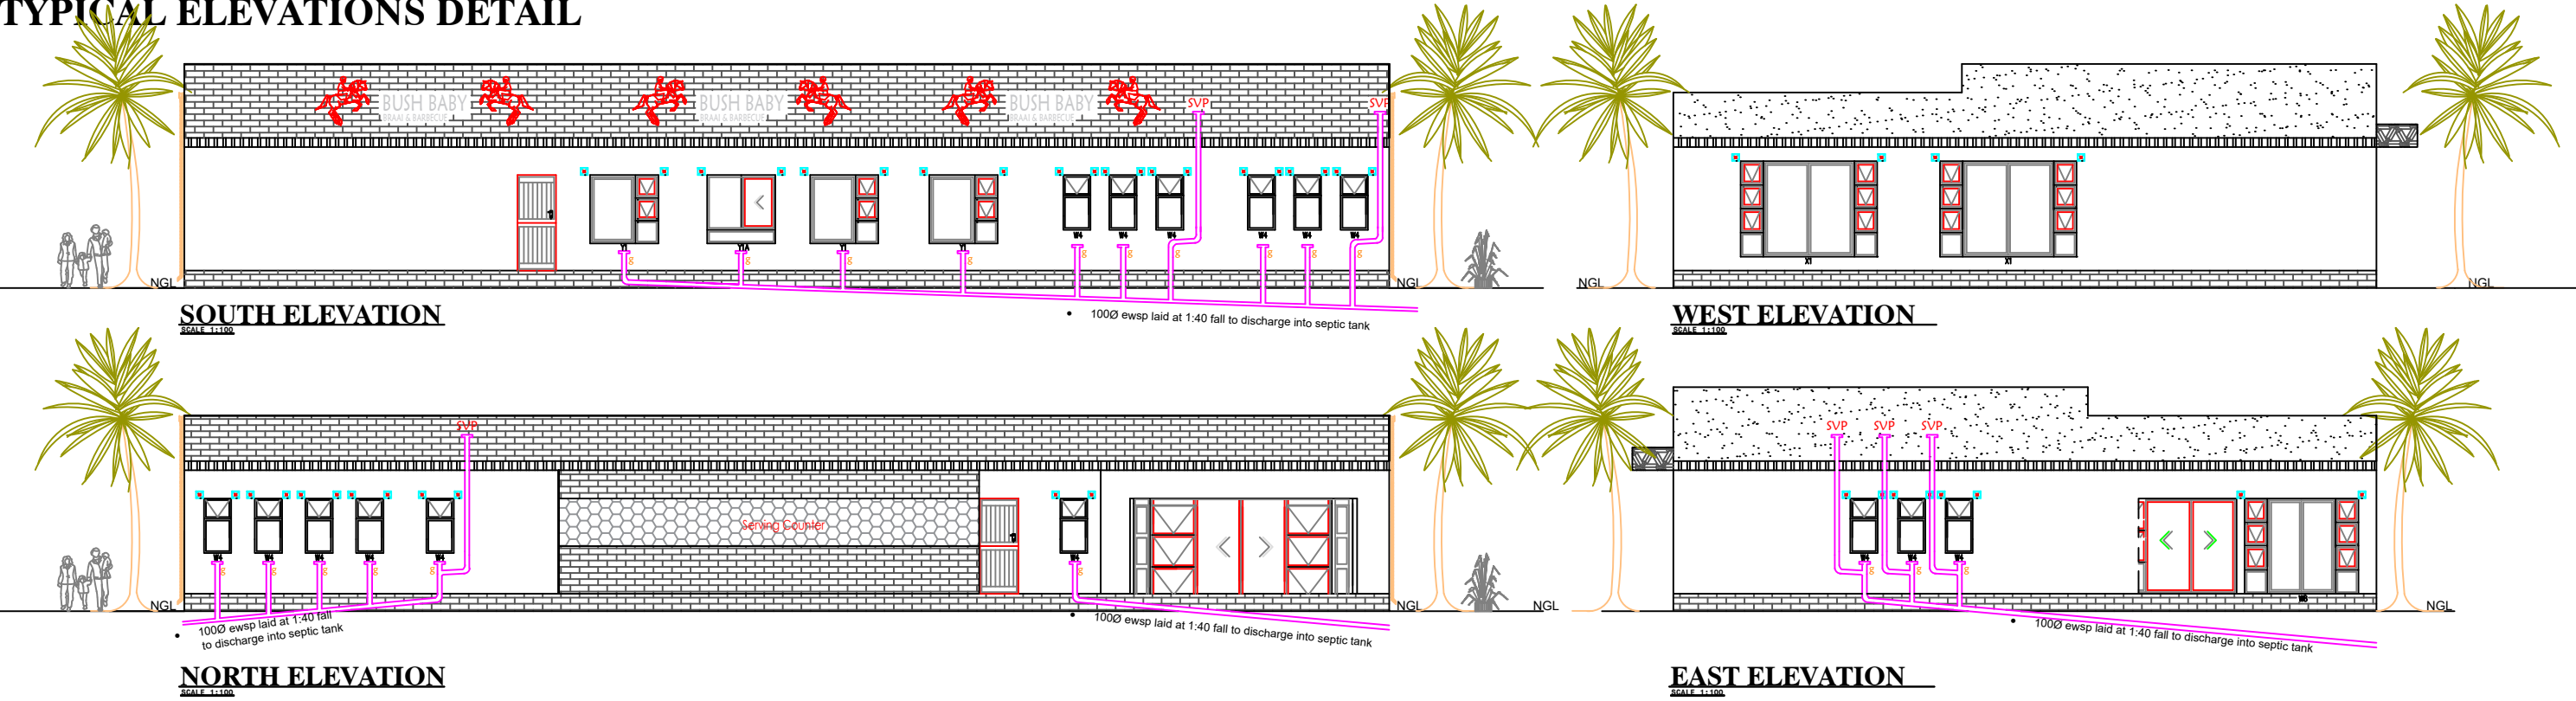


WINDOW SCHEDULE DETAIL

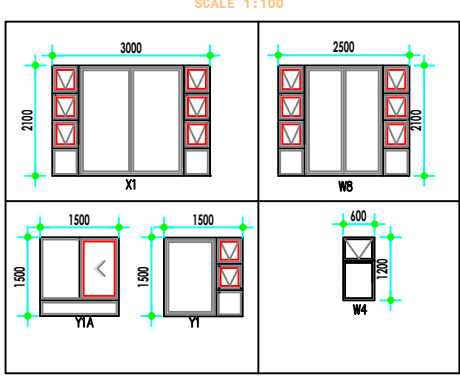


FLOOR PLAN DETAIL

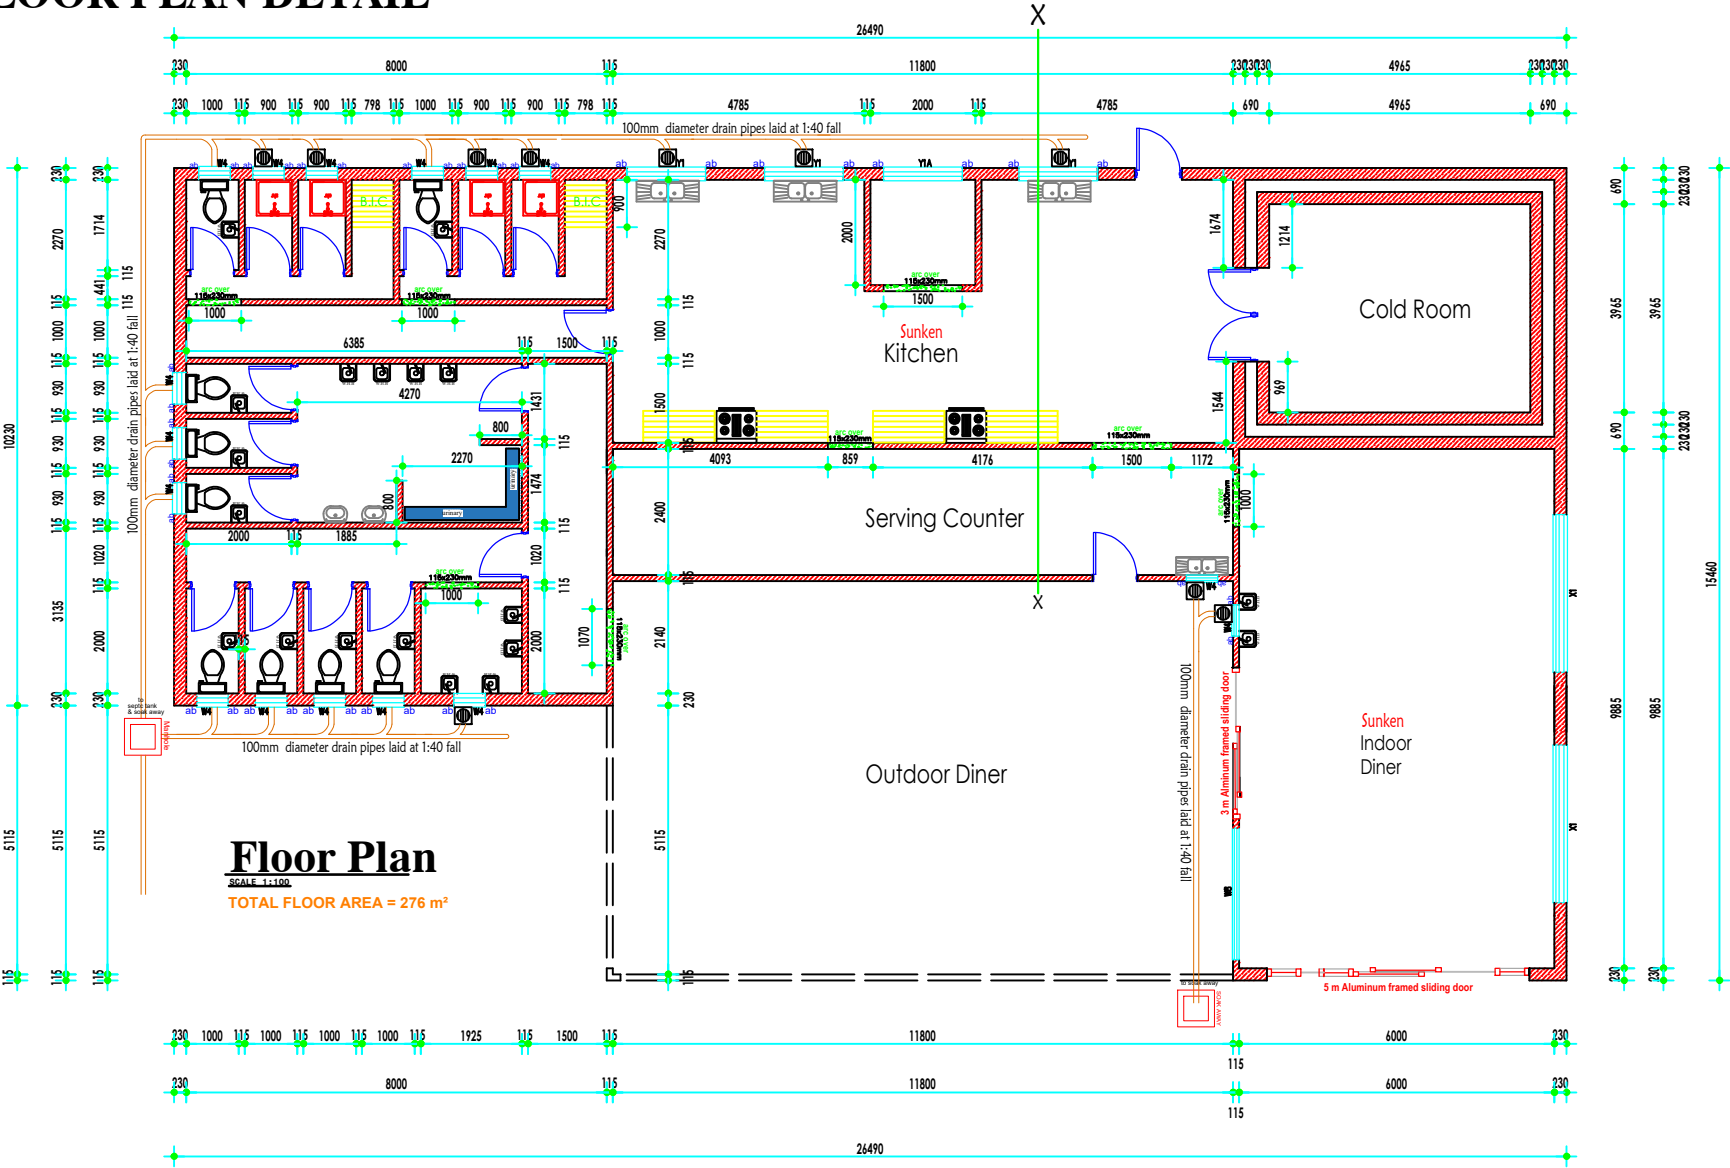


Cross Section (X-X)

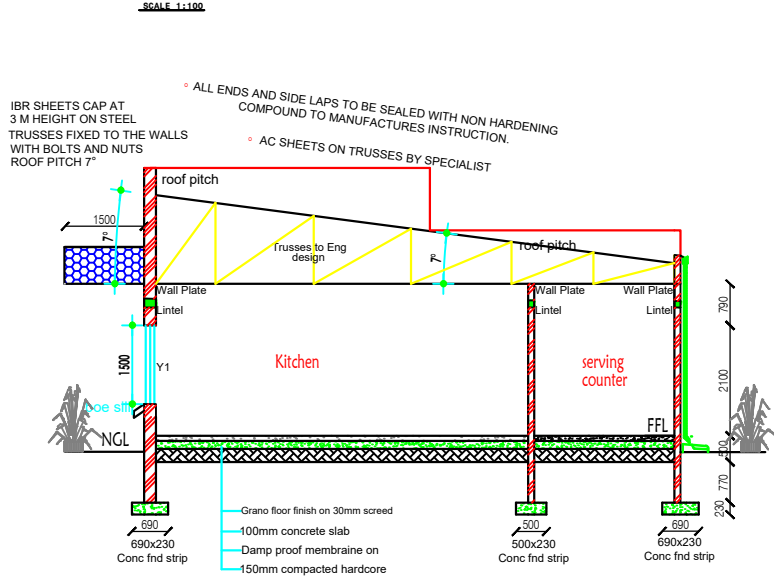


SEPTIC TANK DETAIL

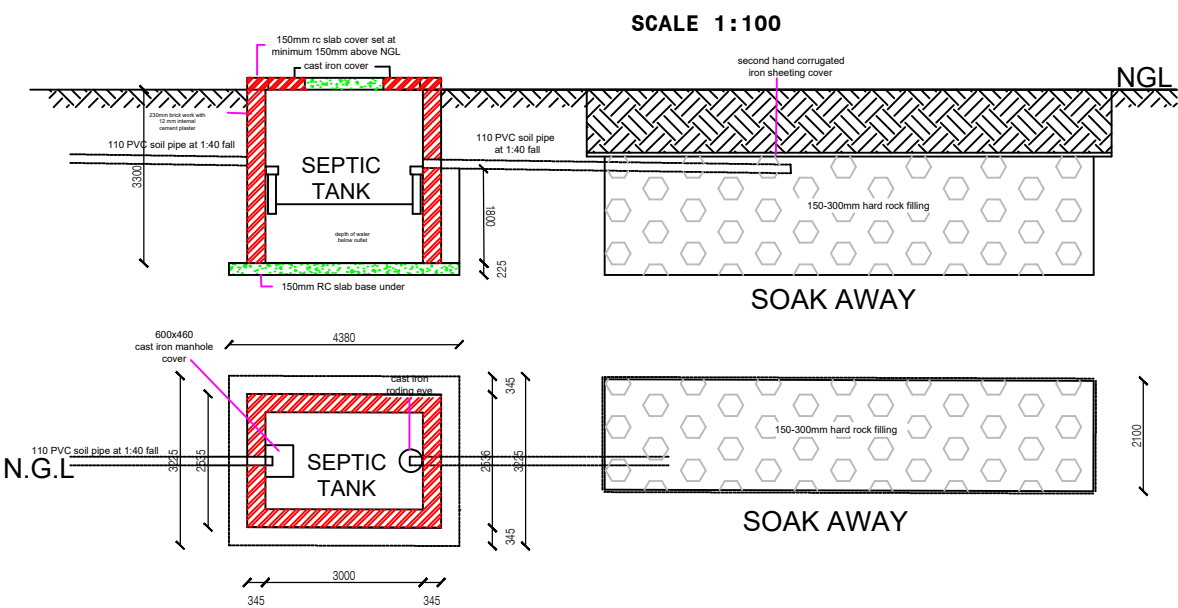


SITE PLAN DETAIL

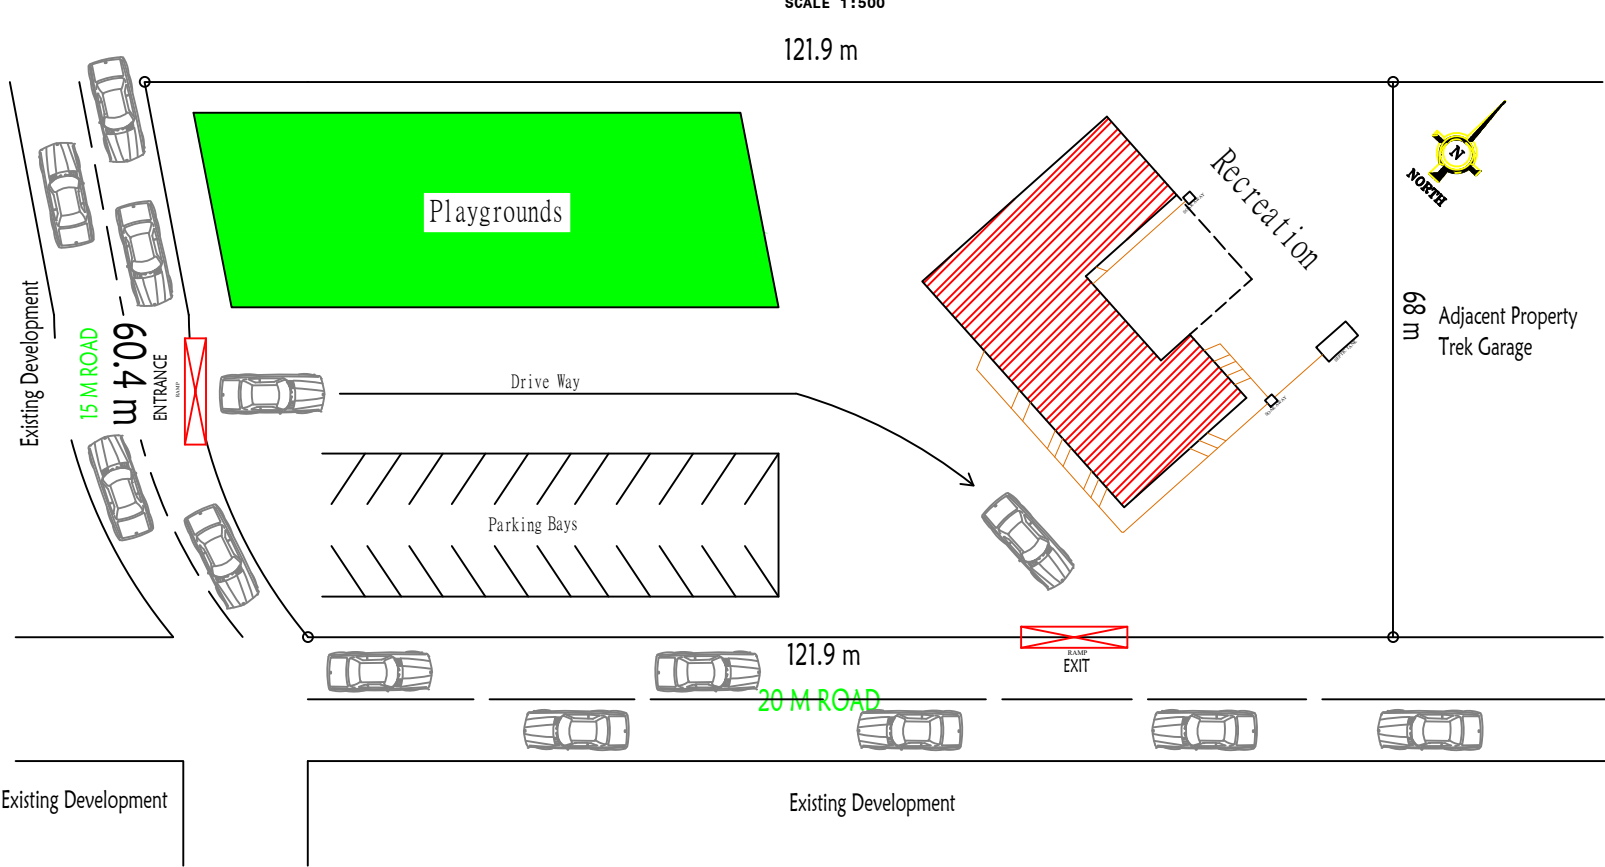


SUNKEN STEP DETAIL

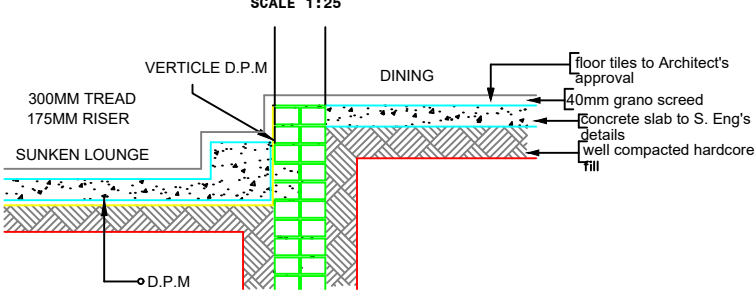

BRICK ON EDGE DETAIL

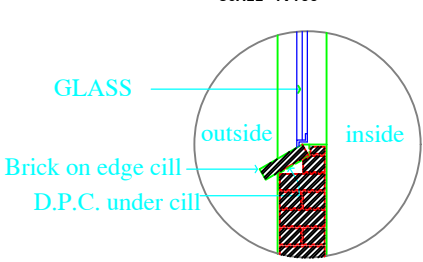

GUTTER DETAIL

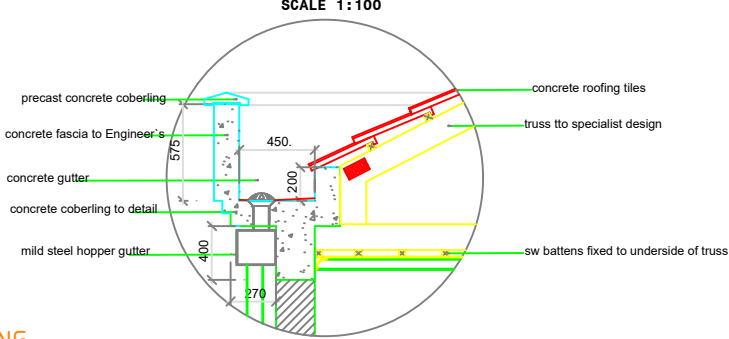

GENERAL NOTES DETAIL

figured dimensions to be to be taken in preference to scaling off drawings. all dimensions, levels and other relevant details to be checked on site prior to construction. all workmanship and materials shall comply with the relevant code of practice and related documents. manufacturers of prefabricated components to verify dimensions on site with contractor prior to manufacture.

FOUNDATIONS

Foundation depth to be determined on site, min 700mm. 230x500 concrete strip footing under 115 brick wall & 230x690 under 230 brick wall

SLAB

100mm concrete floor slab in 1:3:6 mixture minimum. 150mm rammed fill after removal of all loose turf-ant-proof Treatment underside fill and to 1500 beyond cartilage of roof Slab level to be minimum 200mm above natural ground level

BRICKWORK

Above DPC, brickforce should be inserted after every 4 courses Pre-stressed lintels over door and window openings External brickwork woodflat sand/cement render to take two coats Kitchen and bathroom areas to have glazed wall tiles to door height Other rooms areas to have floor finish and wall finish of client's choice

WALLS

All bricks to have d.p.c on slab .B.f.c after every three

ROOF

Flat Roof Gutters to be installed to collect rain Roof pitch 7° AC Sheets on trusses by specialist

SPECIAL SERVICES:

Electrical & plumbing services by specialists. Glazed Aluminum Sliding door by specialists.

LIST OF SCALES

1:25  
1:100  
1:500

DATE: 23/ 03/ 2024

Bush Baby  
Braai & Barbecue

Proposed Food Court



078 000 6559 / 071 531 827  
DRAWN BY: LOVEHOPE MEDA  
Checked @ In God we Trust Designs