

Module 11: IPv4 Addressing


Introduction to Networks v7.0 (ITN)

Module Objectives


Module Title: IPv4 Addressing

Module Objective: Calculate an IPv4 subnetting scheme to efficiently segment your network.

Topic Title	Topic Objective
IPv4 Address Structure	Describe the structure of an IPv4 address including the network portion, the host portion, and the subnet mask.
IPv4 Unicast, Broadcast, and Multicast	Compare the characteristics and uses of the unicast, broadcast and multicast IPv4 addresses.
Types of IPv4 Addresses	Explain public, private, and reserved IPv4 addresses.
Network Segmentation	Explain how subnetting segments a network to enable better communication.
Subnet an IPv4 Network	Calculate IPv4 subnets for a /24 prefix.



© 2019 Cisco and/or its affiliates. All rights reserved. Cisco Confidential




11.1 IPv4 Address Structure


© 2019 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

IPv4 Address Structure

Network and Host Portions

- An IPv4 address is a 32-bit hierarchical address that is made up of a network portion and a host portion.
- When determining the network portion versus the host portion, you must look at the 32-bit stream.
- A subnet mask is used to determine the network and host portions.






© 2019 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

IPv4 Address Structure The Subnet Mask

- To identify the network and host portions of an IPv4 address, the subnet mask is compared to the IPv4 address bit for bit, from left to right.
- The actual process used to identify the network and host portions is called ANDing.

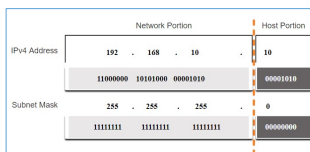

© 2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

IPv4 Address Structure The Prefix Length

- A prefix length is a less cumbersome method used to identify a subnet mask address.
- The prefix length is the number of bits set to 1 in the subnet mask.
- It is written in "slash notation" therefore, count the number of bits in the subnet mask and prepend it with a slash.


Subnet Mask	32-bit Address	Prefix Length
255.0.0.0	11111111.00000000.00000000.00000000	/8
255.255.0.0	11111111.11111111.00000000.00000000	/16
255.255.255.0	11111111.11111111.11111111.00000000	/24
255.255.255.128	11111111.11111111.11111111.10000000	/25
255.255.255.192	11111111.11111111.11111111.11000000	/26
255.255.255.224	11111111.11111111.11111111.11100000	/27
255.255.255.240	11111111.11111111.11111111.11110000	/28
255.255.255.248	11111111.11111111.11111111.11111000	/29
255.255.255.252	11111111.11111111.11111111.11111100	/30

© 2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

IPv4 Address Structure Determining the Network: Logical AND

- A logical AND Boolean operation is used in determining the network address.
- Logical AND is the comparison of two bits where only a 1 AND 1 produces a 1 and any other combination results in a 0.
- 1 AND 1 = 1, 0 AND 1 = 0, 1 AND 0 = 0, 0 AND 0 = 0
- 1 = True and 0 = False
- To identify the network address, the host IPv4 address is logically ANDed, bit by bit, with the subnet mask to identify the network address.

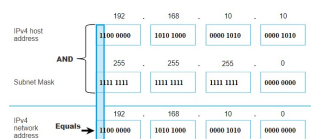

© 2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

IPv4 Address Structure Video – Network, Host and Broadcast Addresses

This video will cover the following:


- Network address
- Broadcast Address
- First usable host
- Last usable host

© 2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

IPv4 Address Structure Network, Host, and Broadcast Addresses

- Within each network are three types of IP addresses:
 - Network address
 - Host addresses
 - Broadcast address



	Network Portion			Host Portion	Host Bits
Subnet mask	255	255	255	0	
255.255.255.0 or /24	11111111	11111111	11111111	00000000	
Network address	192	168	10	0	All 0s
192.168.10.0 or /24	11000000	10100000	00001010	00000000	
First address	192	168	10	1	All 0s and a 1
192.168.10.1 or /24	11000000	10100000	00001010	00000001	
Last address	192	168	10	254	All 1s and a 0
192.168.10.254 or /24	11000000	10100000	00001010	11111110	
Broadcast address	192	168	10	255	All 1s
192.168.10.255 or /24	11000000	10100000	00001010	11111111	

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential


11.2 IPv4 Unicast, Broadcast, and Multicast

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

IPv4 Unicast, Broadcast, and Multicast Unicast

- Unicast transmission is sending a packet to one destination IP address.
- For example, the PC at 172.16.4.1 sends a unicast packet to the printer at 172.16.4.253.

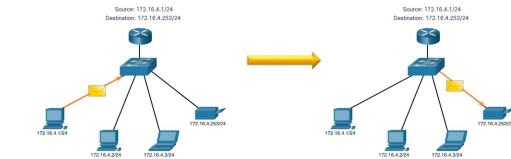


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

IPv4 Unicast, Broadcast, and Multicast Broadcast

- Broadcast transmission is sending a packet to all other destination IP addresses.
- For example, the PC at 172.16.4.1 sends a broadcast packet to all IPv4 hosts.

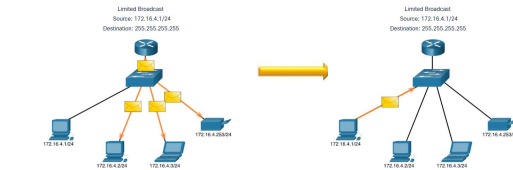


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

IPv4 Unicast, Broadcast, and Multicast

- Multicast transmission is sending a packet to a multicast address group.
- For example, the PC at 172.16.4.1 sends a multicast packet to the multicast group address 224.10.10.5.

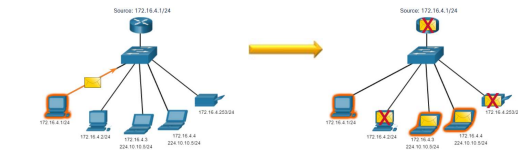

11.3 Types of IPv4 Addresses

Types of IPv4 Addresses

Public and Private IPv4 Addresses


- As defined in in RFC 1918, public IPv4 addresses are globally routed between internet service provider (ISP) routers.
- Private addresses are common blocks of addresses used by most organizations to assign IPv4 addresses to internal hosts.
- Private IPv4 addresses are not unique and can be used internally within any network.
- However, private addresses are not globally routable.

Network Address and Prefix	RFC 1918 Private Address Range
10.0.0.0/8	10.0.0.0 - 10.255.255.255
172.16.0.0/12	172.16.0.0 - 172.31.255.255
192.168.0.0/16	192.168.0.0 - 192.168.255.255

Types of IPv4 Addresses

Routing to the Internet

- Network Address Translation (NAT) translates private IPv4 addresses to public IPv4 addresses.
- NAT is typically enabled on the edge router connecting to the internet.
- It translates the internal private address to a public global IP address.

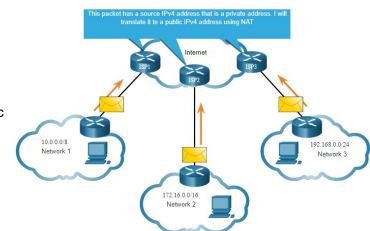

Types of IPv4 Addresses Special Use IPv4 Addresses

Loopback addresses

- 127.0.0.0 /8 (127.0.0.1 to 127.255.255.254)
- Commonly identified as only 127.0.0.1
- Used on a host to test if TCP/IP is operational.

```
C:\Users\NetAcad> ping 127.0.0.1
Pinging 127.0.0.1 with 32 bytes of data:
Reply from 127.0.0.1: bytes=32 time=1ms TTL=128
Reply from 127.0.0.1: bytes=32 time=1ms TTL=128
```

Link-Local addresses

- 169.254.0.0 /16 (169.254.0.1 to 169.254.255.254)
- Commonly known as the Automatic Private IP Addressing (APIPA) addresses or self-assigned addresses.
- Used by Windows DHCP clients to self-configure when no DHCP servers are available.




©2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 17

Types of IPv4 Addresses Legacy Classful Addressing

RFC 790 (1981) allocated IPv4 addresses in classes

- Class A (0.0.0.0/8 to 127.0.0.0/8)
- Class B (128.0.0.0 /16 – 191.255.0.0 /16)
- Class C (192.0.0.0 /24 – 223.255.255.0 /24)
- Class D (224.0.0.0 to 239.0.0.0)
- Class E (240.0.0.0 – 255.0.0.0)



- Classful addressing wasted many IPv4 addresses.

Classful address allocation was replaced with classless addressing which ignores the rules of classes (A, B, C).



©2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 18

Types of IPv4 Addresses Assignment of IP Addresses

- The Internet Assigned Numbers Authority (IANA) manages and allocates blocks of IPv4 and IPv6 addresses to five Regional Internet Registries (RIRs).
- RIRs are responsible for allocating IP addresses to ISPs who provide IPv4 address blocks to smaller ISPs and organizations.



©2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 19


11.4 Network Segmentation



©2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 20

Network Segmentation Broadcast Domains and Segmentation

- Many protocols use broadcasts or multicasts (e.g., ARP use broadcasts to locate other devices, hosts send DHCP discover broadcasts to locate a DHCP server.)
- Switches propagate broadcasts out all interfaces except the interface on which it was received.




- The only device that stops broadcasts is a router.
- Routers do not propagate broadcasts.
- Each router interface connects to a broadcast domain and broadcasts are only propagated within that specific broadcast domain.

CISCO

©2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 21

Network Segmentation Problems with Large Broadcast Domains

- A problem with a large broadcast domain is that these hosts can generate excessive broadcasts and negatively affect the network.
- The solution is to reduce the size of the network to create smaller broadcast domains in a process called subnetting.
- Dividing the network address 172.16.0.0 /16 into two subnets of 200 users each: 172.16.0.0 /24 and 172.16.1.0 /24.
- Broadcasts are only propagated within the smaller broadcast domains.




CISCO

©2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 22

Network Segmentation Reasons for Segmenting Networks

- Subnetting reduces overall network traffic and improves network performance.
- It can be used to implement security policies between subnets.
- Subnetting reduces the number of devices affected by abnormal broadcast traffic.
- Subnets are used for a variety of reasons including by:



CISCO

©2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 23

11.5 Subnet an IPv4 Network

CISCO

©2018 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 24

Subnet an IPv4 Network Subnet on an Octet Boundary

- Networks are most easily subnetted at the octet boundary of /8, /16, and /24.
- Notice that using longer prefix lengths decreases the number of hosts per subnet.

Prefix Length	Subnet Mask	Subnet Mask in Binary (n = network, h = host)	# of hosts
/8	255.0.0.0	nnnnnnnn.hhhhhhhh.hhhhhhhh.hhhhhhhh 11111111.00000000.00000000.00000000	16,777,214
/16	255.255.0.0	nnnnnnnn.nnnnnnnn.hhhhhhhh.hhhhhhhh 11111111.11111111.00000000.00000000	65,534
/24	255.255.255.0	nnnnnnnn.nnnnnnnn.nnnnnnnn.hhhhhhhh 11111111.11111111.11111111.00000000	254



©2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 35

Subnet an IPv4 Network Subnet on an Octet Boundary (Cont.)

- In the first table 10.0.0.0/8 is subnetted using /16 and in the second table, a /24 mask.

Subnet Address (256 Possible Subnets)	Host Range (65,534 possible hosts per subnet)	Broadcast	Subnet Address (65,536 Possible Subnets)	Host Range (254 possible hosts per subnet)	Broadcast
10.0.0.0/16	10.0.0.1 - 10.0.255.254	10.0.255.255	10.0.0.0/24	10.0.0.1 - 10.0.0.254	10.0.0.255
10.1.0.0/16	10.1.0.1 - 10.1.255.254	10.1.255.255	10.0.1.0/24	10.0.1.1 - 10.0.1.254	10.0.1.255
10.2.0.0/16	10.2.0.1 - 10.2.255.254	10.2.255.255	10.0.2.0/24	10.0.2.1 - 10.0.2.254	10.0.2.255
10.3.0.0/16	10.3.0.1 - 10.3.255.254	10.3.255.255
10.4.0.0/16	10.4.0.1 - 10.4.255.254	10.4.255.255	10.0.255.0/24	10.0.255.1 - 10.0.255.254	10.0.255.255
10.5.0.0/16	10.5.0.1 - 10.5.255.254	10.5.255.255	10.1.0.0/24	10.1.0.1 - 10.1.0.254	10.1.0.255
10.6.0.0/16	10.6.0.1 - 10.6.255.254	10.6.255.255	10.1.1.0/24	10.1.1.1 - 10.1.1.254	10.1.1.255
10.7.0.0/16	10.7.0.1 - 10.7.255.254	10.7.255.255	10.1.2.0/24	10.1.2.1 - 10.1.2.254	10.1.2.255
...
10.255.0.0/16	10.255.0.1 - 10.255.255.254	10.255.255.255	10.100.0.0/24	10.100.0.1 - 10.100.0.254	10.100.0.255
...
...	10.255.255.0/24	10.255.255.1 - 10.255.255.254	10.255.255.255



©2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 36

Subnet an IPv4 Network Subnet within an Octet Boundary

- Refer to the table to see six ways to subnet a /24 network.

Prefix Length	Subnet Mask	Subnet Mask in Binary (n = network, h = host)	# of subnets	# of hosts
/25	255.255.255.128	nnnnnnnn.nnnnnnnn.nnnnnnnn.nnnnnnnh 11111111.11111111.11111111.10000000	2	126
/26	255.255.255.192	nnnnnnnn.nnnnnnnn.nnnnnnnn.nnnnnnnh 11111111.11111111.11111111.11000000	4	62
/27	255.255.255.224	nnnnnnnn.nnnnnnnn.nnnnnnnn.nnnnnnnh 11111111.11111111.11111111.11100000	8	30
/28	255.255.255.240	nnnnnnnn.nnnnnnnn.nnnnnnnn.nnnnnnnh 11111111.11111111.11111111.11110000	16	14
/29	255.255.255.248	nnnnnnnn.nnnnnnnn.nnnnnnnn.nnnnnnnh 11111111.11111111.11111111.11111000	32	6
/30	255.255.255.252	nnnnnnnn.nnnnnnnn.nnnnnnnn.nnnnnnnh 11111111.11111111.11111111.11111100	64	2



©2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 37

Subnet an IPv4 Network Video – The Subnet Mask

- This video will demonstrate the process of subnetting.



©2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 38

Subnet an IPv4 Network Video – Subnet with the Magic Number

- This video will demonstrate subnetting with the magic number.



©2020 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 39

Subnet an IPv4 Network Packet Tracer – Subnet an IPv4 Network

In this Packet Tracer, you will do the following:

- Design an IPv4 Network Subnetting Scheme
- Configure the Devices
- Test and Troubleshoot the Network



©2020 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 39

11.6 Subnet a Slash 16 and a Slash 8 Prefix



©2020 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 40

Subnet a Slash 16 and a Slash 8 Prefix Create Subnets with a Slash 16 prefix

- The table highlights all the possible scenarios for subnetting a /16 prefix.

Prefix Length	Subnet Mask	Network Address (n = network, h = host)	# of subnets	# of hosts
/17	255.255.128.0	network.network.network.network 11111111.11111111.10000000.00000000	2	32768
/18	255.255.192.0	network.network.network.network 11111111.11111111.11000000.00000000	4	16382
/19	255.255.224.0	network.network.network.network 11111111.11111111.11100000.00000000	8	8190
/20	255.255.240.0	network.network.network.network 11111111.11111111.11110000.00000000	16	4094
/21	255.255.248.0	network.network.network.network 11111111.11111111.11111000.00000000	32	2048
/22	255.255.252.0	network.network.network.network 11111111.11111111.11111100.00000000	64	1022
/23	255.255.254.0	network.network.network.network 11111111.11111111.11111110.00000000	128	510
/24	255.255.255.0	network.network.network.network 11111111.11111111.11111111.00000000	256	254
/25	255.255.255.128	network.network.network.network 11111111.11111111.11111111.10000000	512	126
/26	255.255.255.192	network.network.network.network 11111111.11111111.11111111.11000000	1024	62
/27	255.255.255.224	network.network.network.network 11111111.11111111.11111111.11100000	2048	30
/28	255.255.255.240	network.network.network.network 11111111.11111111.11111111.11110000	4096	14
/29	255.255.255.248	network.network.network.network 11111111.11111111.11111111.11111000	8192	6
/30	255.255.255.252	network.network.network.network 11111111.11111111.11111111.11111100	16384	2




Subnet a Slash 16 and a Slash 8 Prefix Create 100 Subnets with a Slash 16 prefix

Consider a large enterprise that requires at least 100 subnets and has chosen the private address 172.16.0.0/16 as its internal network address.

- The figure displays the number of subnets that can be created when borrowing bits from the third octet and the fourth octet.
- Notice there are now up to 14 host bits that can be borrowed (i.e., last two bits cannot be borrowed).

To satisfy the requirement of 100 subnets for the enterprise, 7 bits (i.e., $2^7 = 128$ subnets) would need to be borrowed (for a total of 128 subnets).



©2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 34

Subnet a Slash 16 and a Slash 8 Prefix Create 1000 Subnets with a Slash 8 prefix

Consider a small ISP that requires 1000 subnets for its clients using network address 10.0.0.0/8 which means there are 8 bits in the network portion and 24 host bits available to borrow toward subnetting.

- The figure displays the number of subnets that can be created when borrowing bits from the second and third.
- Notice there are now up to 22 host bits that can be borrowed (i.e., last two bits cannot be borrowed).

To satisfy the requirement of 1000 subnets for the enterprise, 10 bits (i.e., $2^{10}=1024$ subnets) would need to be borrowed (for a total of 128 subnets)



©2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 34

Subnet a Slash 16 and a Slash 8 Prefix Video – Subnet Across Multiple Octets

This video will demonstrate creating subnets across multiple octets.



©2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 35

Subnet a Slash 16 and a Slash 8 Prefix Lab – Calculate IPv4 Subnets


In this lab, you will complete the following objectives:

- Part 1: Determine IPv4 Address Subnetting
- Part 2: Calculate IPv4 Address Subnetting



©2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 36


- Enterprise networks will have an:
 - Intranet - A company's internal network typically using private IPv4 addresses.
 - DMZ - A company's internet facing servers. Devices in the DMZ use public IPv4 addresses.
 - A company could use the 10.0.0.0/8 and subnet on the /16 or /24 network boundary.
 - The DMZ devices would have to be configured with public IP addresses.



- The number of host addresses required for each network
- The number of individual subnets needed

[illegible]

- There are five sites and therefore five internet connections which means the organization requires 10 subnets with the largest subnet requires 40 addresses.
- It allocated 10 subnets with a /26 (i.e., 255.255.255.192) subnet mask.



Subnet to Meet Requirements Packet Tracer – Subnetting Scenario

In this Packet Tracer, you will do the following:

- Design an IP Addressing Scheme
- Assign IP Addresses to Network Devices and Verify Connectivity



© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 41

11.8 VLSM



© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 42

VLSM Video – VLSM Basics

- This video will explain VLSM basics.



© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 43

VLSM Video – VLSM Example

- This video will demonstrate creating subnets specific to the needs of the network.




© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 44

VLSM IPv4 Address Conservation

Given the topology, 7 subnets are required (i.e. four LANs and three WAN links) and the largest number of host is in Building D with 28 hosts.

- A /27 mask would provide 8 subnets of 30 host IP addresses and therefore support this topology.

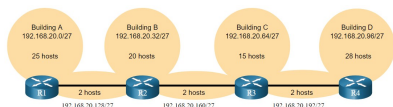


© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 40

VLSM IPv4 Address Conservation (Cont.)

However, the point-to-point WAN links only require two addresses and therefore waste 28 addresses each for a total of 84 unused addresses.

Host portion
 $2^5 - 2 = 30$ host IP addresses per subnet
 $30 - 2 = 28$
 Each WAN subnet wastes 28 addresses
 $28 \times 3 = 84$
 84 addresses are unused

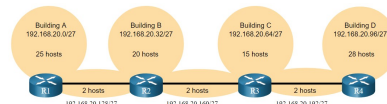


- Applying a traditional subnetting scheme to this scenario is not very efficient and is wasteful.
- VLSM was developed to avoid wasting addresses by enabling us to subnet a subnet.



© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 41

VLSM


- The left side displays the traditional subnetting scheme (i.e., the same subnet mask) while the right side illustrates how VLSM can be used to subnet a subnet and divided the last subnet into eight /30 subnets.
- When using VLSM, always begin by satisfying the host requirements of the largest subnet and continue subnetting until the host requirements of the smallest subnet are satisfied.
- The resulting topology with VLSM applied.

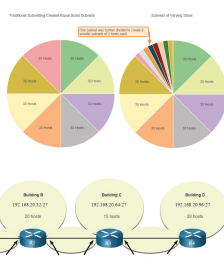

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 42

VLSM VLSM Topology Address Assignment

- Using VLSM subnets, the LAN and inter-router networks can be addressed without unnecessary waste as shown in the logical topology diagram.

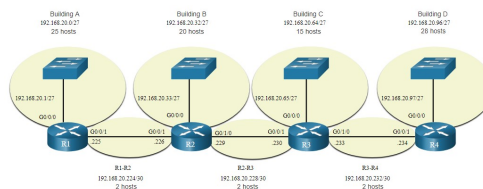

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 43

11.9 Structured Design

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Structured Design IPv4 Network Address Planning

IP network planning is crucial to develop a scalable solution to an enterprise network.

- To develop an IPv4 network wide addressing scheme, you need to know how many subnets are needed, how many hosts a particular subnet requires, what devices are part of the subnet, which parts of your network use private addresses, and which use public, and many other determining factors.

Examine the needs of an organization's network usage and how the subnets will be structured.

- Perform a network requirement study by looking at the entire network to determine how each area will be segmented.
- Determine how many subnets are needed and how many hosts per subnet.
- Determine DHCP address pools and Layer 2 VLAN pools.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Structured Design Device Address Assignment

Within a network, there are different types of devices that require addresses:

- End user clients** – Most use DHCP to reduce errors and burden on network support staff. IPv6 clients can obtain address information using DHCPv6 or SLAAC.
- Servers and peripherals** – These should have a predictable static IP address.
- Servers that are accessible from the internet** – Servers must have a public IPv4 address, most often accessed using NAT.
- Intermediary devices** – Devices are assigned addresses for network management, monitoring, and security.
- Gateway** – Routers and firewall devices are gateway for the hosts in that network.

When developing an IP addressing scheme, it is generally recommended that you have a set pattern of how addresses are allocated to each type of device.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Structured Design Packet Tracer – VLSM Design and Implementation Practice

In this Packet Tracer, you will do the following:

- Examine the Network Requirements
- Design the VLSM Addressing Scheme
- Assign IP Addresses to Devices and Verify Connectivity

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

11.10 Module Practice and Quiz

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Structured Design Packet Tracer – Design and Implement a VLSM Addressing Scheme

In this Packet Tracer, you will do the following:

- Design a VLSM IP addressing scheme given requirements
- Configure addressing on network devices and hosts
- Verify IP connectivity
- Troubleshoot connectivity issues as required.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Structured Design Lab - Design and Implement a VLSM Addressing Scheme

In this lab, you will complete the following objectives:

- Examine Network Requirements
- Design the VLSM Address Scheme
- Cable and Configure the IPv4 Network

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Module Practice and Quiz

What did I learn in this module?

- The IP addressing structure consists of a 32-bit hierarchical network address that identifies a network and a host portion. Network devices use a process called ANDing using the IP address and associated subnet mask to identify the network and host portions.
- Destination IPv4 packets can be unicast, broadcast, and multicast.
- There are globally routable IP addresses as assigned by the IANA and there are three ranges of private IP network addresses that cannot be routed globally but can be used on all internal private networks.
- Reduce large broadcast domains using subnets to create smaller broadcast domains, reduce overall network traffic, and improve network performance.
- Create IPv4 subnets using one or more of the host bits as network bits. However, networks are most easily subnetted at the octet boundary of /8, /16, and /24.
- Larger networks can be subnetted at the /8 or /16 boundaries.
- Use VLSM to reduce the number of unused host addresses per subnet.

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

© 2016 Cisco and/or its affiliates. All rights reserved. Cisco Confidential

Module Practice and Quiz

What did I learn in this module? (Cont.)

- VLSM allows a network space to be divided into unequal parts. Always begin by satisfying the host requirements of the largest subnet. Continue subnetting until the host requirements of the smallest subnet are satisfied.
- When designing a network addressing scheme, consider internal, DMZ, and external requirements. Use a consistent internal IP addressing scheme with a set pattern of how addresses are allocated to each type of device.



© 2020 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 37

Module 11: IPv4 Addressing

New Terms and Commands

- prefix length
- logical AND
- network address
- broadcast address
- first usable address
- last usable address
- unicast, broadcast, and multicast transmissions
- private addresses
- public addresses
- Network Address Translation (NAT)
- loopback addresses
- Automatic Private IP Addressing (APIPA) addresses
- classful addressing (Class A, B, C, D, and E)

Internet Assigned Numbers Authority (IANA)
Regional Internet Registries (RIRs)
AfriNIC, APNIC, ARIN, LACNIC, and RIPE NCC
broadcast domains
subnets
octet boundary
variable-length subnet mask (VLSM)



© 2020 Cisco and/or its affiliates. All rights reserved. Cisco Confidential 38

