



PT SAPTAINDRA SEJATI

CONTROL VALVE 3

RECEIVING INSPECTION

CHECKSHEET

MACHINE MODEL

PC1250-8

RO NO :

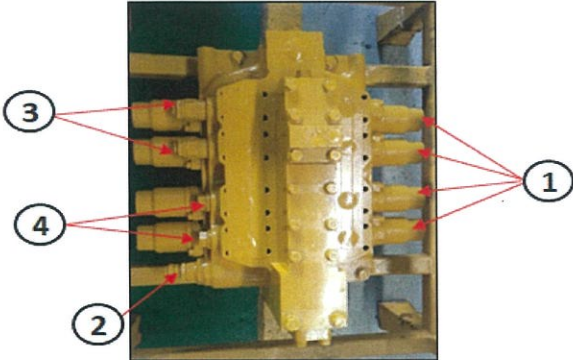
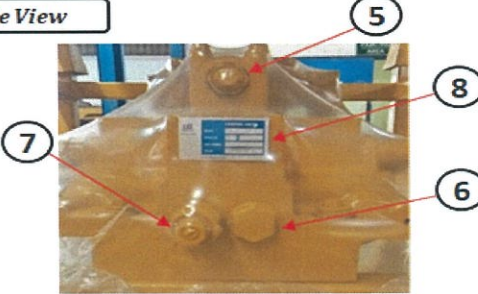
POWERTRAIN SECTION

RECEIVING CHECK SHEET CONTROL VALVE 3 PC 1250 - 8R	WO. NO		DOCUMENT NO	
	COMP.S/N		PUBLIC DATE	
	INSPECTION DATE		REVISION NO	
	JOB SITE		PAGE	

✓ : GOOD CONDITION

X : BAD CONDITION

⊗ : NONE

SKETCH DRAWING OR PHOTOES	NO	ITEM	CHECK	REMARK
Upper Side View  Rear Side View 	1	Spool (4pcs)		
	2	Main Relief Valve		
	3	Suction Safety Valve		
	4	Plug (6pcs)		
	5	Orifice Check Valve		
	6	Jet Sensor Orifice		
	7	Jet Sensor Relief Valve		
	8	Name Plate		
		Painting condition		
		Packing / wrapping		
		Stand		
		Bolt stand		

NOTE : PLEASE MARK "✓" FOLLOWING TO THE ACTUAL CONDITION

OIL LEVEL	EMPTY OR DRAINED	
	PROPER LEVEL	

Note :

INSPECTION BY

CHECK BY

CHECK BY

APPROVED BY

QA INSPECTOR

QA COORDINATOR

GL/SPV PROD

PPC



PT SAPTAINDRA SEJATI

CONTROL VALVE 3

**DISASSEMBLY &
MEASUREMENT**

CHECKSHEET

MACHINE MODEL






PC1250-8

RO NO :

POWERTRAIN SECTION

DISASSEMBLY AND MEASUREMENT CHECK SHEET CONTROL VALVE 3 4 SPOOL	UNIT MODEL		DELIVERY DATE		NUMBER.DOC	QR02 - PT - 119
	COMP.MODEL		WO.NO		PUB.DATE	26-Dec-2013
	COMP. S/N		SITE		REV.NO	00
	RECEIVING DATE		REVISION NO.		PAGE	1 of 1

PROCESS	START		DISASSEMBLY BY	
	FINISH			

No	PART NAME	METHODE	CHECK POINT	EVALUATION				FIGURE OF PARTS TO BE CHECKED			
				ACTUAL			U/A		U/R	N	
1	CASE	VISUAL CHECK	- Check surface area - Check Hole area mounting bolt - Check Groove oring	CONTENTS CHECK	Hole	Surface	Groove				
				Normal							
				Crack							
				Scratch							
				Damage							
				Wear							
2	SPRING BIG 8pcs	VISUAL CHECK	- Check surface area - Check abnormal wear on spring - Check bending on spring	CONTENTS CHECK	Inside	Hole	Surface				
				Normal							
				Damage							
				Scratch							
				Crack							
				Wear							
3	RETAINER	VISUAL CHECK	- Check surface area contact with of spring - Check surface area contact with of case	CONTENTS CHECK	Spline	Tooth	Surface				
				Normal							
				Pitting							
				Chipping							
				Crack							
				Wear							
				Scratch							
4	CHECK VALVE	VISUAL CHECK	- Check surface area - Check Hole area	CONTENTS CHECK	Hole	Surface					
				Normal							
				Crack							
				Scratch							
				Damage							
				Wear							
5	SPOOL 1 s/d 4 BOOM SWING BUCKET ARM	VISUAL CHECK	- Check surface area - Check Groove area - Check Hole area	CONTENTS CHECK	Hole	Surface					
				Normal							
				Pitting							
				Scratch							
				Damage							
				Wear							
7	BODY	VISUAL CHECK	- Check surface area contact with of spool - Check surface area contact with of block	CONTENTS CHECK	Spline	Tooth	Surface				
				Normal							
				Pitting							
				Chipping							
				Crack							
				Wear							
				Scratch							

REMARK :

DISASSEMBLY BY	CHECK BY	APPROVED BY
MECHANIC	QA.INSPECTOR	GL/SPV



PT SAPTAINDRA SEJATI

CONTROL VALVE 3

ASSEMBLY

CHECKSHEET

MACHINE MODEL

PC1250-8

RO NO :







POWERTRAIN SECTION



PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER







ASSEMBLY CHECK SHEET CONTROL VALVE 3 (4 SPOOL) PC1250-8	UNIT MODEL	PC1250-8	DOCUMENT NO.	
	COMP. MODEL	C/V 3 (4 SPOOL)	PUBLIC DATE	25/12/2013
	COMP. S/N		REVISION NO.	00
	WO.NO		PAGE	5 of 6

PROCESS	START		ASSEMBLY BY	
	FINISH			

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN			REMARKS (SKETCH, PHOTOS, COMMENTS)
				MEC	SPV	QA	
1	ASSEMBLY	- Install Oring to flange Then install to valve body - Install backup ring and Oring to sleeve Then install to valve body and then torque mounting Sleeve Act. : kgm	Sleeve Liquid Gasket (LG) Std torque 18 - 22 kgm				 Flange Oring  Nut Sleeve Backup ring Oring
		- Install backup ring and Oring to Plug - Install check valve and spring to sleeve - Install plug assy to sleeve and then torque mounting Plug Act. : kgm					 Plug Oring Backup ring  Nut Sleeve
		- Install backup ring and oring to Plug - Install plug assy to valve body - Install Oring to cover then Install to valve body and then torque mounting bolt Act. : kgm	Std torque 6 - 7 kgm				 Backup ring Plug Oring  Cover Oring
		- Install Oring to plug - Install Plug assy to valve body and then torque mounting plug Act. : kgm					 Plug Oring
		- Install backup ring and Oring to Plug - Install Plug assy to valve body and then torque mounting plug Act. : kgm	Std torque 12 - 16 kgm				 Oring Backup ring Plug
		- Install Main relief valve to body and then torque Act. : kgm	Std torque 28 - 37 kgm				 Relief valve



ASSEMBLY CHECK SHEET CONTROL VALVE 3 (4 SPOOL) PC1250-8	UNIT MODEL	PC1250-8	DOCUMENT NO.	
	COMP. MODEL	C/V 3 (4 SPOOL)	PUBLIC DATE	26/12/2013
	COMP. S/N		REVISION NO.	00
	WO.NO		PAGE	6 of 6

NO.	PARTS	CHECK POINT	SPECIFICATION	SIGN			REMARKS (SKETCH, PHOTOS, COMMENTS)
				MEC	SPV	QA	
2	ASSEMBLY	- Install Jet sensor relief valve to valve body and then torque Act. : kgm	Std torque 18 - 20 kgm				 Jet sensor
		- Install Orifice to valve body and then torque Act. : kgm	Std torque 13 - 18 kgm				 Orifice
		- Install Suction-Safety valve to body and then torque Act. : kgm	Std torque 22 - 24 kgm				 Suction valve Safety valve
		- Install Oring, backup ring and Oring to Plug and then torque Act. : kgm	Std torque 18 - 20 kgm				 Oring Backup ring Oring
		- Install Spool Boom plus, Swing, Bucket plus and Arm plus to valve body	Be careful not to mistake the location of th spool Coat the spool with engine oil				 Spool 1-4
		- Install Retainer, tube and spring to All spool control valve mount - Install Oring to case then Install to valve body and then torque Act. : kgm	Std torque 6 - 7 kgm				 Cover Oring Tube Spring
		- Install spring, check valve and seat to valve body - Install check valve and spring to valve body					 Check valve Spring
		- Install Oring to priority travel valve then Install to valve body and then torque mounting bolt Act. : kgm Act. : kgm	Std torque 8 - 10 kgm (2) Std torque 16 - 18 kgm (3)				 Case Oring Oring

RANDOM ITEM CHECK
 Name : Name :
 QA INSPECTOR PROD. SUPERVISOR

ASSEMBLY BY

INSPECTED BY

APPROVED BY

(MECHANIC)

QUALITY ASSURANCE

(GL / SPV)



PT SAPTAINDRA SEJATI

CONTROL VALVE 3

DELIVERY

CHECKSHEET

MACHINE MODEL

PC1250-8

RO NO :

POWERTRAIN SECTION

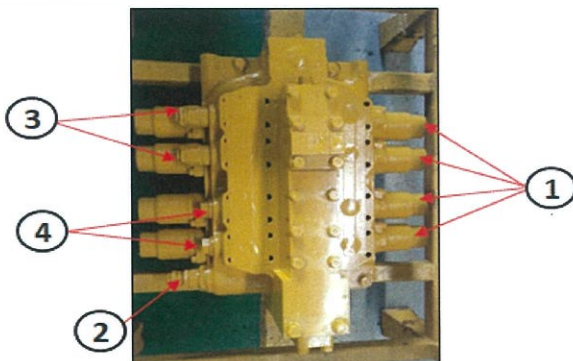
DELIVERY CHECK SHEET CONTROL VALVE 3 PC 1250 - 8R	WO. NO		DOCUMENT NO	
	COMP.S/N		PUBLIC DATE	
	INSPECTION DATE		REVISION NO	
	PART NO. COMPONENT	709 - 14 - 93500	PAGE	

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ : GOOD CONDITION

X : BAD CONDITION

⊗ : NONE

SKETCH DRAWING OR PHOTOES	NO	ITEM	CHECK	REMARK
Upper Side View 	1	Spool (4pcs)		
	2	Main Relief Valve		
	3	Suction Safety Valve		
	4	Plug (6pcs)		
	5	Orifice Check Valve		
	6	Jet Sensor Orifice		
	7	Jet Sensor Relief Valve		
	8	Name Plate		
		Painting condition		
		Packing / wrapping		
		Stand		
		Bolt stand		
		Delivery check sheet		
		Quality passed (Sticker)		
Rear Side View 				

NOTE : PLEASE MARK "✓" FOLLOWING TO THE ACTUAL CONDITION

OIL LEVEL	EMPTY OR DRAINED	
	PROPER LEVEL	

Note :

INSPECTION BY

APPROVED BY

QA/GL

QA COORDINATOR