


STANDARD MODELS : KN-3510DE/KN-3710DE/KN-3710E/KN-3612E/KN-3612DE/KN-3409E/KN-3409DE



KDT heavy duty CNC machine with Italy Masterwood technology, adapt to furniture factory flexible cutting, use for man-made board cutting/hogging/drilling etc. Software can match with various design software, easy operating and handling.

1. Heavy duty machine frame, ensure high precision and long term stable running;
2. Max speed for X/Y/Z is 80/80/30 m/min;
3. With Delta bus contro system and industrial computer;
4. With KDT 12kw spindle;
5. With KDT 10V drill package.

FEATURES

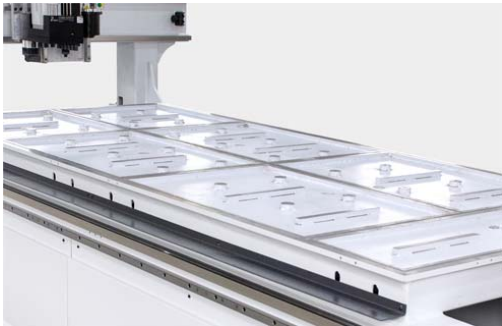

- ♦ High rigidity machine body: Seasonally tempered, five side milling is processed at one time; 4 partition double vacuum adsorption table, ensure the full strength when processing small panel.



- ♦ Drill package
KDT 10V oval bore drill package
Enlarge drill unit bottom pressure, ensure drilling depth




- ♦ Servo Driven
With 1.5KW servo driven motor
Max speed 80 m/min



- ♦ 244m3/h air cool vacuum pump, big volume, enlarge small panel stability



- ♦ Spindle
KDT 12KW ISO30 spindle
Strong power, high precision, long using life

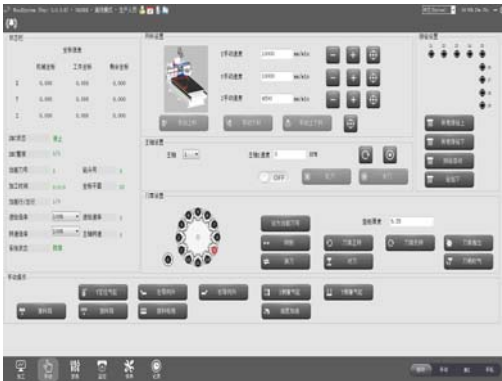

- ♦ System
Delta bus control system(PC control)
Single interface, easy operating
High integration, quick response, machine with drawing software, quick output and optimizer working file.




- ♦ 12 pcs ATC
Servo control auto tool change



♦

LAYOUT DIMENSIONS

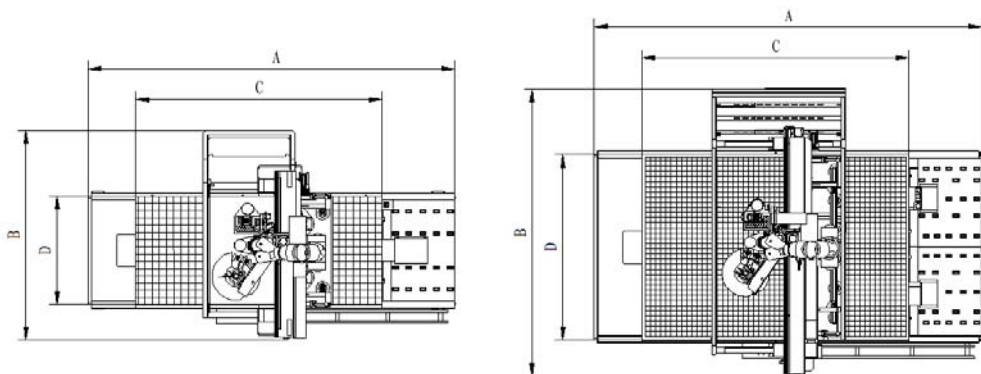

Model	A (mm)	B (mm)	C (mm)	D (mm)	H (mm)
KN-3409E/DE	4260	2430	2860	1260	2415
KN-3510E/DE	4500	2765	3100	1570	2415
KN-3612E/DE	5100	3025	3700	1830	2415

Note: "H" is Height

Model	A (mm)	B (mm)	C (mm)	D (mm)	H (mm)
KN-3710E/DE	4500	3350	3100	2150	2415

Note: "H" is Height

STANDARD MACHINE PARAMETERS

STANDARD MODELS	PACKAGE SIZE(X Y Z) mm			GROSS WEIGHT(kg)	POWER(kW)	Working Pressure(MPa)
KN-3409DE	5075	2100	2270	3500	26.1	0.65
KN-3409E	5075	2100	2270	3500	23.9	0.65
KN-3510DE	5950	2250	2300	3800	31.6	0.65
KN-3612DE	5750	2330	2300	5000	31.6	0.65
KN-3612E	5750	2330	2300	5000	29.4	0.65
KN-3710DE	5950	2310	2500	5000	31.6	0.65
KN-3710E	5950	2310	2500	5000	29.4	0.65

Attention: Functions and specifications may change during time. Please verify with an authorized representative.



PT MARIS DWI JAYA
Woodworking Machinery

Ruko Central Green Ville No. 2 UU | Jakarta Barat 11510, Indonesia
P. +6221. 5637676/5657509 ; F. +6221. 5636047 || info@marisdwijaya.com
www.marisdwijaya.id

APPLICATIONS



Attention: Functions and specifications may change during time. Please verify with an authorized representative.

STANDARD MACHINE PARAMETERS

	KN-3409DE	KN-3409E	KN-3510DE	KN-3612DE	KN-3612E	KN-3710DE	KN-3710E
MAX SPEED(m/min)	100/100/30	100/100/30	100/100/30	100/100/30	100/100/30	80/80/30	80/80/30
MIN PANEL(L*W)	/	/	/	/	/	/	/
MAX PANEL(L*W)	2860*1260	2860*1260	3100*1570	3700*1830	3700*1830	3100*2150	3100*2150
Operating system	Delta	Delta	Delta	Delta	Delta	Delta	Delta
Drive system	INVT	INVT	INVT	INVT	INVT	INVT	INVT
Vacuum Capacity	244m3/h	244m3/h	244*2 m3/h	244*2 m3/h	244*2 m3/h	244*2 m3/h	244*2 m3/h
Vacuum Area	7	7	4	4	4	6	6
Spindle	12kW(ISO 30)	12kW(ISO 30)	12kW(ISO 30)	12kW(ISO 30)	12kW(ISO 30)	12kW(ISO 30)	12kW(ISO 30)
Machining size	2860*1260*100	2860*1260*100	3100*1570*100mm	3700*1830*100mm	3700*1830*100mm	3100*2150*100mm	3100*2150*100mm
Drilling head	10V	-	10V	10V	-	10V	-
Magazine capacity	12	12	12	12	12	12	12
Size&QTY of Dust Hood	Φ 200*1	Φ 200*1	Φ 200*1	Φ 200*1	Φ 200*1	Φ 200*1	Φ 200*1

OPTIONS



Auto loading Gripper Unit (for 4' working table)(5): Auto loading with Gripper (with 4' working table)