## **Flat Heaters for Enclosures**





50W Flat Heater 061000-00



## **Applications**

The flat heater is used to provide evenly distributed temperature within enclosures with electric or electronic components. Its ultra-thin design makes it particularly suitable for high-density applications in which standard enclosure heaters are often too big. Depending on the application, the flat heater can be used as a convection heater or as a contact heater. When used as a contact heater, it offers thermoconductive contact to a component or cabinet wall. Additionally, a specially designed mounting system compensates for thermal expansion of the heater body. Operated as a convection heater, the slim heater warms up the ambient air within a cabinet and is designed for continuous operation.

#### **Features**

- Contact/convection heater
- Ultra flat design only 0.32in {8mm} thick
- Compact
- · Easy, firm installation
- · Screw fixing
- Linear expansion compensation
- Integrated temperature cut-out
- Ready-to-use with strain relief

### Listings

• UL File E234324




Flat Heaters Specifications				
Heating Element	Resistance heater			
Overheat Protection	With automatic reset			
Heater Body	aluminum profile			
Surface Temperature	Max. 302 °F [150 °C] at 77 °F [25 °C]			
Connection	Silicone cable (halogen-free) 3 x AWG 18 [0.75 mm²], length 3.3ft [1m]			
Housing	Plastic, UL 94V-0, black			
Mounting Hardware	M6 screws			
Mounting Position	Horizontal, variable connection or vertical, connection on bottom			
Operating Temperature	-40 to 140 °F [-40 to 60°C]			
Storage Temperature	-40 to 185°F [-40 to 85°C]			
Operating / Storage Humidity	Max. 90% RH (non-condensing)			
Protection Class	I (earthed)			
Protection Type	IP30			
Approvals	UL File E234324, VDE, EAC, CE			

Flat Heaters for Enclosures						
Part Number	Price	Operating Voltage	Heating Capacity	Weight (approx.)	Drawing Link	
<u>061000-00</u>	\$92.00	AC 230V 50/60Hz	50W	0.88 lb [0.4 kg]	PDF	
<u>061010-00</u>	\$110.00	AC 230V50/60 Hz	100W	1.54 lb [0.7 kg]	<u>PDF</u>	
<u>061009-00</u>	\$92.00	AC 120V 50/60 Hz	50W	0.88 lb [0.4 kg]	<u>PDF</u>	
<u>061019-00</u>	\$110.00	AC 120V 50/60 Hz	100W	1.54 lb [0.7 kg]	<u>PDF</u>	

# **Flat Heaters for Enclosures**



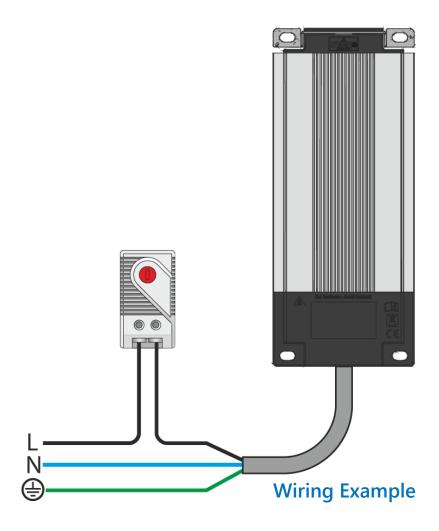



**Size Reference**