
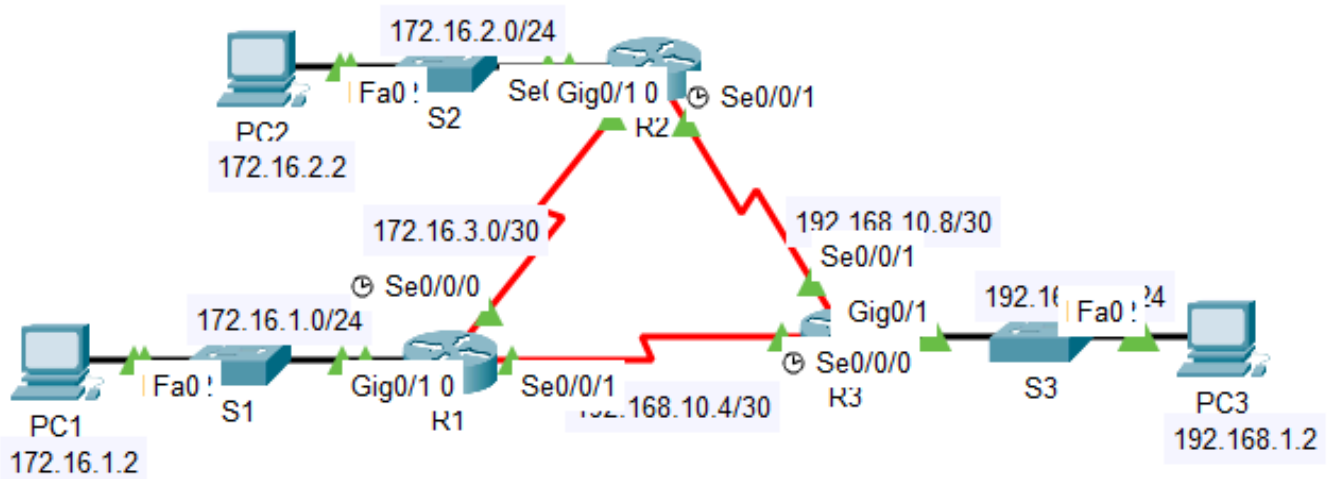


T2032 (R2TP) TP08.1 [pka] Configuring OSPFv2 in a Single Area

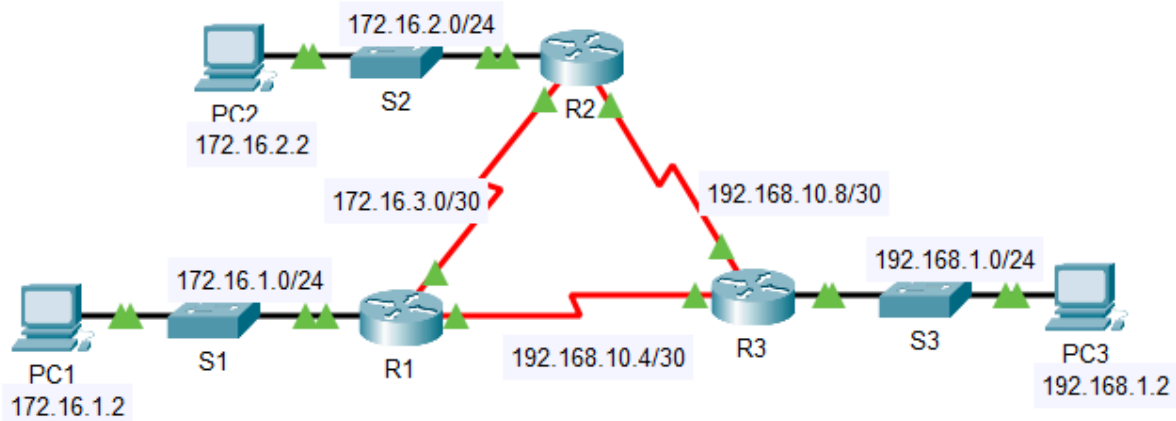

R1
en
conf t

```
router ospf 10
```

```
router id 1.1.1.1
```

```
network 172.16.3.0 0.0.0.3 area 0
```

```
network 192.168.10.4 0.0.0.3 area 0
```

```
network 172.16.1.0 0.0.0.255 area 0
```

```
passive int G0/0
```

```
exit
```

R2

```
en
```

```
conf t
```

```
router ospf 10
```

```
router id 2.2.2.2
```

```
network 172.16.3.0 0.0.0.3 area 0
```

```
network 192.168.10.8 0.0.0.3 area 0
```

```
network 172.16.2.0 0.0.0.255 area 0
```

```
passive int G0/0
```

```
exit
```

R3

```
en
```

```
conf t
```

```
router ospf 10
```

router id 3.3.3.3

network 192.168.10.4 0.0.0.3 area 0

network 192.168.10.8 0.0.0.3 area 0

network 192.168.1.0 0.0.0.255 area 0

passive int G0/0

exit

	Successful	PC1	PC2	ICMP		0.000	N	0	(edit)
	Successful	PC1	PC3	ICMP		0.000	N	1	(edit)
	Successful	PC3	PC2	ICMP		0.007	N	2	(edit)