

HIL and MC lab handbook

TMR4243

November 5, 2014

Contents

1	Introduction	5
1.1	Structure	5
I	Laboratory equipment	6
2	MC-Lab	6
2.1	Towing carriage	6
2.2	Wave generator	6
2.2.1	First order Stoke waves	6
2.2.2	Irregular waves	6
2.3	Qualisys positioning system	6
2.4	Ethernet communication network	7
3	CSE1 - C/S Enterprise I	9
3.1	Control system	9
3.1.1	Real time hardware	9
3.1.2	Real time software	9
3.1.3	Input/Output signals	10
3.1.4	NI Labview user interface	10
3.1.5	Startup procedure	10
3.1.6	Template: DP control system	11
3.2	HIL Simulation Setup	11
3.2.1	Hardware topology	11
3.2.2	Software C/S E1	11
3.2.3	Startup procedure	12
3.3	Development procedure	12
3.3.1	Development for new algorithms in modules in Simulink .	12
3.3.2	Development with structural changes in I/O or Labview UI	12
4	Software	12
II	Laboratory user guide	13
5	Model compilation	13
6	Model deployment	14
7	System interfacing	15
8	Deploying basic VI	16
III	Theory	17
IV	Lab exercises and expected results	18

V	Equipment setup and configuration	19
A	cRIO	19
A.1	Input and output	19
A.1.1	PWM output	19
A.1.2	Analog input	19
A.2	Secondary ethernet port	19
A.2.1	Enabling the port	19
B	Raspberry Pi	20
B.1	OS installation	20
B.1.1	Download	20
B.1.2	Write image to SD card	21
B.1.3	Terminal access	21
B.1.4	Finalize configuration	21
B.2	PS3 Controller installation and configuration	23
C	Qualisys	24
VI	Misc	25
D	Contributers and points of contact	25
E	Suppliers	25
F	YouTube demonstration	25
G	To do list	25
H	Software needed	26

Nomenclature

cRIO	National Instruments compact reconfigurable input/output real-time embedded industrial controller
RPi	Raspberry Pi single-board computer
VI	virtual instrument, a LabVIEW program

1 Introduction

1.1 Structure

Part I describes the laboratory facilities and equipment. A general overview of hardware and software.

Part II is a user guide intended for students of the course. Step-by-step instructions for development and deployment of programs to the real-time controller are given. Lower level details, intended for laboratory assistants are given in Part V.

Hva skal
denne
labben
handle
om?

Part I

Laboratory equipment

2 MC-Lab

The Marine Cybernetics Laboratory is the newest test basin at the Marine Technology Centre. It is located in what was originally a storage tank for ship models made of paraffin wax.

As the name indicates, the facility is especially suited for tests of marine control systems, due to the relatively small size and advanced instrumentation package. It is also suitable for more specialised hydrodynamic tests, mainly due to the advanced towing carriage, which has capability for precise movement of models in 6 degrees of freedom.

The MCLab is operated by the Department of Marine Technology, and has been a Marie Curie EU Training Site (2002-2008). It is mainly used by Master and PhD-students, but it is also available for MARINTEK and external users.

The software in use was developed using rapid prototyping techniques and automatic code generation under Matlab/Simulink and Opal. The target PC on-board the vessel runs the QNX real-time operating system while experimental results are presented in real-time on a host PC using Labview.

2.1 Towing carriage

Carriage : towing speed 2 m/s, 5 (6) DOFs forced motions Current generation: 0-0.15m/s

2.2 Wave generator

The wave genertor is located at the end of the tank and is operated from its own copmuter. It has the capability to create first order Stoke waves or irregular recreate different wave spectras such as JONSWAP or PM spectras. Significant wave height $H_s = 0.3$ [m] with period T between 0.6 [s] and 1.5 [s]

2.2.1 First order Stoke waves

First order stoke waves are regular linear waves. Very nice to do calculations with, but not so representative for real life conditions. Described by potential theory

2.2.2 Irregular waves

2.3 Qualisys positioning system

The positioning system works by tracking reflectors placed on the ship with the use of high speed cameras. Qualisys consists of three systems

Sakset
rett fra
nettsiden
<http://www.ntnu.edu/imt/cybernetics-lab>

http://www.ntnu.edu/imt

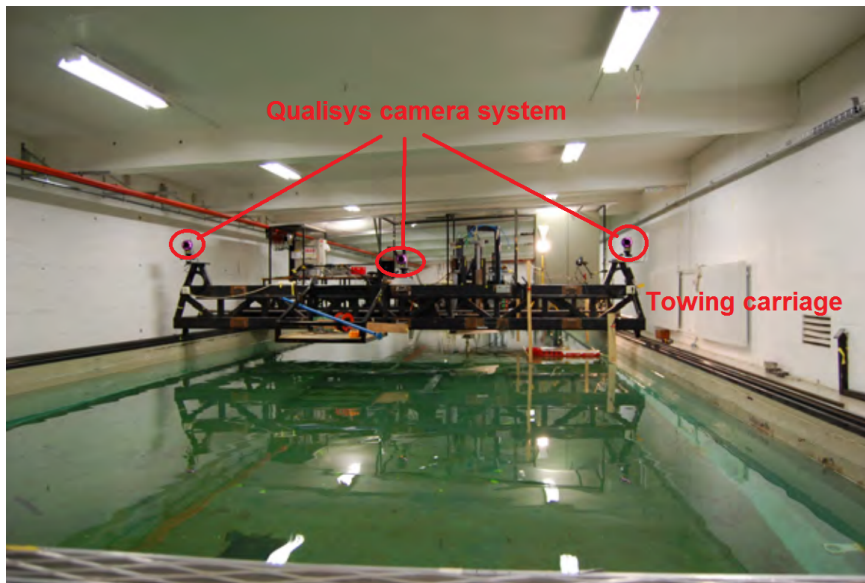


Figure 1: Towing carriage

- Qualisys Oqus: The cameras used to register/see the IR markers
- Qualisys Motion Capture Systems: is the system that process the data from Oqus
- Qualisys Track Manager: The userinterface to interact with Motion Capture System

2.4 Ethernet communication network

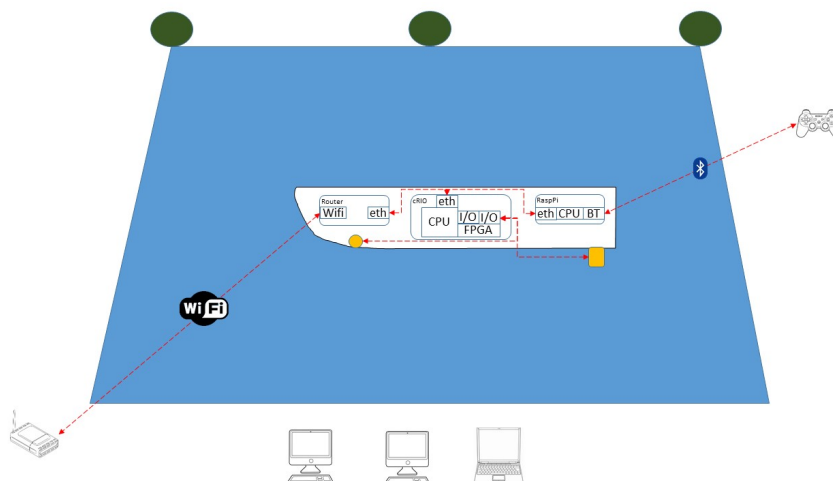


Figure 2: Towing carriage

For communication with the ship, the wireless network HILlab is used

3 CSE1 - C/S Enterprise I



Figure 3: C/S Enterprise I

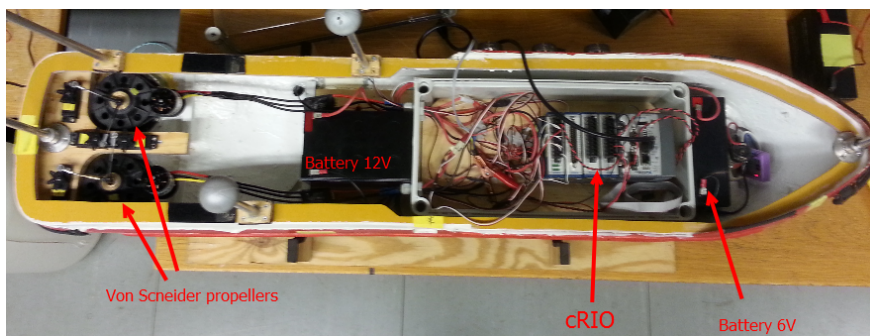


Figure 4: CSE1 - Hardware

3.1 Control system

3.1.1 Real time hardware

CompactRIO

CompactRIO is a reconfigurable embedded control and acquisition system. The CompactRIO system's rugged hardware architecture includes I/O modules, a reconfigurable FPGA chassis, and an embedded controller. Additionally, CompactRIO is programmed with NI LabVIEW graphical programming tools and can be used in a variety of embedded control and monitoring applications. For more info visit the producer website

Sakset fra
ni.com/compactrio

3.1.2 Real time software

LabVIEW - Real time module

National Instruments real-time technology offers reliable, deterministic performance for your time-critical applications. Use the LabVIEW Real-Time Module to develop and deploy complex real-time systems quickly and efficiently to the

CompactRIO microprocessor.

Veristand

3.1.3 Input/Output signals

PWM

Digital output

3.1.4 NI Labview user interface

3.1.5 Startup procedure

Connecting to Cybership Enterprise 1 (RT CompactRIO - NI-cRIO9024-CSE1 (192.168.0.77))

1. Place “Main battery” (large fat one) beneath wireless anntenna, adjacent to waterproof box, between the wires, with battery terminals furthest away from it.
2. Place “Servo battery” (small slim one) at bow between tunnel thruster and waterproof box, with battery terminals closes to the waterproof box.
3. Postive battery terminal (“RED-port”) at portside and negative battery terminal (“BLACK-port”) at starboard side
Connect wire with red isolation (“RED-wire”) to “RED-port” and wire with black isolation (“BLACK-wire”) to “BLACK-port”
4. Connect first the “RED-wire” before the “BLACK-wire” to the batteries.
5. The “Main battery” (large fat one) should be connected first then wait a few sec (5s) before connecting the “Servo battery” (small slim one).
6. Note: it should not matter in which order it is done, but from experience connectiong “RED-wire” before “BLACK-wire” gives a much higher probability for communication with the CompactRIO on Cybership Enterprise 1 (99-100%’ish) than connecting the “BLACK-wire” before the “RED-wire” (25%ish), and it is a habit to connect main before the servo, since main powers “CompactRIO” while servo powers “D-Link wireless bridge”
7. There should be 3 red lights lighting up, one at bow in a purple box for indicatiing power to tunnel thuster two close to “Main battery”, one on each side for each Voith Schneider propeller
8. The indicators on “ACT/LiNK” port 1 should light up (green) to indicate communication with “HILLab”
9. Test communication:
 - Open “Command Promt”
 - write: ping 192.168.0.77

A successfull ping should return somthing like

Nam sin
prosedyre
fra
readme.txt

```
C:\Documents and Settings\mcl>ping 102.168.0.77
```

```
Pinging 192.168.0.77: bytes=32 time = 5ms TTL=64
Pinging 192.168.0.77: bytes=32 time = 5ms TTL=64
Pinging 192.168.0.77: bytes=32 time = 5ms TTL=64
Pinging 192.168.0.77: bytes=32 time = 2ms TTL=64
```

```
Ping statistics for 192.168.0.77:
Packets: Sent = 4, Received = 4, Lost = 0 <0% loss>,
Approximate round trip times in milli-seconds:
Minimum =2ms, Maximum = 5ms, Average = 4ms
```

10. The most important thing is that you receive packets in return, the time might vary but the important thing is that it responds to the ping.
11. If Lost = 100% meaning no response means either "Laptop" or "CompactRIO" is unable to communicate with "HILlab".
12. Check Laptop is connected to wireless network "HILlab", if not connect to it "HILlab"
13. Check ACT/LiNK" port 1 are showing activity e.g. are lit, blinking, if not check ethernet cable is connected to "ACT/LiNK" port 1 and to the "D-Link Wireless Bridge" if not connect to those Battery gives power to "CompactRIO" and "D-Link", lights/indicators are lit/blinking if not check wiring
14. Check battery voltages, "Main battery" should be 10 Volt or more, maximum around 13 Volt, regular 11 to 12 Volt, low 10 Volt "Servo battery" should be in 5 Volt or more, max around 6.4 Volt, regular around 6 Volt
15. Note: Black wire should always be the last to be connected, and "Main Battery" first

3.1.6 Template: DP control system

3.2 HIL Simulation Setup

3.2.1 Hardware topology

3.2.2 Software C/S E1

PWM tick = FPGA clock pulse

$tickinseconds = 1/frequency = 1/40MHz = 1/(40 * 10^6) = 25 * 10^{-9} = 25ns$

output at 50 Hz demands output every $40MHz/50Hz = (40 * 10^6)/50 = 800000tick$

3.2.3 Startup procedure

3.3 Development procedure

3.3.1 Development for new algorithms in modules in Simulink

3.3.2 Development with structural changes in I/O or Labview UI

4 Software

MATLAB	Mathworks	
LabVIEW	National Instruments	
VeriStand	National Instruments	Interfacing
NI MAX	National Instruments	Measurement & Automation Explorer: konfigurering av cRIO
Qualisys?		

Table 1: Software

Hva brukes det enkelte programmet til?

Part II

Laboratory user guide

5 Model compilation

model, controller, Simulink-jdll

6 Model deployment

Veristand osv

7 System interfacing

work space

8 Deploying basic VI

1. Open LabVIEW
2. Create project
3. Blank project
4. In the left pane tree, right-click Project: XXX, New -> Targets and devices
5. Keep setting Existing target or device, Discover an existing target(s) or device(s)
6. In the tree, expand Real-Time CompactRIO, wait for search and select the cRIO
7. In the Project Explorer, drag and drop the VI to the device
8. Right-click the VI, Run

Part III
Theory

Part IV

Lab exercises and expected results

Forslag fra Roger

- Estimere pivot point
- Estimere bølgefrequens og bølgehøyde??
- Tuning PID parametere
- Analysere aggressivitet ved ulik tuning
- Analysere og teste notch effekt i bølgefilter
- Thrust allocation
- Lyapunov function. UGES \rightarrow estimate convergence rate \rightarrow simulate convergence rate \rightarrow test convergence rate
- Bandwidth!

From TMR 4243 and 4515

- Robust nonlinear control methods (different backstepping methods, ISS designs, sliding-mode designs, passivity-based control, nonlinear PID and integral control).
- Adaptive control designs for nonlinear systems (adaptive backstepping, gradient methods, L1 adaptive control, etc.)
- Maneuvering control theory and path-following control designs for marine vessels (path parameterization, path generation, guidance theories, and feedback control laws).
- Fault-diagnosis and fault tolerant control (failure-mode detection, fault isolation, and control redesign to detect and handle failures in equipment and processes).

Part V

Equipment setup and configuration

A cRIO

A.1 Input and output

A.1.1 PWM output

VeriStand FPGA programming LabView -> Create project -> All -> NI VeriStand FPGA project -> Compact RIO -> Discover existing system -> Velge eget utstyr -> Vente på discovering -> I Project explorer *.vi (er bitfilen) *.fpgaconfig (egentlig XML) Endre på *.vi Fjerne overføldige pakker Oppdatere antall pakker i XML-filen og fjern pakker som ikke er aktuelle, oppdatere tall på beholdte pakker. Kompiler

Kopier bit-file ut i samme mappe som *.fpgaconfig I System explorer, FPGA -> Add FPGA target -> Finne *.fpgaconfig

A.1.2 Analog input

A.2 Secondary ethernet port

A.2.1 Enabling the port

1. Start *NI MAX*
2. In the left pane tree, select the cRIO under *Remote Systems*
3. Open the *Network Settings* tab (located at the bottom of the window)
4. Set *Adapter Mode* to *TCP/IP Network*
5. Set *Configure IPv4 Address* to *Static*

Eirik:
FPGA-
greier osv

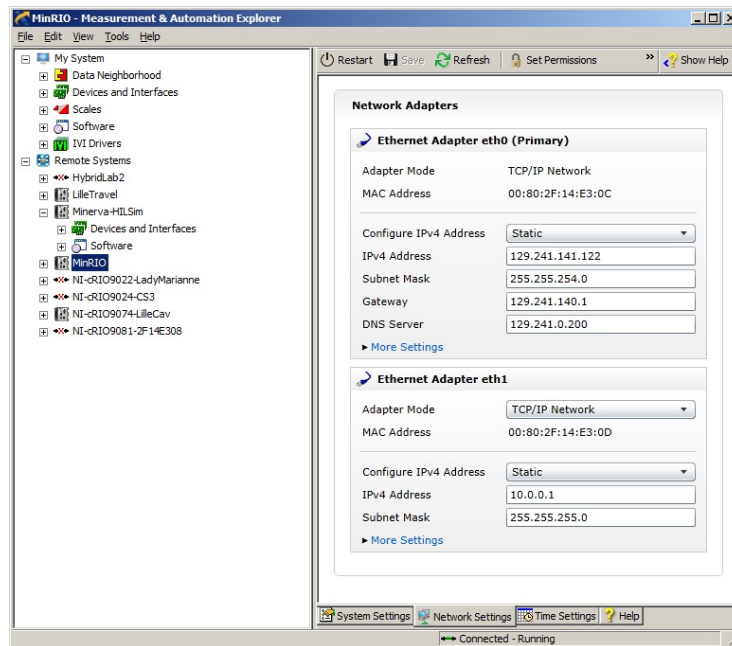


Figure 5: NI MAX - Network Settings

B Raspberry Pi

B.1 OS installation

Windows	Linux, OSX
Win32 Disk Imager	dd
Advanced IP scanner	nmap
Putty	ssh

Table 2: RPi utilities

Description using a Windows desktop, but also possible in Mac and Linux. See table B.1.

B.1.1 Download

- newest raspbian image for instance on <http://www.raspberrypi.org/>, currently 2014-09-09-wheezy-raspbian.img. Extract if zip.
- Win32 Disk Imager for instance <http://sourceforge.net/projects/win32diskimager/>
- Advanced IP scanner <http://www.advanced-ip-scanner.com/>.
- Putty <http://www.chiark.greenend.org.uk/~sgtatham/putty/download.html>

B.1.2 Write image to SD card

Run Win32 Disk Imager as administrator

Select the image file

Make sure you have the right drive

Push write

B.1.3 Terminal access

<http://hertaville.com/2012/09/27/raspbian-raspberry-pi/>

Description using a Windows desktop, but also possible in Mac and Linux.
Then image writer is XXX and putty is XXX.

Determining RPi IP address This step can be skipped if the IP is known.

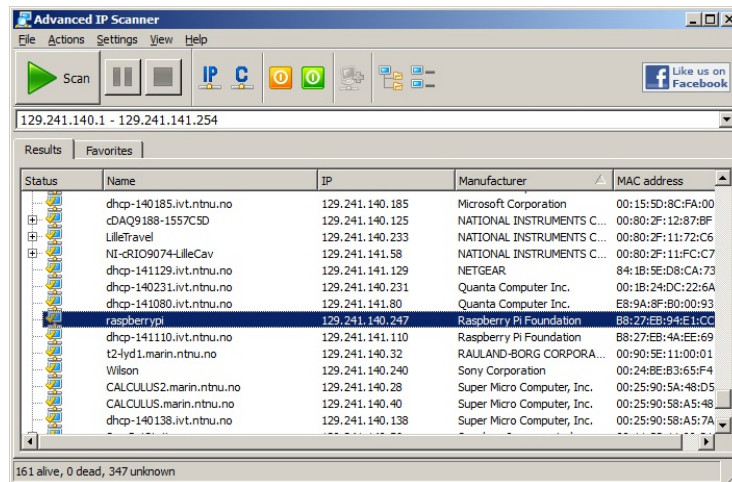


Figure 6: Advanced IP Scanner

By default the RPi has name *raspberrypi*. The IP is given in the next column, as in Figure 6.

Connect via SSH The RPi may be accessed through the network, i.e. without having to directly connect a monitor and keyboard.

Figure 7

Figure 8

Putty <http://www.chiark.greenend.org.uk/~sgtatham/putty/download.html>

Default RPi are

Username: pi

Password: raspberry

However, the password is changed to the MC-lab standard.

B.1.4 Finalize configuration

Figure 9

sudo raspi-config

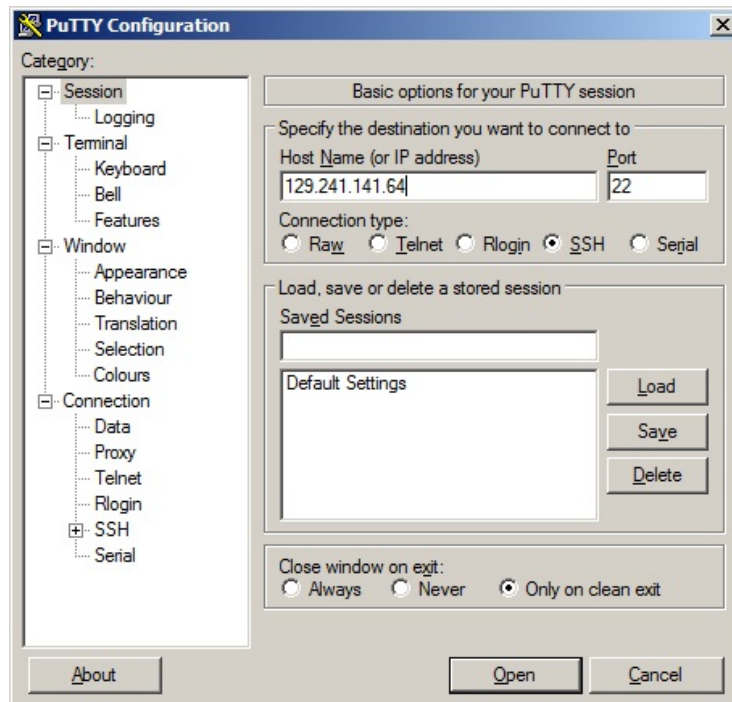


Figure 7: Putty settings

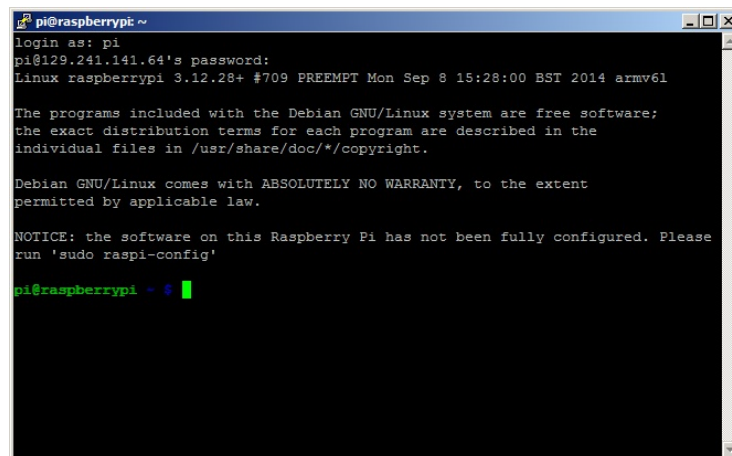


Figure 8: SSH connection

Update configuration tool 8 Advanced Options
A9 Update

Expand filesystem 1 Expand Filesystem
Finish
Yes to reboot now
You will need to reconnect through SSH.

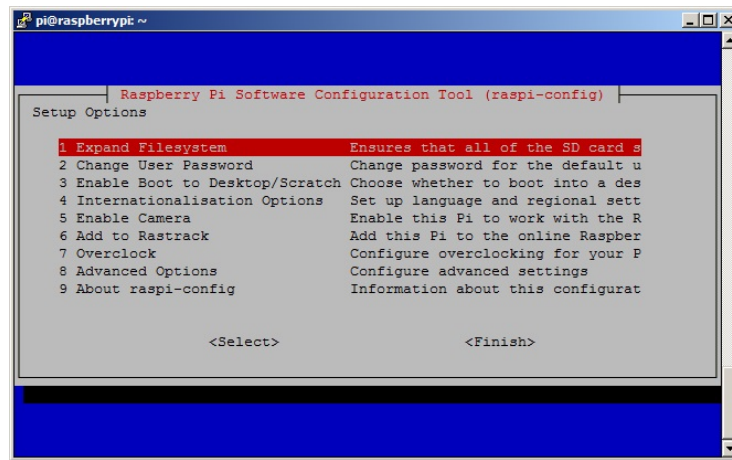


Figure 9: RPi configuration tool

Change password 2 Change User Password
 Update and upgrade
 sudo apt-get update
 sudo apt-get upgrade

B.2 PS3 Controller installation and configuration

Eirik:
 driver,
 python-
 Joystick
 osv

C Qualisys

calibration

Part VI

Misc

D Contributors and points of contact

Håkon Nødset Skåtun	Hakon.Nodset.Skatun@km.kongsberg.com
Øivind Kåre Kjerstad	
Dinh Nam Tran	
Andreas Orsten	
R kanajus	
Torgeir Wahl	
Eirik Valle	
Andreas Reason Dahl	andreas.r.dahl@ntnu.no

Table 3: POCs

See Table D

E Suppliers

Laptops	Dell
cRIO	National Instruments
VSP	Thrusters were ordere at www.cornwallmodelboats.co.uk/ acatalog/voith_schottel.html . Per 2014, availability is variable.

Table 4: Suppliers

F YouTube demonstration

<http://www.youtube.com/watch?v=MIESJsIZ004>

G To do list

- Etablere fargekoder for simulinkblokker (spesielt “ikke røre”-farge)
- Konsekvent notasjon: C/S Enterprise 1 eventuelt CSE1
- Forklaring av hva realtime betyr i HW og SW

- Troubleshooting-prosedyrer for de vanligste feilene
- Implementere “fail to zero” for når kommunikasjonen avbrytes.
- legge til IMU/gyro på båten

H Software needed

- Matlab
- Labview
- LabVIEW development system
- LabVIEW Real-Time Module
- LabVIEW FPGA Module (recommended)
- NI-RIO driver
- VeriStand