

FINE GRINDING HAMMER MILL

INDUSTRIAL PROCESS SOLUTIONS

HIGH CAPACITY GRINDING HIGH QUALITY FEED

FEATURES

- Wide capacity range
- Maximum flexibility and variety
- Quality assured Grade A performance
- Quiet, vibration free operation
- Low investment, operational and maintenance costs
- High efficiency
- Simple startup and compact design
- Spare parts and widespread customer service



FISH



PETS



FINE GRINDING HAMMER MILL



Micronized mills are convenient for grinding fish feed, pet food and other materials which need to be fine-grained, in large capacity production. Micronized mills' grinding chambers are in 650mm diameter, have 1200 mm width to 1000 mm lenght. Operation speed is 3000/3600 RPM. Mills with fine-graining equipment can provide high quality feed in large capacities, while protecting the nutritional value of the feed with their low operating temperatures.

Magnetic seperator in the tank assures that foreign materials won't pose a fire hazard or harm the chamber itself. It provides the maximum operating safety.

The grain material is sent to the mill by twin feeder screws. To assure the operational safety, the twin feeder screws send the material in correspondence to the electrical engines' power consumption.

AREAS OF USAGE

- Aqua feed facilities
- Pet food facilities

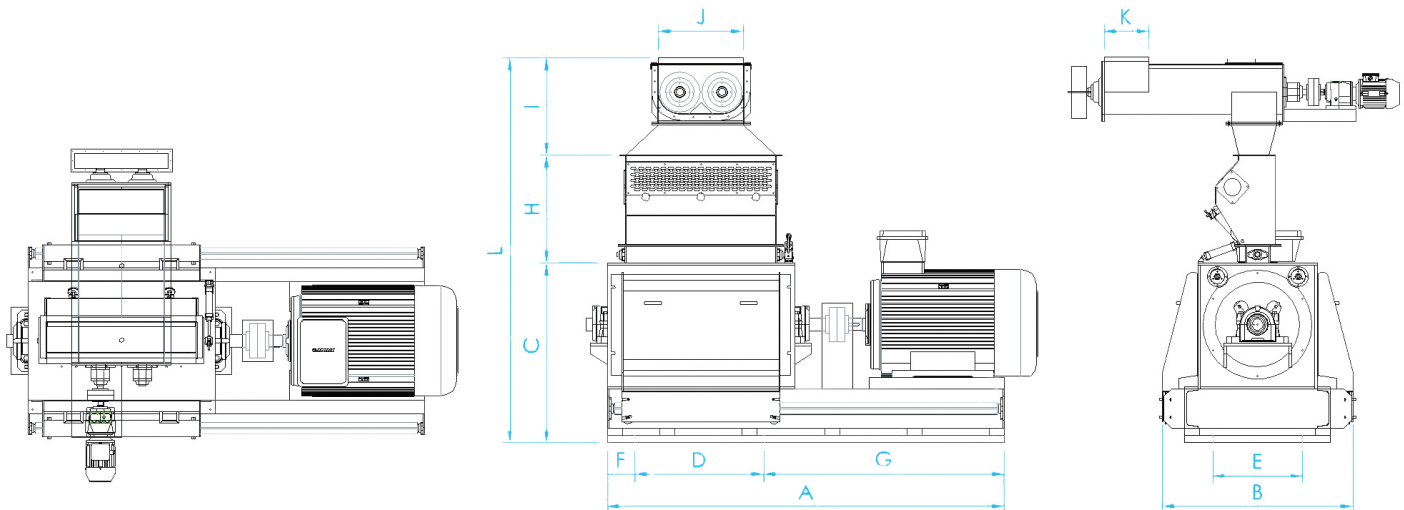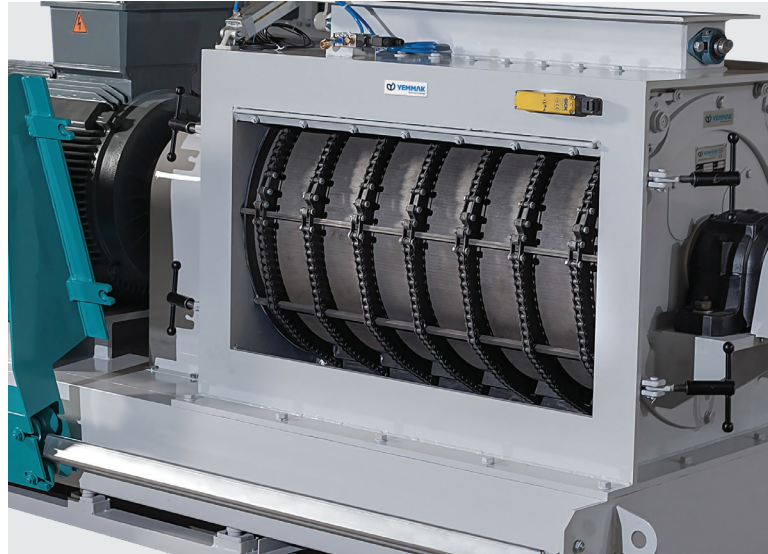

MODEL	DIMENSIONS (mm)											CAPACITY* (ton/h)	ENGINE (kw)	SCREEN AREA (dm ²)	AMOUNT OF AIR NEEDED FOR ASPIRATION (m ³ /min)
	A	B	C	D	E	F	G	H	I	J	K				
CDEG 650x1000	2650	1275	1200	860	600	185	1605	720	648	566	300	8	110-250	140	6500
CDEG 650x1200	2850	1275	1200	1060	600	185	1605	720	648	566	300	12	200-315	160	9000

* The capacities are calculated for Ø1 mm screen.