

STANDARD DEPARTURE CHART - INSTRUMENT

RJFO / OITA

RNAV SID

EBOSHI TWO DEPARTURE

RNAV1

Note 1) DME/DME/IRU or GNSS required.
 ※ The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.
 2) RADAR service required.

Critical DME

—

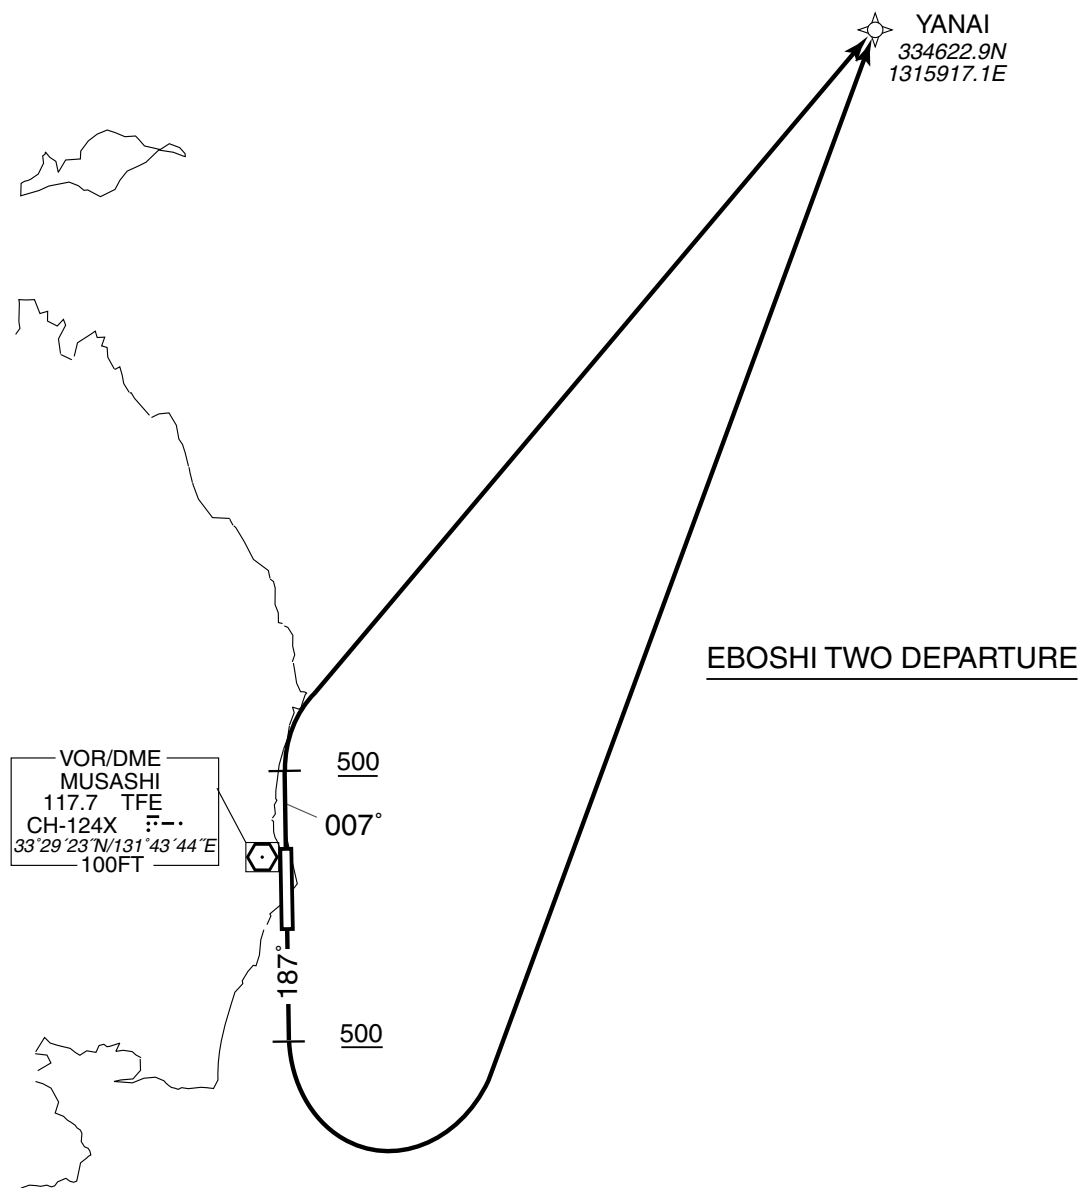
DME GAP

RWY01 : DER ~ 19NM to YANAI
 RWY19 : DER ~ 26NM to YANAI

Inappropriate Navaids

See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

VAR 7°W (2014)

EBOSHI TWO DEPARTURE

RWY01 : Climb on HDG007° at or above 500FT, turn right direct to YANAI.

RWY19 : Climb on HDG187° at or above 500FT, turn left direct to YANAI.

Note RWY01 : 5.0% climb gradient required up to 500FT.

OBST ALT 266FT located at 2.5NM 351° FM end of RWY01.

STANDARD DEPARTURE CHART - INSTRUMENT

RJFO / OITA

RNAV SID

EBOSHI TWO DEPARTURE

RWY01

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	007 (000.4)	-7.0	—	—	+500	—	—	RNAV1
002	DF	YANAI	—	—	-7.0	—	R	—	—	—	RNAV1

RWY19

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	187 (180.4)	-7.0	—	—	+500	—	—	RNAV1
002	DF	YANAI	—	—	-7.0	—	L	—	—	—	RNAV1