

STANDARD DEPARTURE CHART - INSTRUMENT


RJDC / YAMAGUCHI-UBE

RNAV SID

HIMESHIMA ONE DEPARTURE

Basic RNP1

Note GNSS required.

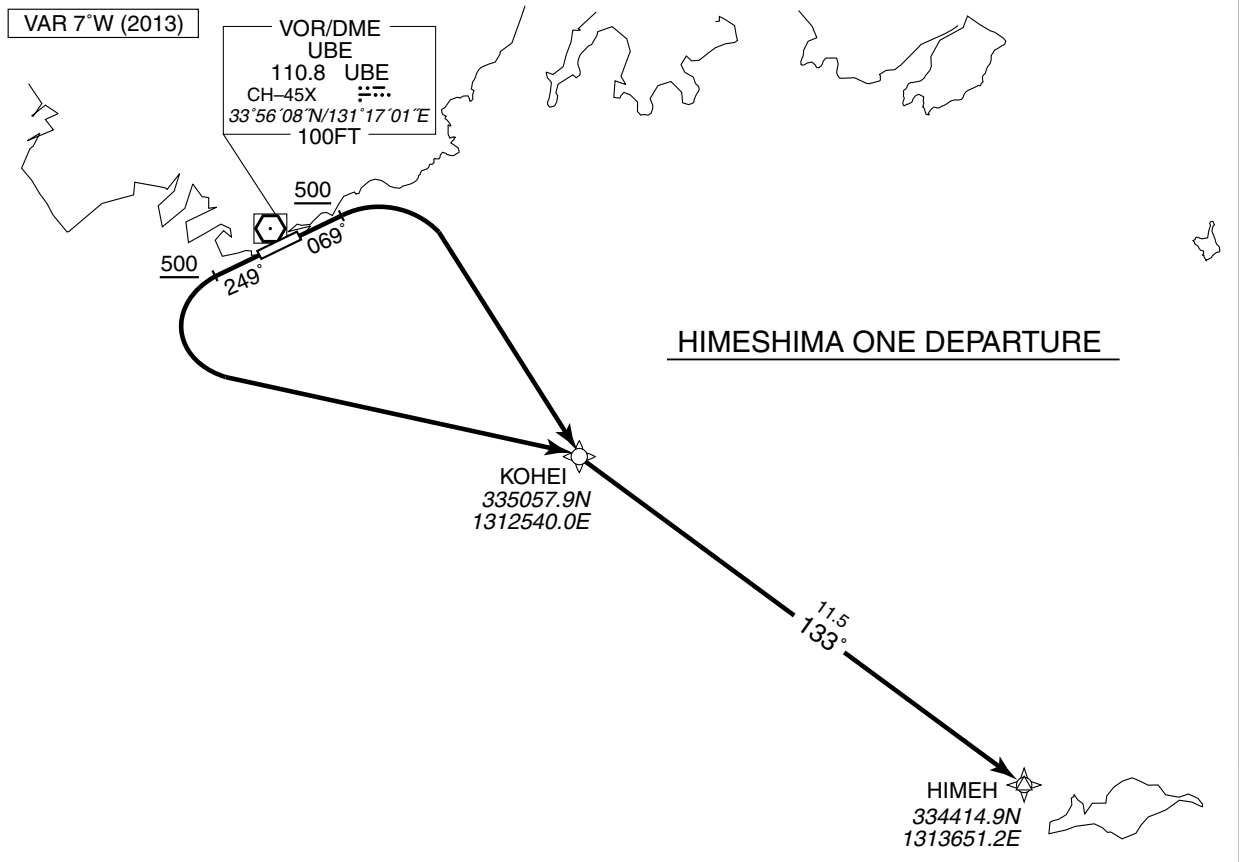HIMESHIMA ONE DEPARTURE

RWY07 : Climb on HDG 069° at or above 500FT, turn right direct to KOHEI, to HIMEH.

RWY25 : Climb on HDG 249° at or above 500FT, turn left direct to KOHEI, to HIMEH.

HIMESHIMA ONE DEPARTURE

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	069 (062.2)	-7.1	—	—	+500	—	—	Basic RNP1
002	DF	KOHEI	—	—	-7.1	—	R	—	—	—	Basic RNP1
003	TF	HIMEH	—	133 (125.8)	-7.1	11.5	—	—	—	—	Basic RNP1

RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	249 (242.2)	-7.1	—	—	+500	—	—	Basic RNP1
002	DF	KOHEI	—	—	-7.1	—	L	—	—	—	Basic RNP1
003	TF	HIMEH	—	133 (125.8)	-7.1	11.5	—	—	—	—	Basic RNP1

STANDARD DEPARTURE CHART - INSTRUMENT


RJDC / YAMAGUCHI-UBE

RNAV TRANSITION

ABARTO TRANSITION			RNAV 1
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	—	
	DME GAP	—	
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

VAR 7°W (2012)

ABARTO TRANSITION

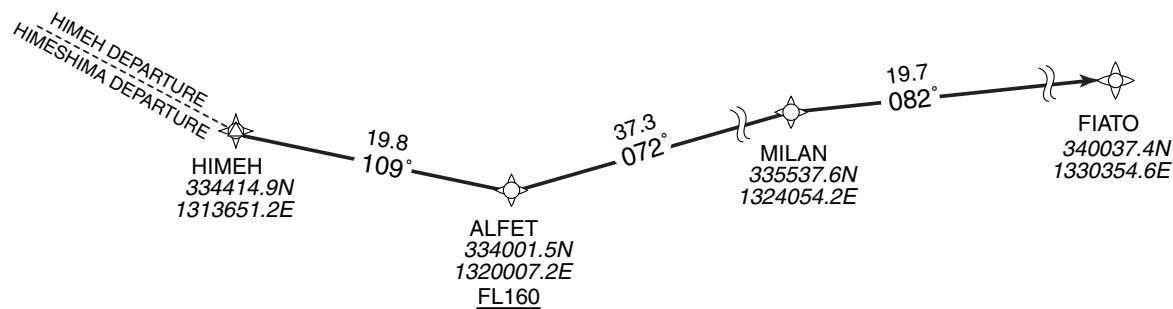

ABARTO TRANSITION

From HIMEH, to ALFET at or above FL160, to MILAN, to FIATO.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	HIMEH	—	—	-7.1	—	—	—	—	—	RNAV1
002	TF	ALFET	—	109 (102.2)	-7.1	19.8	—	+FL160	—	—	RNAV1
003	TF	MILAN	—	072 (065.1)	-7.1	37.3	—	—	—	—	RNAV1
004	TF	FIATO	—	082 (075.2)	-7.1	19.7	—	—	—	—	RNAV1