
STANDARD DEPARTURE CHART -INSTRUMENT

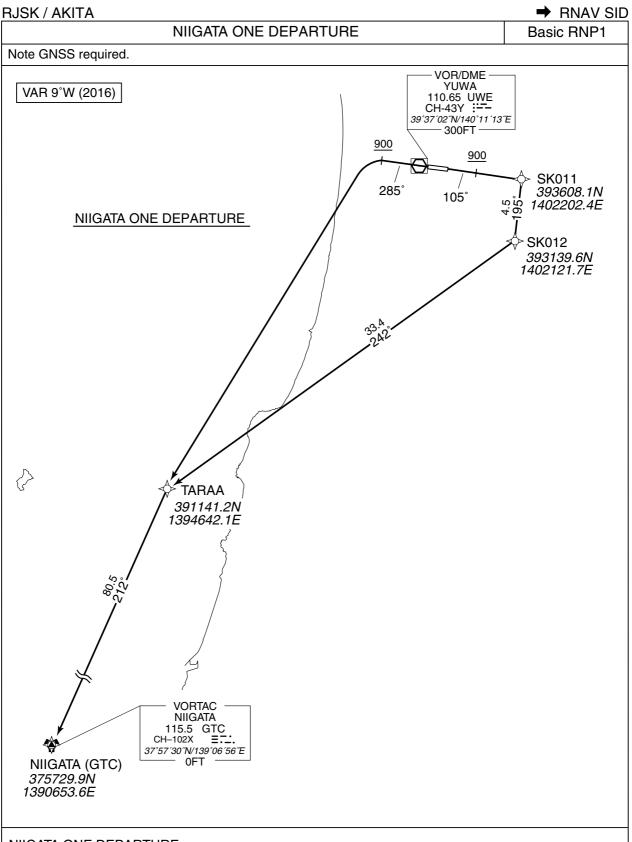

NIIGATA ONE DEPARTURE

RWY10: Climb on HDG 105° at or above 900FT, direct to SK011, to SK012, to TARAA, to GTC.

RWY28: Climb on HDG 285° at or above 900FT, turn left direct to TARAA, to GTC.

STANDARD DEPARTURE CHART -INSTRUMENT

RJSK / AKITA → RNAV SID

NIIGATA ONE DEPARTURE

RWY10

Serial	Path	Waypoint	Fly	Course	Magnetic	Distance	Turn	Altitude	Speed	Vertical	Navigation
Number	Descriptor	Identifier	Over	°M(°T)	Variation	(NM)	Direction	(FT)	(KIAS)	Angle	Specification
001	VA	_	_	105 (096.6)	-8.6	_	_	+900	_	_	Basic RNP1
002	DF	SK011	_	ı	-8.6	_	_	ı	_	_	Basic RNP1
003	TF	SK012	_	195 (186.7)	-8.6	4.5	_	ı	_	_	Basic RNP1
004	TF	TARAA	_	242 (233.5)	-8.6	33.4	-	1	_	_	Basic RNP1
005	TF	GTC	_	212 (203.0)	-8.6	80.5	_	_	_	_	Basic RNP1

RWY28

Serial	Path	Waypoint	Fly	Course	Magnetic	Distance	Turn	Altitude	Speed	Vertical	Navigation
Number	Descriptor	Identifier	Over	$^{\circ}M(^{\circ}T)$	Variation	(NM)	Direction	(FT)	(KIAS)	Angle	Specification
001	VA	_	_	285 (276.6)	-8.6	_	_	+900	_	_	Basic RNP1
002	DF	TARAA	_	_	-8.6	_	_	-	_	_	Basic RNP1
003	TF	GTC	_	212 (203.0)	-8.6	80.5	_	_	_	_	Basic RNP1