

STANDARD ARRIVAL CHART -INSTRUMENT

RJSY / SHONAI


RNAV STAR RWY27

MOKKE ARRIVAL
SHONAI ARRIVAL

Basic RNP1

Note GNSS required.

VAR 8°W (2013)

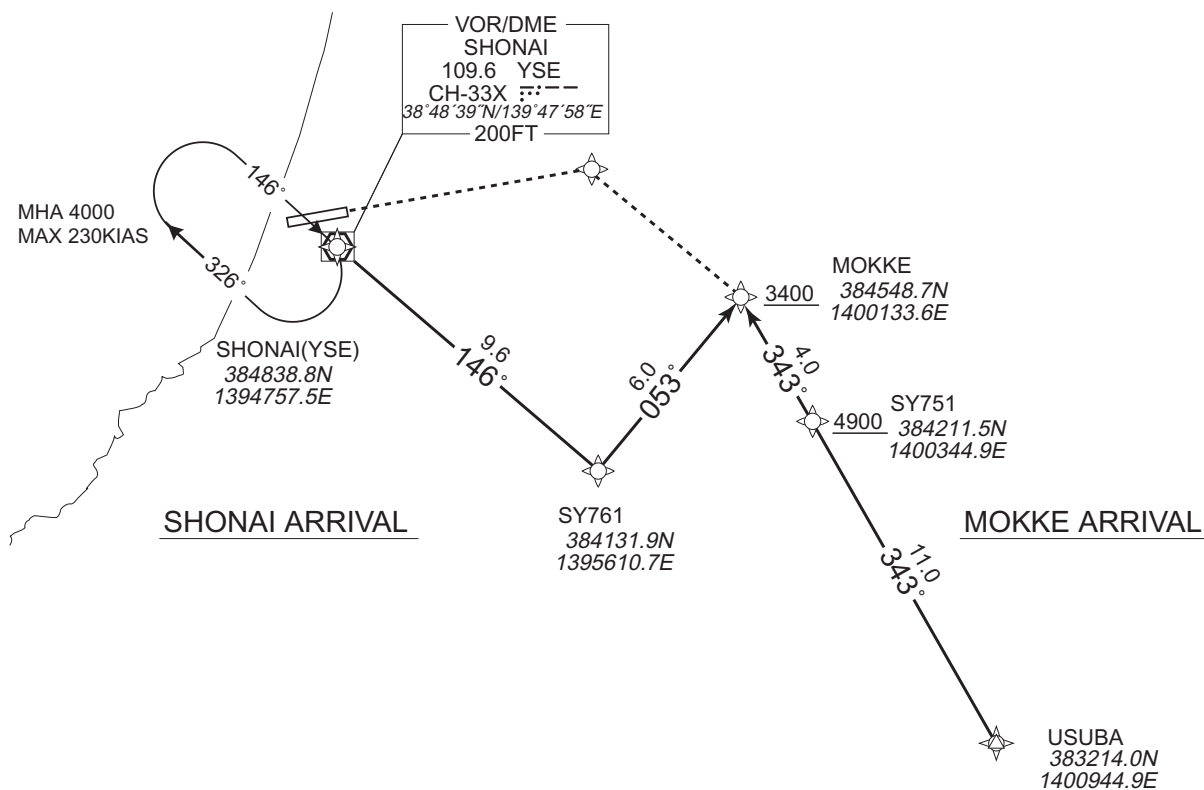

STANDARD ARRIVAL CHART -INSTRUMENT

RJSY / SHONAI

RNAV STAR RWY27

MOKKE ARRIVAL

From USUBA, to SY751 at or above 4900FT, to MOKKE at or above 3400FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	USUBA	—	—	-8.1	—	—	—	—	—	Basic RNP1
002	TF	SY751	—	343 (334.8)	-8.1	11.0	—	+4900	—	—	Basic RNP1
003	TF	MOKKE	—	343 (334.8)	-8.1	4.0	—	+3400	—	—	Basic RNP1

SHONAI ARRIVAL

From YSE, to SY761, to MOKKE at or above 3400FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	YSE	—	—	-8.1	—	—	—	—	—	Basic RNP1
002	TF	SY761	—	146 (137.9)	-8.1	9.6	—	—	—	—	Basic RNP1
003	TF	MOKKE	—	053 (044.4)	-8.1	6.0	—	+3400	—	—	Basic RNP1