

## AD 2 AERODROMES

## RJTY AD 2.1 AERODROME LOCATION INDICATOR AND NAME

## RJTY - YOKOTA

## RJTY AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	354455N1392055E
2	Direction and distance from (city)	3.5nm WNW TACHIKAWA
3	Elevation/ Reference temperature	462ft / -
4	Geoid undulation at AD ELEV PSN	Nil
5	MAG VAR/ Annual change	7.0°W(2003)/0.0°
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	USAF Yokota Airfield Management Tel:042-552-2510 ext.5-7006/5-9127 Fax: 042-552-9975 374 OSS/OSA Unit 5222 APO, AP 96328-5222
7	Types of traffic permitted(IFR/ VFR)	IFR/VFR
8	Remarks	

## RJTY AD 2.3 OPERATIONAL HOURS

1	AD Administration	2100 - 1300 Daily
2	Customs and immigration	Nil
3	Health and sanitation	Nil
4	AIS Briefing Office	H24
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	Nil
7	ATS	Control Tower : 2100-1300 daily Radar Approach control : H24
8	Fuelling	Nil
9	Handling	Nil
10	Security	Nil
11	De-icing	Nil
12	Remarks	Nil

**RJTY AD 2.4 HANDLING SERVICES AND FACILITIES**

1	Cargo-handling facilities	Nil
2	Fuel/ oil types	Nil
3	Fuelling facilities/ capacity	Nil
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

**RJTY AD 2.5 PASSENGER FACILITIES**

1	Hotels	Nil
2	Restaurants	Nil
3	Transportation	Nil
4	Medical facilities	Nil
5	Bank and Post Office	Nil
6	Tourist Office	Nil
7	Remarks	Nil

**RJTY AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

1	AD category for fire fighting	Nil
2	Rescue equipment	Nil
3	Capability for removal of disabled aircraft	Nil
4	Remarks	Nil

**RJTY AD 2.7 SEASONAL AVAILABILITY-CLEARING**

1	Types of clearing equipment	Nil
2	Clearance priorities	Nil
3	Remarks	Nil

**RJTY AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA**

1	Apron surface and strength	To be issued later
2	Taxiway width, surface and strength	To be issued later
3	ACL and elevation	Not available
4	VOR checkpoints	Not available
5	INS checkpoints	Not available
6	Remarks	

**RJTY AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS**

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Nil
2	RWY and TWY markings and LGT	RWY : 18/36 (Marking) RWY centerline, RWY threshold, Fixed distance, TDZ, RWY side stripes, arresting gear, assault zone. (LGT) high intensity RWY, high intensity centerline, assault zone lighting. TWY: (Marking) TWY centerline, RWY hold, TWY side stripes, enhanced centerline markings, TWY designation, ILS hold signs (LGT) TWY edge LGT, RWY hold sign, ILS hold signs
3	Stop bars	Nil
4	Remarks	(LGT) Apron flood LGT

**RJTY AD 2.10 AERODROME OBSTACLES**

In approach/TKOF areas					
RWY/Area affected	Obstacle type	Coordinates	Elevation	Markings/ LGT	Remarks
Nil					

In circling area and at AD				
Obstacle type	Coordinates	Elevation	Markings/ LGT	Remarks
Nil				

## RJTY AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	YOKOTA
2	Hours of service MET Office outside hours	Nil
3	Office responsible for TAF preparation Periods of validity	Nil
4	Trend forecast Interval of issuance	Nil
5	Briefing/ consultation provided	Nil
6	Flight documentation Language(s) used	Nil
7	Charts and other information available for briefing or consultation	Nil
8	Supplementary equipment available for providing information	Nil
9	ATS units provided with information	Nil
10	Additional information(limitation of service, etc.)	Nil

## RJTY AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCN) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
18	To be issued later	3353x61	PCN 77/R/C/W/T Concrete	354547.54N 1392043.44E	463FT
36		3353x61	PCN 77/R/C/W/T Concrete	354401.67N 1392105.64E	430FT
Slope of RWY		Strip Dimensions(M)		Remarks	
7		10		12	
Nil		Nil			

## RJTY AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
18	3353	3353	3353	3353	
36	3353	3353	3353	3353	

## RJTY AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
18			PAPI (*1)					
36			PAPI					
Remarks								
10								
High intensity approach light and sequence flashers(SFLs) available for RWY 18/36. SFLs and PAPIs are step capable (the lights have varying intensity levels depending on weather conditions). (*1)GP not coincidental with RWY18 ILS								

## RJTY AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	ABN: 354447.9N/1392037.4E, White/Green EV10sec, HN&HO
2	LDI location and LGT Anemometer location and LGT	Nil
3	TWY edge and center line lighting	Nil
4	Secondary power supply/ switch-over time	Nil
5	Remarks	WDI LGT, OBST LGT

## RJTY AD 2.16 HELICOPTER LANDING AREA


To be issued later
--------------------

## RJTY AD 2.17 ATS AIRSPACE

Designation and lateral limits		Vertical limits (ft)	Airspace classifica- tion	ATS unit call sign Language	Remarks
1		2	3	4	6
YOKOTA CTR	Area within a radius of 5nm of ARP (35°45'N/ 139°21'E), excluding Tachikawa and Iruma CTR.	Up to but not including 3000 AGL	D	YOKOTA TOWER English	
YOKOTA ACA	SEE below Figure		E	YOKOTA APP YOKOTA DEP YOKOTA ARR English	*ACA: APPROACH CONTROL AREA
YOKOTA CLASS C AIRSPACE	SEE below Figure		C	YOKOTA APP English	Operational Hour 0600UTC- 1000UTC

横田進入管制空域  
Yokota Approach Control Area

YOKOTA CLASS C AIRSPACE  
(Operation hour : 0600UTC - 1000 UTC)

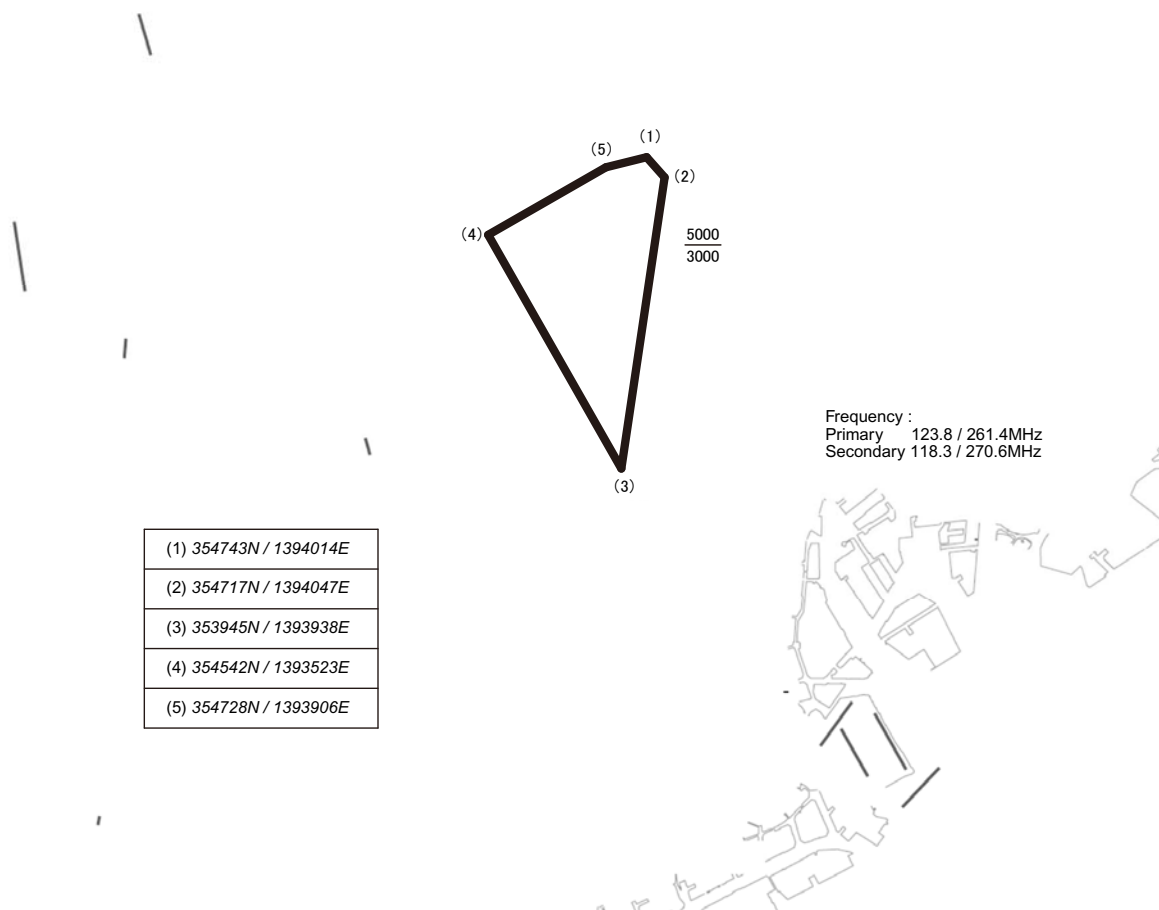

1. 空域の運用について

当該空域においては、計器飛行方式により飛行すること。  
ただし、管制機関から許可された場合を除く。

2. 許可の取得方法

1. ただし書きの許可を得る場合は、当該空域に入域する前に、横田アプローチと通信を設定した上で許可を得ること。

1. Operation of airspace

ACFT should fly by IFR in this airspace except when approved by controlling facilities.

2. Procedures for obtaining the approval

When obtaining the approval as depicted 1. ,ACFT should obtain the approval upon contact with Yokota Approach Control prior to enter this airspace.

## RJTY AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
APP	Yokota Approach Control	118.3MHz(1)(3) 123.8MHz(2) 261.4MHz(2)(3) 270.6MHz(1)(3) 120.7MHz(3) 317.85MHz(3) 243.0MHz(E) 121.5MHz(E)	H24	APP ser provided for Yokota Tachikawa, Iruma ABs and Atsugi NAS RADAR monitored. (1)ABV 5000ft to upper limits of airspace. (2)SFC TO 5000ft (3)VFR advisory ser.
DEP	Yokota Departure Control	122.1MHz 363.8MHz	H24	
TWR	Yokota Tower	134.3MHz 315.8MHz 121.5MHz(E) 243.0MHz(E)	2100 - 1300	
GND	Yokota Ground Control	133.2MHz 308.6MHz	2100 - 1300	
Clearance delivery	Yokota Clearance	131.4MHz 279.9MHz	2100 - 1300	
ATIS	Yokota Airbase	128.4MHz 281.0MHz	2100 - 1300	Maintenance Period : 2245-2315 THU
MET	Yokota Metro	344.6MHz	H24	PMSV Unusable beyond 40NM BLW FL140 210°- 330°.
GCA-ASR	Yokota Approach Control	261.4MHz 120.7MHz 118.3MHz 243.0MHz(E) 121.5MHz(E)	H24	ASR Maintenance Period ASR1800-2000 Daily Caution : Terrain rises rapidly 4NM W of AD. DO not fly BLW 8000FT W of the airfield within 25NM EXC in VFR traffic pattern.
A/G	Yokota Radio	4747KHz(1) 6738KHz(1) 8967KHz(1) 11236KHz(1) 13201KHz(1) 18008KHz(1) 13215KHz(2)(4) 6730KHz(2)(4) 292.1MHz(3)	H24	(1)SSB (2)AM (3)UHF (4) On request



## RJTY AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
TACAN (7.00°W)	YOK	1172MHz (CH-85X)	H24	354456.35N 1392100.94E	438FT	Maintenance Period: 1500 - 2100 MON-SUN Unusable: 010°-034° beyond 26NM BLW 5000FT 116°-119° beyond 18NM at all ALT 142°-143° beyond 36NM BLW 6000FT 251°-310° beyond 28NM BLW 13400FT 311°-345° beyond 32NM BLW 9800FT
ILS-LOC36	I-YOK	109.7MHz	H24	354601.03N 1392040.62E		for RWY36 BRG 357°(MAG) Maintenance Period 1900-2100 MON-THU LOC Restricted beyond 20° left of course for terrain.
ILS-GP36		109.7MHz	H24	354410.78N 1392057.60E		Maintenance Period: 1900 - 2100 TUE-FRI
ILS-LOC18	I-YAS	108.7MHz	H24	354348.72N 1392108.38E		BRG 17(MAG) Maintenance Period 1900-2100 MON-THU
ILS-GP18		108.7MHz	H24	354537.17N 1392051.67E		Maintenance Period 1900-2100 TUE-FRI

**RJTY AD 2.20 LOCAL TRAFFIC REGULATIONS**

## 1. Airport regulations

Prior Permission Required  
Non TACAN equipped ACFT, radar required for departure procedure.  
Advise ATC when making AUTOLAND/COUPLED ILS approach  
Terrain rises rapidly W of final approach course. If on vectors to final, DO NOT CROSS W of YOK R-185 or R-355.

## 2. Taxiing to and from stands

All aircraft contact ground control prior to engine start.

## 3. Parking area for small aircraft(General aviation)

Nil

## 4. Parking area for helicopters

Nil

## 5. Apron - taxiing during winter conditions

Nil

## 6. Taxiing - limitations

Copter avoid overflight of grass area between RWY end and ramp S of Delta TWY ACFT will maintain TWY CL during taxi  
OPR(300ft minimum BTN ACFT in trail)

## 7. School and training flights - technical test flights - use of runways

Nil

## 8. Helicopter traffic - limitation

Nil

## 9. Removal of disabled aircraft from runways

Nil

**RJTY AD 2.21 NOISE ABATEMENT PROCEDURES**

Nationally established quiet hour in effect at YOKOTA 1300-2100 daily, program strictly enforced.

## RJTY AD 2.22 FLIGHT PROCEDURES

## I. 横田 VFR レーダー・アドバイザリー・サービス

1. VFR レーダー・アドバイザリー・サービス（パイロットに対する飛行の安全と航空機の動向に関する情報の提供）は付図に示す横田ターミナル・エリアにおいて終日利用可能である。横田ターミナル・エリアは大変混雑した空域である。レーダー・アドバイザリー・サービスの提供を受けている場合でも、他の航空機との安全な間隔の維持に関するパイロットの責任は軽減されない。また交通が輻輳する場合、VFR 機について異常な接近の可能性をすべて把握できない場合がある。パイロットは常時注意して航行すべきである。特に別図中の "High Traffic Area" においては高い警戒をすべきである。

注：横田 VFR レーダー・アドバイザリー・サービスを受けない航空機は High Traffic Area を 1, 500 ft 以下で通過することを推奨する。

2. VFR レーダー・アドバイザリー・サービスは下記の点を考慮し、可能な限り実施される。

- a) 管制官の業務量に余裕があること
- b) 通信設定ができること
- c) トランスポンダーを装備していること
- d) レーダー監視ができること（低高度を航行中の小型機は監視困難な場合がある。）

3. VFR 機は付図空域内の全域で横田アプローチ・コントロールと交信することが可能である。ただし、High Traffic Area の航行を予定する場合は、入域前に横田アプローチ・コントロールと通信設定し、下記の事項を伝えること。

- a) 航空機無線呼出符号
- b) レーダー・アドバイザリー・サービスを要求すること

(例)  
YOKOTA APPROACH CONTROL, JA1234 REQUEST RADAR TRAFFIC ADVISORIES.

注：横田アプローチ・コントロールがレーダー・トラフィック・アドバイザリーを提供できない場合は次の用語で伝えられる。交通の輻輳によりレーダー・トラフィック・アドバイザリーを提供できない場合には、パイロットは注意して航行し、可能な限り、High Traffic Area の航行は避けること。

(例)  
JA1234, YOKOTA APPROACH CONTROL, UNABLE RADAR TRAFFIC ADVISORIES.

4. 横田アプローチ・コントロールから要求があった場合、次の事項を伝えること。ただし、必要でない事項もあるので、横田アプローチ・コントロールからの要求が無い事項は伝えないこと。

- a) 航空機の型式
- b) 巡航高度及び離脱高度
- c) 飛行の方向または目的地（ただし、「目的地」については、付図空域内の空港等が目的地の場合に限る）
- d) 航空保安無線施設または空港等からの位置

## I. Yokota VFR Radar Advisory Service

1. VFR Radar Advisory Service is available 24-hours a day in the Yokota Terminal Area as depicted in the attached chart. Yokota is an extremely congested airspace. Receiving VFR Radar Advisories does not relieve the pilot of any responsibility to "see and avoid" other traffic. Yokota controllers may be too busy to see all possible conflicts for VFR traffic. Pilots should maintain high vigilance at all times, especially in the "High Traffic Area" depicted.

Note: It is recommended aircraft that choose not to call Yokota for VFR Radar Advisory Service maintain an altitude at or below 1,500ft (MSL) when transitioning the High Traffic Area.

2. VFR Radar Advisory Service (advice and information from the radar facility to assist pilots with information on radar observed traffic) will be provided to the maximum extent possible consistent with:

- a) ATC workload
- b) Two-way radio communication
- c) Aircraft Transponder equipment
- d) Radar reception (small aircraft at low altitudes may be difficult to see)

3. VFR aircraft may call Yokota anywhere in the attached area, but aircraft planning to fly through the High Traffic Area should contact Yokota Approach prior to entering that area. Provide only the following information on initial call-up:

- a) Call sign.
- b) A request for Radar Traffic Advisories.

(Example)  
YOKOTA APPROACH CONTROL, JULIET ALFA  
1-2-3-4 REQUEST RADAR TRAFFIC ADVISORIES.

Note: If Yokota is unable to provide Radar Traffic Advisories, they shall inform the aircraft. If Yokota is too busy to provide Radar Traffic Advisories, aircraft should maintain high vigilance and, if possible, avoid the High Traffic Area.

(Example)  
JULIET ALFA 1-2-3-4, YOKOTA APPROACH CONTROL,  
UNABLE RADAR TRAFFIC ADVISORIES.

4. When requested by Yokota, provide the following information. Yokota may not need all of this information immediately. Do not provide unless requested by the controller.

- a) Aircraft type
- b) Altitude leaving and Altitude to maintain.
- c) Direction of flight or destination airport (if within the Yokota VFR Advisory Service Area)
- d) Position reference a NAVAID or airport.

(例)

Yokota: JA1234, YOKOTA ARRIVAL, SQUAWK 5-4-2-2.

JA1234: JA1234 SQUAWK 5-4-2-2.

Yokota: JA1234, RADAR CONTACT 5 MILES NORTH OF EDA  
RADIO BEACON. SAY TYPE AIRCRAFT,  
ALTITUDE LEAVING AND ALTITUDE TO MAINTAIN.JA1234: JA1234, CESSNA ONE SEVEN TWO, LEAVING TWO  
THOUSAND FIVE HUNDRED, CLIMBING TO FOUR  
THOUSAND FIVE HUNDRED.

Yokota: JA1234 SAY DESTINATION OR ROUTE OF FLIGHT.

JA1234: JA1234 INBOUND CHOFU.

または

JA1234: JA1234 SOUTH BOUND

5. レーダー・アドバイザリー・サービスを受けて付図に  
示す管制圏を飛行しようとする場合、その意思を当該管  
制圏に入域する前に横田アプローチ・コントロールに通  
報しなければならない。横田アプローチ・コントロール  
は当該要求を承認するか、適切な飛行場管制所との通信  
設定を指示するか、又は、交通の状況により要求を承認  
しないことがある。

(Example)

Yokota: JULIET ALFA 1-2-3-4, YOKOTA ARRIVAL,  
SQUAWK 5-4-2-2.

JA 1234: JULIET ALFA 1-2-3-4 SQUAWK 5-4-2-2.

Yokota: JULIET ALFA 1-2-3-4, RADAR CONTACT  
5 MILES NORTH OF EDA RADIO BEACON.  
SAY TYPE AIRCRAFT, ALTITUDE LEAVING  
AND ALTITUDE TO MAINTAIN.JA 1234: JULIET ALFA 1-2-3-4, CESSNA ONE SEVEN  
TWO, LEAVING TWO THOUSAND FIVE  
HUNDRED, CLIMBING TO FOUR THOUSAND  
FIVE HUNDRED.Yokota: JULIET ALFA 1-2-3-4 SAY DESTINATION OR  
ROUTE OF FLIGHT.

JA 1234: JULIET ALFA 1-2-3-4 INBOUND CHOFU.

Or


JA 1234: JULIET ALFA 1-2-3-4 SOUTH BOUND

5. Aircraft receiving VFR Radar Advisory Service who wish  
to fly through one of the control zones depicted in the  
attachment shall inform Yokota Approach of this intention  
prior to entering the control zone. Yokota may approve the  
request, or give a frequency change to the appropriate  
tower, or disapprove the request (as determined by traffic).

## YOKOTA VFR RADAR ADVISORY SERVICE AREA

CALL YOKOTA APPROACH CONTROL ON:

- (1) SFC to 5500: 120.7MHz
- (2) 6000 to FL175: 118.3MHz

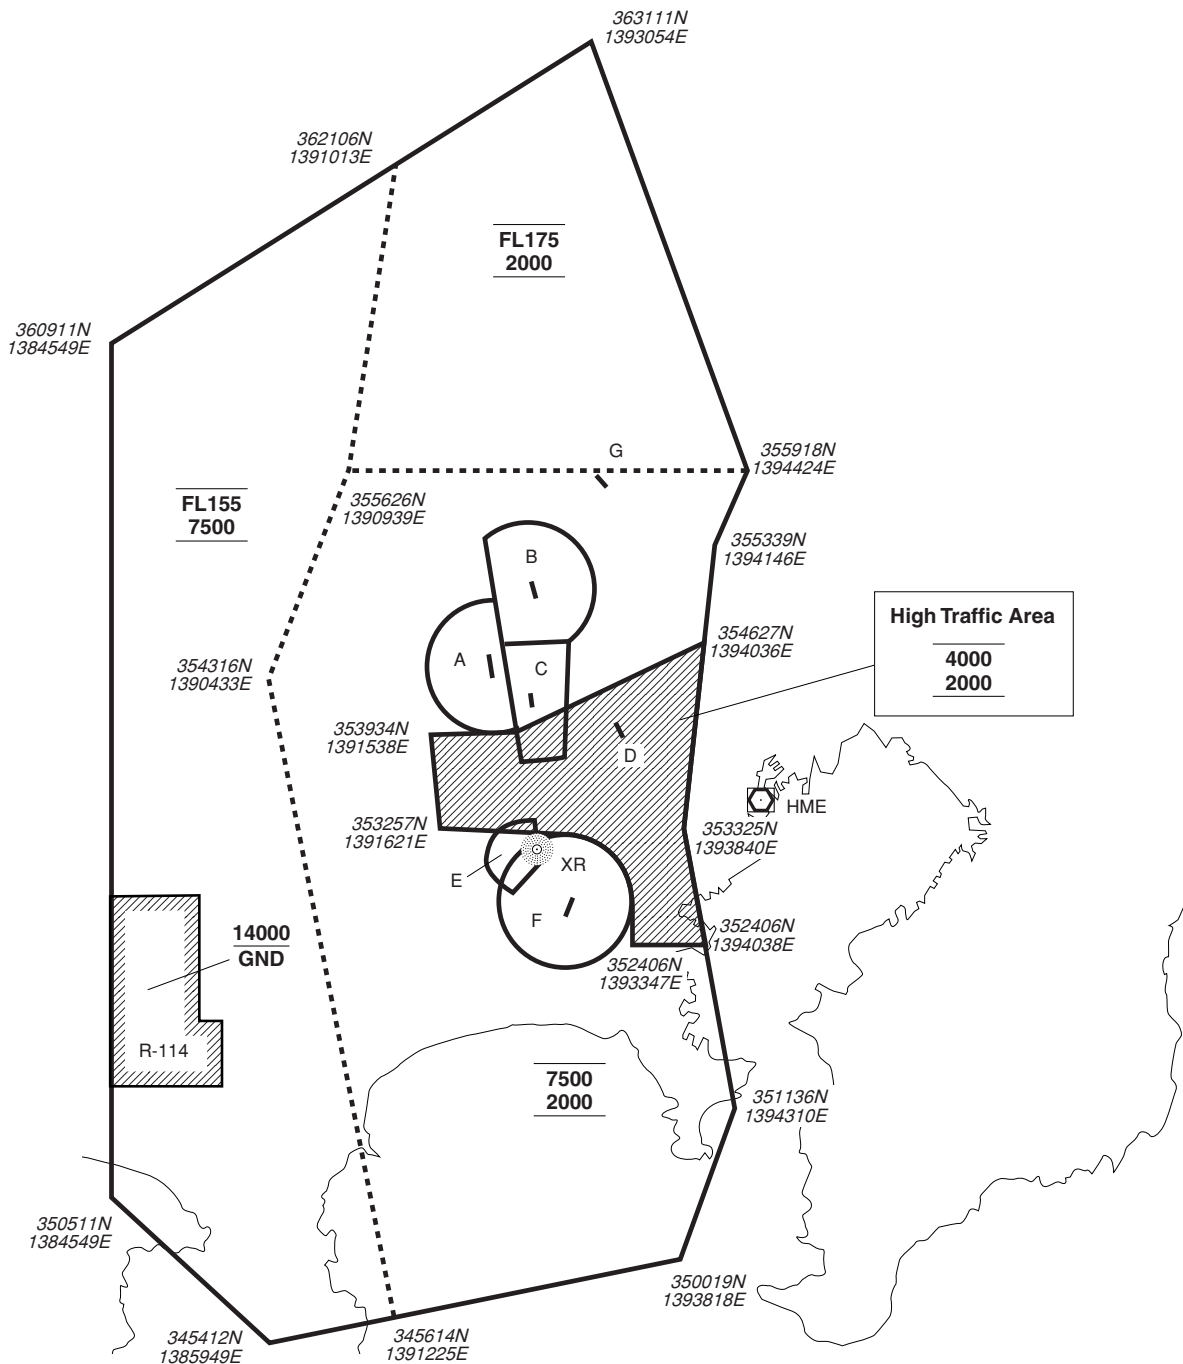

Control Zone	COM(MHz)
A. RJTY	SFC-3000 134.3
B. RJTJ	SFC-6000 122.05
C. RJTC	SFC-3000 118.85
D. RJTF	none 130.8
E. RJTR	SFC-1700 122.5
F. RJTA	SFC-6000 126.2
G. Honda	none 130.75

## II. WX MINIMA CONCERNING ASR APCH PROCEDURE

	<u>RWY</u>	<u>GS/TCH/RPI</u>	<u>CAT</u>	<u>DH/ MDA-VIS</u>	<u>HAT/HATh HAA</u>	<u>CEIL-VIS</u>
ASR ④⑥	18		AB	1120/40	658	(700-¾)
			CDE	1120-1⅜	658	(700-1⅜)
	36		AB	1160/40	730	(700-¾)
			CDE	1160-1⅝	730	(700-1⅝)
C CIR ⑤⑥	18		AB	1120-1¼	658	(700-1¼)
			C	1240-2¼	778	(800-2¼)
			D	1380-3	918	(1000-3)
			E	1580-3	1118	(1200-3)
	36		AB	1160-1¼	698	(700-1¼)
			C	1240-2¼	778	(800-2¼)
			D	1380-3	918	(1000-3)
			E	1580-3	1118	(1200-3)

Rwy 18: When ALS inop, increase CAT AB vis to 1¼ miles, CAT CDE vis to 1⅝ miles. Rwy 36: When ALS inop, increase CAT AB vis to 1¼ miles, CAT CDE vis to 2 miles.

① CAUTION: Terrain rises rapidly west of arpt. On vectors to final, do not cross west of YOK R-185 or YOK R-355. Turn inbound on approach if no turn is received. ② Abv 5000. ③ 5000 and blw. ④ MP 1500-2100Z Mon-Fri, 2200-0000Z Sat-Sun. ⑤ Circling NA E of Rwy 18-36. ⑥ Amdt 6.

NOTE:REPRINTING DOD FLIP

## RJTY AD 2.23 ADDITIONAL INFORMATION

RWY CLSD every 3rd FRI monthly 0330-0830.

Do not mistake IRUMA AD 7NM NNE or TACHIKAWA AD 4NM ESE for YOKOTA.

Hawks frequently circle over the field, crows fly across RWY, advise ATC of hazardous bird act. Peak bird act APR-OCT Change Control Zone A. RJTY. SFC 2999

Numerous OBST on/off-base at both end of RWY are not lit.

## RJTY AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome/Heliport Chart

Standard Departure Chart- Instrument (BREEE)

Standard Departure Chart- Instrument (TIMAP)

Standard Departure Chart- Instrument (BUSYU)

Standard Departure Chart- Instrument (FISAB - RNAV)

Standard Departure Chart- Instrument (GERGE - RNAV)

Instrument Approach Chart (HI-ILS or LOC RWY18)

Instrument Approach Chart (ILS or LOC/DME RWY18)

Instrument Approach Chart (HI-ILS or LOC RWY36)


Instrument Approach Chart (ILS or LOC/DME RWY36)

Instrument Approach Chart (RNAV(GPS) RWY18)

Instrument Approach Chart (RNAV(GPS) RWY36)

RJTY / YOKOTA

AD CHART

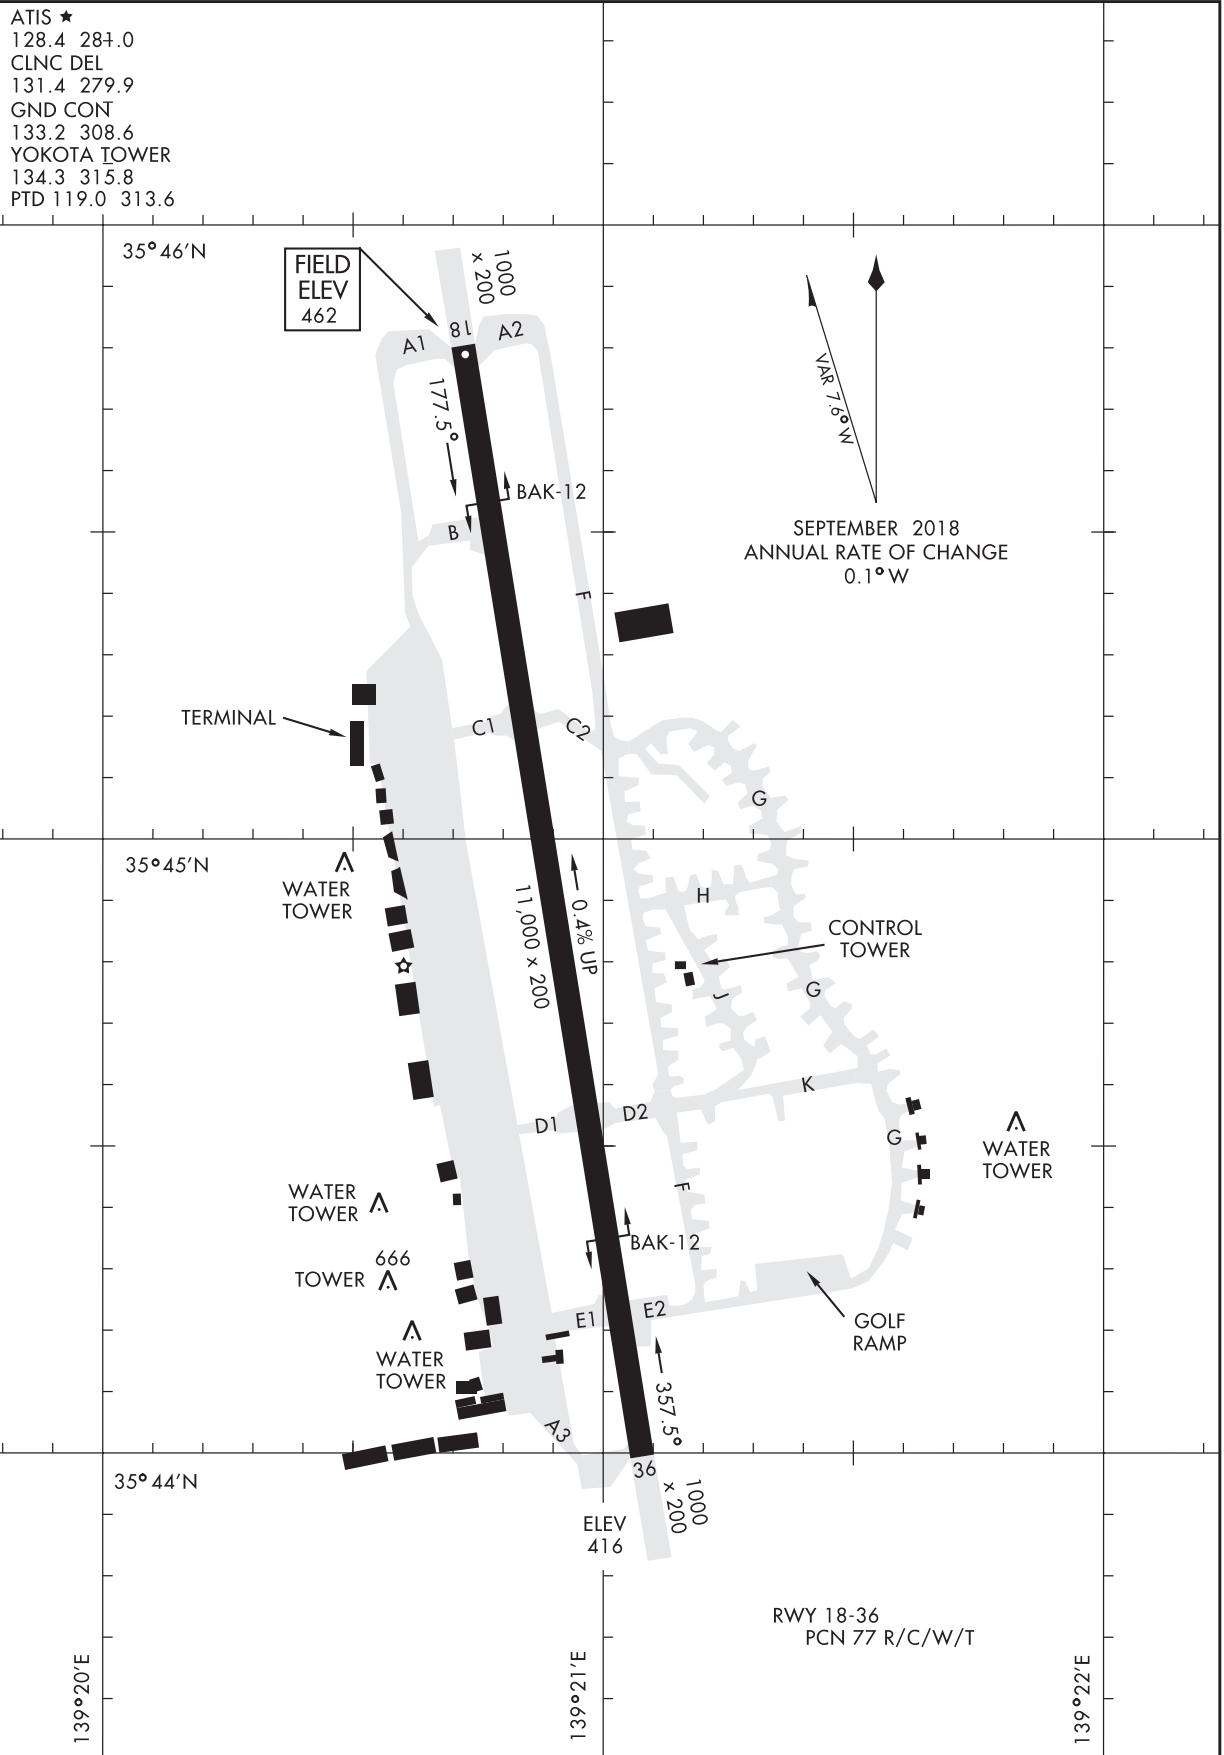


NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

BREEE FOUR DEPARTURE (OBSTACLE)

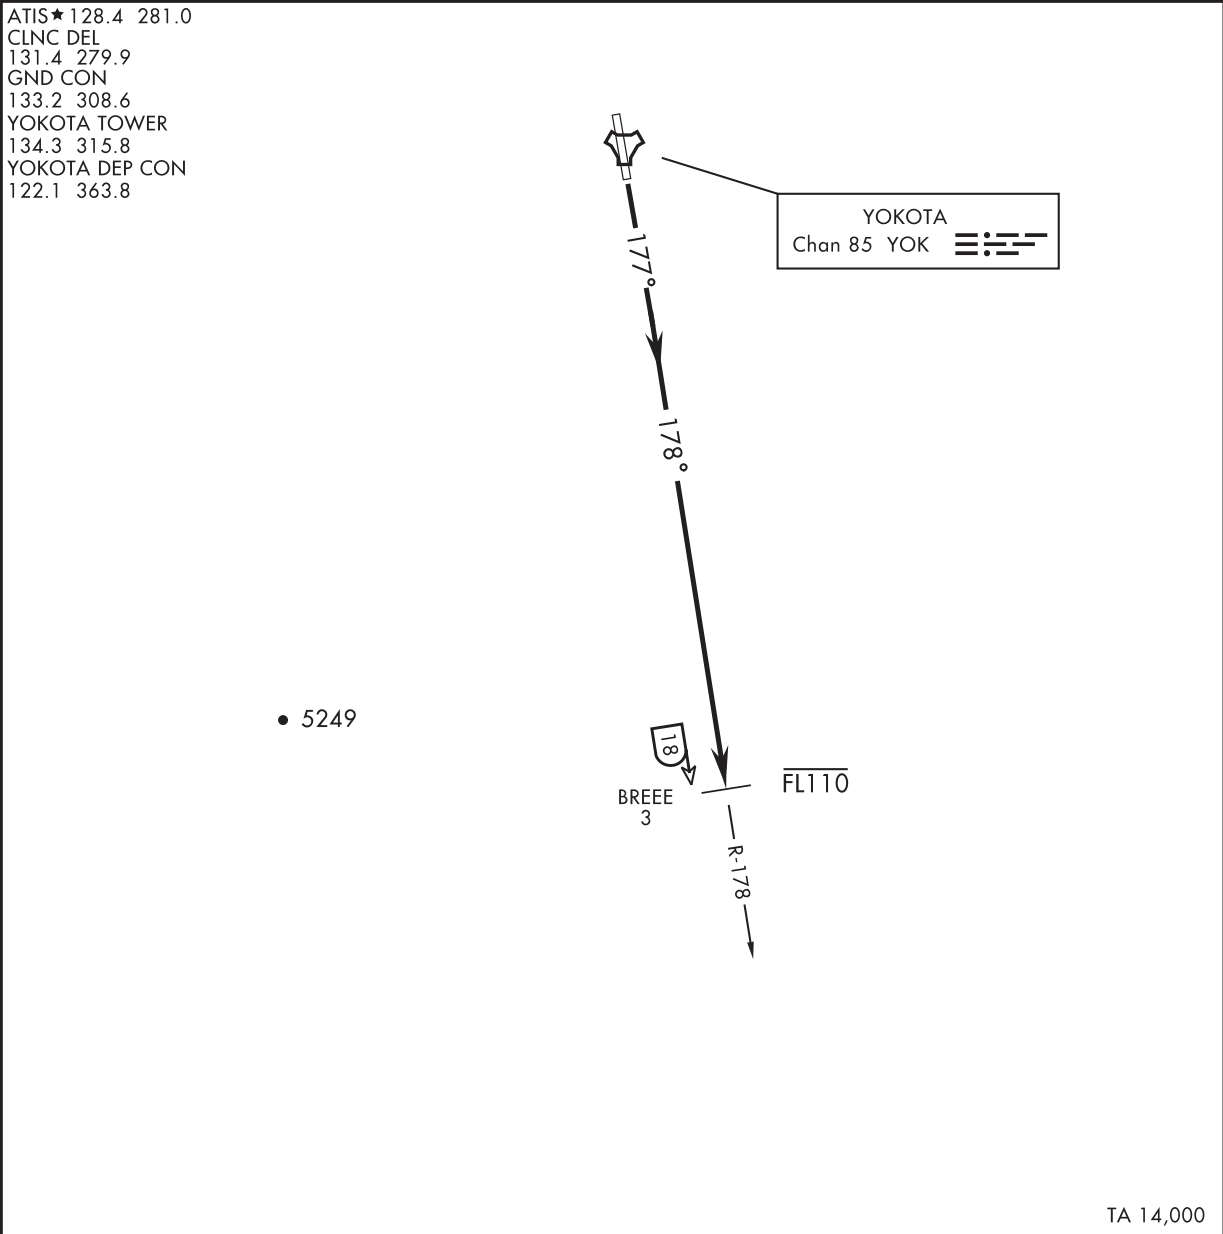

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climb to 4000, turn right to intercept YOK TACAN R-178 to BREEE.  
Cross BREEE at or below FL110. Continue as assigned by ATC.

CHANGE : Update

NOTE: REPRINTING DOD FLIP




## STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

TIMAP FOUR DEPARTURE (OBSTACLE)

ATIS ★ 128.4 281.0  
 CLNC DEL  
 131.4 279.9  
 GND CON  
 133.2 308.6  
 YOKOTA TOWER  
 134.3 315.8  
 YOKOTA DEP CON  
 122.1 363.8

SL-1458 [USAF]

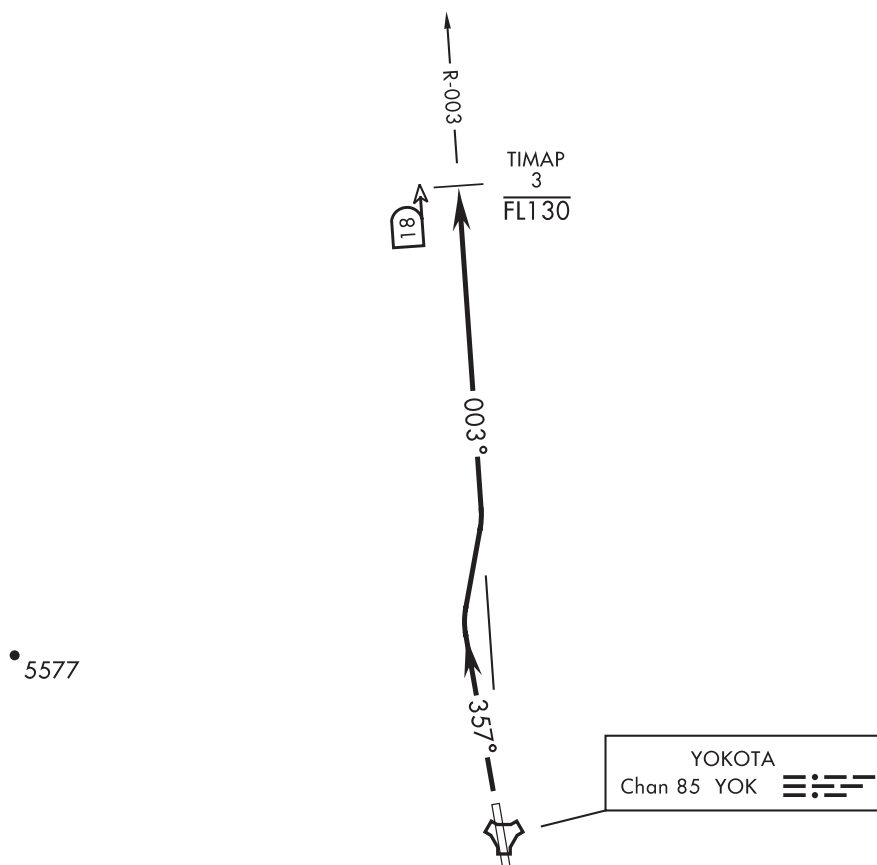

TA 14,000



## DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climb to 4000, turn right to intercept YOK TACAN R-003 to TIMAP.  
 Cross TIMAP at or below FL130. Continue as assigned by ATC.

CHANGE : Update

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

ATIS★128.4 281.0  
CLNC DEL  
131.4 279.9  
GND CON  
133.2 308.6  
YOKOTA TOWER  
134.3 315.8  
YOKOTA DEP CON  
122.1 363.8

BUSYU ONE DEPARTURE

Rwy	Knots	60	120	180	240	300	360
* 18 (a) V/V(fpm)		360	720	1080	1440	1800	2160
† 18 (b) V/V(fpm)		465	930	1395	1860	2325	2790
* 36 (c) V/V(fpm)		383	766	1149	1532	1915	2298
† 36 (b) V/V(fpm)		476	952	1428	1904	2380	2856

\* Minimum † ATC Climb Rate  
(a) to 8000  
(b) to 13,400  
(c) to 7900



DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 18: Climbing right turn to intercept YOK TACAN R-283 to BUSYU.  
Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

TAKE-OFF RWY 36: Climbing left turn to intercept YOK TACAN R-283 to BUSYU.  
Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

CHANGE : New PROC

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

FISAB TWO DEPARTURE (RNAV)

ATIS★128.4 281.0  
CLNC DEL  
131.4 279.9  
GND CON  
133.2 308.6  
YOKOTA TOWER  
134.3 315.8  
YOKOTA DEP CON  
122.1 363.8

TAKE-OFF OBSTACLES:  
(1) RWY 36, building 3043' from DER, 1311' left of centerline, 53' AGL/527' MSL.  
(2) RWY 36, building with antenna 2153' from DER, 1095' right of centerline, 76' AGL/532' MSL.  
(3) RWY 36, misc natural 1583' from DER, 640' left of centerline, 53' AGL/522' MSL.

5577

TIMAP 13,000

005° (1.5)

FISAB (2.2)

RNAV 1  
DME/DME RNP-0.3 NA

**RADAR REQUIRED**  
(for non-GPS Equipped Aircraft)

**GPS REQUIRED**

TA 14,000

▼

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 36: Climb direct FISAB, then track 005° to TIMAP. Cross TIMAP at or below 13,000 or as assigned by ATC.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT


RJTY /YOKOTA

GERGE TWO DEPARTURE (RNAV)

ATIS★128.4 281.0  
CLNC DEL  
131.4 279.9  
GND CON  
133.2 308.6  
YOKOTA TOWER  
134.3 315.8  
YOKOTA DEP CON  
122.1 363.8

TAKE-OFF OSBTACLES:

- (1) RWY 18, terrain within 15' from DER, 500' right of centerline, up to 417' MSL.
- (2) RWY 18, building 3492' from DER, 1415' right of centerline, 90' AGL/512' MSL.
- (3) RWY 18, building 6006' from DER, 1744' right of centerline, 145' AGL/529' MSL.
- (4) RWY 18, pylon 4436' from DER 1410' right of centerline, 100' AGL/492' MSL.
- (5) RWY 18, pylon 4870' from DER 1312' right of centerline, 100' AGL/502' MSL.
- (6) RWY 18, MSL tree 2217' from DER 755' left of centerline, 90' AGL/494' MSL.

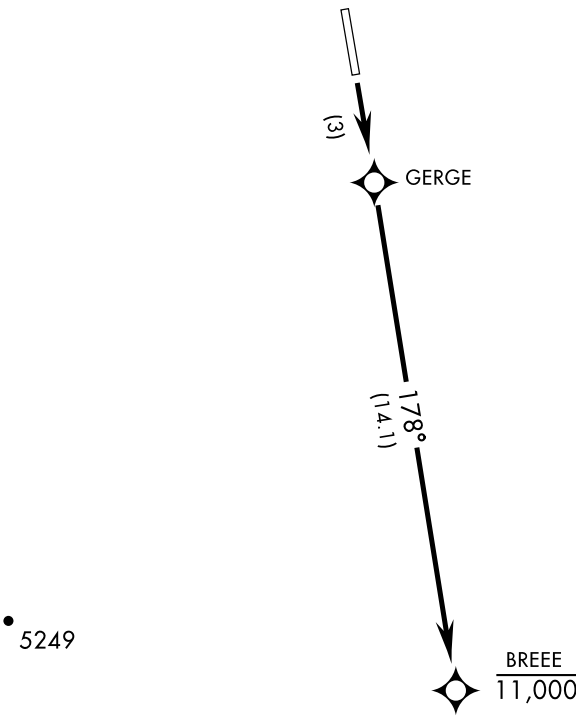

RNAV 1  
DME/DME RNP-0.3 NA

**RADAR REQUIRED**  
(for non-GPS Equipped Aircraft)

**GPS REQUIRED**

TA 14,000



DEPARTURE ROUTE DESCRIPTION


TAKE-OFF RWY 18: Climb direct GERGE, then track 178° to BREEE. Cross BREEE at or below 11,000.

NOTE: REPRINTING DOD FLIP

**INTENTIONALLY LEFT BLANK**

INSTRUMENT APPROACH CHART


RJTY / YOKOTA

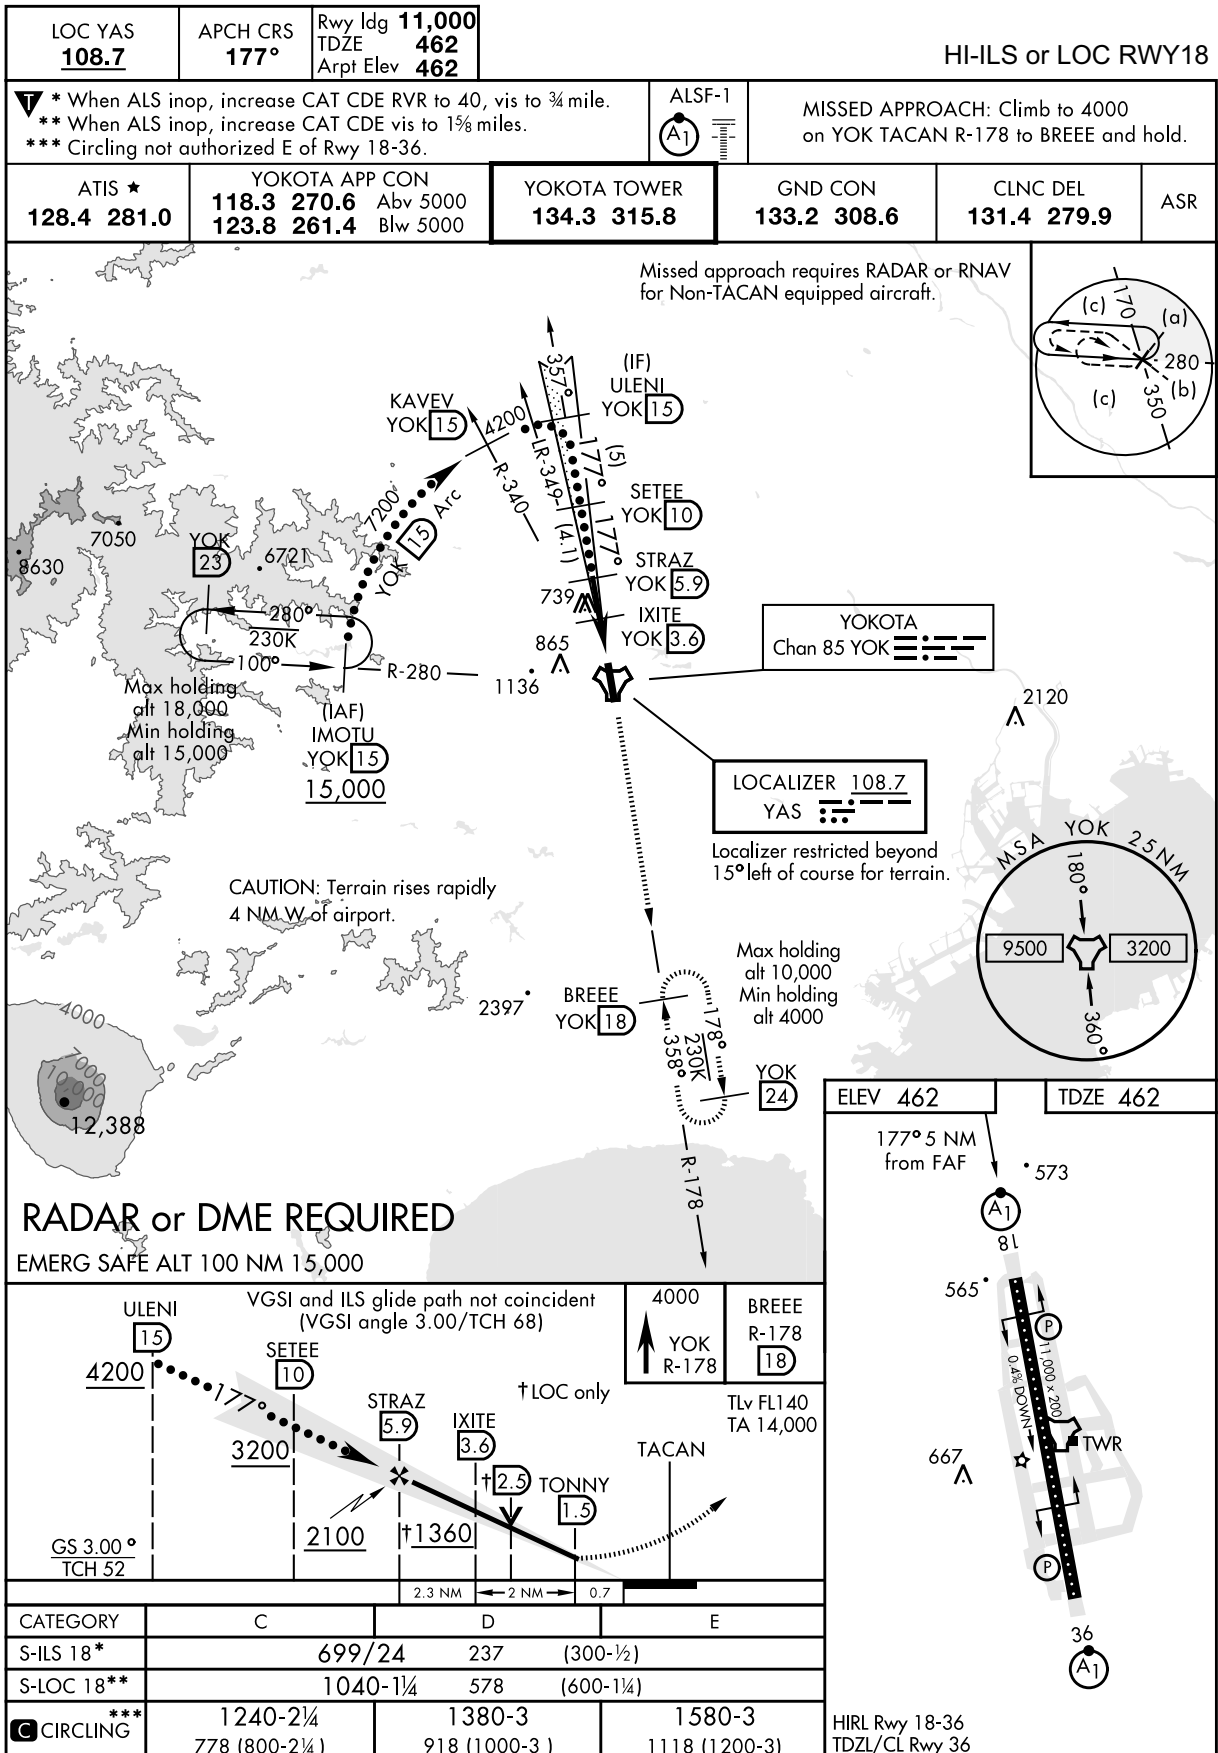

NOTE: REPRINTING DOD FLIP

## INSTRUMENT APPROACH CHART


RJTY / YOKOTA

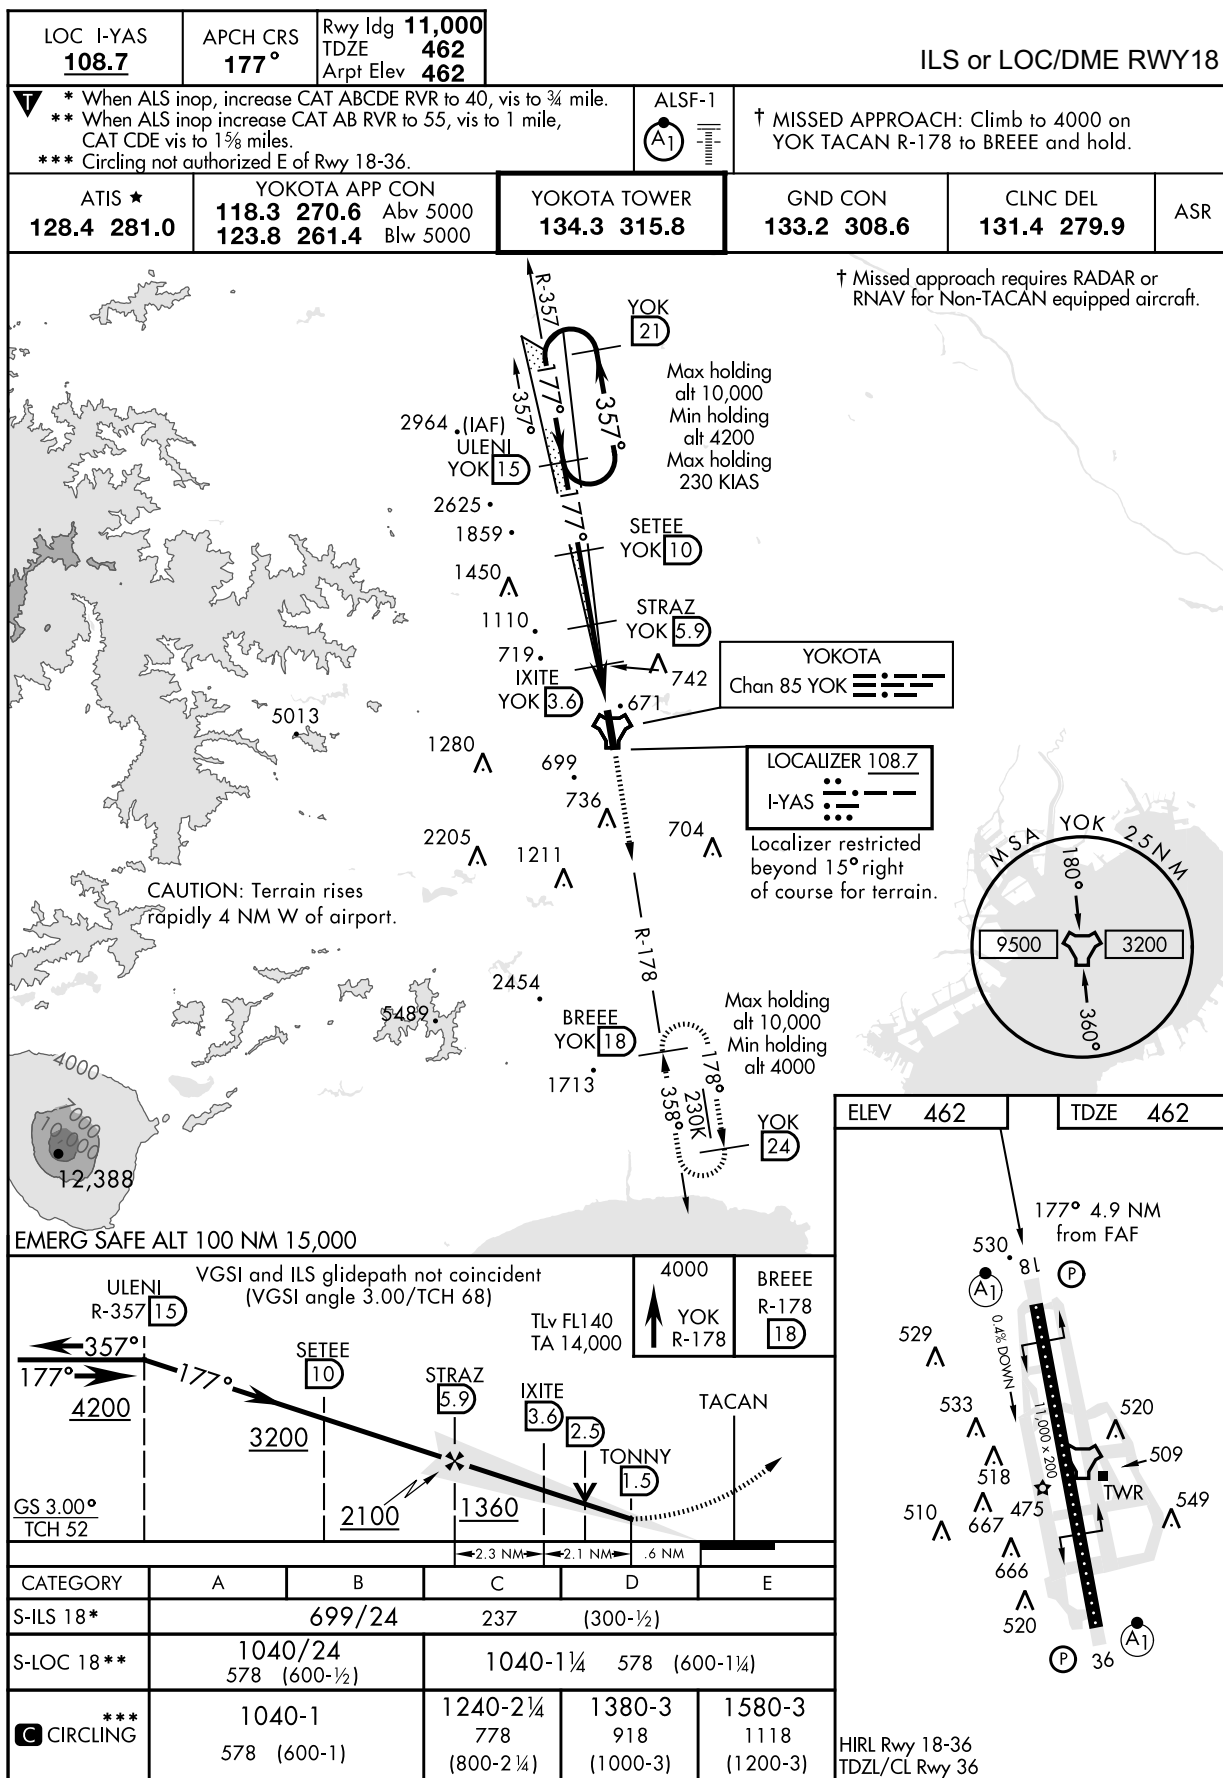

NOTE: REPRINTING DOD FLIP

## INSTRUMENT APPROACH CHART


RJTY / YOKOTA

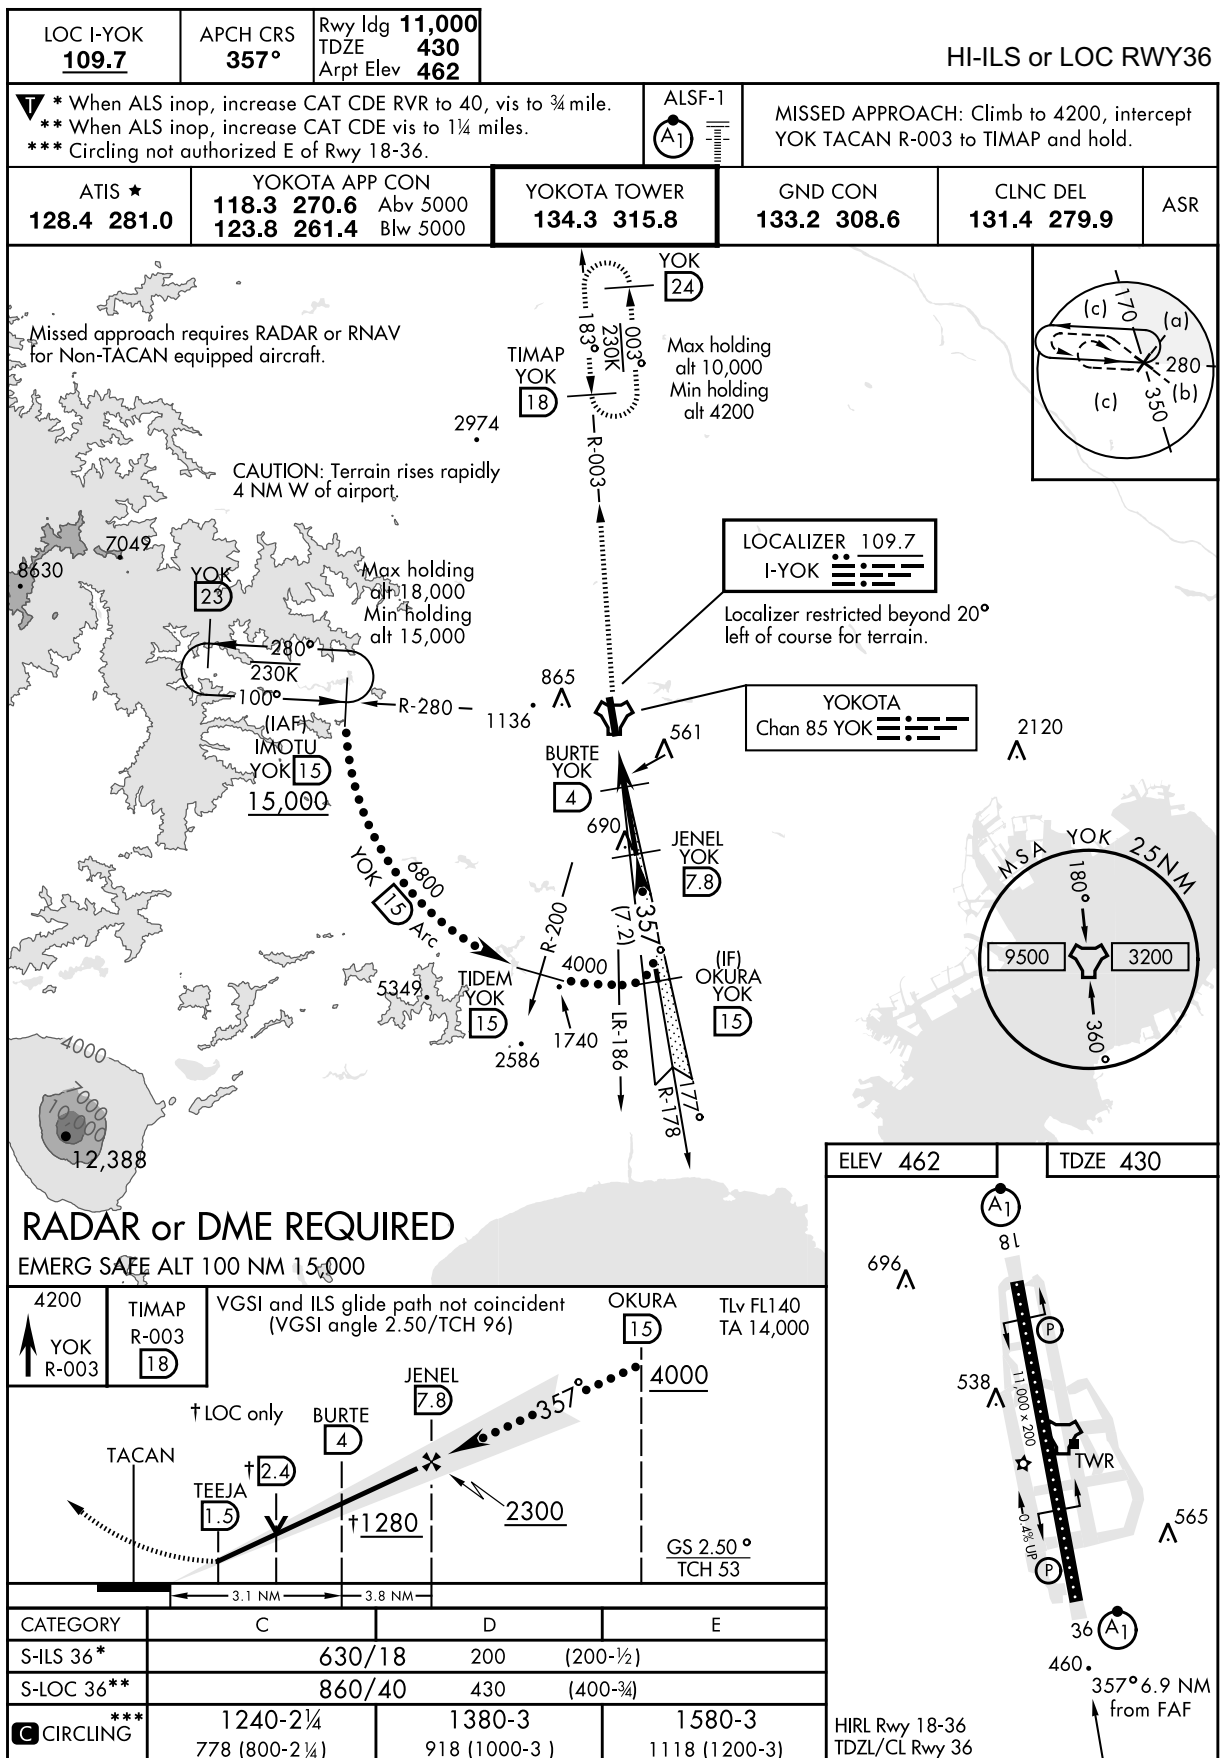



## INSTRUMENT APPROACH CHART

RJTY / YOKOTA

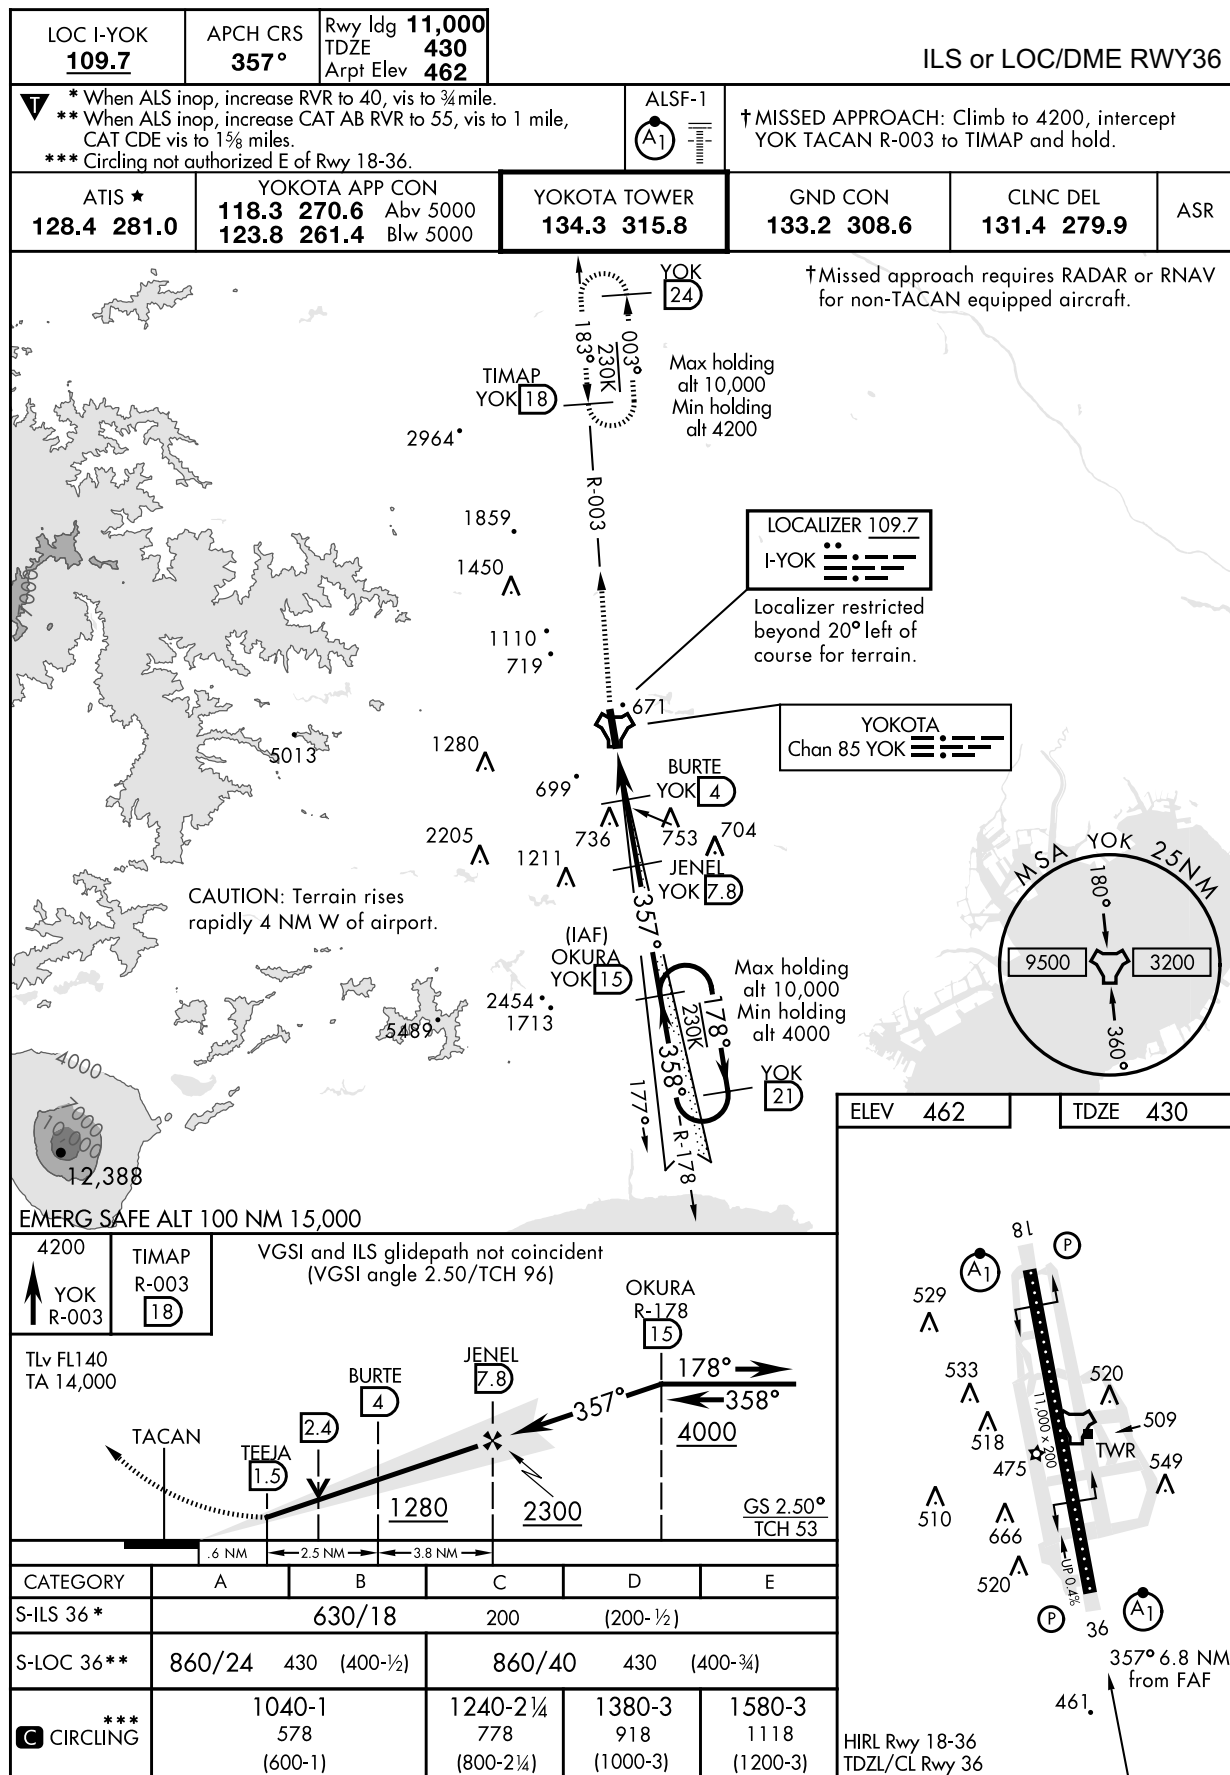

INSTRUMENT APPROACH CHART

RJTY / YOKOTA

APCH CRS <b>177°</b>	Rwy ldg <b>11,000</b> TDZE <b>462</b> Arpt Elev <b>462</b>
-------------------------	------------------------------------------------------------------

RNAV (GPS) RWY18

<p><b>▽</b> * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 3/4 miles. ** Circling not authorized E of Rwy 18-36.</p>		<p>ALSIF-1 </p>	<p>MISSED APPROACH: Climb to 4000 direct MESTR WPT and hold.</p>		
<p>ATIS ★ <b>128.4 281.0</b></p>	<p>YOKOTA APP CON <b>118.3 270.6</b> Abv 5000 <b>123.8 261.4</b> Blw 5000</p>	<p>YOKOTA TOWER <b>134.3 315.8</b></p>	<p>GND CON <b>133.2 308.6</b></p>	<p>CLNC DEL <b>131.4 279.9</b></p>	<p>ASR</p>

DME/DME RNR - 0.3 NA



EMERG SAFE ALT 100 NM 15,000

<p>TLV FL 140 TA 14,000</p>		4000	MESTR	ELEV 462	TDZE 462
<p>BODAI 357° 177° 4200</p>		177°	RISSA 2500	1.4 NM to RW18	HANIV 1340
<p>3.09° TCH 68</p>					RW18
<p>3.5 NM</p>		2.5 NM			
CATEGORY	A	B	C	D	
LNAV MDA *	960/24 498 (500-1/2)	960/50 498 (500-1)			
<b>C</b> CIRCLING **	1020-1 558 (600-1)	1040-1 578 (600-1)	1240-2 778 (800-2 1/4)	1380-3 918 (1000-3)	

HIRL Rwy 18-36  
TDZL/CL Rwy 36

NOTE: REPRINTING DOD FLIP

## RJTY / YOKOTA

RNAV (GPS) RWY36

ALSF-1

**MISSED APPROACH:** Climb to 5300 direct BODAI WPT and hold, continue climb-in-hold to 5300.

DME/DME RNP-0.3 NA

MISSED APPROACH

4 NM

357°

230K

177°

BODAI

Max holding alt 10,000

899

784

RW36

565

FONUD

655

(FAF) KARMN

2200

357°

(8)

4000 NoPT

271°

(8.6)

(IAF) WHILY

4000

177°

230K

357°

4 NM

(IAF/IF) MESTR

Max holding alt 10,000

Min holding alt 4000

2454

2068

4075

3000

1000

EMERG SAFE ALT 100 NM 15,000

MSA RW36 25 NM

9500

**5300** **BODAI**

↑

TLv FL140  
TA 14,000

VGSI and ILS glide path not coincident (VGSI angle 2.50/TCH 96).

RW36 1.6 NM to RW36 1100 2200 4000 MESTR 177° 357°

≤ 2.68°  
TCH 75

**ELEV 462** **TDZE 430**

529 533 518 510 666 666 520 549 509 520 36

11,000 x 200 0.4% UP

BCN 475 TWVR

357° to RW36

CATEGORY	A	B	C	D
LNAV MDA*	940/24 510 (500-1/2)	940/55 510 (500-1)	1240-2 1/4 778 (800-2 1/4)	1380-3 918 (1000-3)
<b>C</b> CIRCLING**	1040-1 578 (600-1)			

HIRL all Rwys  
TDZL/CL Rwy 36

Civil Aviation Bureau, Japan (EFF:23 APR 2020)