

RJER / RISHIRI

AD CHART



INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART-INSTRUMENT

RJER / RISHIRI

SID

RISHIRI REVERSAL ONE DEPARTURE

RWY07 : Turn left,....

RWY25 : Turn right,....

.... Climb via RSE R-035 to 4,000ft or above, turn left within RSE 20DME, proceed to RSE VOR/DME.

Cross RSE VOR/DME at or above 8,000ft.



INTENTIONALLY LEFT BLANK

INSTRUMENT APPROACH CHART

RJER / RISHIRI

VOR/DME/LOC RWY25



MINIMA		THR elev. 112	AD elev. 99	
CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
A	500 (401)	900	640 (541)	1600
B		1000		
C			700 (601)	2400
D	—	—	—	—


Circling to North side of RWY only.

CHANGE : ALT restriction added (R-129/12DME).

INSTRUMENT APPROACH CHART

RJER / RISHIRI

VOR/DME A

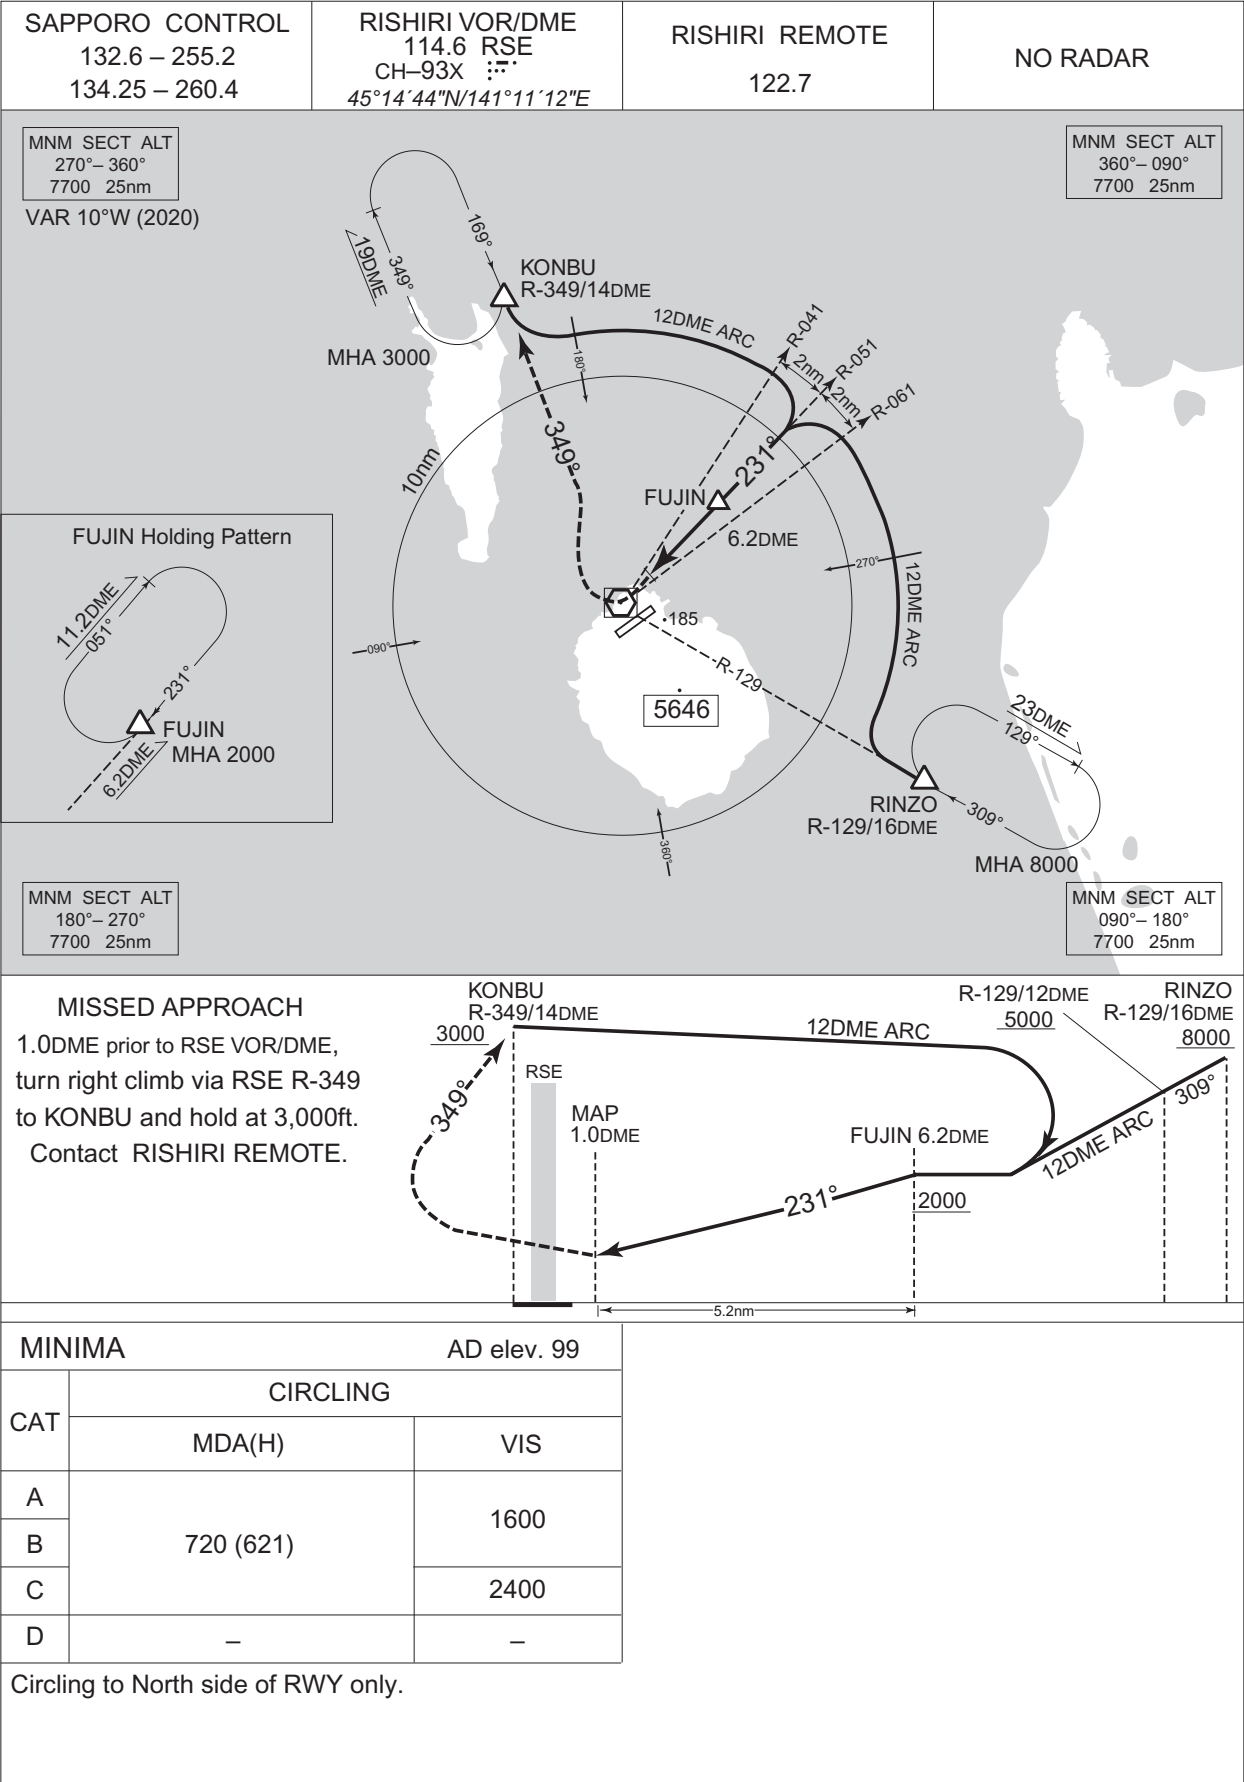

MISSED APPROACH
1.0DME prior to RSE VOR/DME,
turn right climb via RSE R-349
to KONBU and hold at 3,000ft.
Contact RISHIRI REMOTE.

KONBU
R-349/14DME
3000

R-129/12DME
5000

RINZO
R-129/16DME
8000

MINIMA

AD elev. 99


CAT	CIRCLING	
	MDA(H)	VIS
A	720 (621)	1600
B		2400
C		
D	—	—

Circling to North side of RWY only.


RJER / RISHIRI

VOR/DME B

SAPPORO CONTROL 132.6 – 255.2 134.25 – 260.4	RISHIRI VOR/DME 114.6 RSE CH-93X 45°14'44"N/141°11'12"E	RISHIRI REMOTE 122.7	NO RADAR
--	--	-------------------------	----------

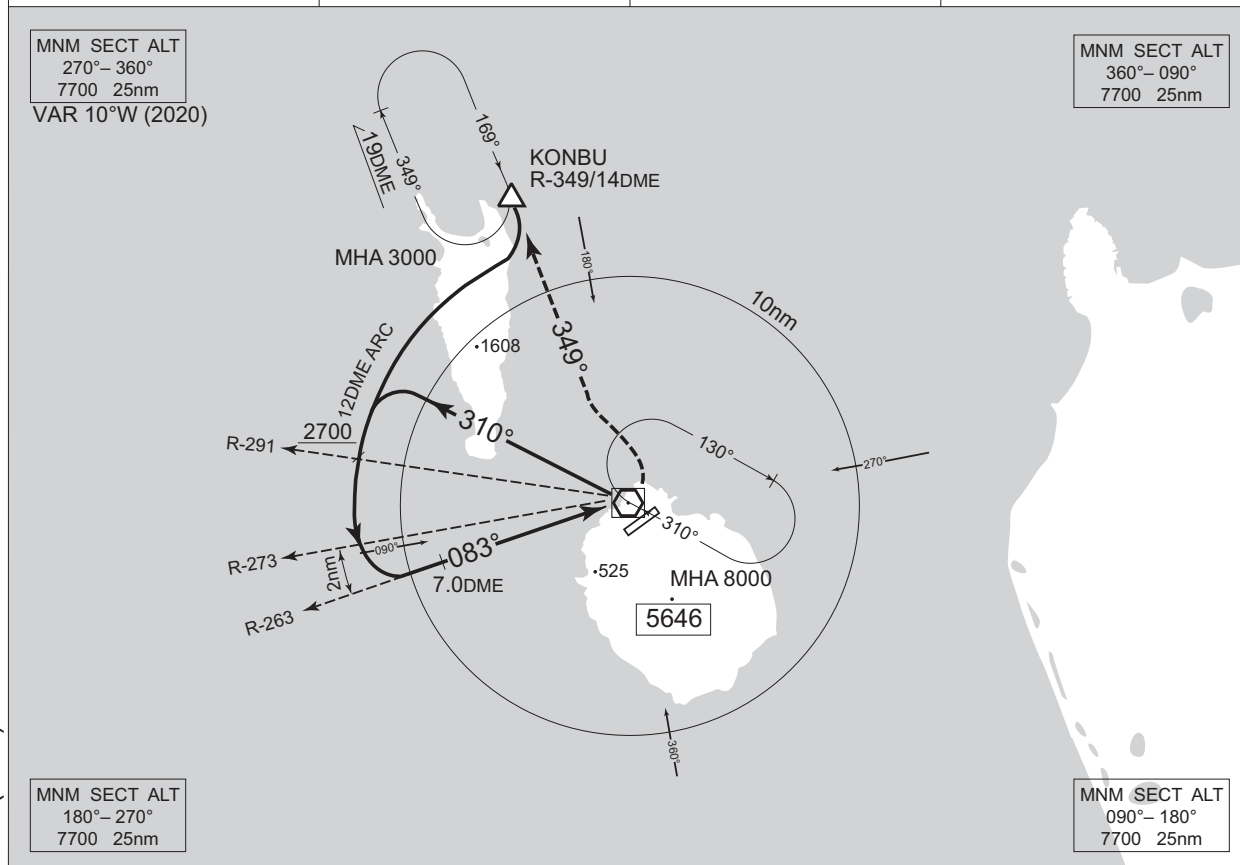

CHANGE : VAR. Course, radial FM RSE. Bearing on HOLD pattern (RSE).

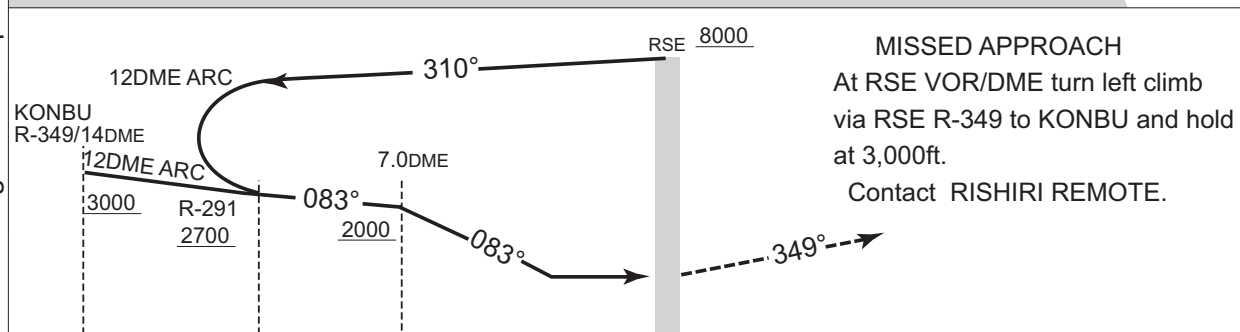

MINIMA		AD elev. 99
CAT	CIRCLING	
	MDA(H)	VIS
A	840 (741)	1600
B		
C		2400
D	—	—


Circling to North side of RWY only.

INTENTIONALLY LEFT BLANK

INSTRUMENT APPROACH CHART

RJER / RISHIRI

Visual REP

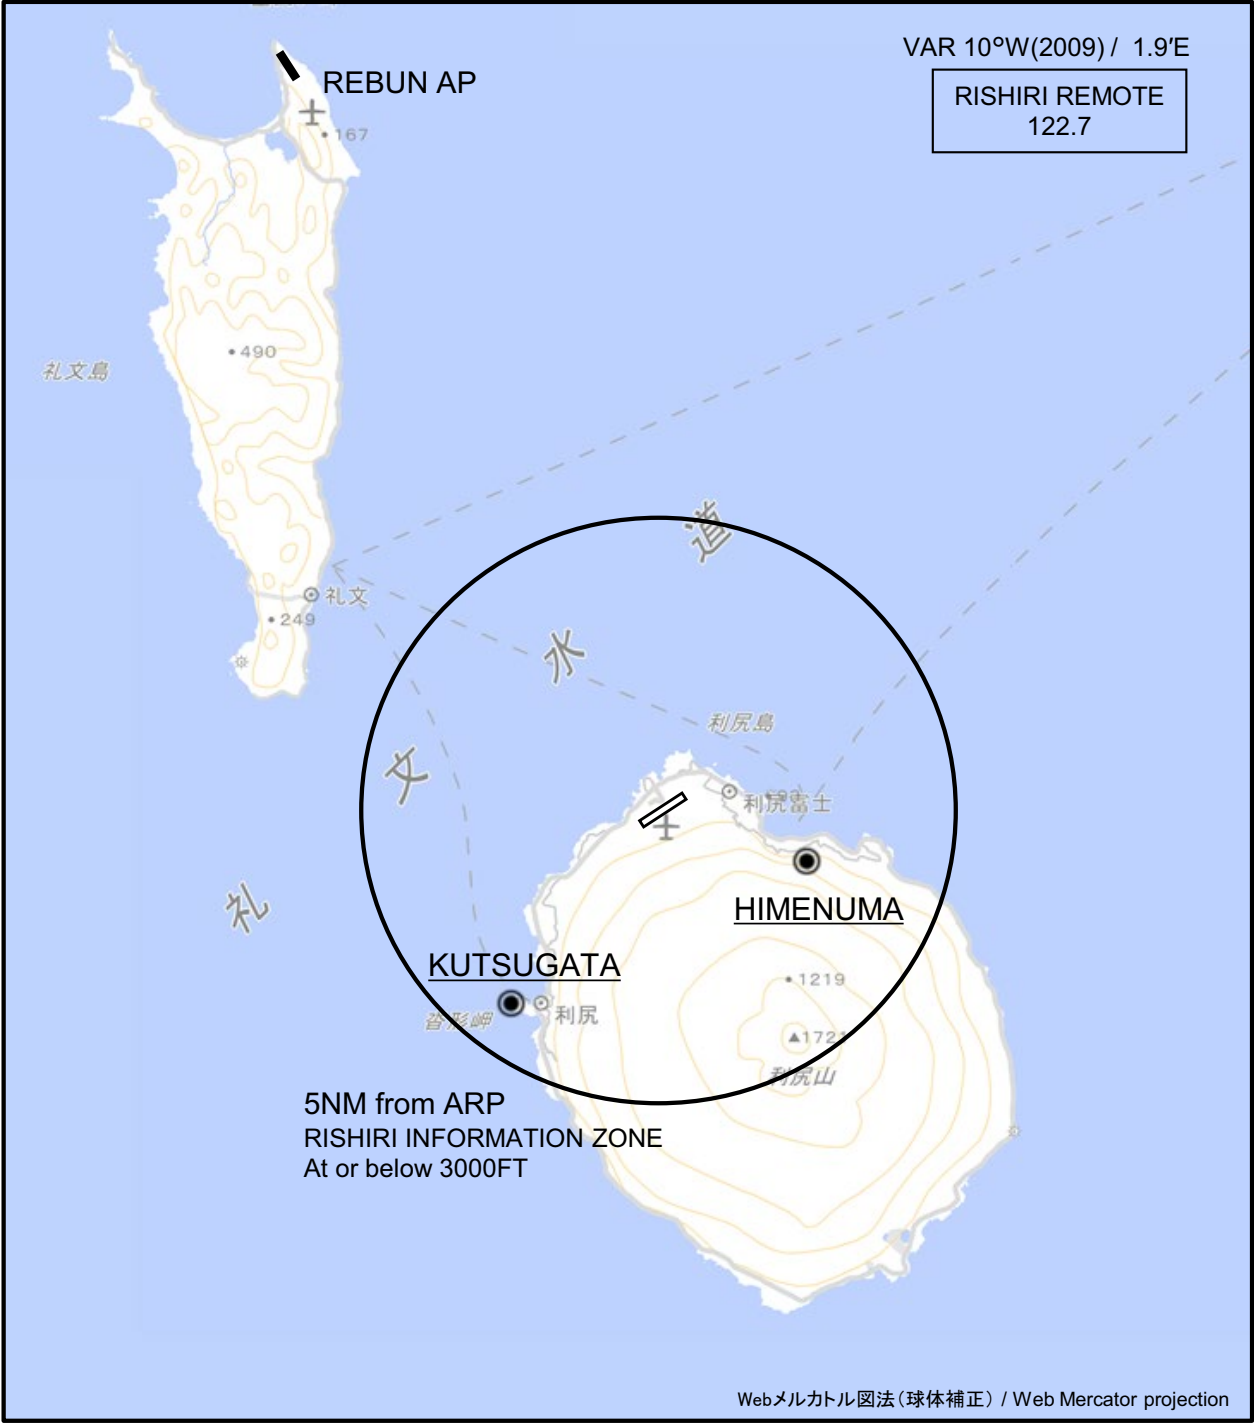

CHANGE : Map updated. BRG/DIST from ARP.

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
姫沼 Himenuma	110°T / 2.7NM	姫沼 Pond
沓形 Kutsugata	217°T / 4.2NM	沓形岬 Cape

Note : In the SE through SW of the airport, A/G COM from Rishiri Remote is blinded by Mt. Rishiri(1,721m/5,646ft).

RJER / RISHIRI

Minimum Vectoring Altitude CHART

