


CHANGE : WIND SPEED METER added.

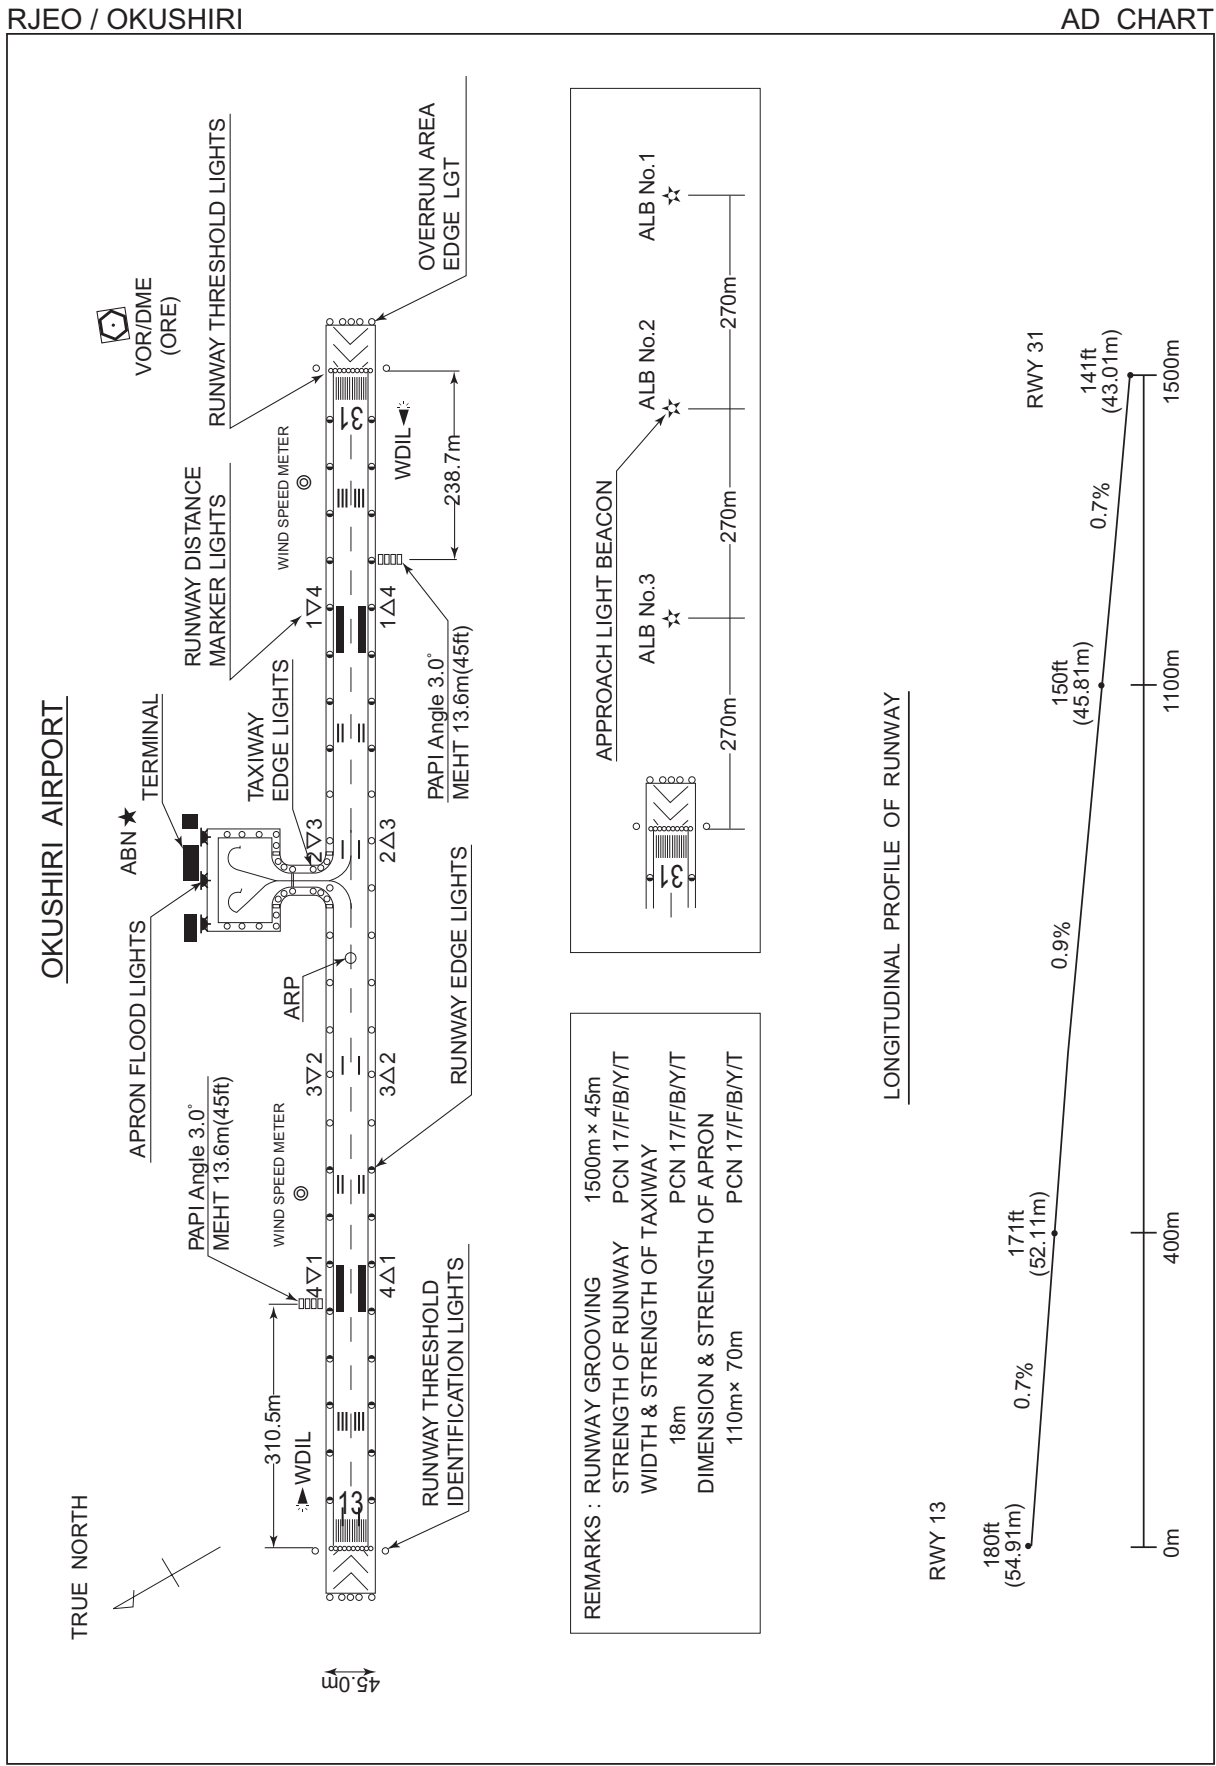

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART - INSTRUMENT

RJEO / OKUSHIRI

SID

ESASI TWO DEPARTURE

RWY13 : Turn left,...

RWY31 : Climb via RWY HDG until 1500FT or above, complete left turn within
ORE 10DME,...

...climb via ORE R115 to ESASI.

Cross ESASI at assigned or specified altitude.

Note : When take off from RWY13, following climb gradient should be
maintained until 700FT.

Speed (Knots)	60	90	120	150	180	210
Rate (Feet/Min)	300	450	600	750	900	1050

CHANGE : TAKE OFF MINIMA deleted.



STANDARD DEPARTURE CHART - INSTRUMENT

RJEO / OKUSHIRI

RNAV SID

**AONAE ONE DEPARTURE**

RWY13: Climb on HDG 130° at or above 600FT, turn left direct to AONAE, to ESASI.

RWY31: Climb on HDG 310° at or above 600FT, turn left direct to EO100, to AONAE, to ESASI.

Note RWY31: 4.5% climb gradient required up to 600FT.

OBST ALT 209FT located at 0.1NM 354°FM end of RWY31

RWY13

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	130 (120.3)	-9.8	-	-	+600	-	-	Basic RNP1
002	DF	AONAE	-	-	-9.8	-	L	-	-	-	Basic RNP1
003	TF	ESASI	-	115 (105.6)	-9.8	20.6	-	-	-	-	Basic RNP1

RWY31

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	310 (300.3)	-9.8	-	-	+600	-	-	Basic RNP1
002	DF	EO100	-	-	-9.8	-	L	-	-	-	Basic RNP1
003	TF	AONAE	-	095 (084.9)	-9.8	17.1	-	-	-	-	Basic RNP1
004	TF	ESASI	-	115 (105.6)	-9.8	20.6	-	-	-	-	Basic RNP1

CHANGE : New PROC

STANDARD ARRIVAL CHART - INSTRUMENT

RJEO / OKUSHIRI

RNAV STAR RWY31



IKORU ARRIVAL

From ESASI at or above 5000FT, to IKORU at or above 3000FT.

Serial
Number

Path
Descriptor

Waypoint
Identifier

Fly
Over

Course
°M(°T)

Magnetic
Variation

Distance
(NM)

Turn
Direction

Altitude
(FT)

Speed
(KIAS)

Vertical
Angle

Navigation
Specification

001

IF

ESASI

-

-

-9.8

-

-

+5000

-

-

Basic RNP1

002

TF

IKORU

-

296
(285.9)

-9.8

23.7

-

+3000

-

-

Basic RNP1

CHANGE : New PROC


INTENTIONALLY LEFT BLANK

INSTRUMENT APPROACH CHART

RJEO / OKUSHIRI

VOR RWY31

SAPPORO CONTROL 119.3 – 276.5 134.25 – 260.4	OKUSHIRI 109.85 CH-35Y 42°04'13"N / 139°26'36"E	VOR/DME ORE 122.7	OKUSHIRI REMOTE 122.7	NO RADAR
--	--	-------------------------	--------------------------	----------

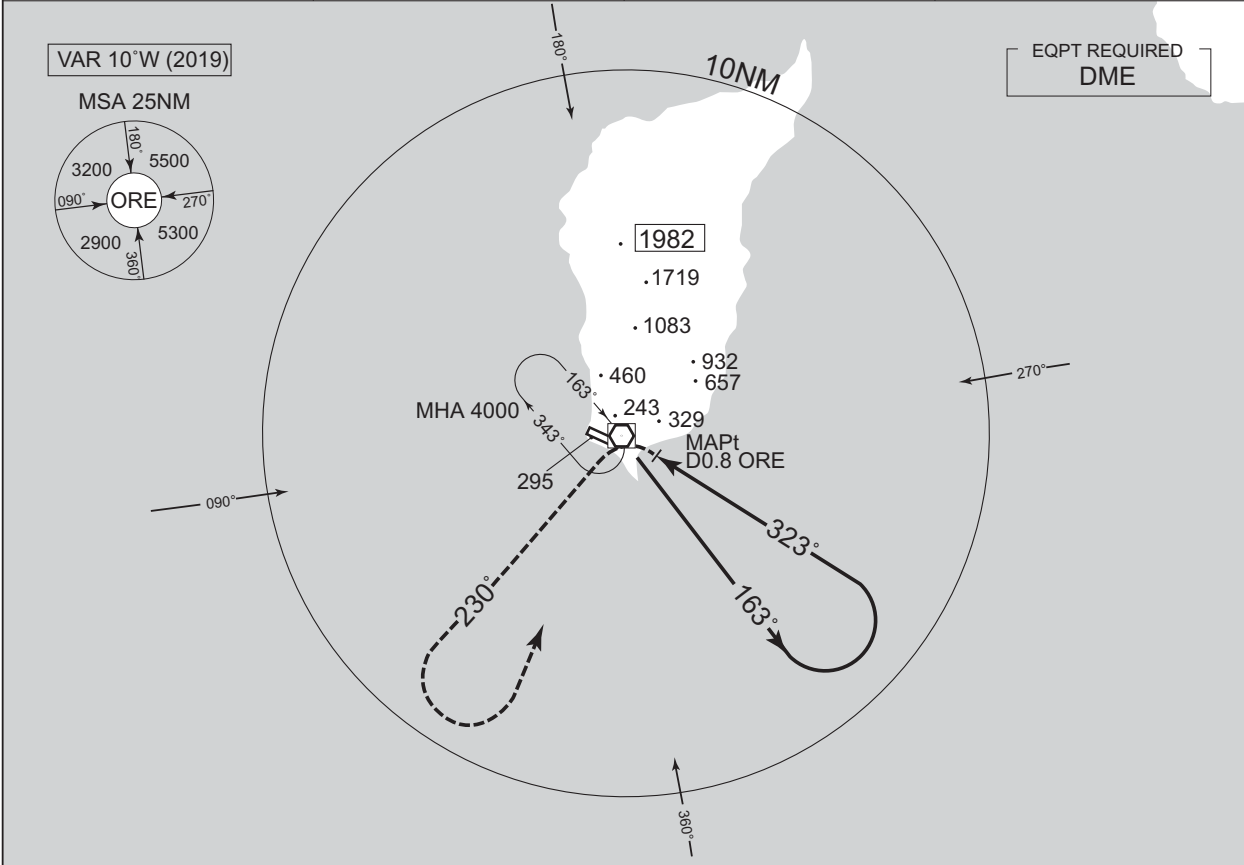

MISSED APPROACH

Turn left, climb to 3000FT or above via ORE R230, turn left direct to ORE VOR/DME within ORE 10.0DME and hold at 4000FT.
Contact OKUSHIRI REMOTE.

Remain within ORE 10.0DME

DME to ORE 0.8 1.4

MINIMA		THR elev. 141	AD elev. 161	
CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
A	600 (459)	1500	600 (439)	1600
B			620 (459)	
C		2000		
D	—	—	—	—


Circling to SOUTH side of RWY only.

CHANGE : VAR,MSA


VOR RWY13

VOR RWY13

SAPPORO CONTROL 119.3 – 276.5 134.25 – 260.4	OKUSHIRI VOR/DME 109.85 ORE CH-35Y 42°04'13"N / 139°26'36"E	OKUSHIRI REMOTE 122.7	NO RADAR
--	--	--------------------------	----------

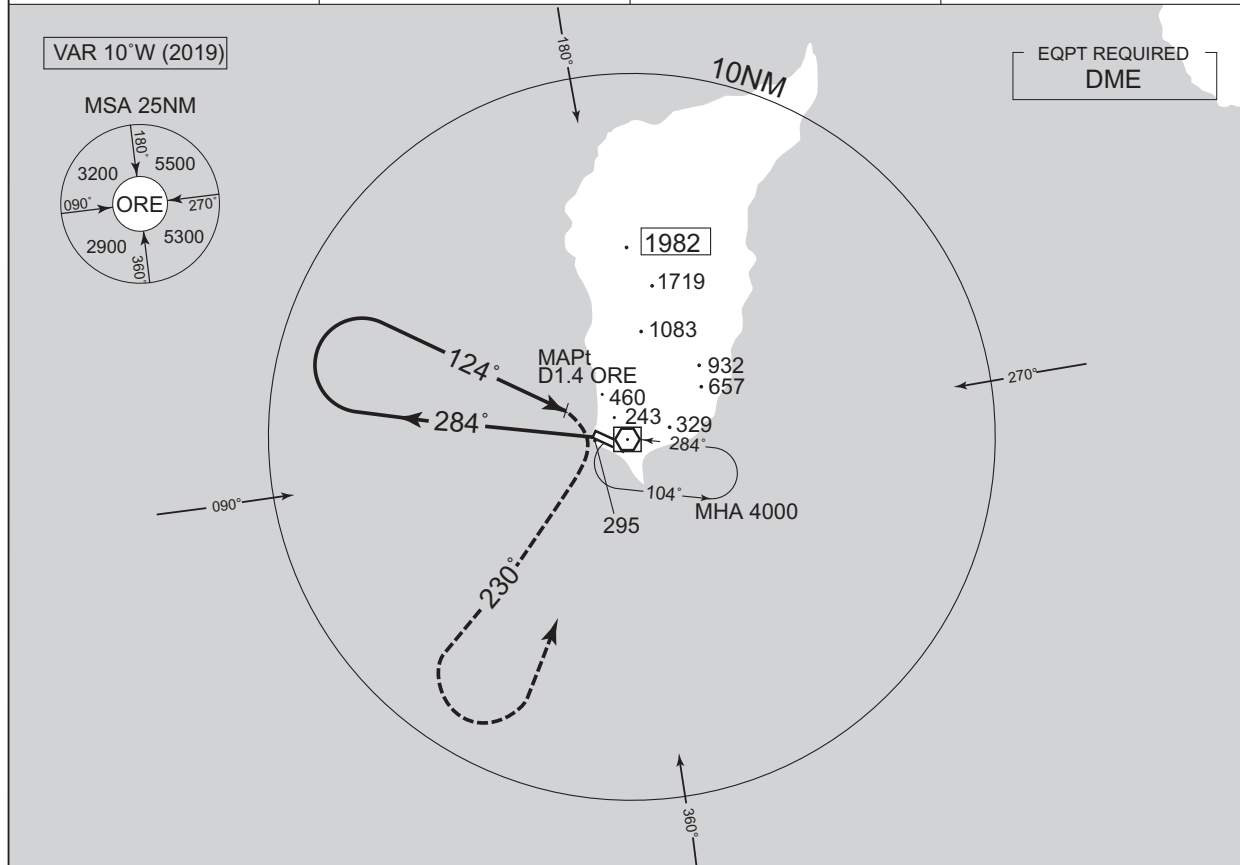

Remain within ORE 10.0DME

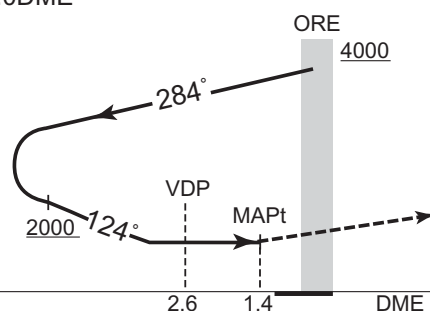

MISSED APPROACH

Turn right, climb to 3000FT or above
via ORE R230, turn left direct to
ORE VOR/DME within ORE 10.0DME
and hold at 4000FT.
Contact OKUSHIRI REMOTE.

Contact OKUSHIRI REMOTE.

MINIMA		THR elev. 180	AD elev. 161	
CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
A	760 (599)	1500	760 (599)	1600
B		2000		2400
C				
D	—	—	—	—


Circling to SOUTH side of RWY only.

CHANGE : DME to ORE(VDP)

INSTRUMENT APPROACH CHART

RJEO / OKUSHIRI

VOR A

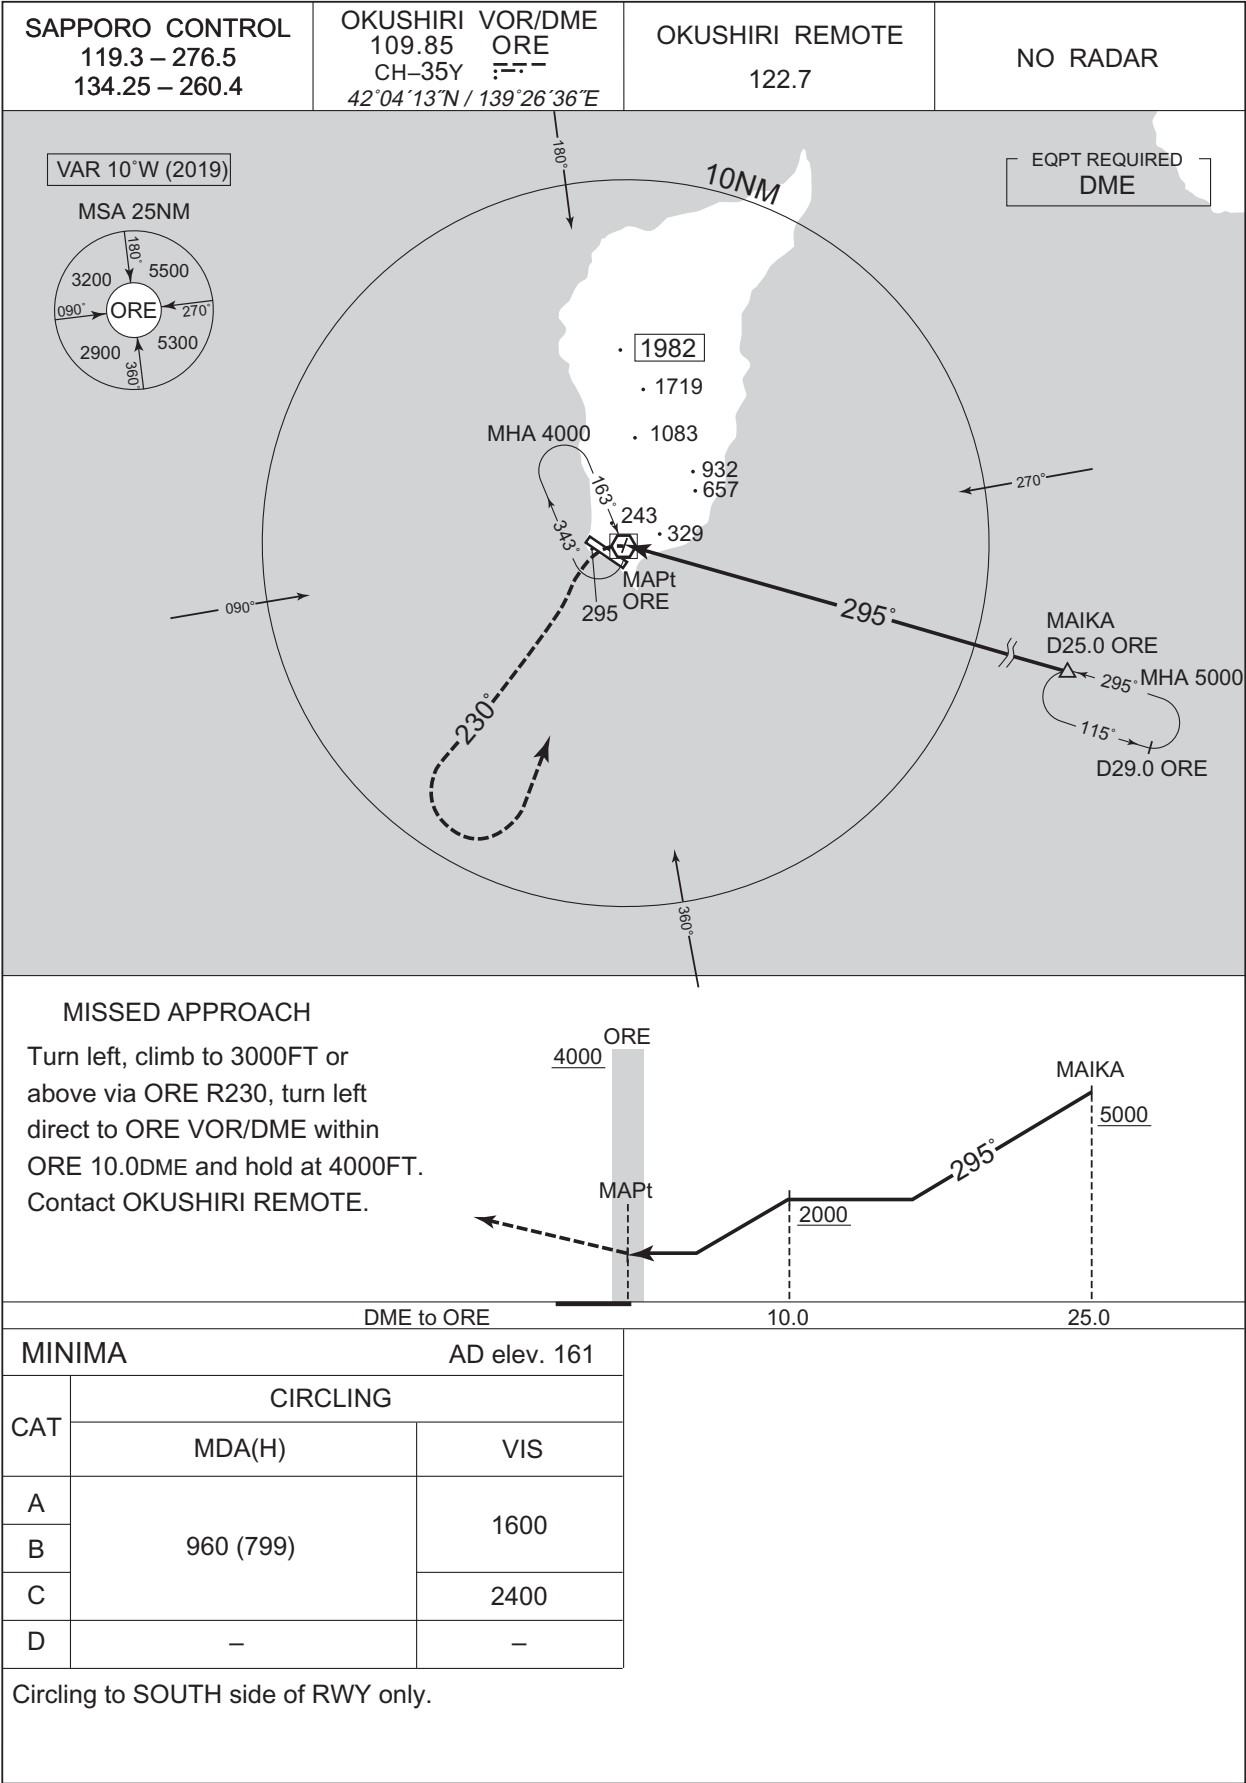


CHANGE : VAR,MSA

RJE0 / OKUSHIRI

RNAV(GNSS) RWY31

MISSED APPROACH

Climb via ORE R307 to ORE 2.8DME, turn left
HDG070° to intercept and proceed via ORE
R115 to IKORU and hold at 3000FT.
Contact OKUSHIRI REMOTE.

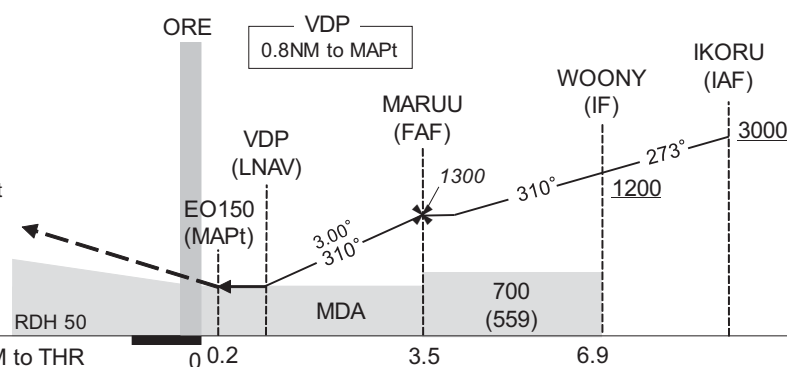

MINIMA		THR elev. 141	AD elev. 161			
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	490(349)	1500	490(349)	1500	600(439)	1600
B		1800		1800	620(459)	
C						
D	-	-	-	-	-	-

CHANGE : New PROC

RJEO / OKUSHIRI

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
稲穂岬 Inahomisaki	028°T / 12.0NM	灯台 Lighthouse
10NM E	090°T / 10.0NM	海上 Over the sea
10NM SE	135°T / 10.0NM	海上 Over the sea

INTENTIONALLY LEFT BLANK