

**AD 2 AERODROME****ROAH AD 2.1 AERODROME LOCATION INDICATOR AND NAME****ROAH - NAHA****ROAH AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA**

1	ARP coordinates and site at AD	261136N/1273823E 197°/1.86km from RWY 18L THR
2	Direction and distance from (city)	4km (2nm) W of Naha city office
3	Elevation/ Reference temperature	11ft / 32°C (2004-2008)
4	Geoid undulation at AD ELEV PSN	103ft
5	MAG VAR/ Annual change	5°W (2008) / 1.8 ' W
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	Naha Airport Office (CAB) 531-3,Ashimine Naha City, Okinawa Pref. AFS:ROAHYFYX Tel:098(857)1101, 098(857)1107(ATS)
7	Types of traffic permitted(IFR/VFR)	IFR/VFR
8	Remarks	Nil

**ROAH AD 2.3 OPERATIONAL HOURS**

1	AD Administration	H24
2	Customs and immigration	Customs: H24 Immigration: 2130-1315
3	Health and sanitation	Quarantine(human): H24 Quarantine(animal): 2200-1330 Quarantine(plant): 2230-1300
4	AIS Briefing Office	H24
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	H24
7	ATS	H24
8	Fuelling	H24
9	Handling	H24
10	Security	2130 - 1200
11	De-icing	Nil
12	Remarks	Nil

**ROAH AD 2.4 HANDLING SERVICES AND FACILITIES**

1	Cargo-handling facilities	All modern facilities handling weights up to 249,250lb / 113,000kg.
2	Fuel/ oil types	Fuel grades : (CIV) JET A-1, 100/130 (JSDF) JET A-1 PLUS Oil grades : Turbine grade on prior arrangement. All piston grades
3	Fuelling facilities/ capacity	Fuel truck refueling / Ask AD administration
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

**ROAH AD 2.5 PASSENGER FACILITIES**

1	Hotels	Hotels in the city
2	Restaurants	At airport
3	Transportation	Monorail, buses and taxis
4	Medical facilities	Hospitals in the city
5	Bank and Post Office	At airport
6	Tourist Office	At airport
7	Remarks	Nil

**ROAH AD 2.6 RESCUE AND FIRE FIGHTING SERVICES**

1	AD category for fire fighting	CAT 9
2	Rescue equipment	Chemical fire fighting truck x 3 Water supply truck Lighting power supply truck Emergency medical equipments conveyance truck
3	Capability for removal of disabled aircraft	Ask AD administration
4	Remarks	Nil

**ROAH AD 2.7 SEASONAL AVAILABILITY-CLEARING**

1	Types of clearing equipment	Not applicable
2	Clearance priorities	Not applicable
3	Remarks	Nil



## ROAH AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	Surface: Concrete and asphalt Strength: PCN 74/R/B/X/T...NR1, NR2, NR3, NR4, NR5, NR6 PCN 62/R/B/X/T...WEST apron, TYPHOON EVACUATION apron PCN 48/R/B/X/T...RUNUP AREA PCN 22/F/A/X/T...LIGHT AIRCRAFT spot	
2	Taxiway width, surface and strength	Surface: Concrete and asphalt Strength: PCN 74/R/B/X/T...A1 PCN 66/F/B/X/T...A2, A3 PCN 66/R/B/X/T...A4, A5 PCN 76/R/B/X/T...A6 PCN 102/F/C/X/T...A7 PCN 84/F/B/X/T...A8, A9 PCN 104/F/B/X/T...B PCN 108/F/C/X/T...E1 PCN 56/F/A/X/T...E2 PCN 81/F/A/X/T...E3 PCN 105/F/B/X/T...E4 PCN 81/F/B/X/T...E4C PCN 129/F/B/X/T...E5 PCN 91/F/C/X/T...E6 PCN 111/F/C/X/T...E7 PCN 70/F/C/X/T...E8 PCN 108/F/C/X/T...E8S PCN 80/F/C/X/T...E9 PCN 70/F/A/X/T...E10 PCN 96/F/A/X/T...W1 PCN 94/F/A/X/T...W2 PCN 103/F/A/X/T...W3 PCN 74/F/B/X/T...W3C PCN 64/F/B/X/T...W4 PCN 59/F/A/X/T...W5 PCN 74/R/B/X/T...N1, N2, N3, C1, C2, D PCN 94/F/A/X/T...J1, J2, R PCN 92/F/A/X/T...T1, T2 PCN 71/F/C/X/T...T3, T4 PCN 96/F/C/X/T...T5 PCN 63/F/C/X/T...T6, T7 PCN 97/F/A/X/T...T8, T9 PCN 92/F/A/X/T...C  Width: 34m ...E2, E6, E8S, E9, W4 30m ...E1, E3, E4, E4C, E5, E7, E8, W2, W3, W3C, J1, J2, C, T1 - T9 28.5m...E10 26.5m...B, W1, W5 44.9m...R 23m ...Other TWY	
3	ACL and elevation	Not available	
4	VOR checkpoints	Not available	


5	INS checkpoints	<p>Spot NR</p> <p>11 : 261210.16N/1273900.76E      12 : 261210.09N/1273858.76E      12M : 261209.66N/1273858.68E      13 : 261210.01N/1273856.78E      13M : 261209.58N/1273856.59E      14 : 261209.94N/1273854.80E</p> <p>21 : 261215.84N/1273900.38E      22 : 261216.31N/1273858.00E      23 : 261216.36N/1273855.70E      24 : 261217.81N/1273854.77E      25 : 261219.25N/1273855.50E      26 : 261219.51N/1273857.85E      27 : 261219.95N/1273900.35E</p> <p>31 : 261225.90N/1273859.91E      32 : 261226.46N/1273857.58E      33 : 261226.45N/1273855.26E      34 : 261227.87N/1273854.30E      35 : 261229.24N/1273855.08E      36R : 261229.79N/1273856.54E      36 : 261229.72N/1273857.04E      36L : 261230.47N/1273857.36E      37 : 261231.50N/1273859.89E</p> <p>41 : 261234.36N/1273859.19E      42 : 261236.27N/1273859.72E      43R : 261238.15N/1273859.65E      43 : 261238.72N/1273859.61E      43L : 261239.58N/1273858.62E      44R : 261241.07N/1273859.52E      44 : 261241.50N/1273859.55E      44L : 261242.50N/1273858.48E      45C : 261243.35N/1273859.18E      45 : 261243.97N/1273858.60E      46C : 261245.16N/1273859.10E      46 : 261245.43N/1273858.53E</p> <p>51R : 261247.61N/1273857.57E      51 : 261248.48N/1273858.37E      51L : 261249.07N/1273857.51E      52 : 261250.52N/1273857.42E      57D : 261254.40N/1273858.52E</p> <p>61 : 261255.39N/1273900.89E      62 : 261256.57N/1273902.92E      63 : 261257.30N/1273904.91E      63E : 261257.53N/1273905.52E      64 : 261258.02N/1273906.89E      65 : 261258.74N/1273908.89E      65E : 261258.95N/1273909.45E      66 : 261259.46N/1273910.88E</p> <p>98 : 261141.92N/1273830.97E      99 : 261143.23N/1273830.90E      100L : 261144.55N/1273830.84E      100 : 261145.33N/1273830.94E      100R : 261145.86N/1273830.78E      101 : 261147.83N/1273832.26E      102 : 261149.54N/1273832.16E      103 : 261151.00N/1273832.09E      104 : 261153.07N/1273833.10E</p>
6	Remarks	Nil

## ROAH AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS


1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	<ul style="list-style-type: none"> <li>• C1, C2, D, N1, N2, N3 are designated as aircraft stand taxilane intended to provide access to aircraft stands at NR1, NR2, NR3, NR4, NR5 and NR6 apron.</li> <li>• Aircraft stand identification sign : SPOT NR21 - 27, 31 - 37, 41 - 44</li> </ul>
2	RWY and TWY markings and LGT	<p>RWY : RWY18L/36R, 18R/36L          (Marking) RWY designation, RWY CL, RWY THR, Aiming point, TDZ, RWY side stripe          (LGT) REDL, RCLL, RTHL, RENL, RTZL(RWY36R, 18R/36L), WBAR, RWY DIST marker LGT(RWY18L/36R)</p> <p>TWY: All TWY          (Marking) TWY CL, RWY HLDG PSN, TWY side stripe, Mandatory instruction          (LGT) TWY edge LGT, Taxiing guidance sign</p> <p>TWY: E1 - E10, W2 - W4, A1 - A9, B, J1, J2, T1 - T9, C, R,          ACFT stand taxilane C1, C2, D, N1 - N3          (LGT) TWY CL LGT</p> <p>TWY: E1 - E10, W1 - W5, T1 - T9          (LGT) RWY guard LGT</p> <p>TWY: E1, E2, E3, E4, E4C, E5, E6, E7, E8, E9, A2 - A4, B, J1, J2, T3 - T7          (Marking) Intermediate HLDG PSN          (See Figure "Marking AIDs and Parkings Area (East side)")</p> <p>TWY: A8, T1, T2          (Marking) Intermediate HLDG PSN          (LGT) Intermediate HLDG PSN LGT</p> <p>TWY: E1, E2          (LGT) RWY Entrance LGT (RWY status LGT)          (See attached chart)</p> <p>TWY: T3, T4, T6, T7          (LGT) Rapid exit TWY indicator LGT</p>
3	Stop bars	<p>Stop bar LGT: E1, E2, E4, E5 - E10, T1 - T9          Stop bar lights Operations</p> <ol style="list-style-type: none"> <li>1) Stop bar lights are installed at each taxi holding position associated with Runway 18L/36R, 18R/36L.</li> <li>2) Stop bar lights will be operated when the visibility or the lowest RVR of the runway 18L/36R and/or 18R/36L is at or less than 600m.</li> <li>3) Stop bar lights on taxiways E1, E2, E9, E10, T1, T2, T8 and T9 are controlled individually by ATC.</li> <li>4) Stop bar lights on taxiways E4, E5 THRU E8S and T3 THRU T7 are not controlled individually by ATC.</li> <li>5) During the period stop bar lights operated, taxiways E4, E5 THRU E8S and T3 THRU T7 are not available for departure aircraft.</li> </ol>
4	Remarks	<p>(Marking) Overrun area, Stop line(N2, N3)</p> <p>(LGT) Apron flood LGT</p>

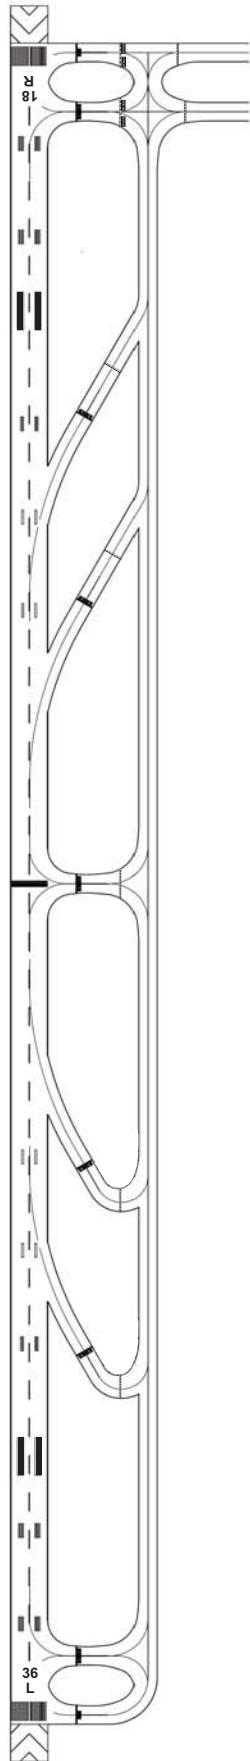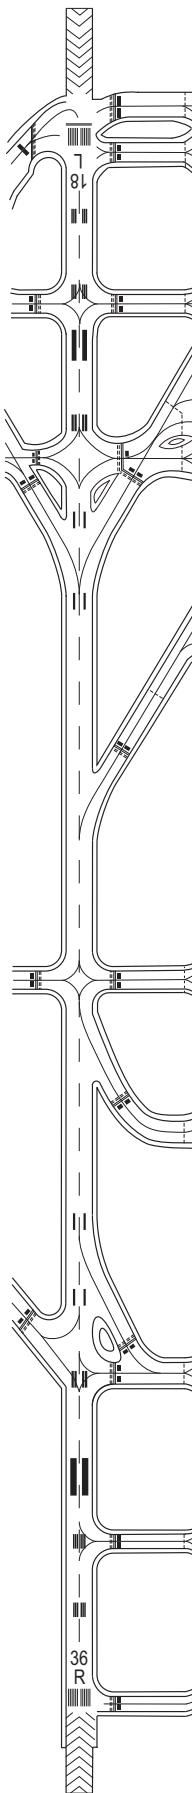MARKING AIDS  
(RWY18R/36L)MARKING AIDS  
(RWY18L/36R)

Marking AIDs and Parkings Area (West side)


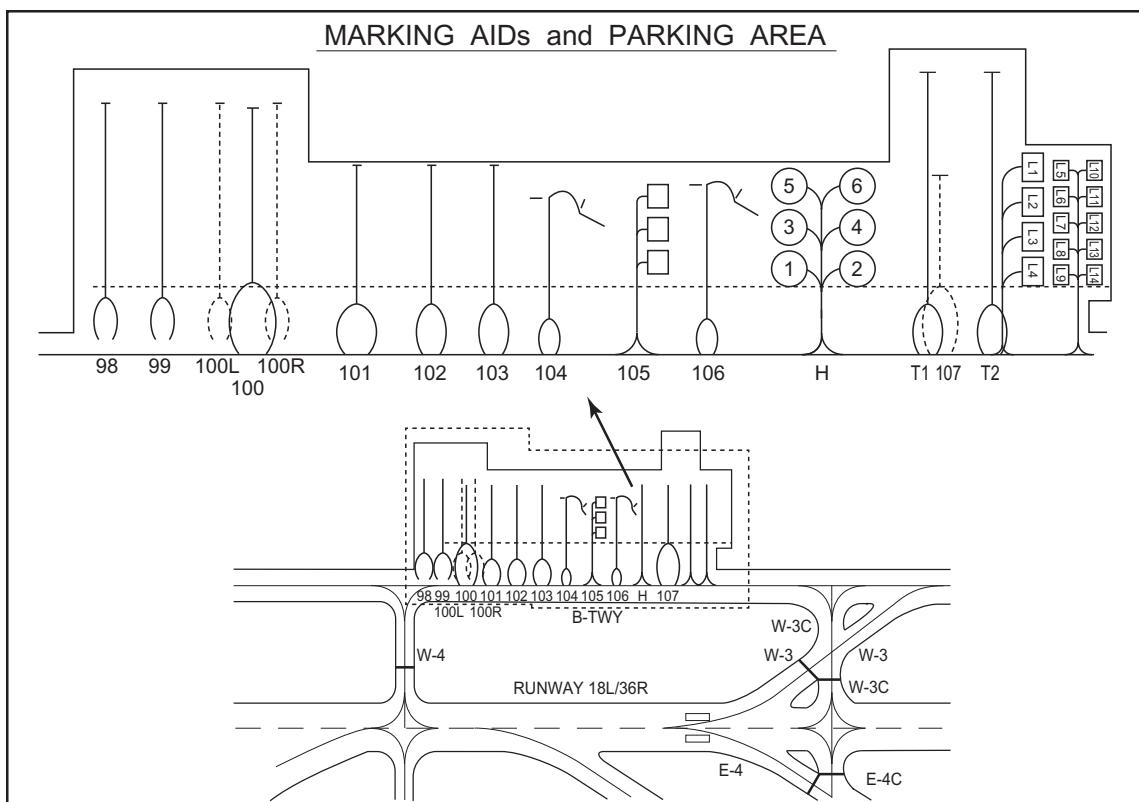


Marking AIDs and Parkings Area (East side)

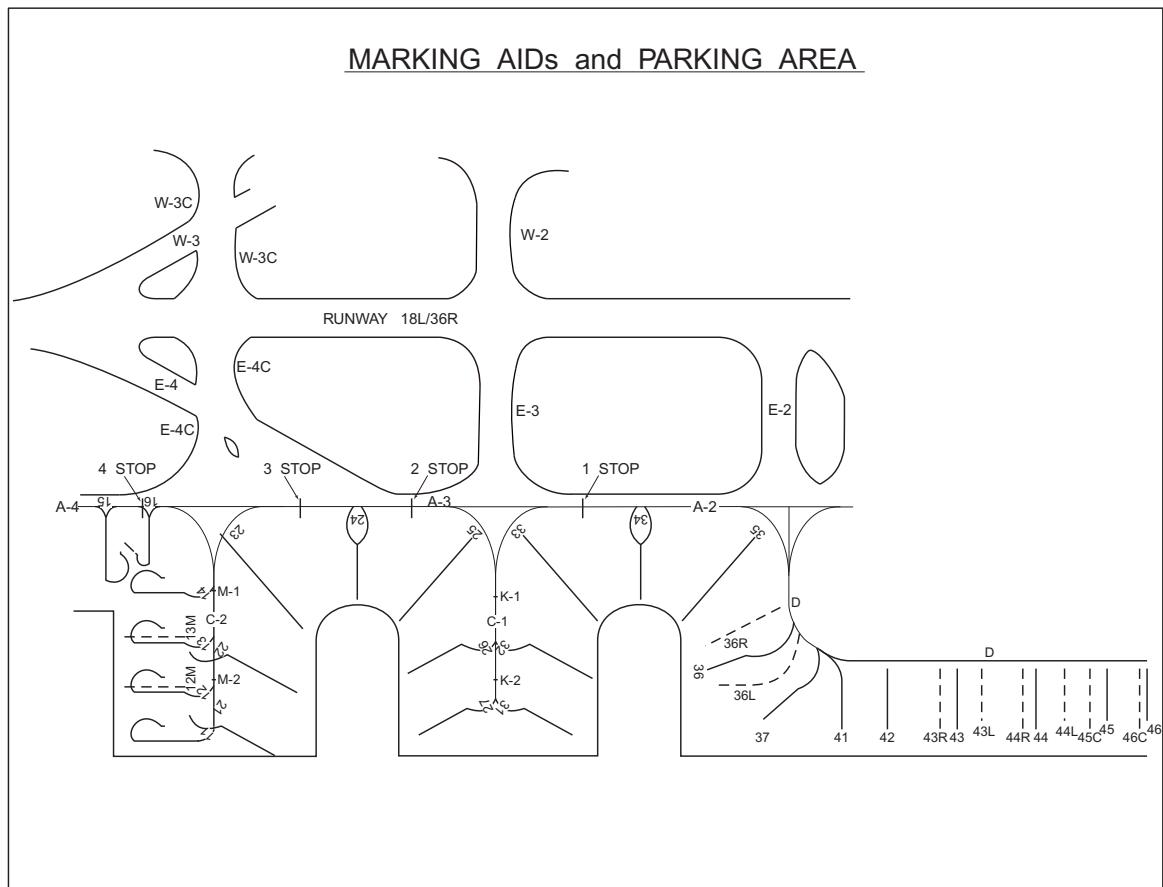


## Intermediate Holding Position Marking and Intermediate Holding Position Lights

The Intermediate Holding Position Marking indicates the position where aircraft is to hold to prevent collision with other aircraft on the taxiway. The Intermediate Holding Position Lights are collocated with the Intermediate Holding Position Marking and synchronized with the taxiway center line lights. The Intermediate Holding Position Lights consist of 5 yellow lights and the Intermediate Holding Position Marking is a single broken line as illustrated in the figure below;

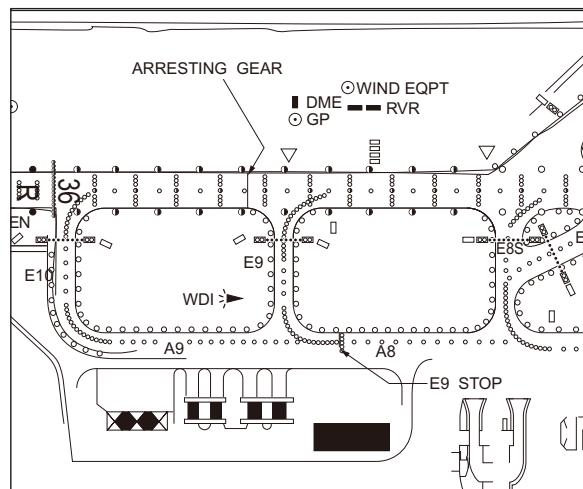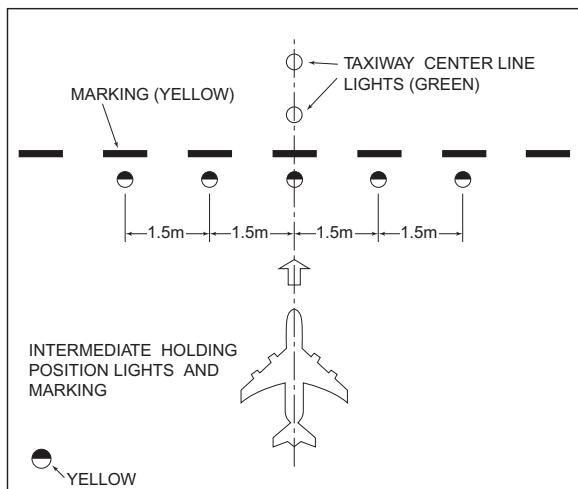


## GP HOLD LINE

The "GP HOLD LINE" is installed on TWY T1 AND T2 , consists of Intermediate holding position lights and marking. (see below figure, and AD2.24-ADC-1 AD CHART) REF AD2.20.2.2.1 for taxiing procedure on the "GP HOLD LINE".

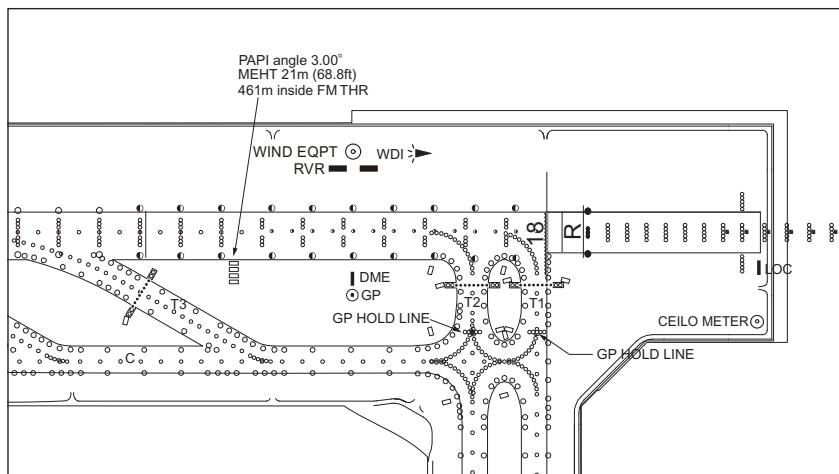

Runway Entrance Lights (REL)

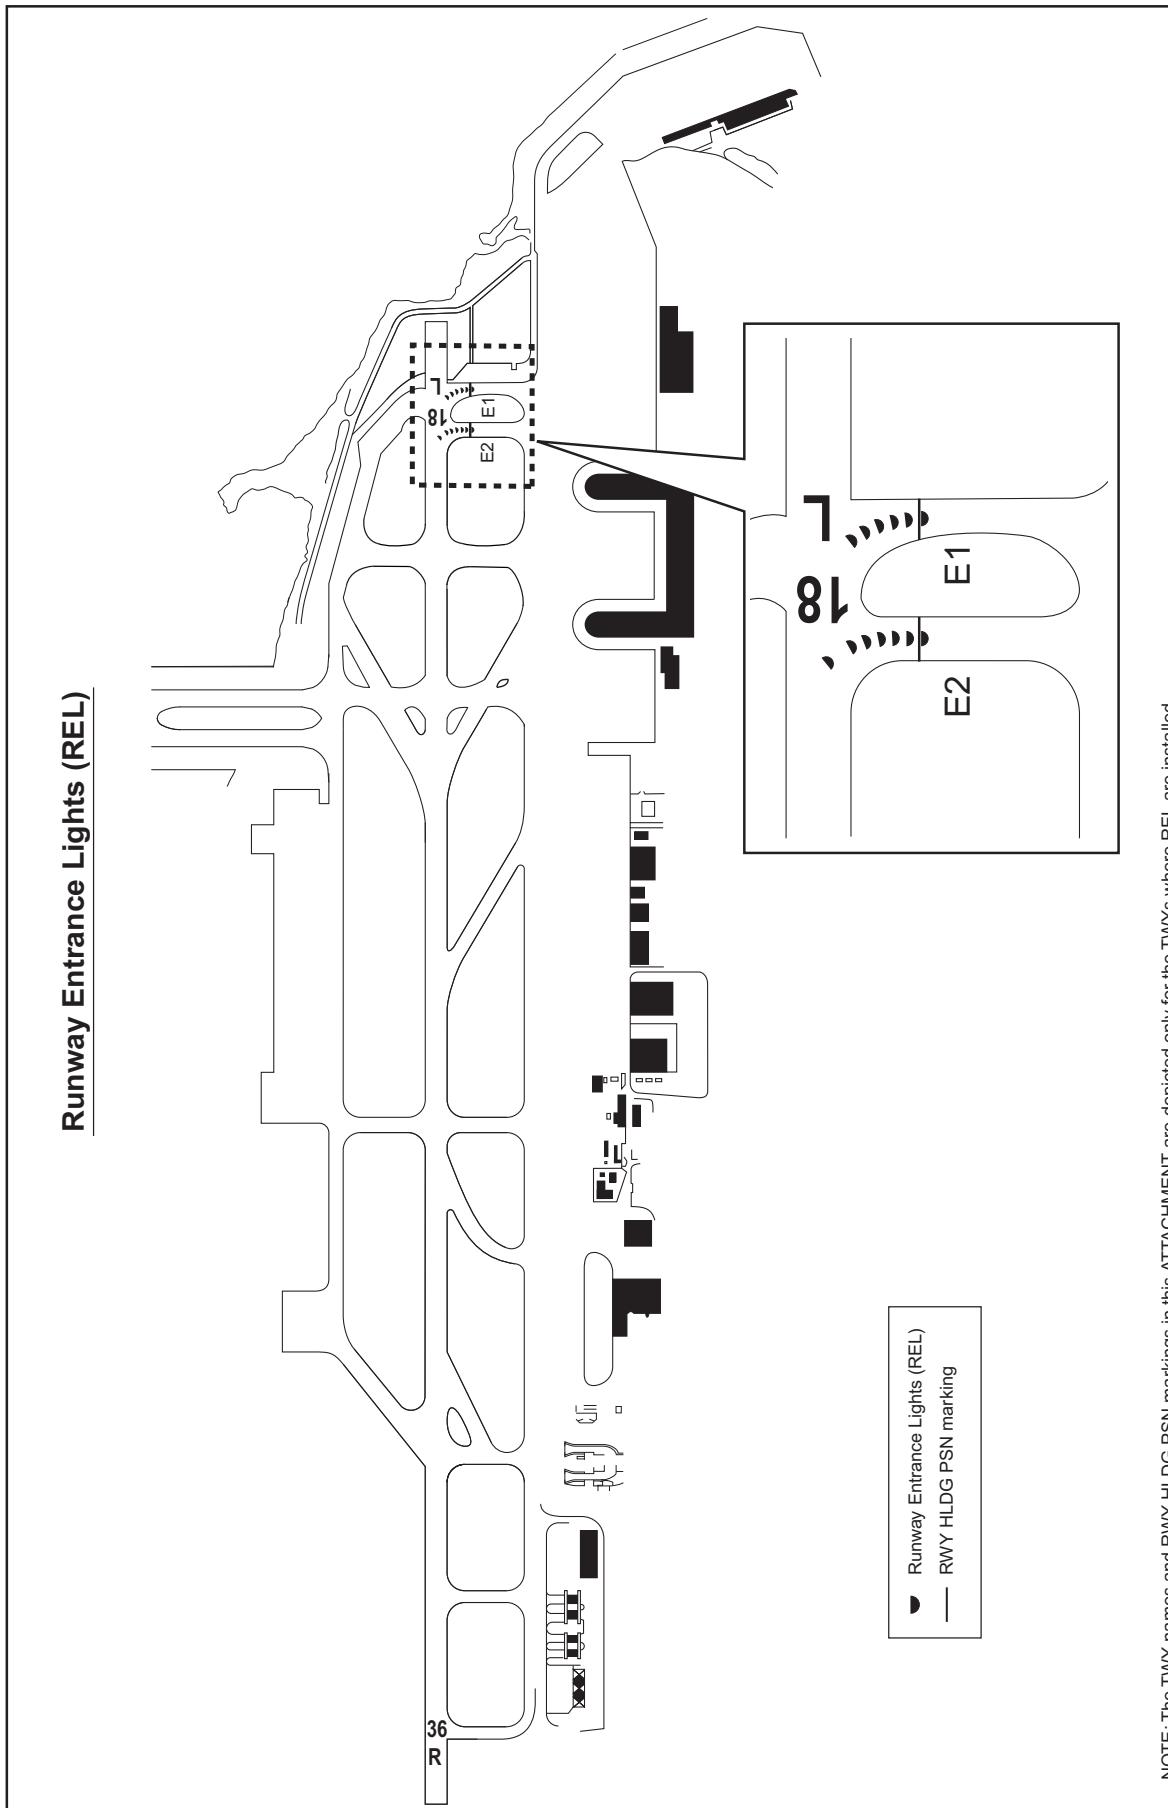

NOTE: The TWY names and RWY HLDG PSN markings in this ATTACHMENT are depicted only for the TWYs where REL are installed.

## ROAH AD 2.10 AERODROME OBSTACLES


■ In Area2 See Obstacle data

■ In Area3 To be developed


## ROAH AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	NAHA
2	Hours of service MET Office outside hours	H24
3	Office responsible for TAF preparation Periods of validity	NAHA 30 Hours
4	Trend forecast Interval of issuance	Nil
5	Briefing/consultation provided	P,Ja,En
6	Flight documentation Language(s) used	C En
7	Charts and other information available for briefing or consultation	S <sub>6</sub> , U <sub>85</sub> , U <sub>7</sub> , U <sub>5</sub> , U <sub>3</sub> , U <sub>25</sub> , U <sub>2</sub> /T <sub>r</sub> , P <sub>S</sub> , P <sub>5</sub> , P <sub>3</sub> , P <sub>25</sub> , P <sub>SWE</sub> , P <sub>SWF</sub> , P <sub>SWG</sub> , P <sub>SWI</sub> , P <sub>SWM</sub> , P <sub>SW</sub> (domestic), E, C, W <sub>E</sub> , W <sub>F</sub> , W <sub>G</sub> , W <sub>I</sub> , W, N
8	Supplementary equipment available for providing information	Doppler Radar for Airport Weather (See attached chart)
9	ATS units provided with information	TWR, GCA, APP, ATIS
10	Additional information(limitation of service, etc.)	Nil

Airspace for the advisory service concerning low level wind shear (RWY18L)

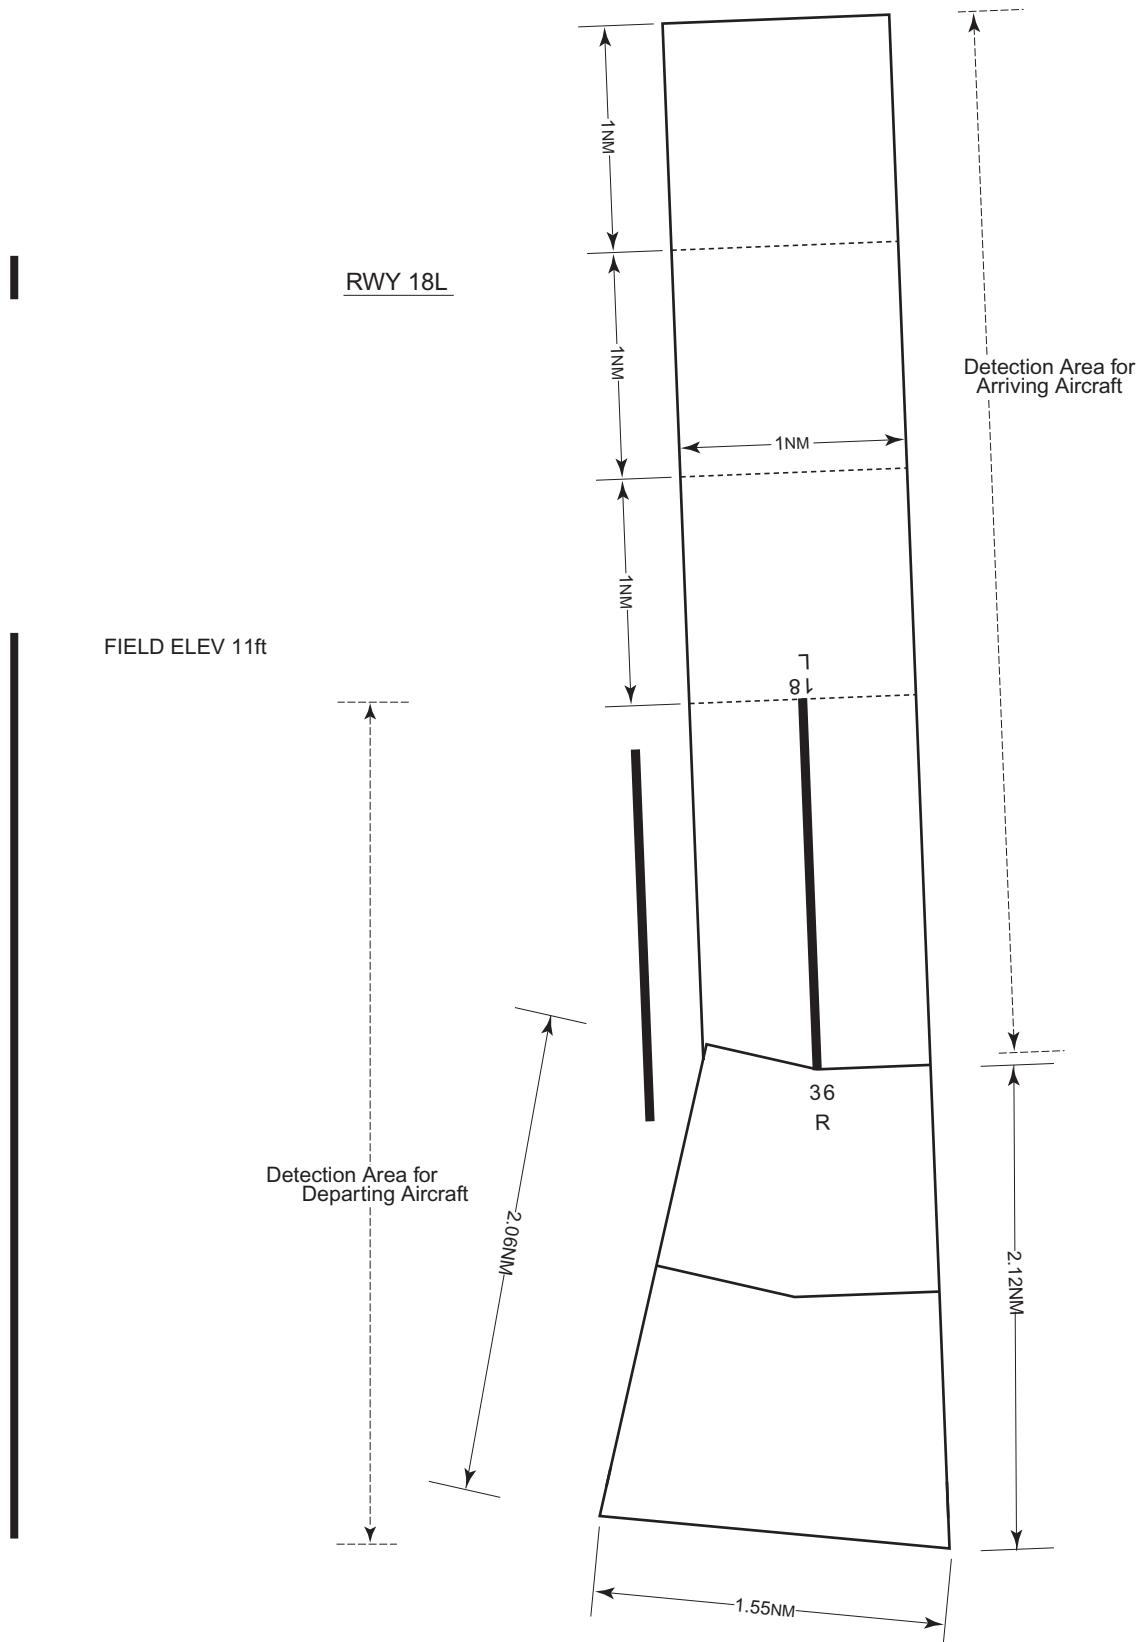



UPPER LIMIT:1600ft above FIELD ELEV LEVEL  
LOWER LIMIT:FIELD ELEV LEVEL

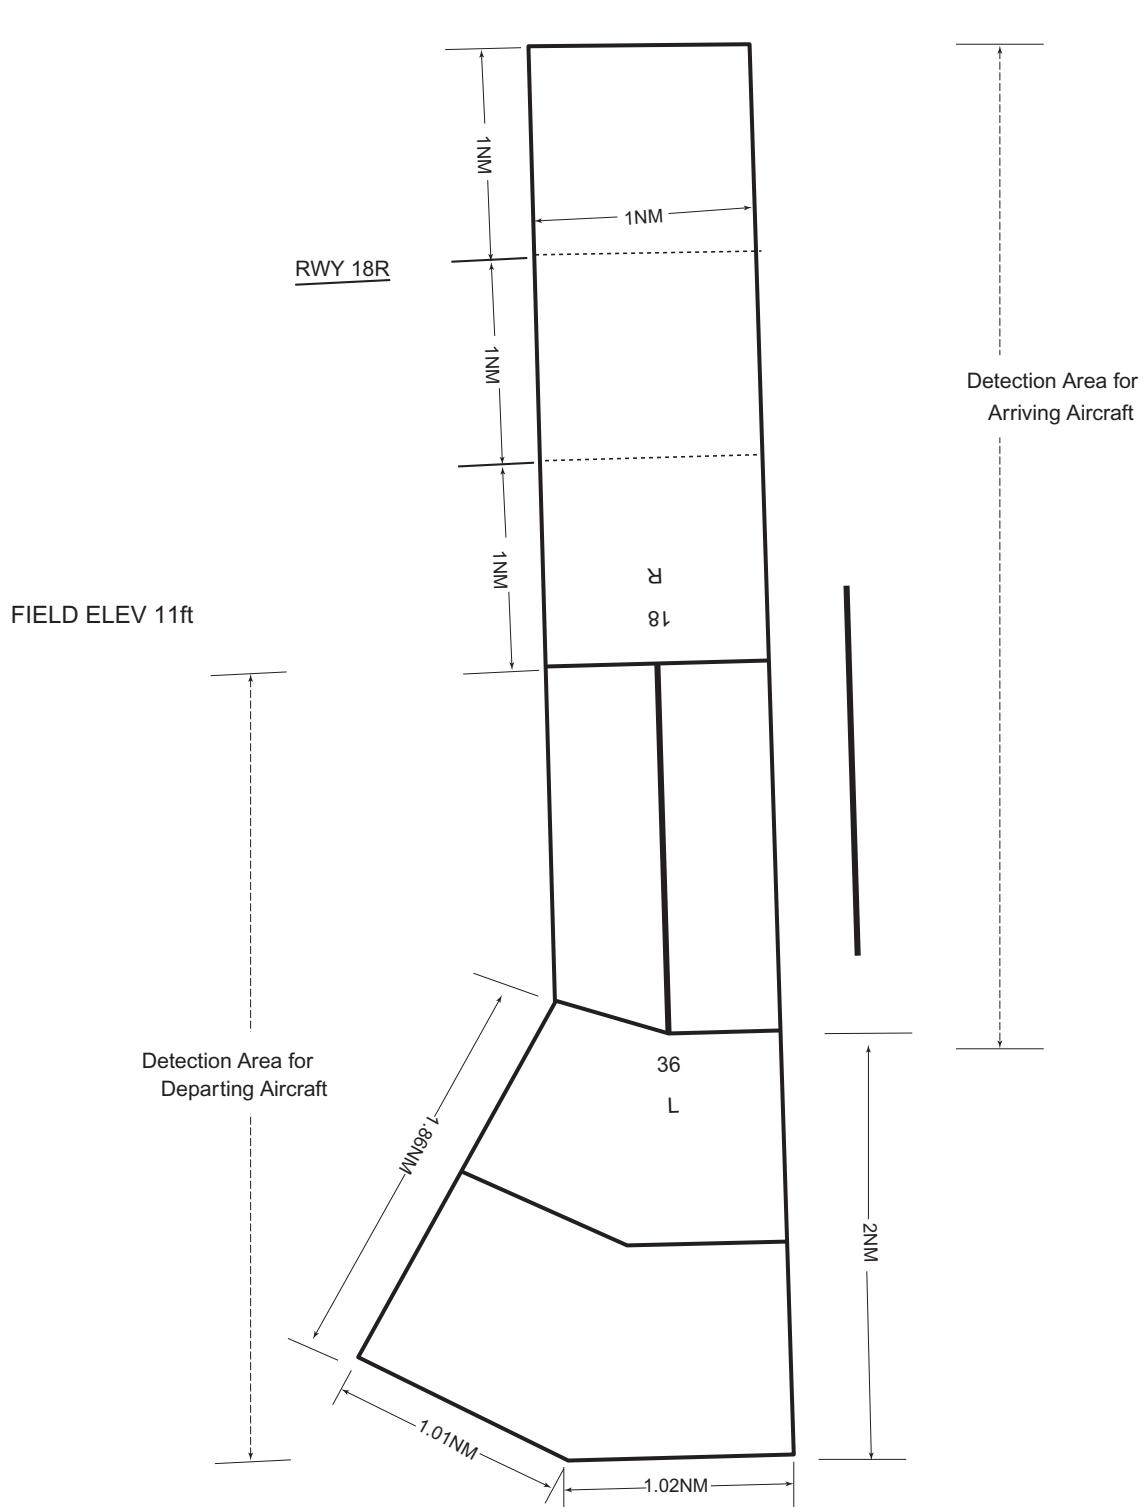Airspace for the advisory service concerning low level wind shear (RWY18R)



UPPER LIMIT:1600ft above FIELD ELEV LEVEL  
LOWER LIMIT:FIELD ELEV LEVEL

**Airspace for the advisory service concerning low level wind shear (RWY36R)**

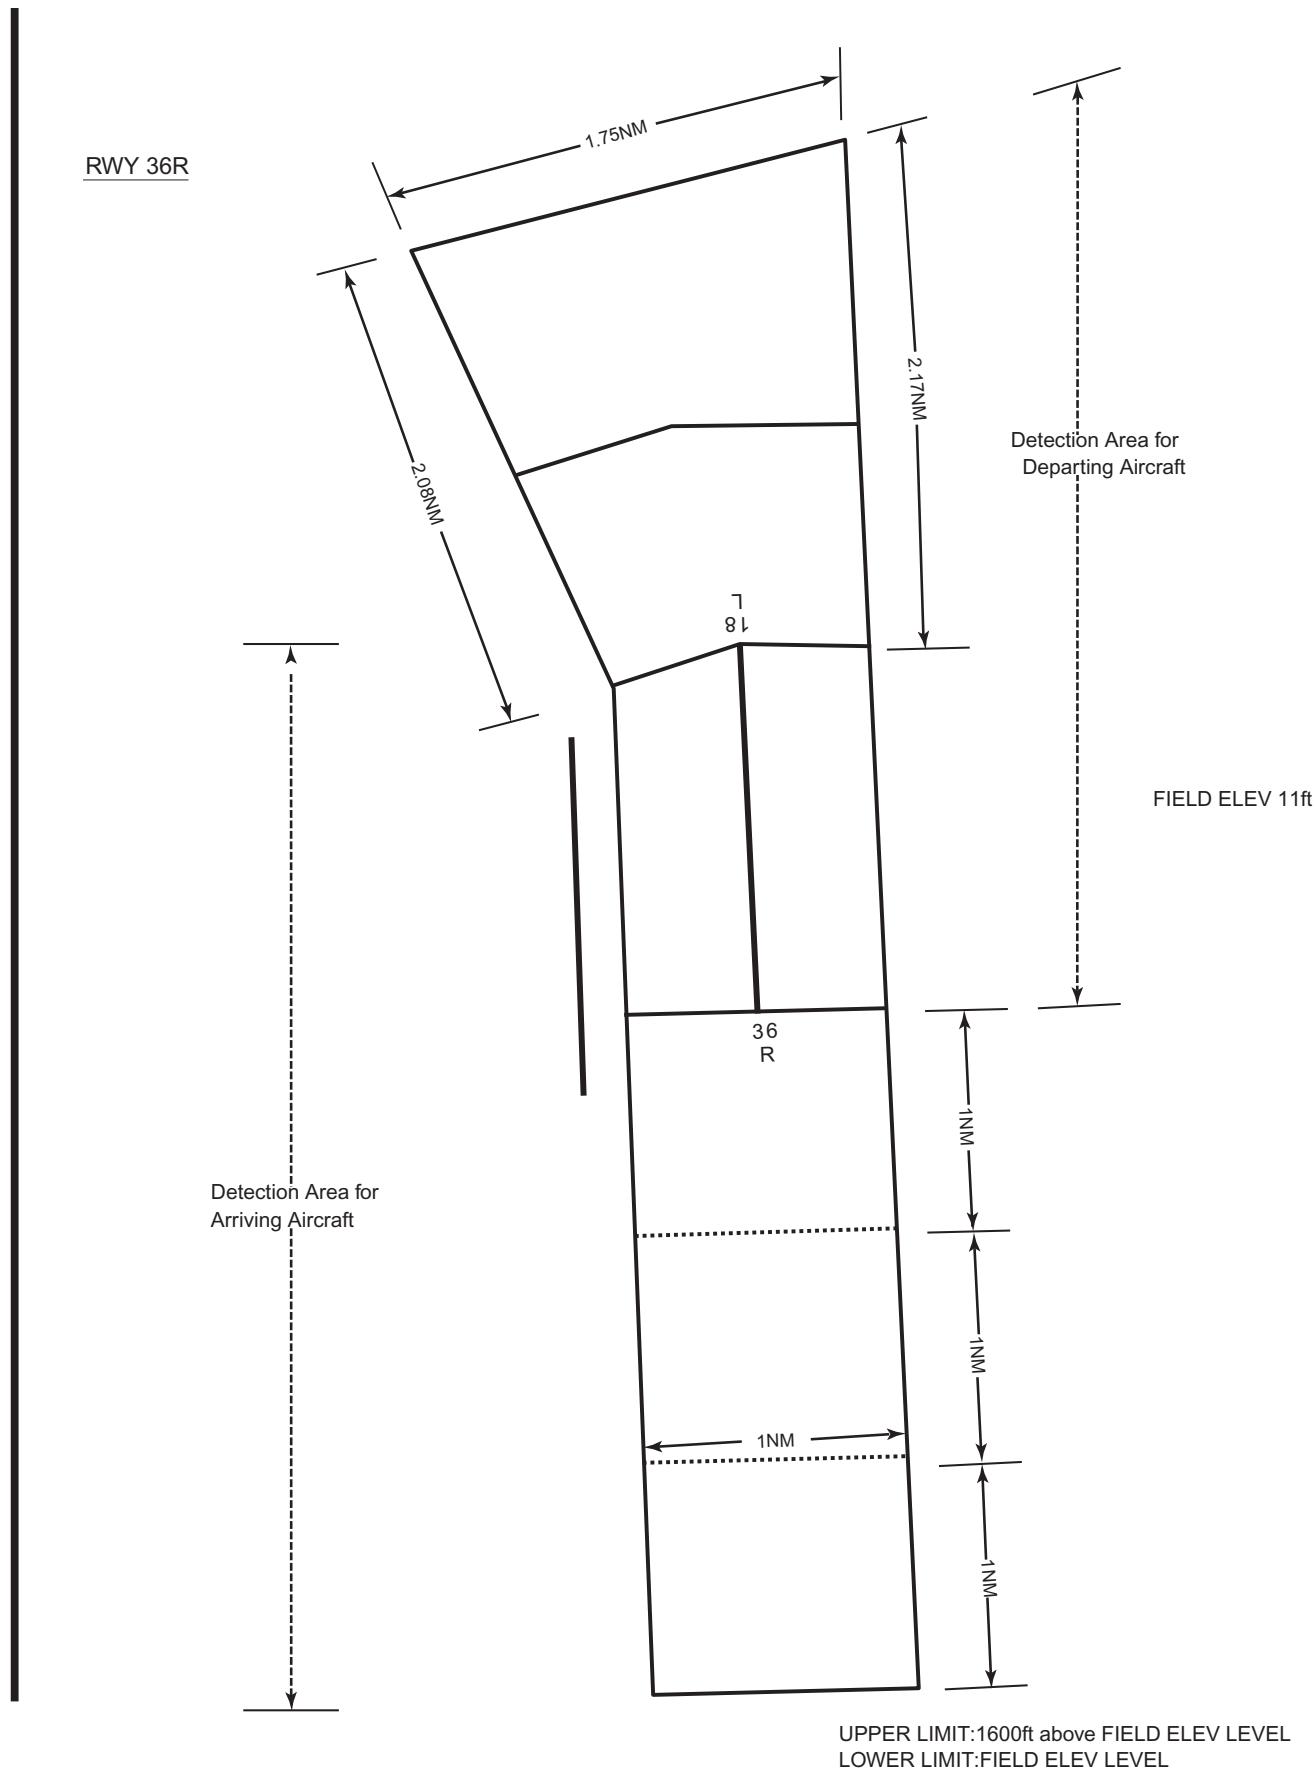

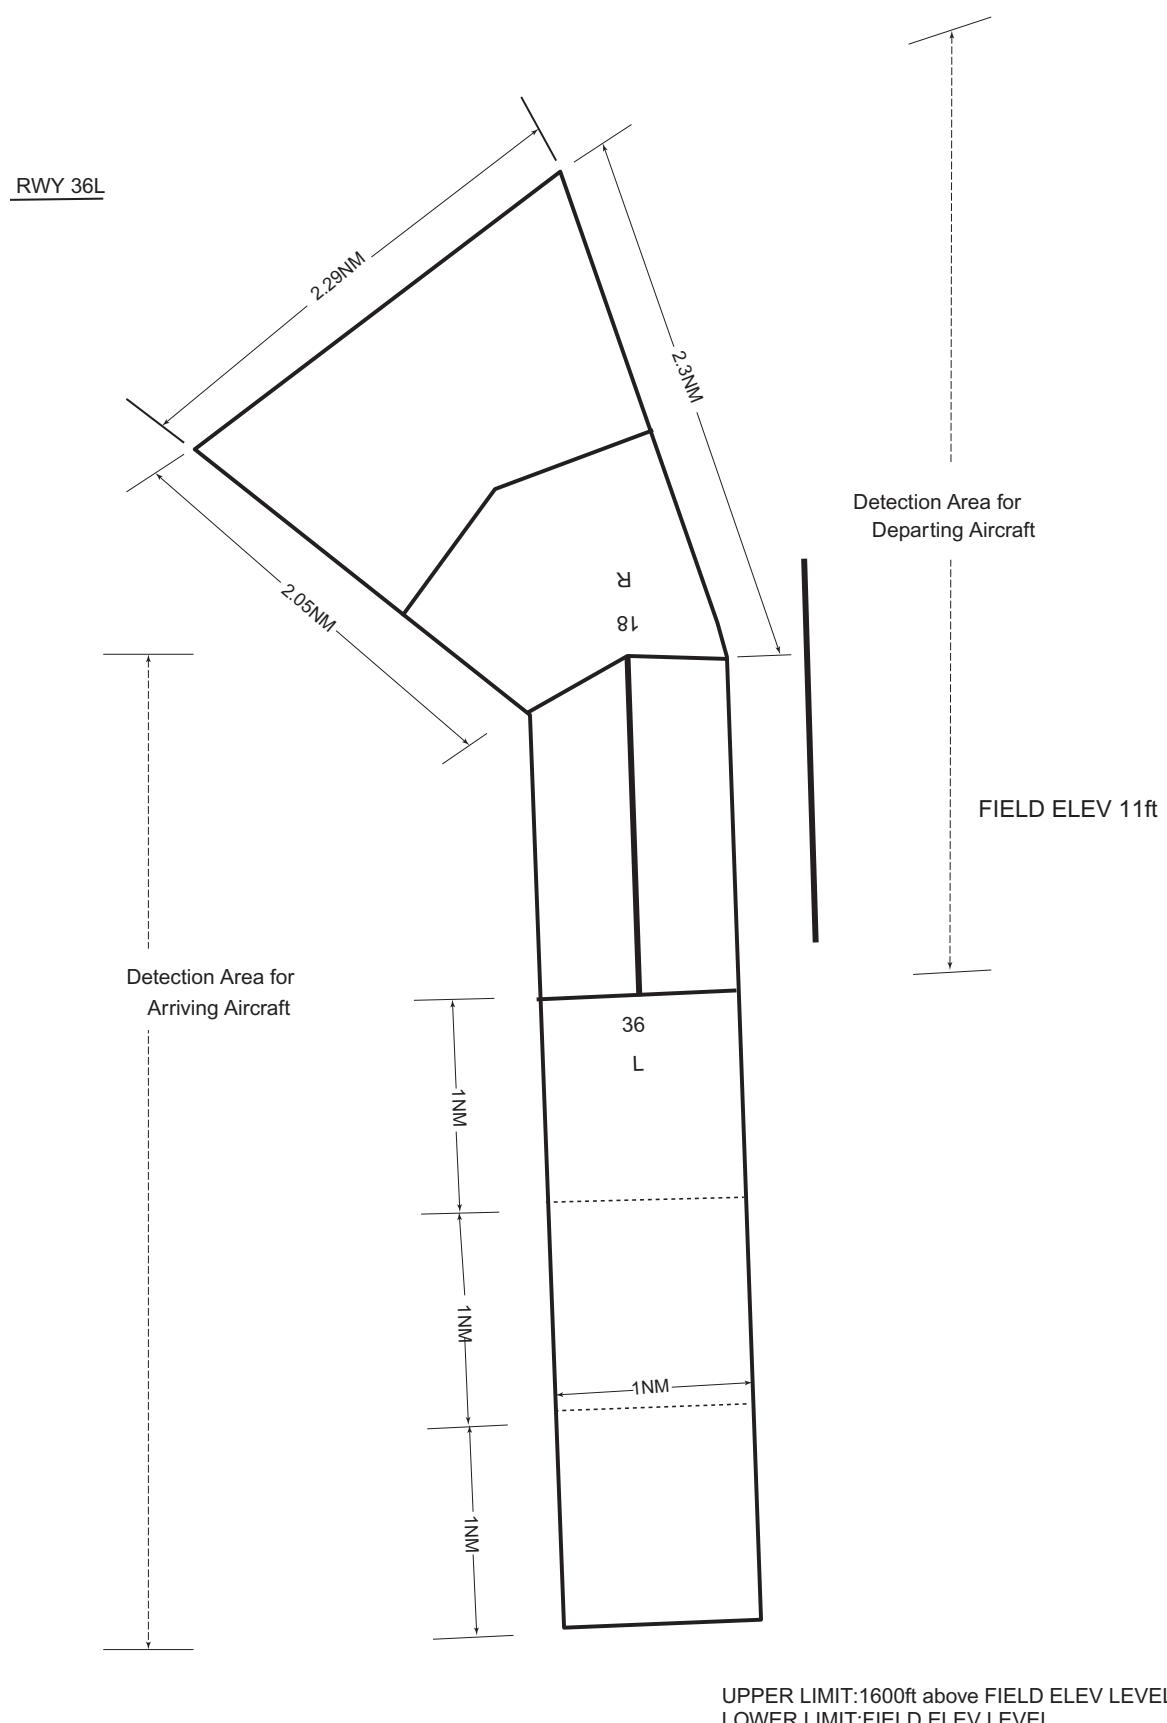**Airspace for the advisory service concerning low level wind shear (RWY36L)**

## ROAH AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

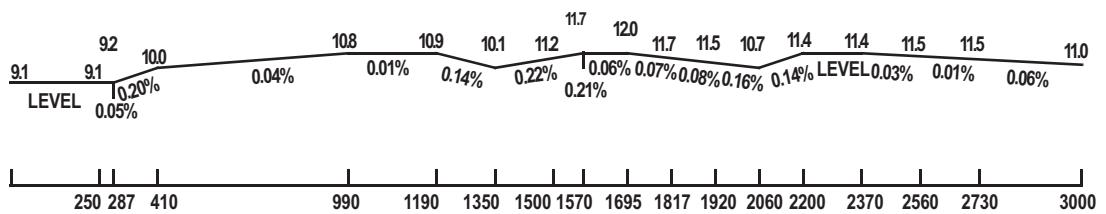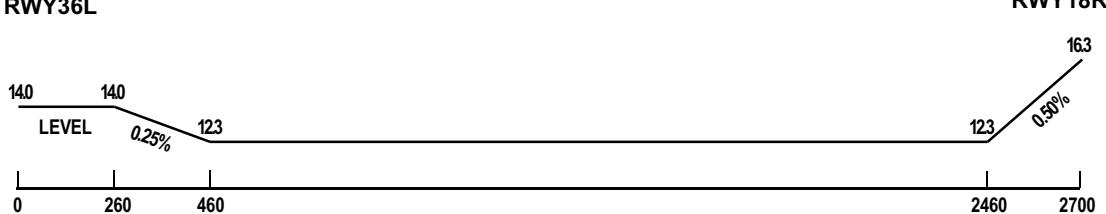Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCN) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
18L	177.30°	3000 x 45	PCN 115/F/A/X/T Asphalt	261233.63N/ 1273842.84E 104FT	THR ELEV: 11FT TDZ ELEV: 11.5FT
36R	357.30°	3000 x 45	PCN 115/F/A/X/T Asphalt	261056.24N/ 1273847.41E 103FT	THR ELEV: 9.1FT TDZ ELEV: 10.7FT
18R	177.30°	2700 x 60	PCN 78/F/A/X/T Asphalt	261211.00N/ 1273756.64E 103FT	THR ELEV: 16.3FT TDZ ELEV: 13.8FT
36L	357.30°	2700 x 60	PCN 78/F/A/X/T Asphalt	261043.34N/ 1273800.77E 103FT	THR ELEV: 14.0FT TDZ ELEV: 14.0FT
Slope of RWY	Strip Dimensions(M)	RESA (Overrun) Dimensions (M)		Remarks	
7	10	11		14	
See attached chart	3120 x 300	90x(MNM:195 MAX:300)*		RWY grooving: 3000 x 30m	
	3120 x 300	150x(MNM:190 MAX:290)*			
		*For detail, ask airport administrator			
See attached chart	2820 x 300	240x300		RWY grooving: 2700 x 40m	
	2820 x 300	240x300			
Slope of RWY					
<b>RWY36R</b> <span style="float: right;"><b>RWY18L</b></span> 					
<b>RWY36L</b> <span style="float: right;"><b>RWY18R</b></span> 					

## ROAH AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
18L	3000	3000	3000	3000	9843ft
TWY: E2	2904	2904	2904		9528ft
TWY: E3, W2	2604	2604	2604		8544ft
TWY: E4C, W3C	2294	2294	2294		7527ft
TWY: E4	2018	2018	2018		6621ft
TWY: W3	1999	1999	1999		6559ft
TWY: E5	1512	1512	1512		4961ft
TWY: E6, W4	1321	1321	1321		4334ft
TWY: E8S, W5	606	606	606		1988ft
TWY: E9	258	258	258		846ft
36R	3000	3000	3000	3000	9843ft
TWY: E9	2628	2628	2628		8622ft
TWY: E8S	2310	2310	2310		7579ft
TWY: W5	2257	2257	2257		7405ft
TWY: E8	2052	2052	2052		6733ft
TWY: E7, E6, W4	1558	1558	1558		5112ft
TWY: E4C, W3C	606	606	606		1988ft
TWY: E3, E2	296	296	296		971ft
18R	2700	2700	2700	2700	8859ft
TWY: T2	2530	2530	2530		8301ft
TWY: T3	1800	1800	1800		5906ft
TWY: T4	1500	1500	1500		4922ft
TWY: T5	1290	1290	1290		4232ft
36L	2700	2700	2700	2700	8859ft
TWY: T8	2530	2530	2530		8301ft
TWY: T7	1800	1800	1800		5906ft
TWY: T6	1500	1500	1500		4922ft
TWY: T5	1290	1290	1290		4232ft

誘導路の TORA, TODA 及び ASDA は、誘導路中心線と滑走路中心線の交点から滑走路末端までの距離を示す。

(TORA, TODA and ASDA for TWY indicate distances BTN the point where TWY CL meets RWY CL and RWY THR.)

## ROAH AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
18L	PALS 480m LIH	Green Green	PAPI 3.00%LEFT 453m 70ft	Nil	3000m 30m Coded color (White/Red) LIH	3000m 60m Coded color (White/Yellow) LIH	Red	Nil (*1)
36R	PALS (CAT I) 900m LIH	Green Green	PAPI 3.00%LEFT 447m 70ft	900m	3000m 30m Coded color (White/Red) LIH	3000m 60m Coded color (White/Yellow) LIH	Red	Nil (*2)
18R	PALS (CAT I) 900m LIH	Green Green	PAPI 3.00%LEFT 461m 68.8ft	900m	2700m 30m Coded color (White/Red) LIH	2700m 60m Coded color (White/Yellow) LIH	Red	Nil (*3)
36L	PALS (CAT I) 900m LIH	Green Green	PAPI 3.00%LEFT 436m 67.2ft	900m	2700m 30m Coded color (White/Red) LIH	2700m 60m Coded color (White/Yellow) LIH	Red	Nil (*3)
Remarks								
10								
Overrun area edge LGT(LEN:150m Color:Red) (*1) Overrun area edge LGT(LEN:192m Color:Red) (*2) Overrun area edge LGT(LEN:60m Color:Red) (*3)								

## ROAH AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	ABN: 261248N/1273908E, White/Green EV4.3sec, HO
2	LDI location and LGT Anemometer location and LGT	LDI: Nil Anemometer : RWY18L: 295m from RWY18L THR, lighted RWY36R: 432m from RWY36R THR, lighted RWY18R: 300m from RWY18R THR, lighted RWY36L: 325m from RWY36L THR, lighted
3	TWY edge and center line lighting	TWY edge and center line lights installed, see AD2.9
4	Secondary power supply / switch-over time	Within 1 sec : REDL, RENL, RTHL, WBAR, RCLL, Overrun area edge LGT, Stop bar LGT, Runway Entrance Lights  Within 15 sec : Other LGT
5	Remarks	Nil

## ROAH AD 2.16 HELICOPTER LANDING AREA

Nil


## ROAH AD 2.17 ATS AIRSPACE


Designation and lateral limits		Vertical limits (ft)	Airspace classification	ATS unit call sign Language	Remarks
1		2	3	4	6
Naha CTR	(1) Area within a radius of 5nm of NAHA ARP (2612N/12738E), in the west side of a line extending from 261429N1274125E on 052°56'T and 125°31'T	----- 2000 (EXC 2000)	D	Naha Tower En	
	(2) Area within a radius of 19nm of NHC VORTAC, in the west side of NHC 015R and in the north side of NHC 315R, excluding area(1) and area within a radius of 5nm of Kadena ARP(2621N/12746E).	----- 700 (EXC 700)	B	Naha APP/DEP Naha RADAR Naha ARR En	
Naha PCA	See attached chart		B	Naha APP/DEP Naha RADAR Naha ARR Kadena ARR En	
Naha ACA	See attached chart		E	Naha APP/DEP Naha RADAR Naha ARR Kadena ARR En	
Naha TCA	See attached chart		E	Naha TCA En	



## 那覇特別管制区

## Naha Positive Control Area (Class B)

NAME	LATERAL LIMITS	UPPER LIMIT (AMSL)	UNIT PROVIDING SERVICE	REMARKS
		LOWER LIMIT (AMSL) M(ft)		
1	2	3	4	5
那覇 Naha	下記に示される区域 The area shown below		<p>1. 那覇VORTACのR050及びR230の線の北西で飛行する航空機: Naha APP 119.1MHz/335.8MHz</p> <p>1. Aircraft operating northwest of the Naha VORTAC 050/230 radials: Naha APP 119.1MHz/335.8MHz</p> <p>2. 那覇VORTACのR050及びR230の線の南東で飛行する航空機: Naha APP 126.5MHz/258.3MHz</p> <p>2. Aircraft operating southeast of the Naha VORTAC 050/230 radials: Naha APP 126.5MHz/258.3MHz</p>	<p>当該空域を飛行しようとする航空機は、入域前に那覇アプローチに連絡し、コールサイン、現在位置、高度及び意図を通報し指示を受けること。(当該空域と重複する那覇管制圏を飛行しようとする航空機に対しては、那覇アプローチから当該管制圏内の飛行に係る指示が発出される。)</p> <p>All aircrafts requiring transit of Naha Positive Control Area must call Naha Approach prior to the point of entry to provide aircraft identification, position, altitude and intention. (Pilots intending to fly in the portion of the overlapping Naha CTR with Naha PCA should maintain contact with Naha Approach for ATC clearances and instructions.)</p>

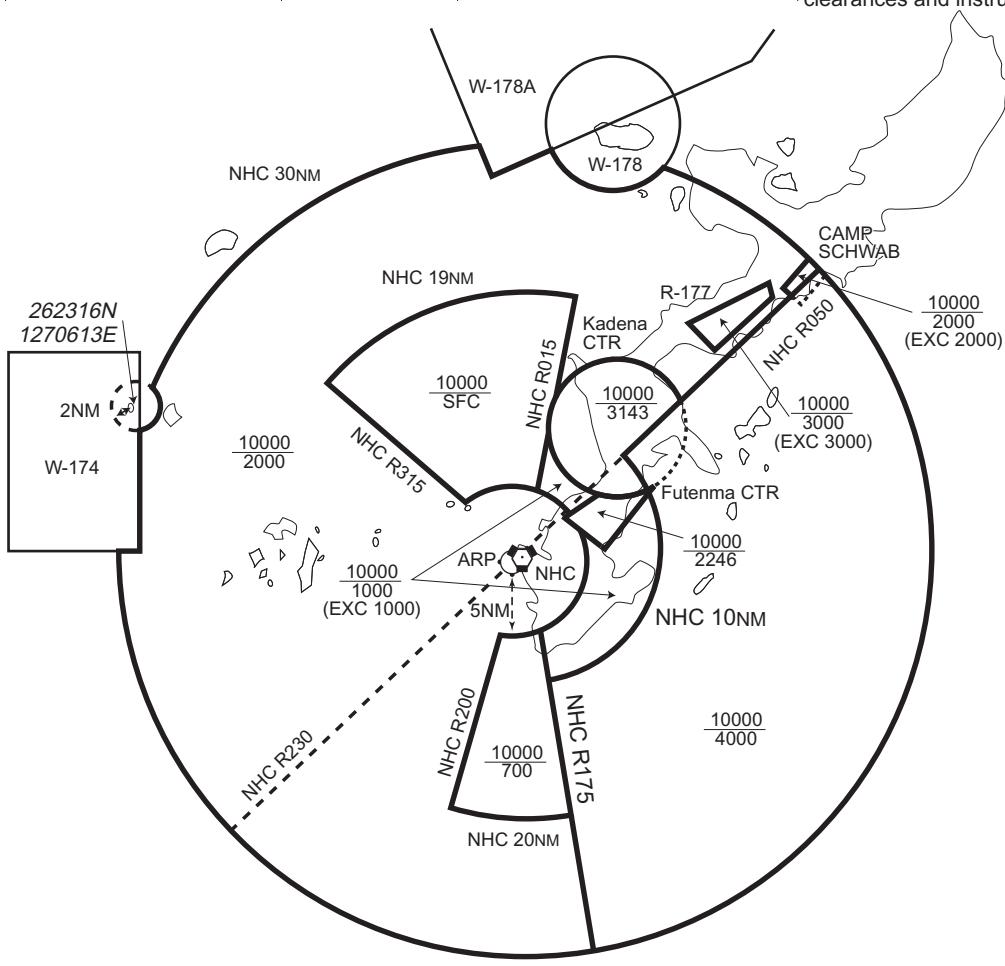

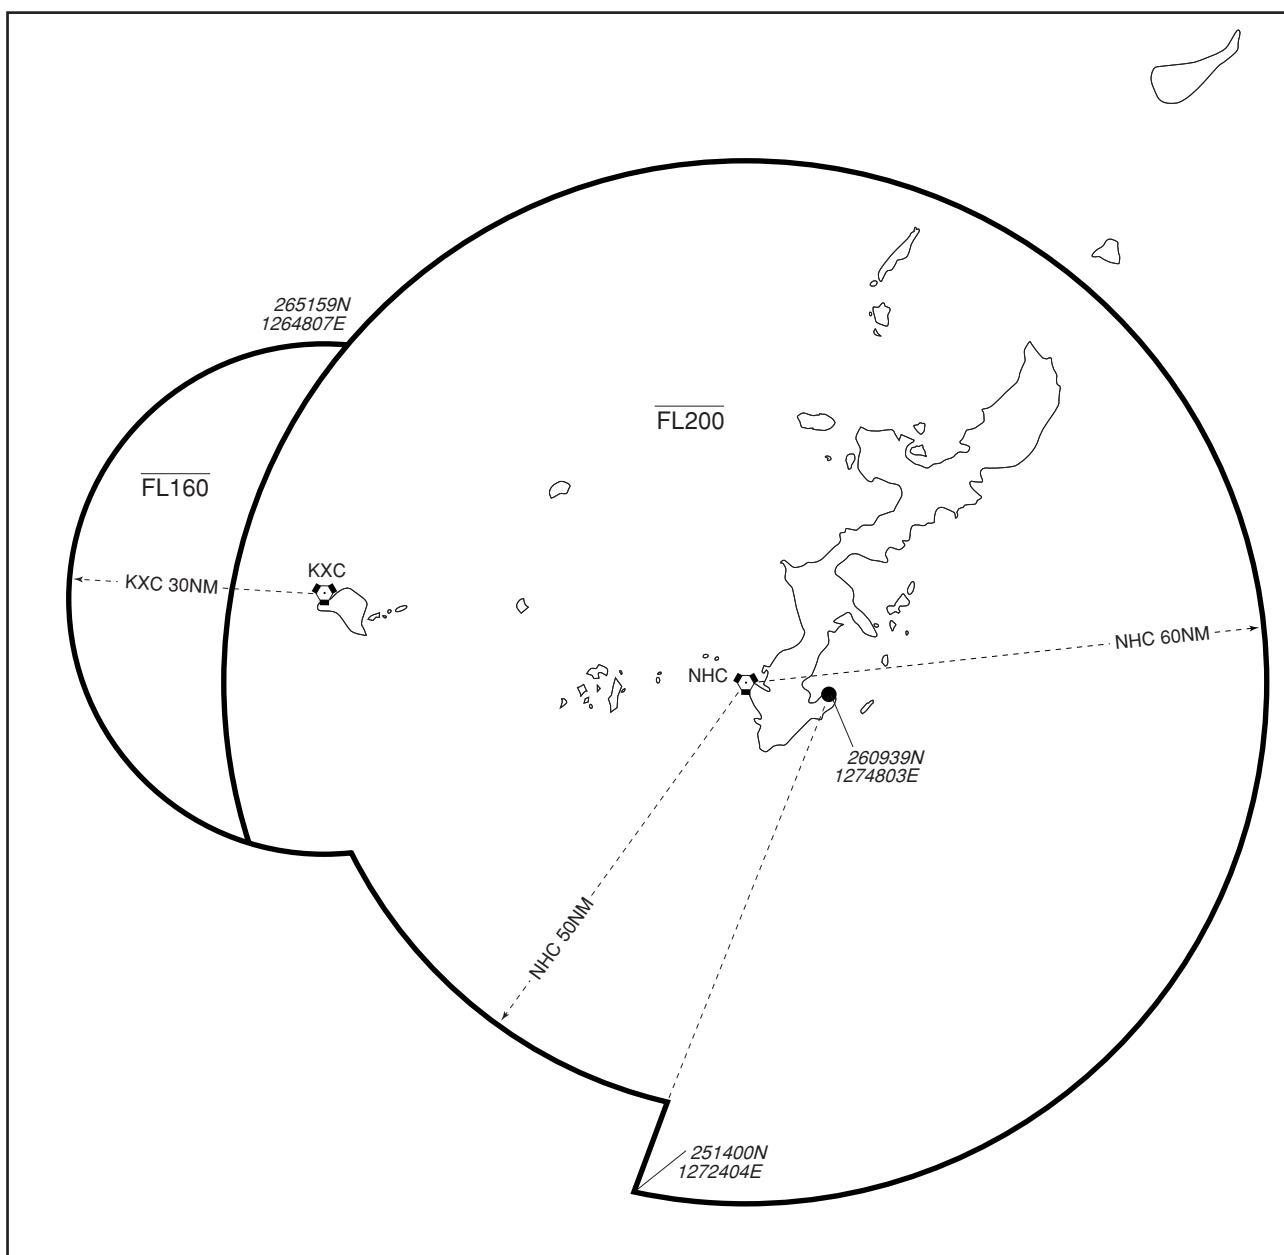那覇進入管制区  
Naha Approach Control Area

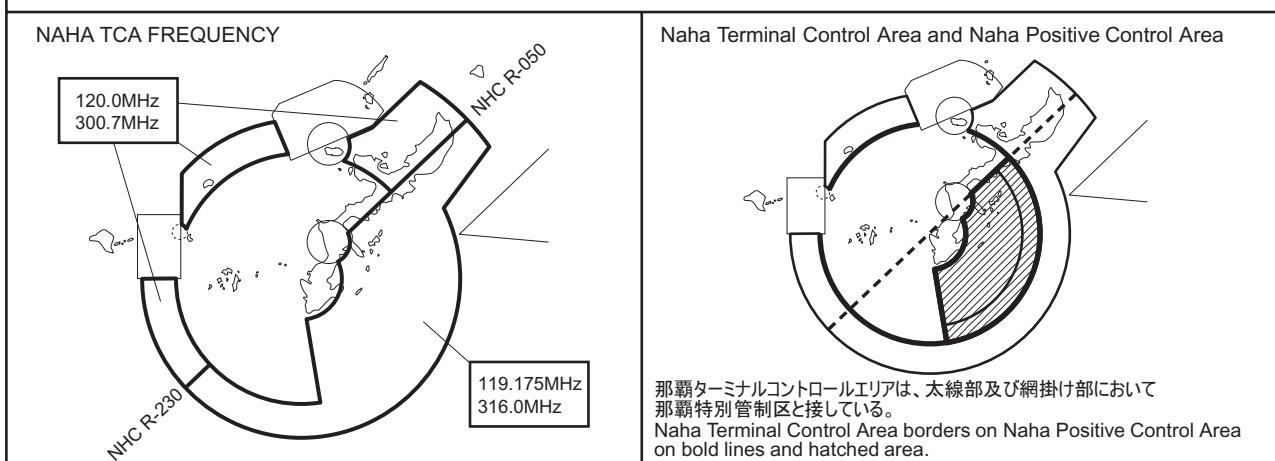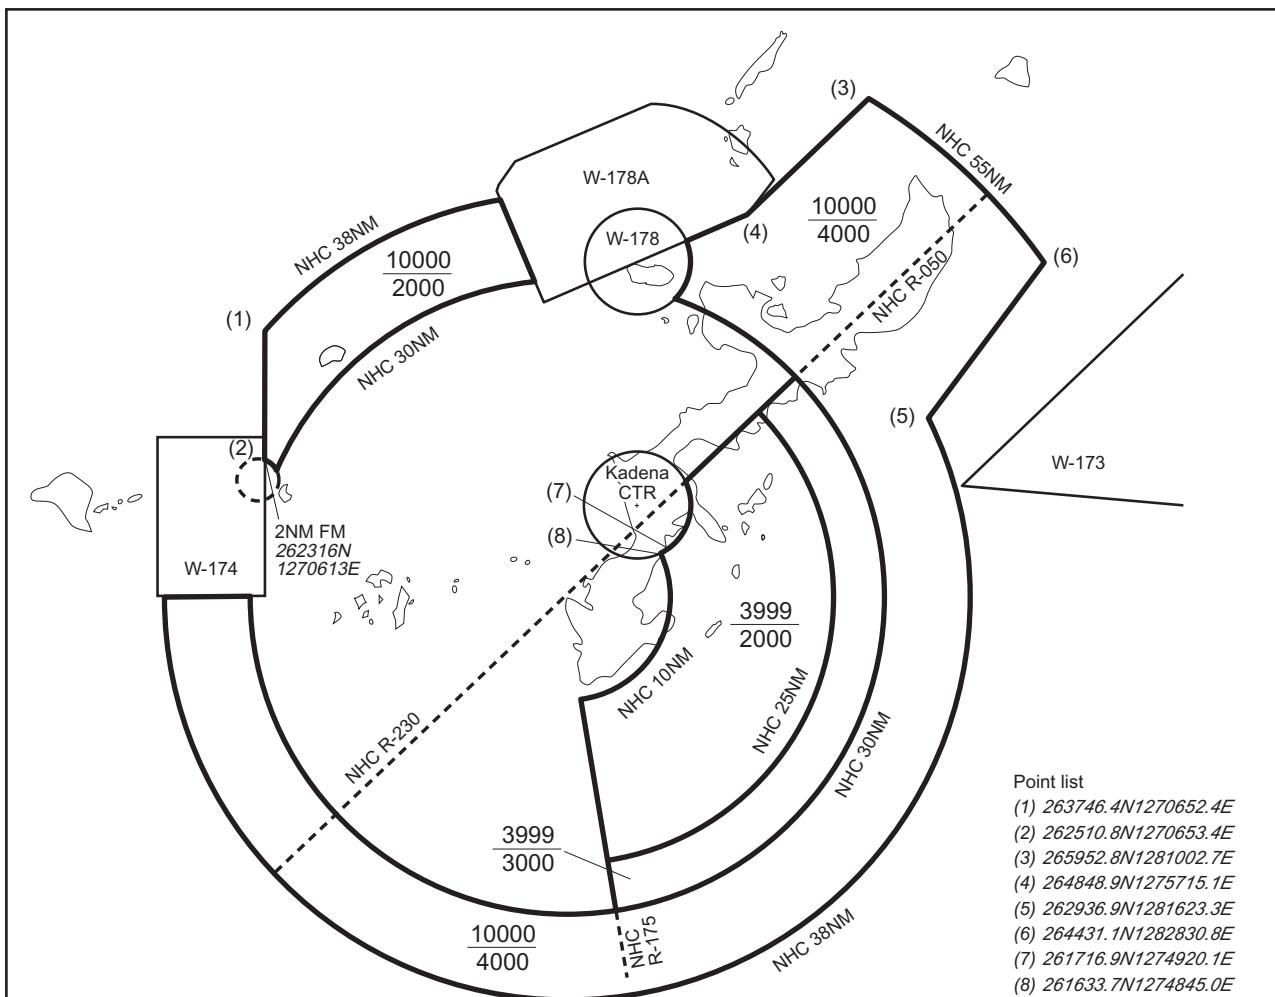那覇ターミナルコントロールエリア  
Naha Terminal Control Area

## 注意事項

1. パイロットは、那覇ターミナルコントロールエリアと那覇特別管制区の境界に留意し、那覇特別管制区に許可なく入域しないこと。
2. 那覇特別管制区への入域を要求する場合、パイロットは那覇TCAにその旨を通報し指示に従うこと。

## CAUTION


1. Pilots shall pay attention to the boundary between Naha Terminal Control Area and Naha Positive Control Area, and shall remain outside Naha Positive Control Area unless obtained clearance.
2. When intending to enter Naha Positive Control Area, pilots shall inform Naha TCA of their intention, and shall follow the instruction.

## ROAH AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
APP/DEP	Naha Approach/ Naha Departure	119.1MHz(1) 335.8MHz(1) 126.5MHz(2) 258.3MHz(2) 119.65MHz 228.2MHz	H24	(1) Primary for airspace northwest of Naha VORTAC R050/R230 (2) Primary for airspace southeast of Naha VORTAC R050/R230
ARR	Naha Arrival	118.85MHz(3) 278.5MHz(3)	H24	(3) Primary for aircraft landing at Naha Airport
	Kadena Arrival	135.9MHz(4) 255.8MHz(4) 285.4MHz	H24	(4) Primary for aircraft landing at Kadena AB and MCAS Futenma
ASR	Naha Radar	120.0MHz 121.1MHz 122.45MHz 125.55MHz 119.65MHz 228.2MHz 257.5MHz 261.4MHz 270.6MHz 287.8MHz 289.4MHz 290.3MHz 297.2MHz  310.0MHz 317.8MHz 321.5MHz 363.8MHz 121.5MHz(E) 243.0MHz(E)	H24	
TCA	Naha TCA	120.0MHz(5) 310.0MHz 122.45MHz 321.5MHz 119.175MHz(6) 300.7MHz(5) 316.0MHz(6)	2230-1130	(5) Primary for Naha Terminal Control Area northwest of Naha VORTAC R050/R230  (6) Primary for Naha Terminal Control Area southeast of Naha VORTAC R050/R230
TWR	Naha Tower	118.1MHz 126.2MHz 236.6MHz 308.6MHz 121.5MHz(E) 243.0MHz(E) 118.75MHz 247.8MHz	H24	
GND	Naha Ground	121.8MHz 284.6MHz 121.9MHz 284.4MHz	H24	
DLVRY	Naha Delivery	122.075MHz 256.0MHz	H24	
GCA-ASR -PAR	Naha GCA	119.5MHz 121.1MHz 124.7MHz 261.4MHz 288.1MHz 289.4MHz 296.3MHz 121.5MHz(E) 243.0MHz(E)	119.05MHz 120.6MHz 123.85MHz 236.8MHz 304.5MHz 318.2MHz	0100-1200 GLIDE PATH (1) RWY 18L: 3.0° (2) RWY 36R: 3.0° (3) RWY 18R: 3.0° (4) RWY 36L: 3.0°
ATIS	Naha Airport	127.8MHz 293.0MHz	H24	


## ROAH AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid (VOR declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR (5°W/2014)	NHC	116.5MHz	H24	261230.71N/1273834.32E		
TACAN	NHC	1199MHz (CH-112X)	H24	261229.51N/1273833.44E	56.8ft	TACAN AZM Unusable: 340°-030° beyond 35nm BLW 3,000ft. 060°-070° beyond 35nm BLW 3,000ft. 070°-120° beyond 30nm BLW 3,000ft. 120°-130° beyond 20nm BLW 3,000ft. 130°-150° beyond 25nm BLW 3,000ft. 150°-160° beyond 30nm BLW 3,000ft. 170°-180° beyond 35nm BLW 3,000ft. 240°-300° beyond 35nm BLW 3,000ft.
ILS-LOC 36R	IOK	110.3MHz	H24	261239.35N/1273840.95E		LOC : 177.5m (582ft) away FM RWY 18L THR. 45m(148ft) W of RCL. LOC off-set 0.63° BRG (MAG) 002°
ILS-GP 36R	-	335.0MHz	H24	261106.67N/1273842.59E		GP: 328m (1076ft) inside FM RWY 36R THR. 120m(394ft) W of RCL. Angle 3.0° HGT of ILS Ref datum 17.4m(57ft).
ILS-DME 36R	IOK	1001MHz (CH-40X)	H24	261107.00N/1273841.98E	28ft	DME: 336.4m(1104ft) inside FM RWY 36R THR. 134.9m(443ft) W of RCL.
ILS-LOC 18R	ION	110.15MHz	H24	261033.64N/1273803.22E		LOC : 301.5m (990ft) away FM RWY 36L THR. 55m(180ft) E of RCL. LOC off-set 0.84° BRG (MAG) 182°
ILS-GP 18R	-	334.25MHz	H24	261200.70N/1273801.29E		GP: 322.6m (1058ft) inside FM RWY 18R THR. 115m(377ft) E of RCL. Angle 3.0° HGT of ILS Ref datum 15.8m(52ft).
ILS-DME 18R	ION	1125MHz (CH-38Y)	H24	261200.55N/1273801.65E	31ft	DME: 327.6m(1075ft) inside FM RWY 18R THR. 125m(410ft) E of RCL.
ILS-LOC 36L	IOW	111.7MHz	H24	261221.27N/1273756.17E		LOC : 316.0m (1037ft) away FM RWY 18R THR. BRG (MAG) 003°
ILS-GP 36L	-	333.5MHz	H24	261053.50N/1273755.98E		GP: 317.7m (1042ft) inside FM RWY 36L THR. 120m(394ft) W of RCL. Angle 3.0° HGT of ILS Ref datum 16.5m(55ft).
ILS-DME 36L	IOW	1015MHz (CH-54X)	H24	261053.81N/1273755.60E	32ft	DME: 327.7m(1075ft) inside FM RWY 36L THR. 130m(427ft) W of RCL.
MSAS	-	1575.42MHz	H24			Transmitting antennas are satellite based

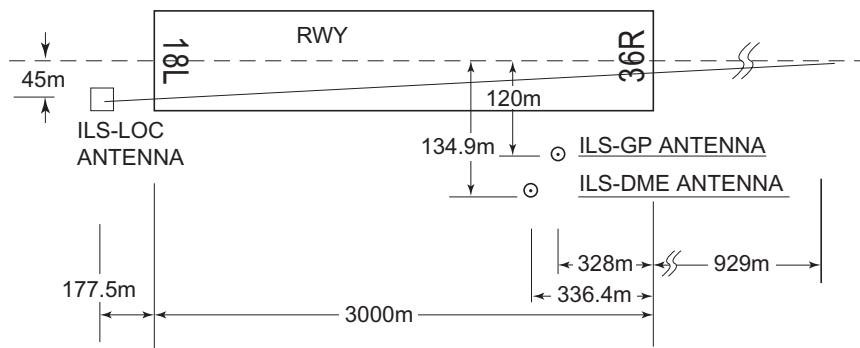
ILS for RWY 36R

## REMARKS :

- |                         |              |
|-------------------------|--------------|
| 1. LOC OFFSET Angle     | 0.63°        |
| 2. LOC beam BRG (MAG)   | 002°         |
| 3. GP Angle             | 3.0°         |
| 4. HGT of ILS REF datum | 17.4m (57ft) |
| 5. ELEV of ILS-DME      | 8.48m (28ft) |

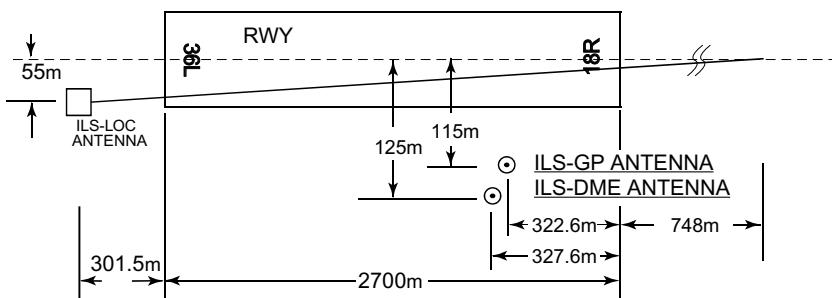ILS for RWY18R

- REMARKS : 1. LOC OFFSET Angle 0.84°  
 2. LOC beam BRG(MAG) 182°  
 3. GP Angle 3.0°  
 4. HGT of ILS REF datum 15.8m(52ft)  
 5. ELEV of ILS-DME 9.3m(31ft)

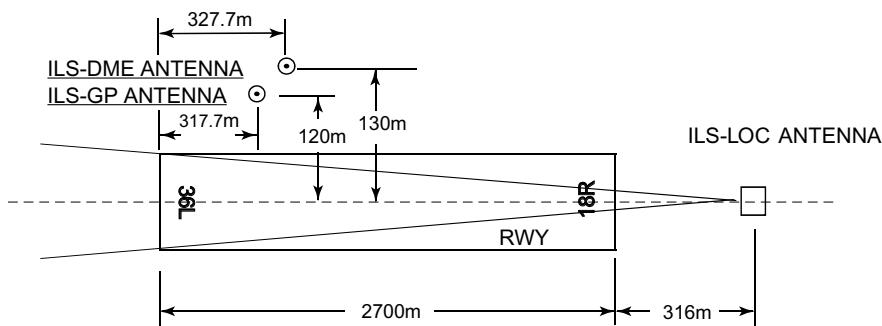ILS for RWY36L

- REMARKS : 1. LOC beam BRG (MAG) 003°  
 2. GP Angle 3.0°  
 3. HGT of ILS REF datum 16.5m(55ft)  
 4. ELEV of ILS-DME 9.6m(32ft)

## ROAH AD 2.20 LOCAL TRAFFIC REGULATIONS

## 1. Airport regulations

## 1.1 定期便以外の航空機の取扱い

定期便以外の航空機による当空港の使用については、事前に空港管理者と調整すること。詳細については、大阪航空局那覇空港事務所航空管制運航情報官に連絡すること。  
(電話 : 098-857-1107)

## 1.1 Aircraft other than scheduled

Use of this airport by aircraft other than scheduled is all subject to prior arrangements with the airport administrator. Contact JCAB Naha operations for further details.  
(Tel:098-857-1107)

## 1.2 管制方式

航空機の運航者は、次に掲げる方式に従うこと。

## (1) 一般事項

- A. パイロットは、那覇空港の標準計器出発方式、標準計器到着方式及び計器進入方式に公示される高度制限について、事前確認を徹底した上で、確実に高度制限を遵守して飛行すること。
- B. 第6エプロン内には、管制塔からの不可視区域が存在する。

## (2) 出発機

- A. 全てのIFR出発機は、エンジン始動5分前に那覇デリバリーと通信設定し、次に掲げる事項を通報すること。

- a) 航空機呼出符号
- b) 目的地
- c) 要求高度（代替要求高度がある場合は、当該高度）
- d) 駐機位置（スポット番号）

- B. パイロットは、プッシュバック及び/又はエンジン始動が遅れる場合、又はそれが予想される場合は、管制官に対してその旨通報すること。ただし、他の航空機の地上交通による遅延、又は出発制御時刻等が付加されたために生じる遅延を除く。

- C. 那覇特別管制区を飛行しようとするVFR機は、地上走行前に那覇グランド/タワーに対して、当該管制圏を離脱する飛行方向又は飛行経路及び要求高度を通報すること。那覇グランド/タワーは、那覇レーダーと通信設定を行う周波数及び二次レーダー個別コードを指定する。

## (3) インターセクション・デパートチャー

- A. 出発機はパイロットの同意なしに誘導路E2、T2及びT8からのインターフェクション・デパートチャーを指示されることがある。誘導路E2、T2及びT8から出発できない場合は、管制官に対してその旨通報すること。

- B. AD1.1.6.3.2(2)B.b(a)に記載されている出発機間の管制間隔（ヘビー機に後続するミディアム機又はライト機間、ミディアム機に後続するライト機間は3分間）は、次に掲げる誘導路から出発する航空機には適用されない。3分間の間隔を必要とする航空機は、那覇グランド/タワーに対してその旨通報すること。

## 1.2 ATC Procedures

Aircraft operators shall comply with the following procedures.

## (1) General

- A. Pilots shall certainly pre-check and surely comply with altitude restrictions published on standard instrument departures, standard instrument arrivals and instrument approach procedures at Naha Airport.
- B. Invisible areas from control tower exist within APRON NR-6.

## (2) Departure

- A. All IFR departing aircraft shall contact Naha Delivery 5 minutes prior to starting engines and advise the following information.

- a) call sign
- b) destination
- c) proposed flight level/altitude (alternative flight levels/altitudes, if any)
- d) parking position (spot number)

- B. Pilots shall advise ATC if any delay in push-back and/or engine start-up is experienced or anticipated except when delay has been caused by other ground traffic or departure time restriction such as release time.

- C. VFR aircraft intending to operate within the Naha Positive Control area shall advise the Naha ground/tower prior to taxi of intended direction or route of flight and proposed altitude to depart from respective Control Zone. The Naha ground/tower will assign a frequency to contact Naha Radar and discrete beacon code.

## (3) Intersection departure

- A. Departing aircraft may be instructed intersection departure from TWY E2, T2, T8 without pilot's consent. Aircraft unable to depart from TWY E2, T2, T8 shall advise ATC accordingly.

- B. Separation for departure as in AD1.1.6.3.2(2)B.b(a) (3 minutes for MEDIUM or LIGHT aircraft behind HEAVY aircraft, LIGHT aircraft behind MEDIUM aircraft) will not be applied to aircraft departing from the following TWYs. Aircraft requiring separation of 3 minutes shall advise "NAHA GROUND/TOWER" accordingly.

滑走路 RWY	先行機が出発する誘導路 TWY where a leading aircraft departing	後続機が出発する誘導路 TWY where a succeeding aircraft departing
18L	E1, W1	E2
	E3	W2
	E4	W3
	E4C	W3C
36R	E8S	W5
18R	T1	T2
36L	T9	T8

## (4) 到着機

- A. 全ての民間 IFR 到着機は、那覇タワー /GCA との最初の通信設定時において、駐機位置（スポット番号）を通報すること。
- B. 後続機は他の周波数にいる場合があることから、パイロットは、最寄りの誘導路経由で、又は管制官の指示に従い、遅滞なく滑走路を離脱することによって、滑走路占有時間の短縮に努めること。
- C. 全ての到着機は、管制官から指定された二次レーダー個別コードを、着陸するまで変更しないこと。ただし、管制官から別途指示された場合は、この限りでない。
- D. 那覇特別管制区を飛行しようとする VFR 機は、那覇レーダーと通信設定を行う前に ATIS を聴取するよう努め、通信設定時に ATIS 情報を受信した旨、飛行経路及び要求高度を通報すること。
- E. 那覇タワーと通信設定する VFR 機は、以下の管轄周波数に連絡し、コールサイン、現在位置、高度及び意図を通報し指示を受けること。
  - a) 空港標点から東象限を飛行する航空機  
(VRP:AJA,YONABARU,MABUNI)  
Naha TWR:118.1MHz/308.6MHz
  - b) 空港標点から西象限を飛行する航空機  
(VRP:SANDO,DOHNATSU,MAEJIMA,  
KERAMA NORTH,KERAMA SOUTH)  
Naha TWR:118.75MHz/247.8MHz

## (5) 視認進入

- A. 視認進入を許可された航空機は、進入許可発出時の指定高度にかかわらず、自機に適用される場周経路高度まで速やかに降下すること。ただし、管制官から別途指示された場合は、この限りでない。
- B. 視認進入を行う航空機は、回転翼機及び後方乱気流区分がライトの固定翼機を除き、騒音軽減のため海上を飛行すること。

## (4) Arrival

- A. All civil IFR arriving aircraft shall advise parking position (spot number) on initial contact with Naha Tower/GCA.
- B. Pilots are encouraged to reduce RWY occupancy time by exiting the RWY without delay at the first available taxiway or as instructed by ATC, for succeeding aircraft which may be on a different frequency.
- C. All arriving aircraft shall remain on discrete beacon code assigned by ATC until making a full stop landing, unless otherwise instructed by ATC.
- D. VFR aircraft intending to operate within the Naha Positive Control area should monitor ATIS broadcast prior to contacting Naha Radar, and advise ATIS code received, route of flight, and proposed altitude on initial contact.
- E. VFR aircraft should call Naha TWR to provide the aircraft identification, position, altitude and intention using the following frequency.
  - a) Aircraft operating east side of Naha Control Zone  
(VRP:AJA,YONABARU,MABUNI)  
Naha TWR:118.1MHz/308.6MHz
  - b) Aircraft operating west side of Naha Control Zone  
(VRP:SANDO,DOHNATSU,MAEJIMA,  
KERAMA NORTH,KERAMA SOUTH)  
Naha TWR:118.75MHz/247.8MHz

## (5) Visual approach

- A. Aircraft cleared for visual approach shall descend to appropriate traffic pattern altitude regardless of the assigned altitude when the approach clearance is issued, unless otherwise instructed by ATC.
- B. Aircraft, except fixed wing aircraft in light wake turbulence category and rotary wing aircraft, shall remain over the water when conducting visual approach due to noise abatement.

**1.3 PDA (parts departing aircraft) reporting to Airport Administration**

In order to secure the safety of aircraft operations and to rectify the issue of falling objects from aircraft operating in the vicinity of Naha Airport, aircraft operators are required to notify Airport Administration (Tel 098-857-1107) of any "Parts Departing Aircraft" from flights operating to/from Naha Airport, without delay. This information shall be shared by relevant parties in order to prevent recurrence of such.

## 2. Taxiing to and from stands

**2.1 Taxiing procedure**

All aircraft are required to hold at "GP HOLD LINE" on TWY T1 and T2 for RWY18R until receiving taxi clearance to protect the ILS glide slope signal.

**2.2 エプロンにおける安全対策について**

- 1) エプロン内においては、正確に黄色い導入線に沿って走行すること。
- 2) ジェットブーストによる地上の車両、設備及び隣接スポットの他の航空機への影響を回避するため、エプロン内においては、エンジン出力を最小にすること。

**2.2 Safety measures in Aprons**

- 1) While operating in the apron area, follow strictly yellow guide line.
- 2) In order to avoid jet blast damage to ground vehicles, equipment and other aircraft in adjacent spots, engine power should be kept to minimum within APRON.

## 3. Parking area for small aircraft(General aviation)

See AD2.9 Marking AIDs and Parkings Area(West side)

## 4. Parking area for helicopters

See AD2.9 Marking AIDs and Parkings Area(West side)

## 5. Apron - taxiing during winter conditions

Nil

## 6. Taxiing - limitations

**1. Wing tip clearance at the TWY intersection (REF. AD1.1.6.8)**

Wing tip clearance at the TWY intersection between the aircraft holding at the stop marking on the TWY and the other aircraft taxiing behind it are as follows.

- (1) When B744 holding at the stop marking on TWY E1, E2, E3, E4C, E6, E8S, E9

Wing Span (WS) of aircraft taxiing on TWY A1-A4, A5-A6 or A7-A9	WS=< 51.1m	51.1m <WS=< 68.1m	WS> 68.1m
Wing tip clearance	*A	*B	*C

- (2) When B744 holding at the stop marking on TWY W2

Wing Span (WS) of aircraft taxiing on TWY B	WS=< 52.1m	52.1m <WS=< 69.1m	WS> 69.1m
Wing tip clearance	*A	*B	*C

- (3) When B744 holding at the stop marking on TWY T1, T2, T8

Wing Span (WS) of aircraft taxiing on TWY C	WS=< 18.1m	18.1m <WS=< 35.1m	WS> 35.1m
Wing tip clearance	*A	*B	*C

Legend:

\*A : wing tip clearance >= 15m

\*B : 6.5m <= wing tip clearance < 15m

\*C : wing tip clearance < 6.5m

**2. Restricted TWY**

Taxiing from E5 to A5, and vice versa, AVBL wheelbase 9.8m or less, YS11, P3, C1, C130 and US1, for example.

**3. 航空機重量制限**

誘導路 A8 及び W5 を使用する A350-900 型機においては、航空機重量が下表の値を超えてはならない。

**3. Aircraft weight restriction**

When A350-900 using TWY A8 and W5, aircraft weight shall not exceed the values listed in the table below.

誘導路 TWY	A8		W5	
航空機重量 Aircraft weight	(lb)	(kg)	(lb)	(kg)
	533,500	242,000	474,200	215,100

## 7. School and training flights - technical test flights - use of runways

Nil

## 8. Helicopter traffic - limitation

Nil

## 9. Removal of disabled aircraft from runways

Nil

**ROAH AD 2.21 NOISE ABATEMENT PROCEDURES**

Nil

**ROAH AD 2.22 FLIGHT PROCEDURES****1. TAKE OFF MINIMA**

	RWY	ACFT CAT	REDL & RCLL		REDL or RCLL or RCL marking		NIL (DAYTIME ONLY)	
			RVR	VIS	RVR	VIS	RVR	VIS
Multi-Engine ACFT with TKOF ALTN AP FILED	18L	A,B,C,D	400m	400m	400m	400m	-	500m
	18R		400m	400m	400m	400m	-	500m
	36R		400m	400m	400m	400m	-	500m
	36L		400m	400m	400m	400m	-	500m
OTHER	18L 18R 36R 36L	A,B,C,D	AVBL LDG MINIMA					

## 2. WX MINIMA CONCERNING PAR APCH PROCEDURE

PAR RWY 18L

MINIMA		THR ELEV: 11		AD ELEV: 11	
CAT	PAR		CIRCLING		
	DA(H)	RVR/CMV	MDA(H)	VIS	
A				1600	
B	211(200)	750	620(609)	2400	
C				3200	
D					

Circling to WEST side of RWY only

PAR RWY 36R

MINIMA		THR ELEV: 9		AD ELEV: 11	
CAT	PAR		CIRCLING		
	DA(H)	RVR/CMV	MDA(H)	VIS	
A				1600	
B	209(200)	550	620(609)	2400	
C				3200	
D					

Circling to WEST side of RWY only

PAR RWY 18R

MINIMA		THR ELEV: 16		AD ELEV: 11	
CAT	PAR		CIRCLING		
	DA(H)	RVR/CMV	MDA(H)	VIS	
A				1600	
B	216(200)	550	620(609)	2400	
C				3200	
D					

Circling to WEST side of RWY only

PAR RWY 36L

MINIMA		THR ELEV: 14		AD ELEV: 11	
CAT	PAR		CIRCLING		
	DA(H)	RVR/CMV	MDA(H)	VIS	
A				1600	
B	214(200)	550	620(609)	2400	
C				3200	
D					

Circling to WEST side of RWY only

## 3. PAR Missed Approach Procedure

Unless otherwise instructed by ATC, execute each missed approach procedure as follows.

- (1) RWY18L: At guidance limit, climb to 1200FT via NHC R182 to NHC15.0DME, climb to 2000FT via NHC 15.0DME clockwise ARC to OLVAL and hold. Contact NAHA APP.
- (2) RWY36R : At guidance limit, climb to 1200FT on HDG 003° to NHC 2.4DME, turn left, via NHC R341 to NHC 15.0DME, climb to 2000FT via NHC 15.0DME counterclockwise ARC to OLVAL and hold. Contact NAHA APP.
- (3) RWY18R : At guidance limit, turn right, climb to 1200FT via NHC R226 to NHC 15.0DME, climb to 2000FT via NHC 15.0DME clockwise ARC to OLVAL and hold. Contact NAHA APP.
- (4) RWY36L : At guidance limit, turn left, climb to 1200FT via NHC R308 to NHC 8.5DME, climb to 2000FT via NHC R308 to NHC 15.0DME, via NHC 15.0DME counterclockwise ARC to OLVAL and hold. Cross NHC R308/12.0DME at or above 1400FT. Contact NAHA APP.

## 4. Lost communication procedures for arrival aircraft under radar navigational guidance

If radio communications with Naha Approach/Arrival/GCA are lost for 1 minute, or 5 seconds on final approach(PAR), squawk Mode A/3 Code 7600 and :

- (1) Contact Naha Tower.
- (2) If unable, proceed in accordance with Visual Flight Rules.
- (3) If unable,  
Proceed to OLVAL at the last assigned altitude or 2,000FT whichever is higher and execute Instrument Approach.

Note : Procedures other than above will be issued when required.

## 5. Trajectorized Airport Traffic Data Processing System (TAPS)

那覇アプローチの指示のもとに、当該進入管制区を飛行する航空機は、モードA/3の二次レーダー個別コード及びモードCによる応答を指示される。

二次レーダー個別コードを搭載していない航空機が、当該コードによる応答を指示された場合は、管制官に対してその旨通報すること。

Aircraft flying under control of Naha Approach in the Approach Control Area will be instructed to reply with discrete beacon code on Mode A/3 and Mode C.

If an aircraft with non-discrete beacon code capability is instructed to reply with discrete beacon code, it shall advise ATC accordingly.

6. 場周経路高度		6. Traffic Pattern Altitude	
(1) 東側場周経路		(1) East side	
A. 固定翼機		A.FIXED-WING AIRCRAFT	
最大離陸重量 7000kg 以下	1,000ft	Maximum take-off weight 7000kg or less.....	
		1,000ft	
B. 回転翼機	800ft	B.ROTARY-WING AIRCRAFT.....	
		800ft	
(2) 西側場周経路		(2) West side	
A. 固定翼機		A.FIXED-WING AIRCRAFT	
a) ジェット機		a) JET	
戦闘機及び練習機	1,700ft	Fighter and Trainer.....	
その他	1,000ft	1,700ft	
b) プロペラ機		Others.....	
最大離陸重量 7000kg 超	1,000ft	1,000ft	
最大離陸重量 7000kg 以下	700ft	700ft	
B. 回転翼機	500ft	B.ROTARY-WING AIRCRAFT.....	
		500ft	

## ROAH AD 2.23 ADDITIONAL INFORMATION

## 1. RWY18L 進入区域の船舶の通過

航空機の運航に影響がある高さの船舶が RWY18L 進入区域を通過する場合、以下の対応が取られる。

- 1) NOTAM ROAH 又は ATC により船舶の情報提供が行われる。
- 2) 以下の場合において、船舶が A 点～B 点を通過する間、待機が指示されることがある。

## a) RWY18L 着陸時

船舶高 35m(115ft)/MSL 超の場合、PAR 進入を行う到着機

船舶高 43m(142ft)/MSL 超の場合、全ての到着機

## b) RWY36R 出発時及び着陸時

船舶高 65m(214ft)/MSL 超の場合、IFR 出発機

船舶高 94m(309ft)/MSL 超の場合、IFR 到着機


## 1. Passage of vessel across RWY18L approach area

While vessel with height that affects ACFT operations is passing across RWY18L approach area, the following action will be taken.

- 1) The information of vessel will be provided by NOTAM ROAH or ATC.
- 2) While vessel is crossing between point A and point B, holding instruction may be issued in the following situations.
  - a) ACFT for landing RWY18L
    - When vessel height is above 35m(115ft)/MSL : arrival ACFT to conduct PAR APCH
    - When vessel height is above 43m(142ft)/MSL : all arrival ACFT
  - b) ACFT for take-off/landing RWY36R
    - When vessel height is above 65m(214ft)/MSL : IFR departure ACFT
    - When vessel height is above 94m(309ft)/MSL : IFR arrival ACFT

船舶経路

VESSEL COURSE

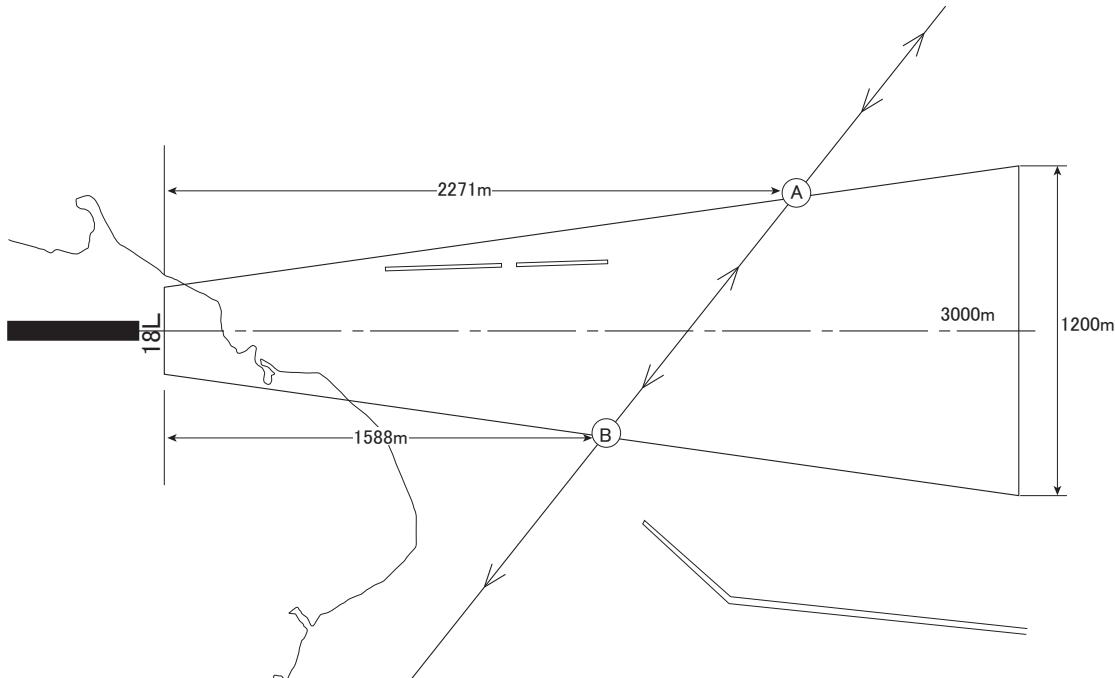

## 2. 滑走路上の維持工事

滑走路及び空港施設の維持工事のため、計画的な滑走路閉鎖が行われる。

(NOTAM ROAH 参照)

## 2. Schedule maintenance on the RWY

Scheduled RWY unserviceability due to RWY and facilities maintenance.


(See NOTAM ROAH)

<p><b>3. その他</b></p> <p>(1) アレスティングギア (型式 : BAK-12)</p> <p>1) 位置 滑走路上の以下の場所にアレスティングギアが装備されている。(飛行場面図 参照)</p> <ul style="list-style-type: none"> <li>a) RWY36R 進入端から 250M(820ft) 内側</li> <li>b) RWY36R 進入端から 877M(2,877ft) 内側</li> <li>c) RWY18L 進入端から 278M(912ft) 内側</li> <li>d) RWY36L 進入端から 20M(65.6ft) 外側</li> <li>e) RWY36L 進入端から 589.1M(1,931.5ft) 内側</li> <li>f) RWY18R 進入端から 20M(65.6ft) 外側</li> <li>g) RWY18R 進入端から 589.1M(1,931.5ft) 内側</li> </ul> <p>2) 通常の運用形態 使用 RWY に応じて、以下のアレスティングギアが RWY 上に張られた状態になっている。</p> <ul style="list-style-type: none"> <li>RWY18L: 上記 1) の a)</li> <li>RWY36R: 上記 1) の c)</li> </ul> <p>以下のアレスティングギアが過走帯内に張られた状態になっている。</p> <ul style="list-style-type: none"> <li>RWY36L: 上記 1) の d)</li> <li>RWY18R: 上記 1) の f)</li> </ul> <p>(2) ジェットバリア (MEN) MEN が RWY36R 及び RWY18L の過走帯端に設置されている。</p> <p>(3) ジェットバリア (型式 : BAK-12/15) BAK-12/15 が RWY36L 及び RWY18R の過走帯端に設置されている。</p> <p>(4) ノース及びサウスヘリパッド ノースヘリパッド及びサウスヘリパッドが B TWY 上に設置されている。 (飛行場面図 参照)</p>	<p><b>3. Other</b></p> <p>(1) Arresting-gear (Type BAK-12)</p> <p>1) Location Arresting-gears are installed on the RWY as follow. (See Aerodrome Chart)</p> <ul style="list-style-type: none"> <li>a) 250M(820ft) from RWY36R THR</li> <li>b) 877M(2,877ft) from RWY36R THR</li> <li>c) 278M(912ft) from RWY18L THR</li> <li>d) 20M(65.6ft) from outside RWY36L THR</li> <li>e) 589.1M(1,931.5ft) from inside RWY36L THR</li> <li>f) 20M(65.6ft) from outside RWY18R THR</li> <li>g) 589.1M(1,931.5ft) from inside RWY18R THR</li> </ul> <p>2) Normal configuration The following arresting-gear shall remain in the ready position for the RWY in use.</p> <ul style="list-style-type: none"> <li>RWY18L: paragraph 1) a) above</li> <li>RWY36R: paragraph 1) c) above</li> </ul> <p>The following arresting-gear shall remain in the ready position for the overrun.</p> <ul style="list-style-type: none"> <li>RWY36L: paragraph 1) d) above</li> <li>RWY18R: paragraph 1) f) above</li> </ul> <p>(2) Jet barrier (MEN) MENs are located on RWY36R overrun and RWY18L overrun end.</p> <p>(3) Jet barrier (Type BAK-12/15) BAK-12/15s are located on RWY36L overrun and RWY18R overrun end.</p> <p>(4) North and South Helipad North helipad and South helipad are located on B TWY. (See Aerodrome Chart)</p>
--	---

## ROAH AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome/Heliport Chart -1
Aerodrome/Heliport Chart -2
Aerodrome Obstacle Chart - ICAO Type A (RWY18L/36R)
Aerodrome Obstacle Chart - ICAO Type A (RWY18R/36L)
Aerodrome Obstacle Chart - ICAO Type B
Standard Departure Chart - Instrument (NAHA NORTH, LAVON, OLVAL, NAHA SOUTHWEST)
Standard Departure Chart - Instrument (ESKOB-RNAV)
Standard Departure Chart - Instrument (VIGER-RNAV)
Standard Departure Chart - Instrument (KIZNA-RNAV)
Standard Arrival Chart - Instrument (SCUBA, LAVON, LAFTY)
Standard Arrival Chart - Instrument (IHEYA NORTH, VELNO NORTH-RNAV)
Standard Arrival Chart - Instrument (RESORT NORTH-RNAV)
Standard Arrival Chart - Instrument (GUPTI NORTH, ENTOK NORTH-RNAV)
Standard Arrival Chart - Instrument (IHEYA SOUTH, VELNO SOUTH-RNAV)
Standard Arrival Chart - Instrument (RESORT SOUTH-RNAV)
Standard Arrival Chart - Instrument (GUPTI SOUTH, ENTOK SOUTH-RNAV)
Instrument Approach Chart (ILS Z or LOC Z RWY36R)
Instrument Approach Chart (ILS Y or LOC Y RWY36R)
Instrument Approach Chart (ILS X or LOC X RWY36R)
Instrument Approach Chart (ILS Z or LOC Z RWY36L)
Instrument Approach Chart (ILS Y or LOC Y RWY36L)
Instrument Approach Chart (ILS X or LOC X RWY36L)
Instrument Approach Chart (ILS or LOC RWY18R)
Instrument Approach Chart (RNAV(GNSS) RWY36R)
Instrument Approach Chart (RNAV(GNSS) RWY36L)
Instrument Approach Chart (RNAV(GNSS) RWY18R)
Instrument Approach Chart (RNAV(GNSS) RWY18L)
Instrument Approach Chart (VOR A or TACAN B)
Instrument Approach Chart (VOR C)
Instrument Approach Chart (TACAN D)
Other Chart (Visual REP)
Other Chart (MVA CHART)

## AERODROME CHART

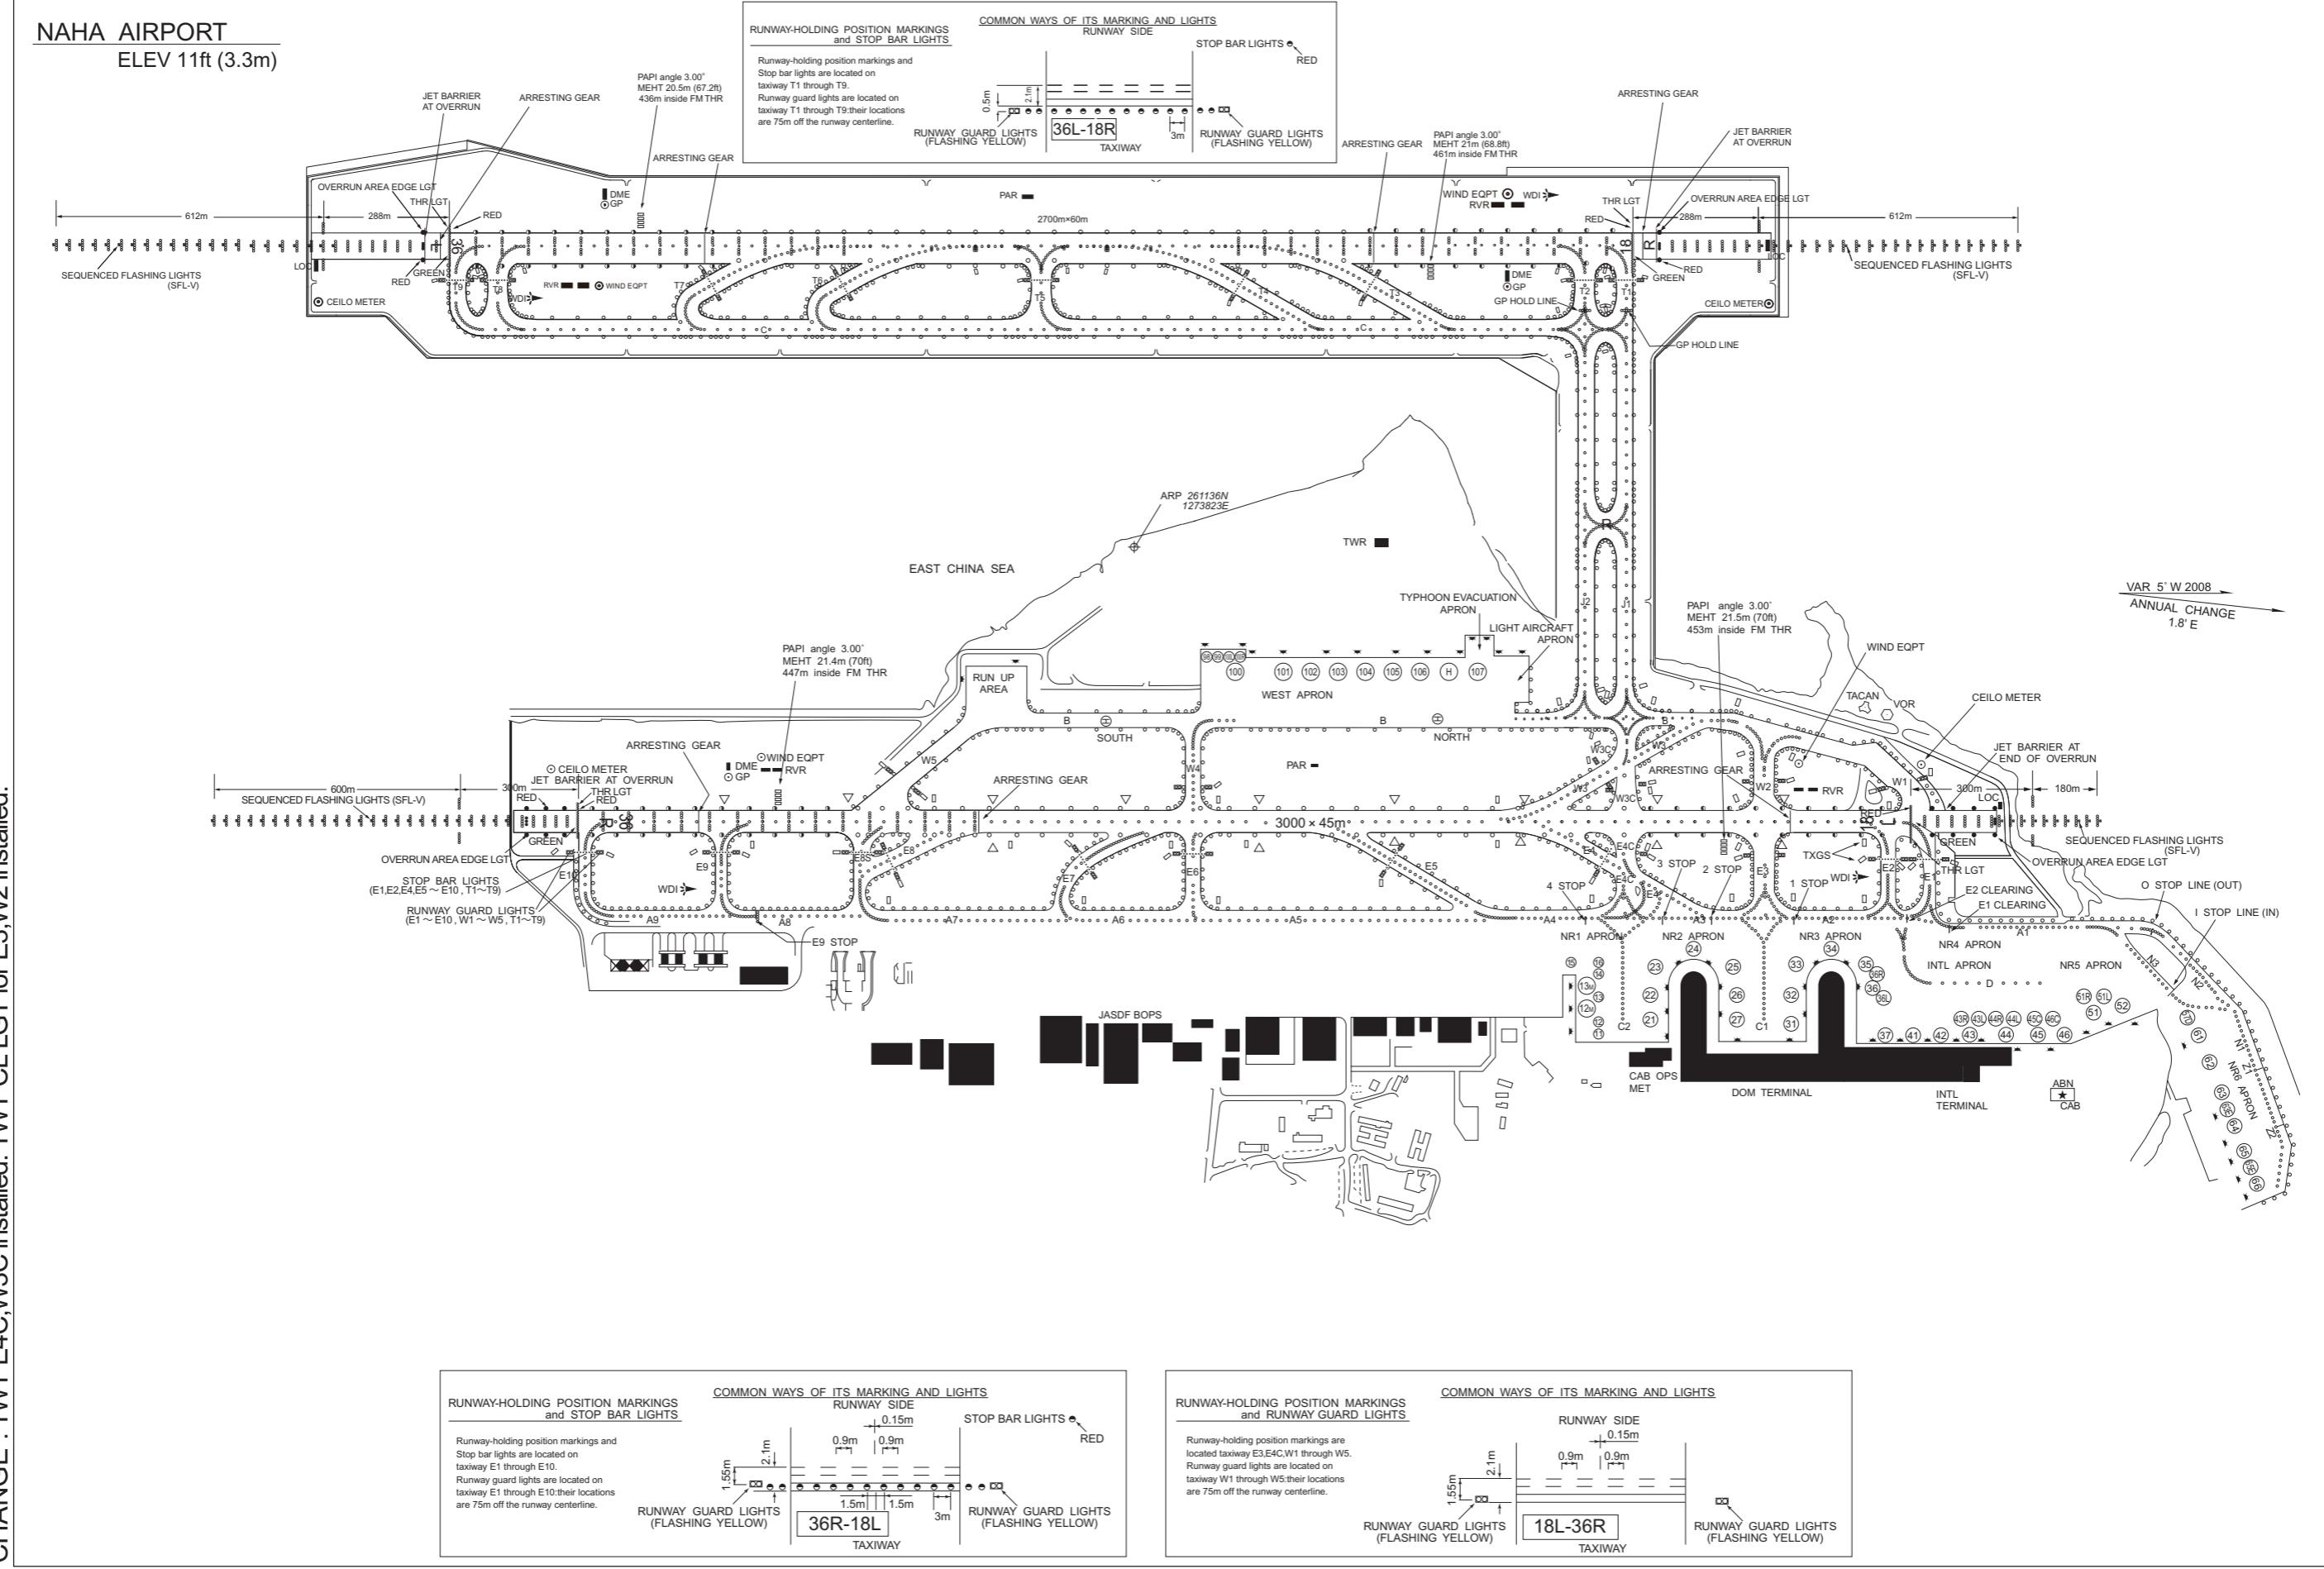


ROAH / NAHA

## AD CHART

CHANGE : TWY E4C,W3C installed.

## NAHA AIRPORT

ELLEV 11ft (3.3m)

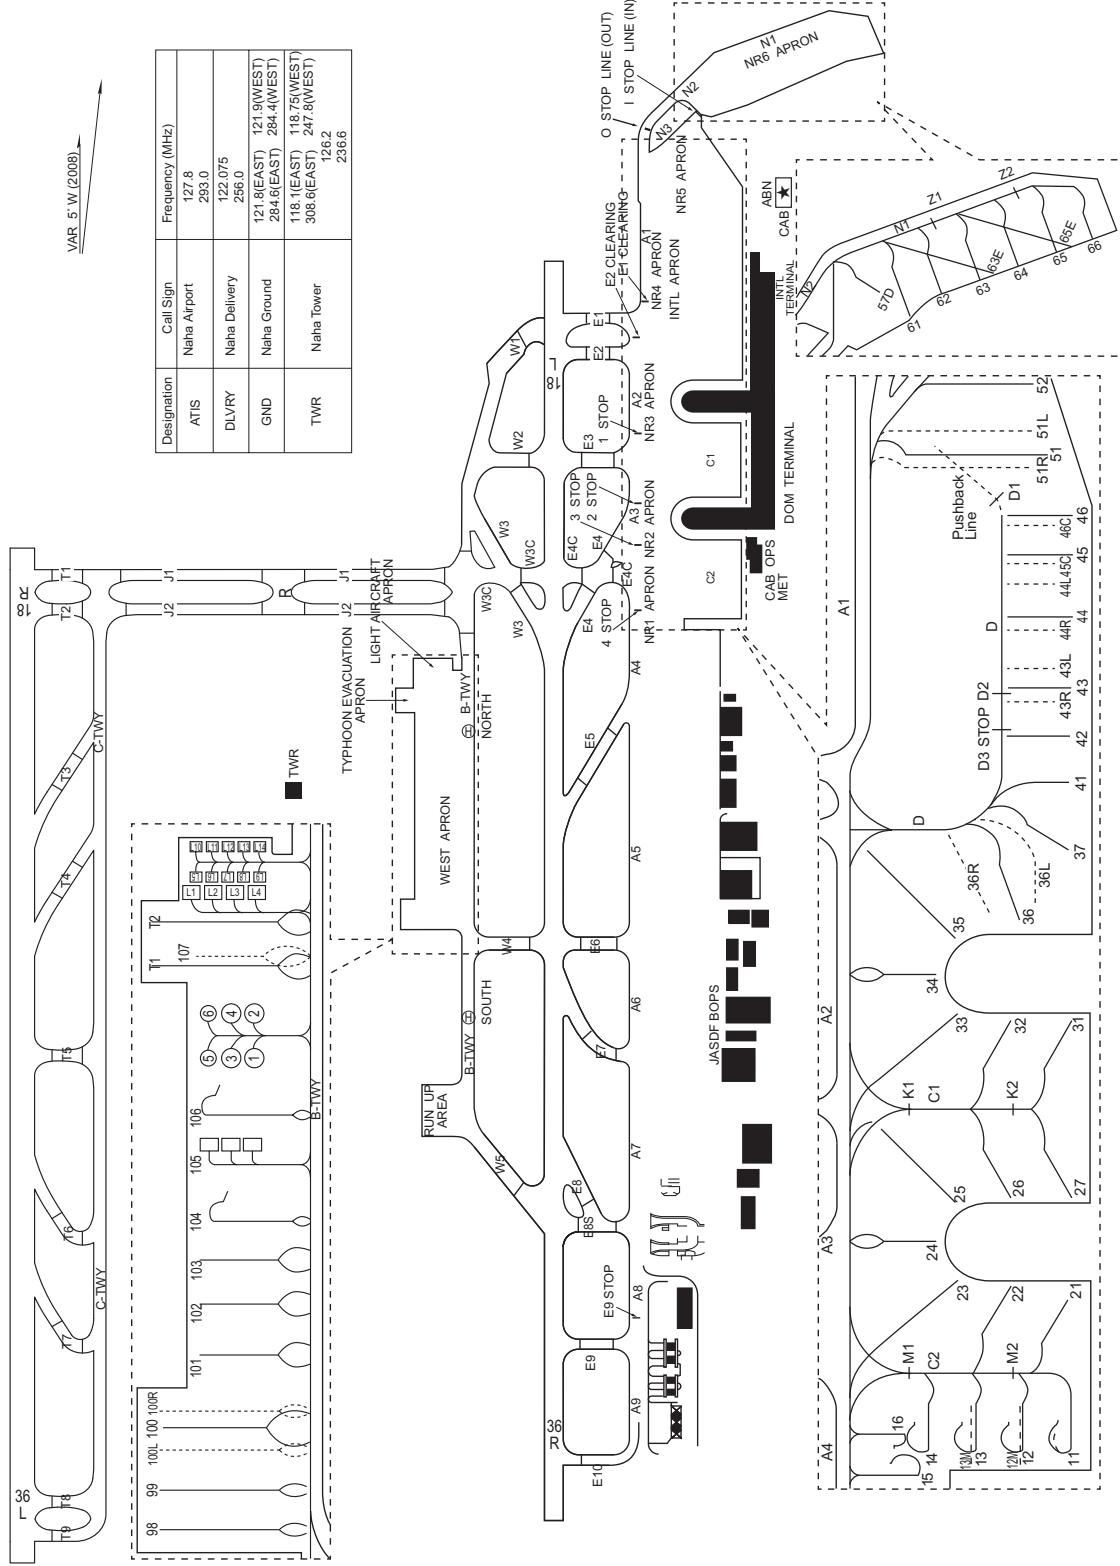


**INTENTIONALLY LEFT BLANK**

DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC

MAGNETIC VARIATION 5°25' W-APR 2020

AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

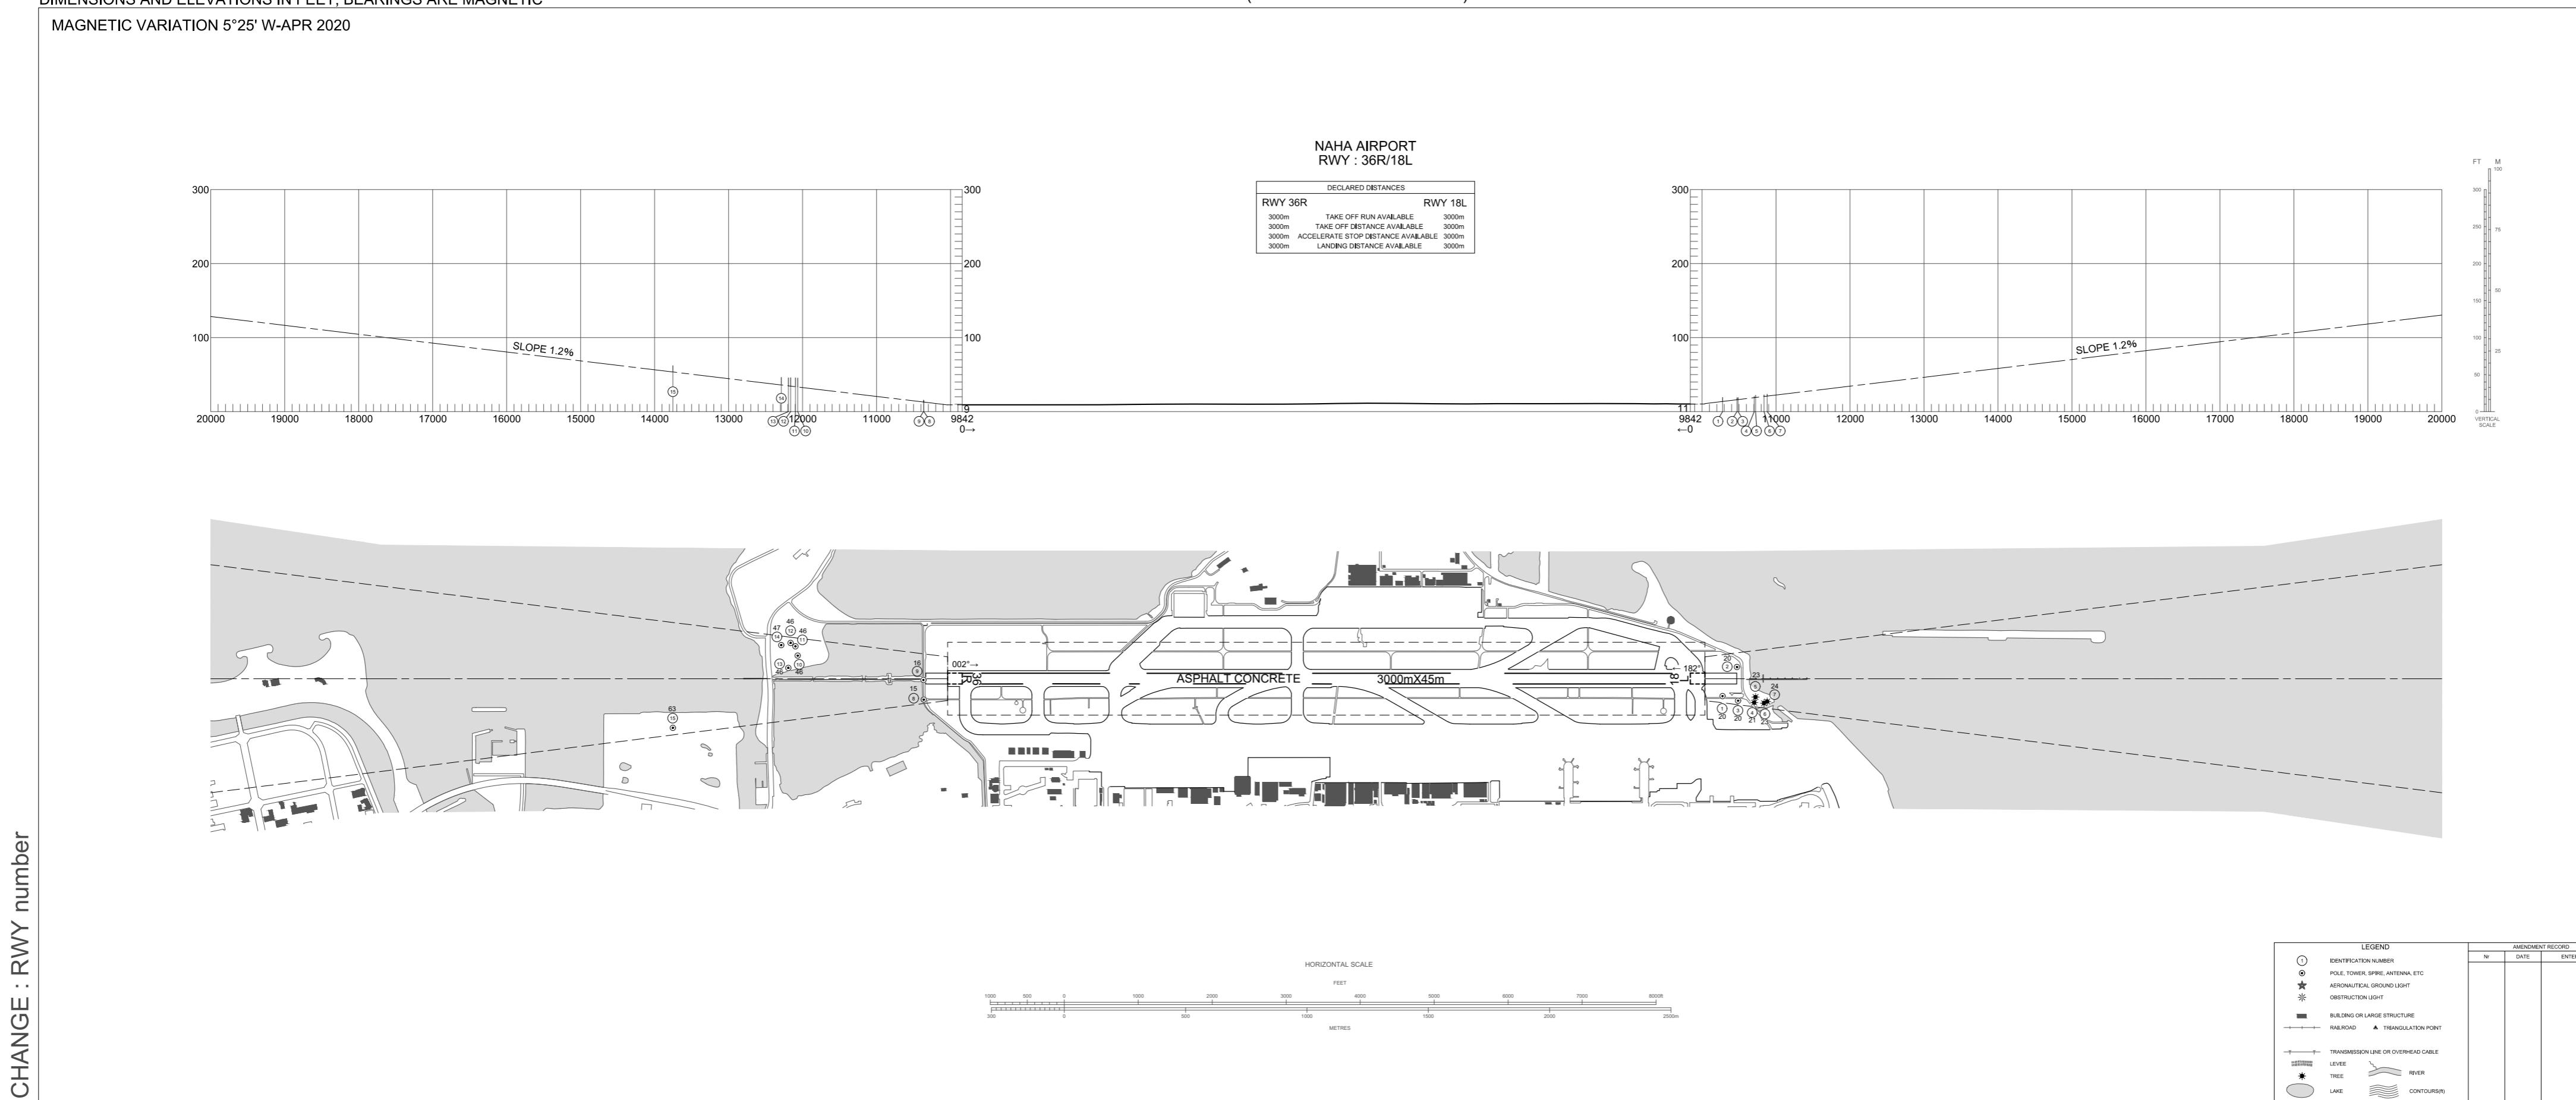



AERODROME OBSTACLE CHART-ICAO  
TYPE A (OPERATING LIMITATIONS)

DIMENSIONS AND ELEVATIONS IN FEET, BEARINGS ARE MAGNETIC


MAGNETIC VARIATION 5°25' W-APR 2020

NAHA AIRPORT  
RWY : 36L/18R


DECLARED DISTANCES		
RWY 36L	RWY 18R	
2700m	TAKE OFF RUN AVAILABLE	2700m
2700m	TAKE OFF DISTANCE AVAILABLE	2700m
2700m	ACCELERATE STOP DISTANCE AVAILABLE	2700m
2700m	LANDING DISTANCE AVAILABLE	2700m

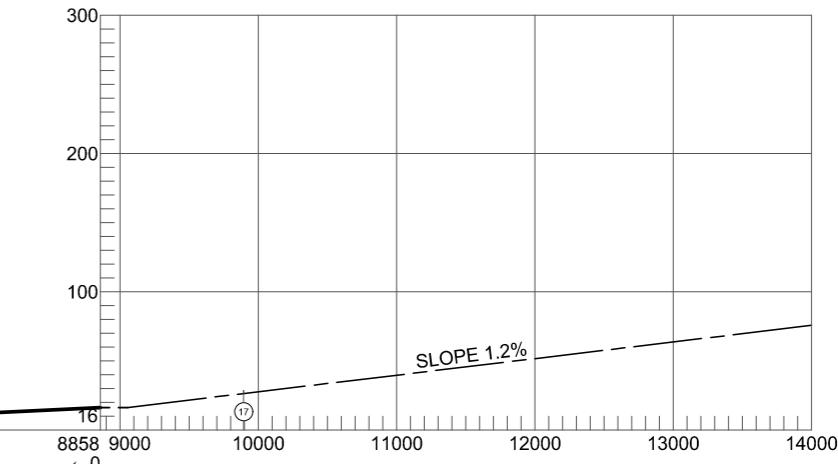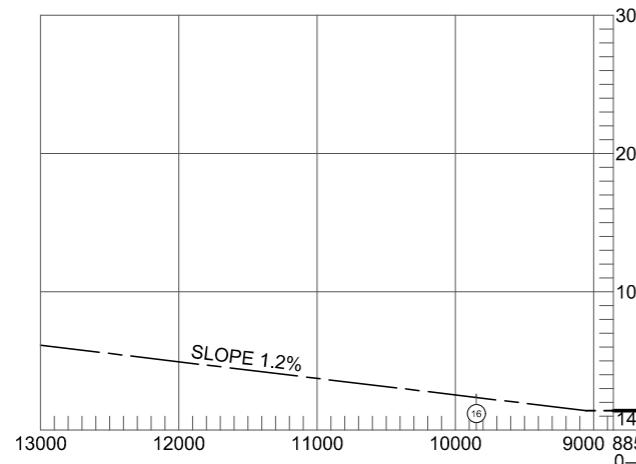

FT M  
300 100  
250 75  
200 50  
150 25  
100 0  
VERTICAL SCALE

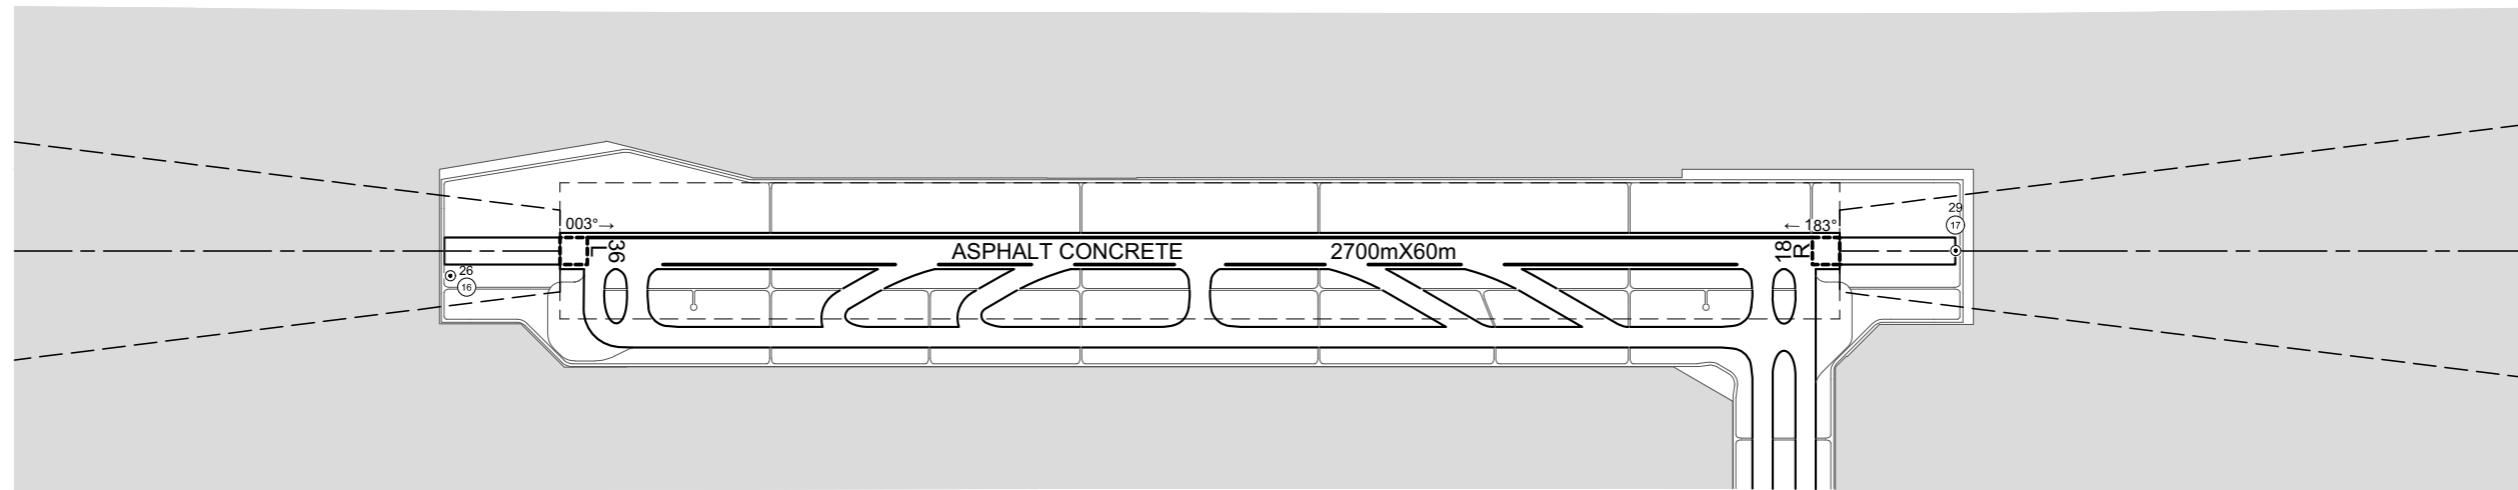

CHANGE : Newly established

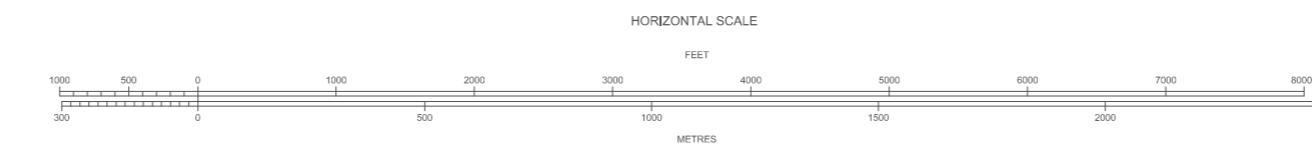


LEGEND			AMENDMENT RECORD		
①	IDENTIFICATION NUMBER		N°	DATE	ENTERED BY
◎	POLE, TOWER, SPIRE, ANTENNA, ETC				
★	AERONAUTICAL GROUND LIGHT				
※	OBSTRUCTION LIGHT				
—	BUILDING OR LARGE STRUCTURE				
—	RAILROAD	▲	TRIANGULATION POINT		
—	TRANSMISSION LINE OR OVERHEAD CABLE				
—	LEVEE				
★	TREE				
—	RIVER				
●	LAKE				
~~~~~	CONTOURS(ft)				

DIMENSIONS AND ELEVATIONS IN FEET BEARINGS ARE MAGNETIC

## AERODROME OBSTACLE CHART - ICAO

## TYPE B (OPERATING LIMITATIONS)

# AERODROME ELEVATION 11ft ARP

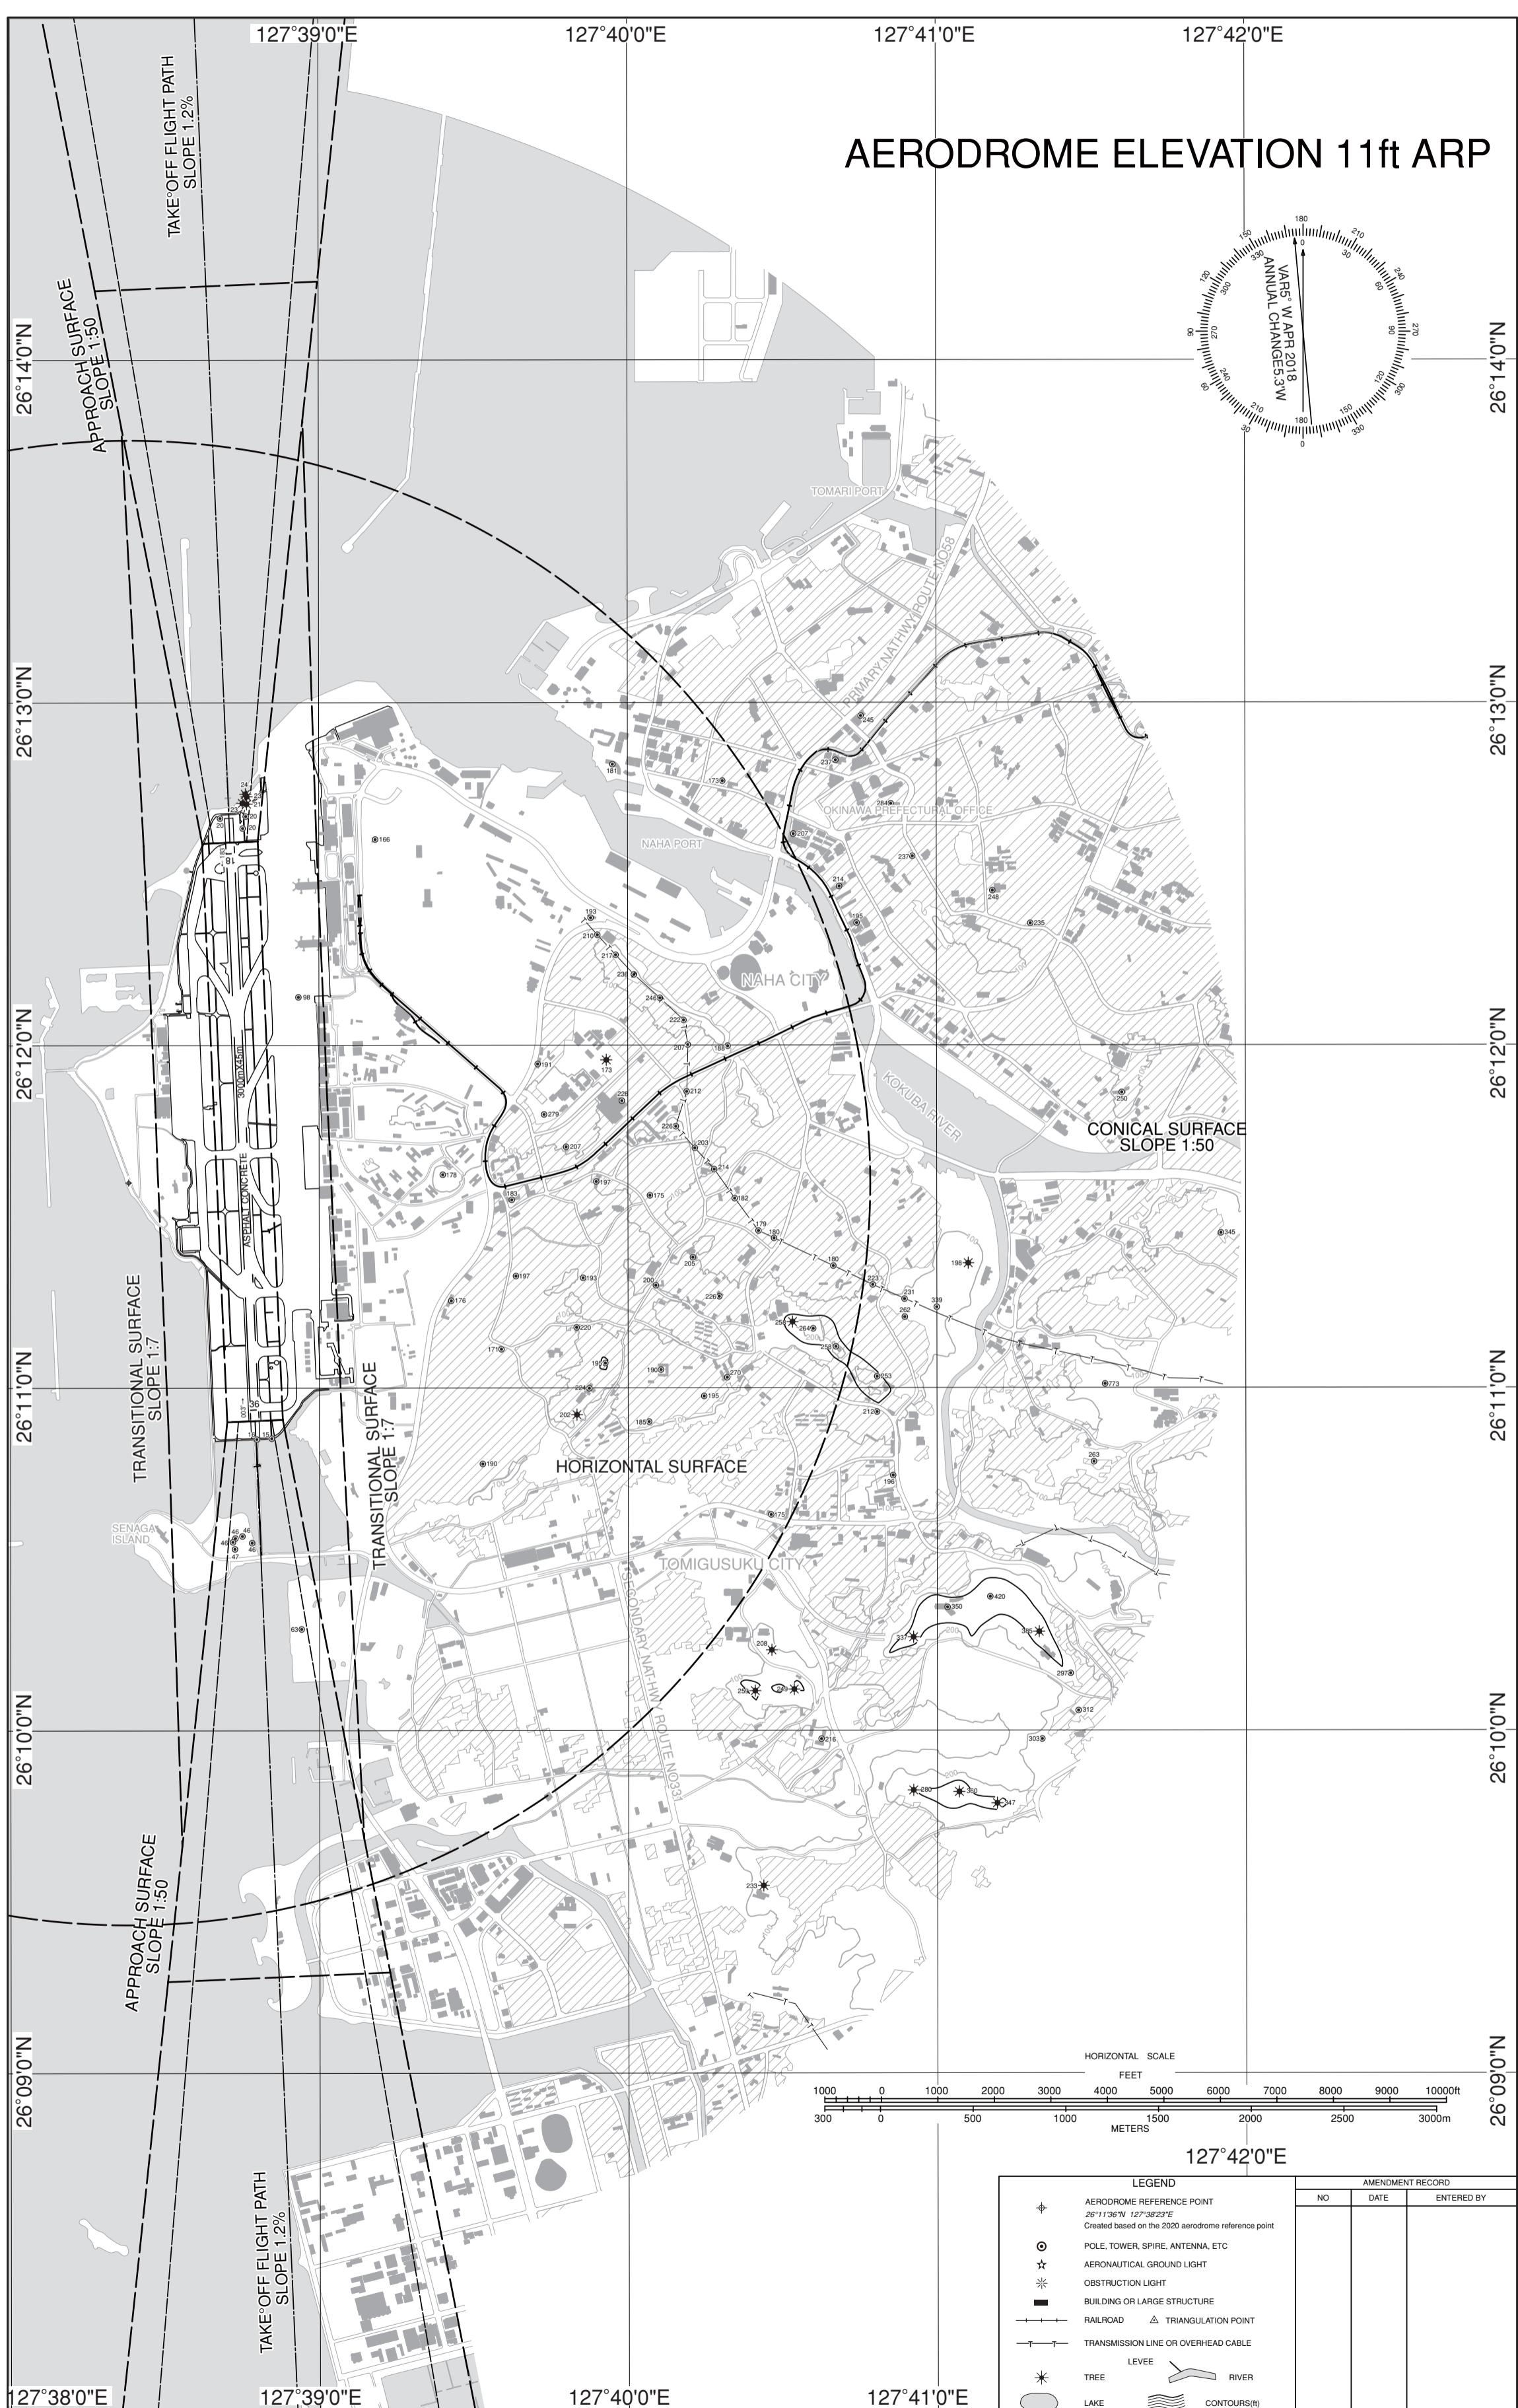

STANDARD DEPARTURE CHART-INSTRUMENT

ROAH/ NAHA

SID

NAHA NORTH FOUR DEPARTURE

RWY18L/18R: (Not established)  
RWY36R : Climb RWY HDG to NHC 2.4DME,...  
RWY36L : Climb RWY HDG to 500FT,...  
...turn left, via NHC R341 to EISAR.

Note RWY36R/36L: 5.0% climb gradient required up to 500FT.

SCUBA TRANSITION

From over EISAR, via NHC R341 to 24.1DME, turn right to intercept NHC R344 to SCUBA.  
Cross SCUBA at or above 4000FT.

LAVON ONE DEPARTURE

RWY18L : Climb RWY HDG to NHC 4.7DME, turn right, via NHC R196...  
RWY18R : Climb RWY HDG to 600FT, turn right, via NHC R211...  
... to intercept and proceed via NHC 15.0DME clockwise ARC to LAVON.  
  
RWY36R : Climb RWY HDG to NHC 2.4DME, turn left, via NHC R341...  
RWY36L : Climb RWY HDG to 500FT, turn left, via NHC R308...  
...to intercept and proceed via NHC 15.0DME counterclockwise ARC to LAVON.

Note RWY36R/36L: 5.0% climb gradient required up to 500FT.

OLVAL ONE DEPARTURE

RWY18L : Climb RWY HDG to NHC 4.7DME, turn right, via NHC R196...  
RWY18R : Climb RWY HDG to 600FT, turn right, via NHC R211...  
... to intercept and proceed via NHC 15.0DME clockwise ARC to OLVAL.

RWY36R : Climb RWY HDG to NHC 2.4DME, turn left, via NHC R341...  
RWY36L : Climb RWY HDG to 500FT, turn left, via NHC R308...  
...to intercept and proceed via NHC 15.0DME counterclockwise ARC to OLVAL.


Note RWY36R/36L: 5.0% climb gradient required up to 500FT.

NAHA SOUTHWEST FOUR DEPARTURE

RWY18L : Climb RWY HDG to NHC 4.7DME,...  
RWY18R : Climb RWY HDG to 500FT,...  
... turn right, via NHC R196 to LAFTY.  
RWY36R/36L: (Not established)

CHANGE:New PROC

## STANDARD DEPARTURE CHART-INSTRUMENT

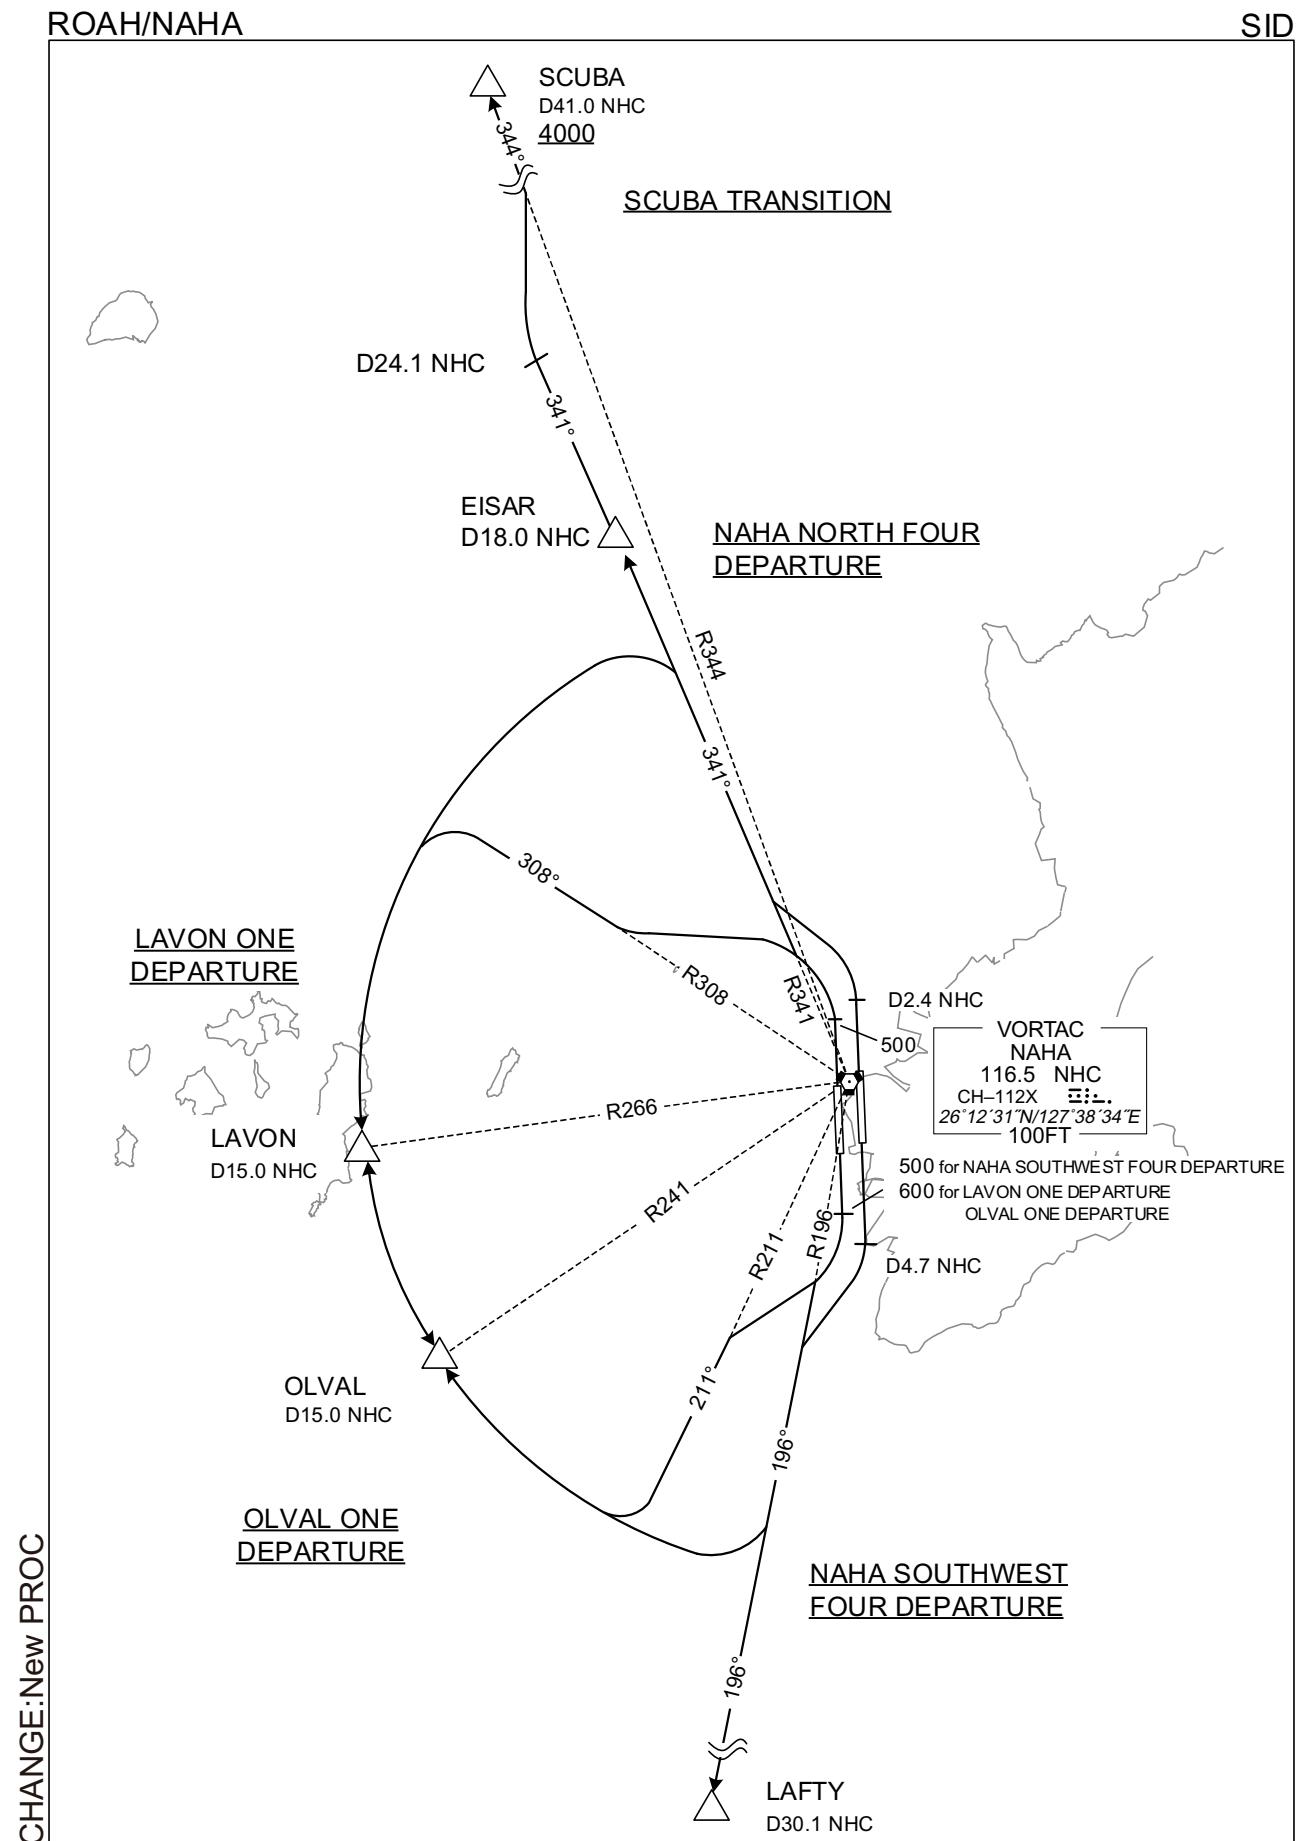

## STANDARD DEPARTURE CHART-INSTRUMENT

ROAH/NAHA		RNAV SID and TRANSITION	
ESKOB ONE DEPARTURE AMAMI TRANSITION / CHERY TRANSITION / YANBARU TRANSITION		RNAV1	
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.	DME GAP	RWY18L : DER - ESKOB RWY18R : DER - ESKOB AMAMI TRANSITION : ESKOB - AMAMI CHERY TRANSITION : ESKOB - CHERY YANBARU TRANSITION : ESKOB - ADDAN	RNAV1
Critical DME	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.	
<div style="border: 1px solid black; padding: 5px; display: inline-block;">VAR 5°W (2019)</div> <div style="border: 1px solid black; padding: 5px; display: inline-block; margin-top: 10px;">TACAN AMAMI 1189 ALT CH-102X :.. 28°26'37"N/129°35'00"E 1000FT</div> <div style="border: 1px solid black; padding: 5px; display: inline-block; margin-top: 10px;">TACAN CHINEN 1176 TIT CH-89X :.. 26°09'38"N/127°48'04"E 500FT</div> <div style="border: 1px solid black; padding: 5px; display: inline-block; margin-top: 10px;">VORTAC NAHA 116.5 NHC CH-112X :.. 26°12'31"N/127°38'34"E 100FT</div>			
<b>ESKOB ONE DEPARTURE</b> RWY18L : Climb on HDG183° at or above 500FT, direct to KYANN, to AH801, to ESKOB. RWY18R : Climb on HDG183° at or above 500FT, direct to KYANN, to AH801, to ESKOB. RWY36R/36L : (Not established)		<b>AMAMI TRANSITION</b> From ESKOB, to ADDAN, to CHERY, to AMAMI. <b>CHERY TRANSITION</b> From ESKOB, to ADDAN, to CHERY. <b>YANBARU TRANSITION</b> From ESKOB, to ADDAN.	
CHANGE: New PROC			

## STANDARD DEPARTURE CHART-INSTRUMENT

ROAH/NAHA

RNAV SID and TRANSITION

ESKOB ONE DEPARTURE

## RWY18L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	183 (177.6)	-5.4	-	-	+500	-	-	RNAV1
002	DF	KYANN	-	-	-5.4	-	-	-	-	-	RNAV1
003	TF	AH801	-	093 (087.6)	-5.4	4.7	-	-	-	-	RNAV1
004	TF	ESKOB	-	056 (050.9)	-5.4	15.0	-	-	-	-	RNAV1

## RWY18R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	183 (177.6)	-5.4	-	-	+500	-	-	RNAV1
002	DF	KYANN	-	-	-5.4	-	-	-	-	-	RNAV1
003	TF	AH801	-	093 (087.6)	-5.4	4.7	-	-	-	-	RNAV1
004	TF	ESKOB	-	056 (050.9)	-5.4	15.0	-	-	-	-	RNAV1

## AMAMI TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ESKOB	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	ADDAN	-	037 (031.2)	-5.4	36.3	-	-	-	-	RNAV1
003	TF	CHERY	-	057 (051.4)	-5.4	23.7	-	-	-	-	RNAV1
004	TF	AMAMI	-	034 (028.3)	-5.4	103.3	-	-	-	-	RNAV1

## CHERY TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ESKOB	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	ADDAN	-	037 (031.2)	-5.4	36.3	-	-	-	-	RNAV1
003	TF	CHERY	-	057 (051.4)	-5.4	23.7	-	-	-	-	RNAV1

## YANBARU TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ESKOB	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	ADDAN	-	037 (031.2)	-5.4	36.3	-	-	-	-	RNAV1


STANDARD DEPARTURE CHART-INSTRUMENT

ROAH/NAHA

RNAV SID and TRANSITION

VIGER ONE DEPARTURE CANOP TRANSITION / DORIS TRANSITION			RNAV1
<p>Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll.</p> <p>2) RADAR service required.</p>	DME GAP	<p>RWY18L : DER – VIGER RWY18R : DER – VIGER CANOP TRANSITION : VIGER – CANOP DORIS TRANSITION : VIGER – DORIS</p>	
Critical DME	–	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

VAR 5°W (2019)

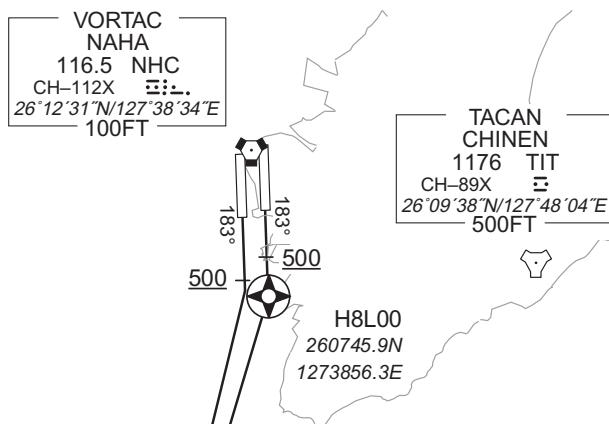

DORIS TRANSITION


DORIS  
260430.5N  
1264153.3E

CANOP  
252955.8N  
1270917.1E

VIGER ONE DEPARTURE

VIGER  
255743.9N  
1273526.9E

CANOP TRANSITION



VIGER ONE DEPARTURE

RWY18L : Climb on HDG 183° at or above 500FT, direct to H8L00, turn right direct to VIGER .  
RWY18R : Climb on HDG 183° at or above 500FT, turn right direct to VIGER .  
RWY36R/L : (Not established)

CANOP TRANSITION

From VIGER, to CANOP.

DORIS TRANSITION

From VIGER, to DORIS.

CHANGE: New PROC

## STANDARD DEPARTURE CHART-INSTRUMENT

ROAH/NAHA

RNAV SID and TRANSITION

VIGER ONE DEPARTURE

## RWY18L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	183 (177.6)	-5.4	-	-	+500	-	-	RNAV1
002	DF	H8L00	Y	-	-5.4	-	-	-	-	-	RNAV1
003	DF	VIGER	-	-	-5.4	-	R	-	-	-	RNAV1

## RWY18R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	183 (177.6)	-5.4	-	-	+500	-	-	RNAV1
002	DF	VIGER	-	-	-5.4	-	R	-	-	-	RNAV1


CANOP TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	VIGER	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	CANOP	-	226 (220.4)	-5.4	36.5	-	-	-	-	RNAV1

DORIS TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	VIGER	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	DORIS	-	284 (278.2)	-5.4	48.6	-	-	-	-	RNAV1

## STANDARD DEPARTURE CHART-INSTRUMENT

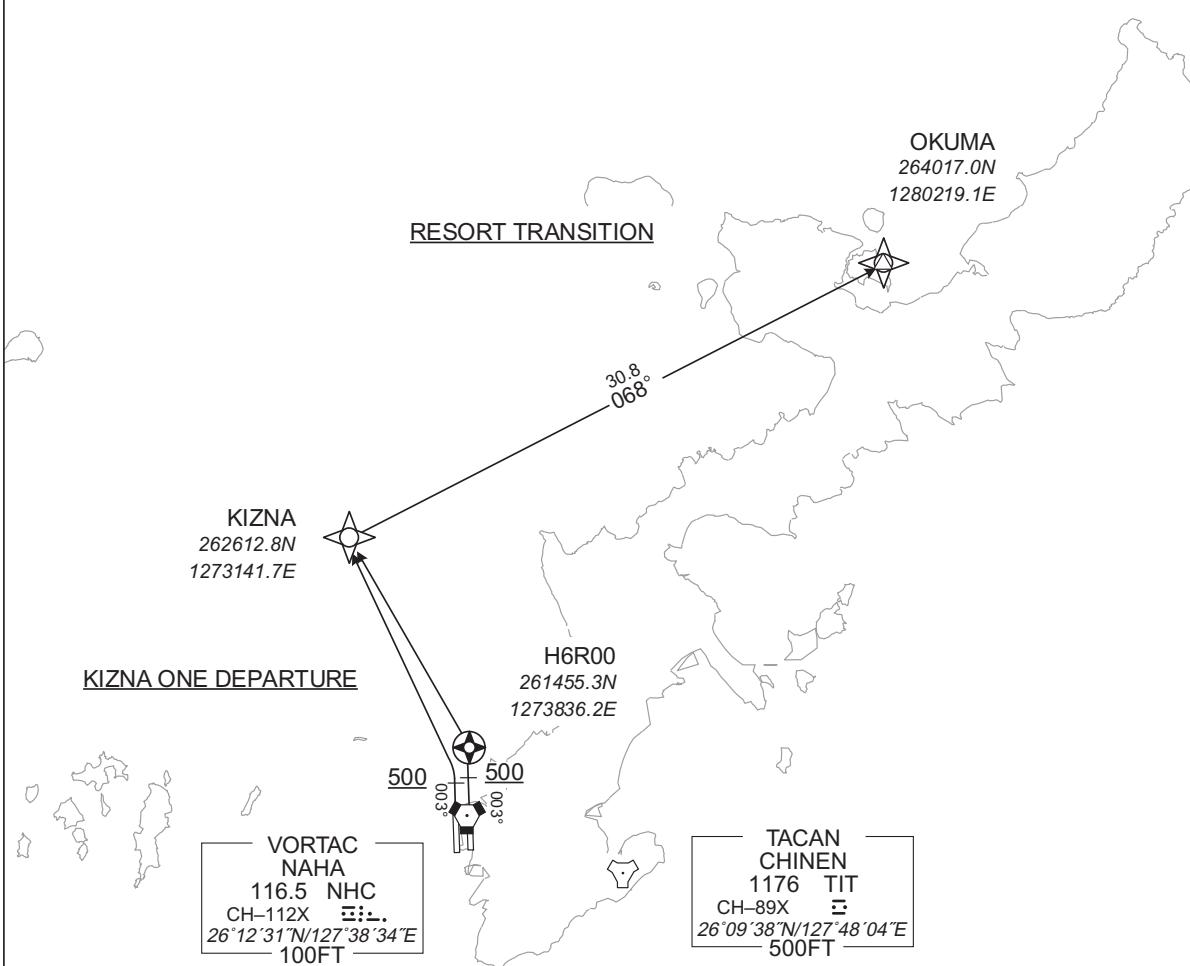ROAH/NAHA		RNAV SID and TRANSITION	
KIZNA ONE DEPARTURE RESORT TRANSITION		RNAV1	
Note 1) DME/DME/IRU or GNSS required. ※The aircraft equipped with only DME/DME/IRU must be able to update its position without delay at the starting point of take-off roll. 2) RADAR service required.	DME GAP	RNAV1	RWY36R : DER - KIZNA RWY36L : DER - KIZNA RESORT TRANSITION : KIZNA - OKUMA
Critical DME	-	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.
VAR 5°W (2019)			
 <p><b>KIZNA ONE DEPARTURE</b></p> <p><b>RESORT TRANSITION</b></p> <p><b>KIZNA</b> 262612.8N 1273141.7E</p> <p><b>OKUMA</b> 264017.0N 1280219.1E</p> <p><b>H6R00</b> 261455.3N 1273836.2E</p> <p><b>VORTAC NAHA</b> 116.5 NHC CH-112X <math>\ominus</math> 26°12'31"N/127°38'34"E 100FT</p> <p><b>TACAN CHINEN</b> 1176 TIT CH-89X <math>\ominus</math> 26°09'38"N/127°48'04"E 500FT</p>			
<p><b>KIZNA ONE DEPARTURE</b></p> <p>RWY18L/18R: (Not established)</p> <p>RWY36R : Climb on HDG003° at or above 500FT, direct to H6R00, turn left direct to KIZNA .</p> <p>RWY36L : Climb on HDG003° at or above 500FT, turn left direct to KIZNA .</p> <p>NOTE RWY36R/36L: 5.0% climb gradient required up to 500FT.</p> <p><b>RESORT TRANSITION</b></p> <p>From KIZNA, to OKUMA.</p>			
CHANGE: New PROC			

## STANDARD DEPARTURE CHART-INSTRUMENT

ROAH/NAHA

RNAV SID and TRANSITION

KIZNA ONE DEPARTURE

## RWY36R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	003 (357.6)	-5.4	-	-	+500	-	-	RNAV1
002	DF	H6R00	Y	-	-5.4	-	-	-	-	-	RNAV1
003	DF	KIZNA	-	-	-5.4	-	L	-	-	-	RNAV1

## RWY36L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	003 (357.6)	-5.4	-	-	+500	-	-	RNAV1
002	DF	KIZNA	-	-	-5.4	-	L	-	-	-	RNAV1

RESORT TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIZNA	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	OKUMA	-	068 (062.7)	-5.4	30.8	-	-	-	-	RNAV1

STANDARD DEPARTURE CHART-INSTRUMENT


ROAH/NAHA

RNAV TRANSITION

KUROUSA TRANSITION CHAMP TRANSITION YUGAF TRANSITION			RNAV1
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	DME GAP	KUROUSA TRANSITION: KIZNA – SCUBA 40.0NM to AMAMI – AMAMI CHAMP TRANSITION : KIZNA – SCUBA YUGAF TRANSITION : KIZNA – 30.0NM to VOLVO 80.0NM to AMAMI – AMAMI	
Critical DME	–	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

VAR 5°W (2019)

CHANGE: Correction of misdescription (Critical DME ↔ DME GAP).

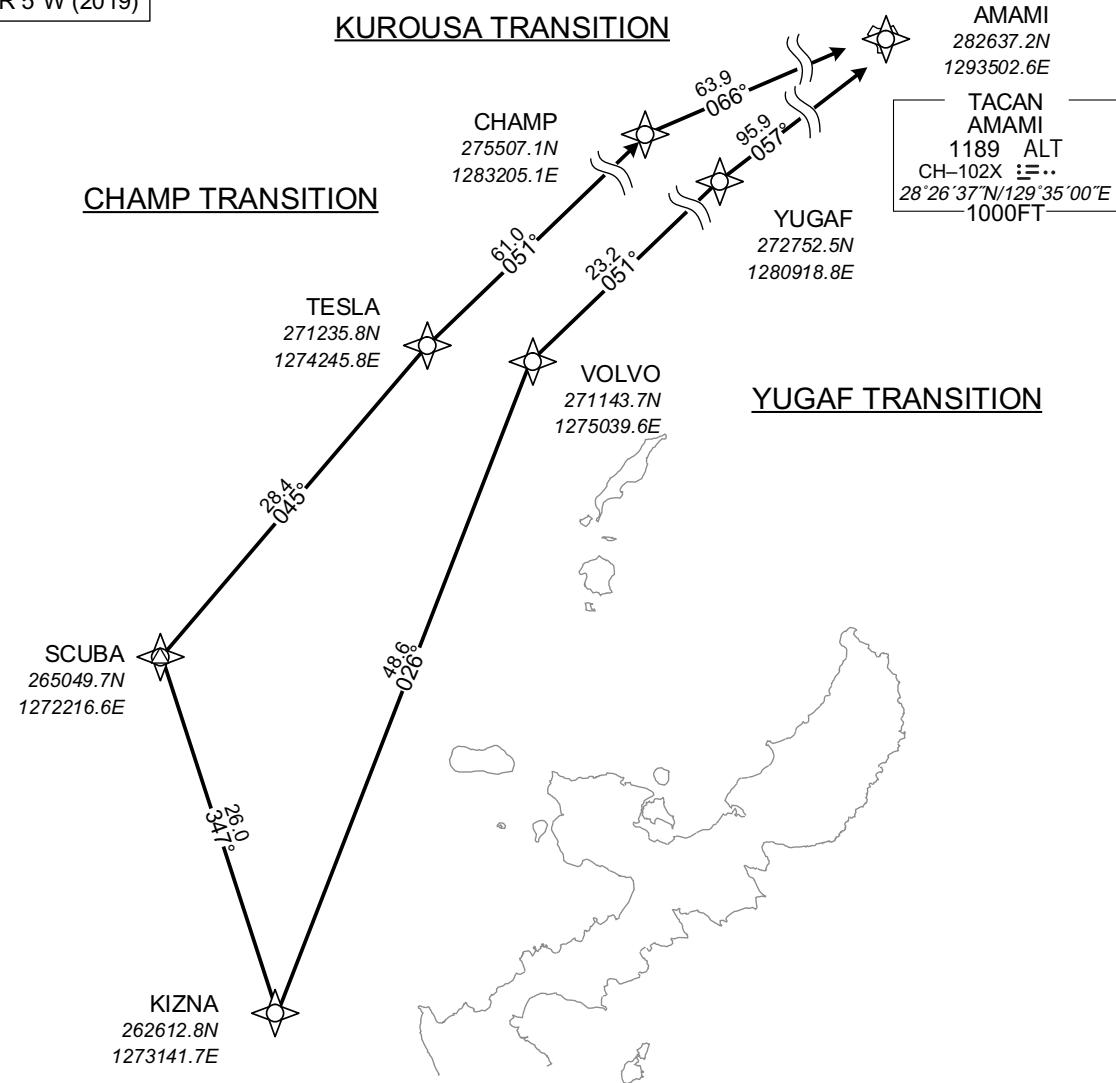

## STANDARD DEPARTURE CHART-INSTRUMENT

ROAH/NAHA

RNAV TRANSITION

## KUROUSA TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIZNA	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	SCUBA	-	347 (341.2)	-5.4	26.0	-	-	-	-	RNAV1
003	TF	TESLA	-	045 (039.9)	-5.4	28.4	-	-	-	-	RNAV1
004	TF	CHAMP	-	051 (045.6)	-5.4	61.0	-	-	-	-	RNAV1
005	TF	AMAMI	-	066 (060.2)	-5.4	63.9	-	-	-	-	RNAV1

## CHAMP TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIZNA	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	SCUBA	-	347 (341.2)	-5.4	26.0	-	-	-	-	RNAV1
003	TF	TESLA	-	045 (039.9)	-5.4	28.4	-	-	-	-	RNAV1
004	TF	CHAMP	-	051 (045.6)	-5.4	61.0	-	-	-	-	RNAV1

## YUGAF TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIZNA	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	VOLVO	-	026 (020.3)	-5.4	48.6	-	-	-	-	RNAV1
003	TF	YUGAF	-	051 (045.7)	-5.4	23.2	-	-	-	-	RNAV1
004	TF	AMAMI	-	057 (051.9)	-5.4	95.9	-	-	-	-	RNAV1

CHANGE: New PROC

## STANDARD DEPARTURE CHART-INSTRUMENT


## ROAH/ NAHA

## RNAV TRANSITION

GURUX TRANSITION LAGOON TRANSITION			RNAV1
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	DME GAP	GURUX TRANSITION : KIZNA – GURUX LAGOON TRANSITION KIZNA – GANJU	
Critical DME	–	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

VAR 5°W (2019)

CHANGE: Correction of misdescription (Critical DME ↔ DME GAP).

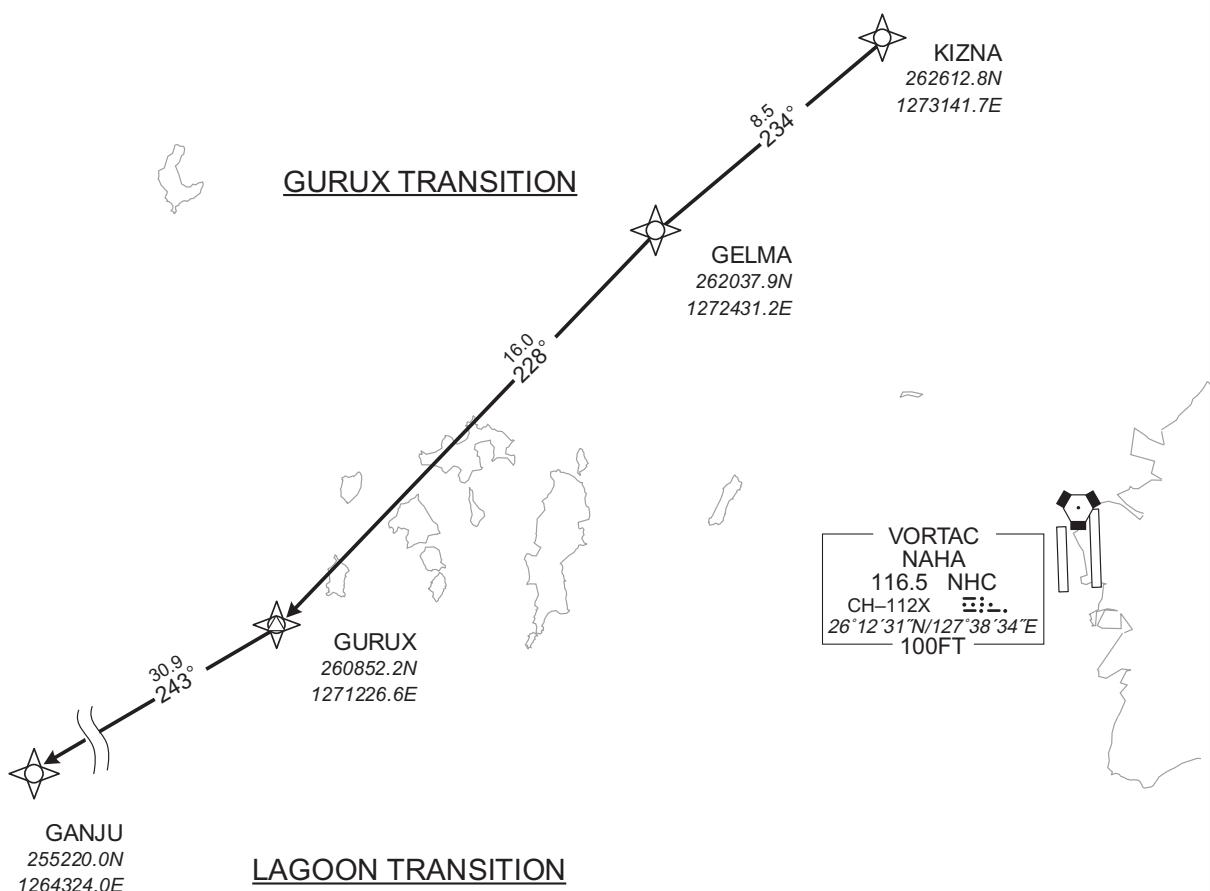GURUX TRANSITION

From KIZNA, to GELMA, to GURUX.

LAGOON TRANSITION

From KIZNA, to GELMA, to GURUX, to GANJU.

## STANDARD DEPARTURE CHART-INSTRUMENT

ROAH/NAHA

RNAV TRANSITION

GURUX TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIZNA	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	GELMA	-	234 (229.0)	-5.4	8.5	-	-	-	-	RNAV1
003	TF	GURUX	-	228 (222.7)	-5.4	16.0	-	-	-	-	RNAV1

LAGOON TRANSITION

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	KIZNA	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	GELMA	-	234 (229.0)	-5.4	8.5	-	-	-	-	RNAV1
003	TF	GURUX	-	228 (222.7)	-5.4	16.0	-	-	-	-	RNAV1
004	TF	GANJU	-	243 (237.7)	-5.4	30.9	-	-	-	-	RNAV1

STANDARD ARRIVAL CHART-INSTRUMENT

ROAH/NAHA

STAR

SCUBA ARRIVAL

From over SCUBA, via NHC R344 to 28.1 DME, turn right to intercept and proceed via NHC R341 to EISAR.

Cross NHC R344/28.1DME at or above 3000FT, cross EISAR at or above 2000FT.

LAVON ARRIVAL

From over LAVON, via NHC 15.0DME counterclockwise ARC to VIGER.

Cross VIGER at or above 2000FT.

(When using NHC TACAN only)

From over LAVON at or above 5000FT, via NHC 15.0DME counterclockwise ARC to VIGER.

Cross VIGER at or above 4400FT.

LAFTY ARRIVAL

From over LAFTY, via NHC R196 to VIGER.

Cross VIGER at or above 2000FT.

(When using NHC TACAN only)

From over LAFTY, via NHC R196 to VIGER.

Cross VIGER at or above 4400FT.

CHANGE: New PROC

## STANDARD ARRIVAL CHART-INSTRUMENT

ROAH/NAHA

STAR

**SCUBA ARRIVAL**

SCUBA  
D41.0 NHC  
MAX240KIAS  
MHA 4000

D50.0 NHC  
164°  
344°

D28.1 NHC  
3000

R344  
161°

EISAR  
D18.0 NHC  
2000

LAVON  
D15.0 NHC  
5000 (When using NHC TACAN only)

R266

VORTAC NAHA  
116.5 NHC  
CH-112X  
26°12'31"N/127°38'34"E  
100FT

**LAVON ARRIVAL**

VIGER  
D15.0 NHC  
2000  
4400 (When using NHC TACAN only)


R196

**LAFTY ARRIVAL**

LAFTY  
D30.1 NHC  
MAX240KIAS  
MHA 3000

D40.0 NHC  
016°  
196°  
010°

STANDARD ARRIVAL CHART-INSTRUMENT

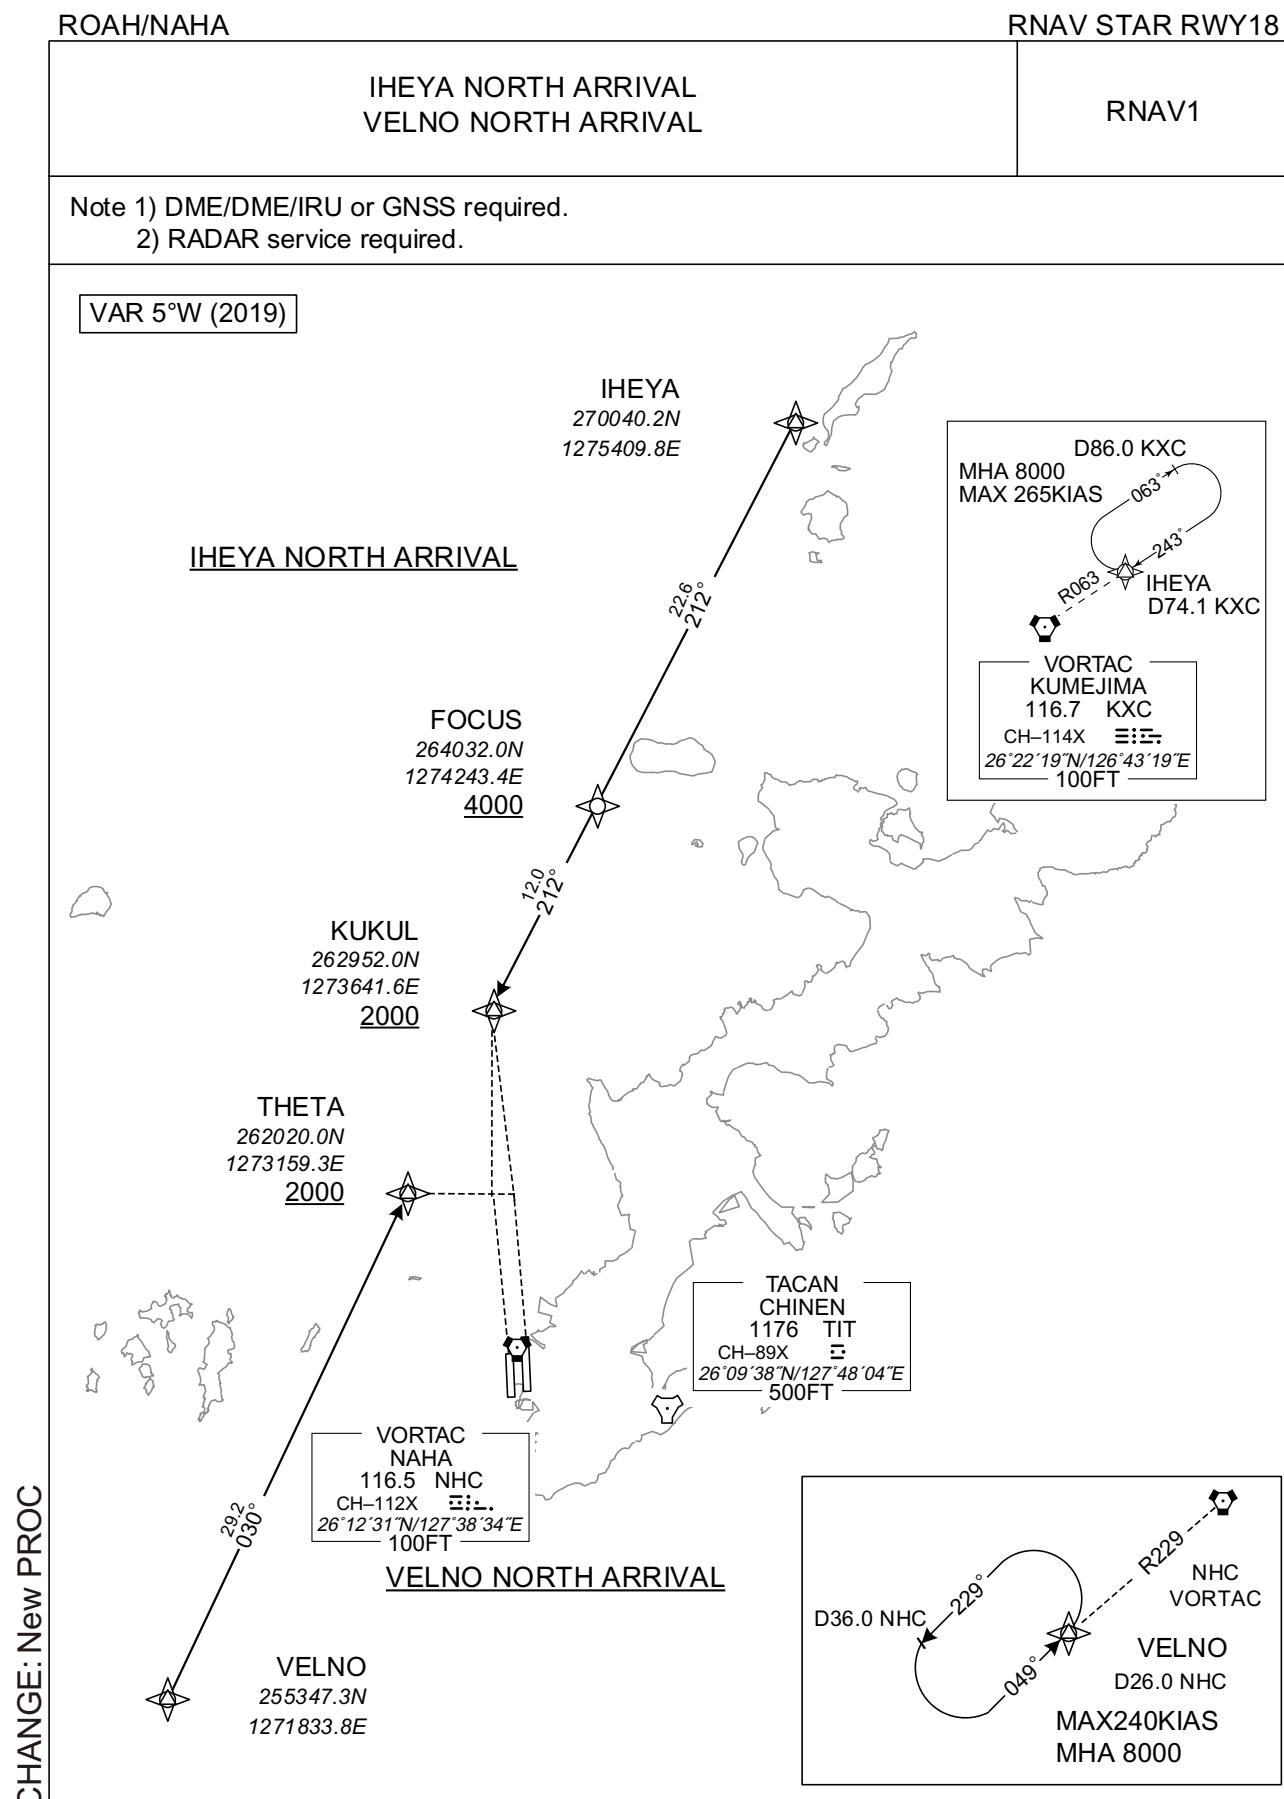

## STANDARD ARRIVAL CHART-INSTRUMENT

ROAH / NAHA

RNAV STAR RWY18

IHEYA NORTH ARRIVAL

From IHEYA, to FOCUS at or above 4000FT, to KUKUL at or above 2000FT.

Critical DME	-
DME GAP	IHEYA – KUKUL
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	IHEYA	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	FOCUS	-	212 (206.9)	-5.4	22.6	-	+4000	-	-	RNAV1
003	TF	KUKUL	-	212 (206.8)	-5.4	12.0	-	+2000	-	-	RNAV1

VELNO NORTH ARRIVAL

From VELNO, to THETA at or above 2000FT.

Critical DME	-
DME GAP	VELNO – THETA
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	VELNO	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	THETA	-	030 (024.4)	-5.4	29.2	-	+2000	-	-	RNAV1

CHANGE: New PROC

## STANDARD ARRIVAL CHART-INSTRUMENT

ROAH/NAHA

RNAV STAR RWY18

## RESORT NORTH ARRIVAL


RNAV1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

3) CDO only.

VAR 5°W (2019)

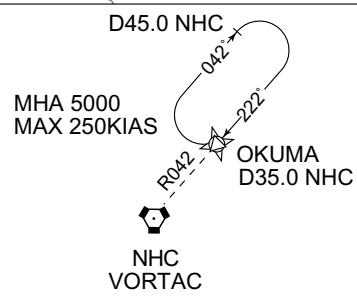RESORT NORTH ARRIVALOKUMA  
264017.0N  
1280219.1ECLIFF  
263312.5N  
1274453.2E  
2700KUKUL  
262952.0N  
1273641.6E  
2000

VORTAC  
NAHA  
116.5 NHC  
CH-112X  
26°12'31"N/127°38'34"E  
100FT

TACAN  
CHINEN  
1176 TIT  
CH-89X  
26°09'38"N/127°48'04"E  
500FT

RESORT NORTH ARRIVAL

From OKUMA, to CLIFF at or above 2700FT, to KUKUL at or above 2000FT.

Critical DME	-
DME GAP	OKUMA - KUKUL
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

CHANGE: New PROC

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OKUMA	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	CLIFF	-	251 (245.7)	-5.4	17.1	-	+2700	-	-	RNAV1
003	TF	KUKUL	-	251 (245.5)	-5.4	8.1	-	+2000	-	-	RNAV1

## STANDARD ARRIVAL CHART-INSTRUMENT

ROAH/NAHA


RNAV STAR RWY18

GUPTI NORTH ARRIVAL  
ENTOK NORTH ARRIVAL

Basic RNP1

Note 1) GNSS required. 2) CDO only.

VAR 5°W (2019)

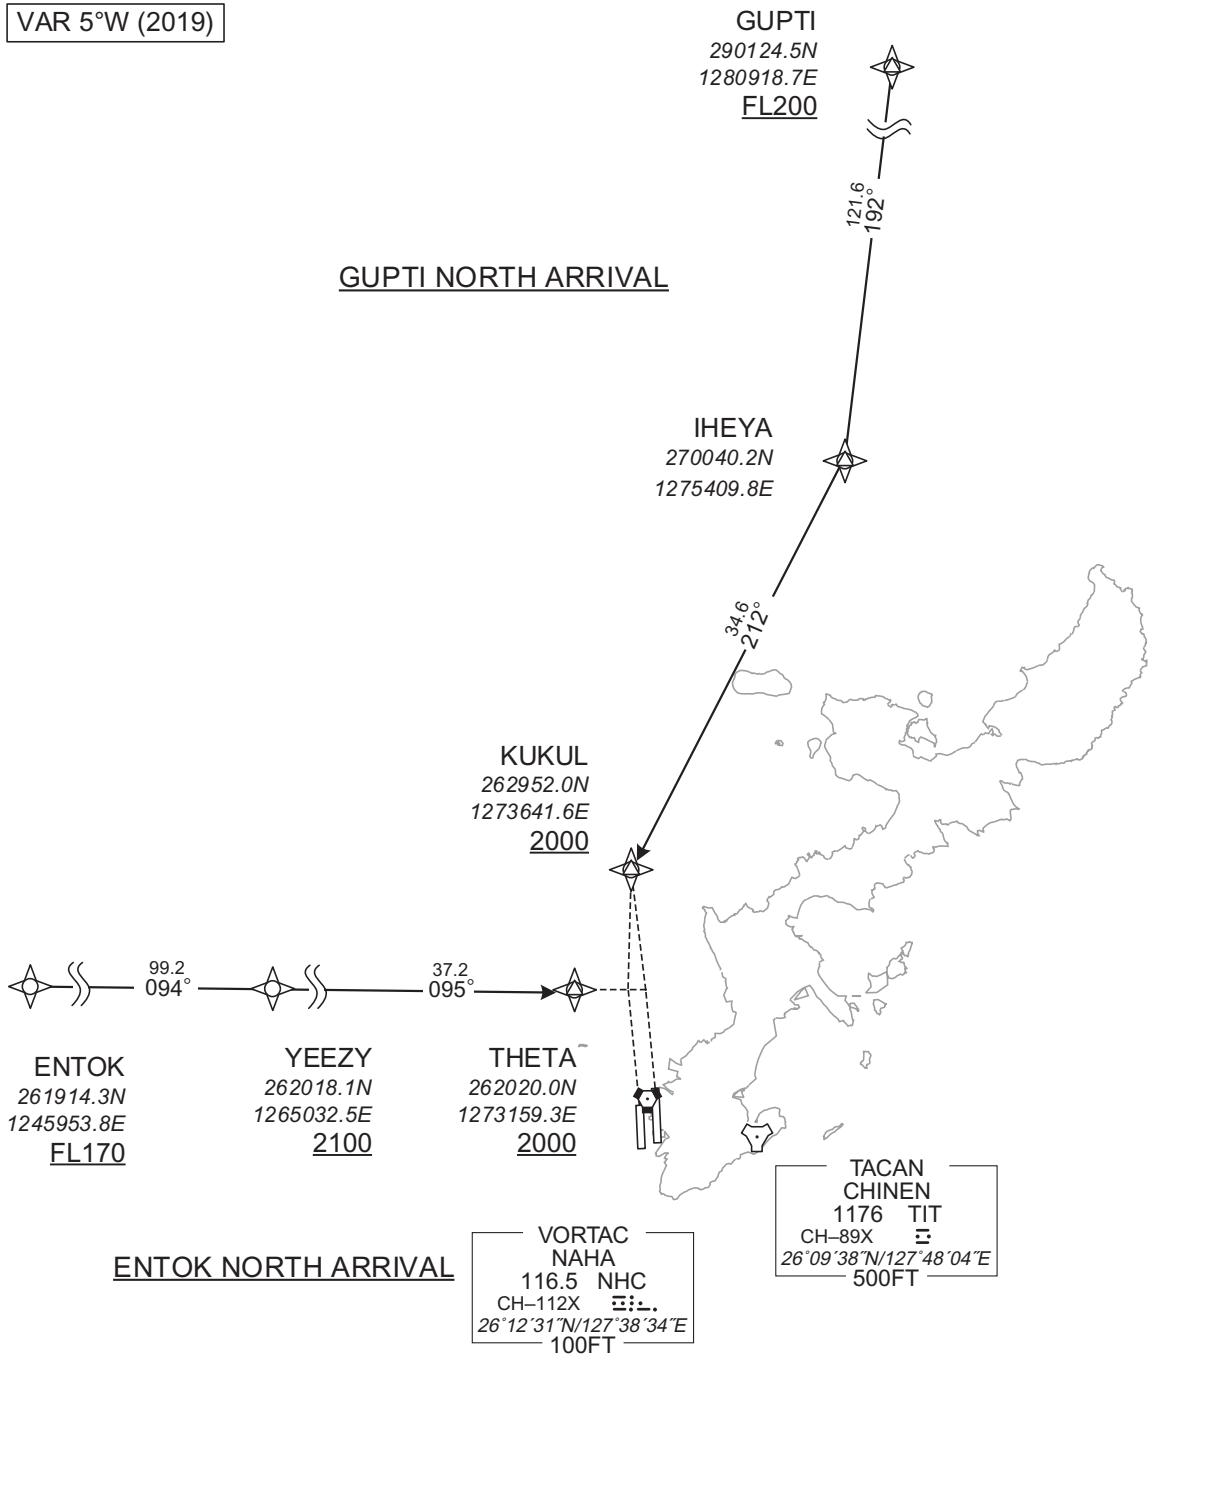

CHANGE: New PROC

## STANDARD ARRIVAL CHART-INSTRUMENT

ROAH / NAHA

RNAV STAR RWY18

GUPTI NORTH ARRIVAL

From GUPTI at or above FL200, to IHEYA, to KUKUL at or above 2000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GUPTI	-	-	-5.4	-	-	+FL200	-	-	Basic RNP1
002	TF	IHEYA	-	192 (186.4)	-5.4	121.6	-	-	-	-	Basic RNP1
003	TF	KUKUL	-	212 (206.9)	-5.4	34.6	-	+2000	-	-	Basic RNP1

ENTOK NORTH ARRIVAL

From ENTOK at or above FL170, to YEEZY at or above 2100FT, to THETA at or above 2000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ENTOK	-	-	-5.4	-	-	+FL170	-	-	Basic RNP1
002	TF	YEEZY	-	094 (089.0)	-5.4	99.2	-	+2100	-	-	Basic RNP1
003	TF	THETA	-	095 (089.8)	-5.4	37.2	-	+2000	-	-	Basic RNP1

CHANGE: New PROC

## STANDARD ARRIVAL CHART-INSTRUMENT

ROAH/NAHA


RNAV STAR RWY36

IHEYA SOUTH ARRIVAL  
VELNO SOUTH ARRIVAL

RNAV1

Note 1) DME/DME/IRU or GNSS required.  
2) RADAR service required.

VAR 5°W (2019)

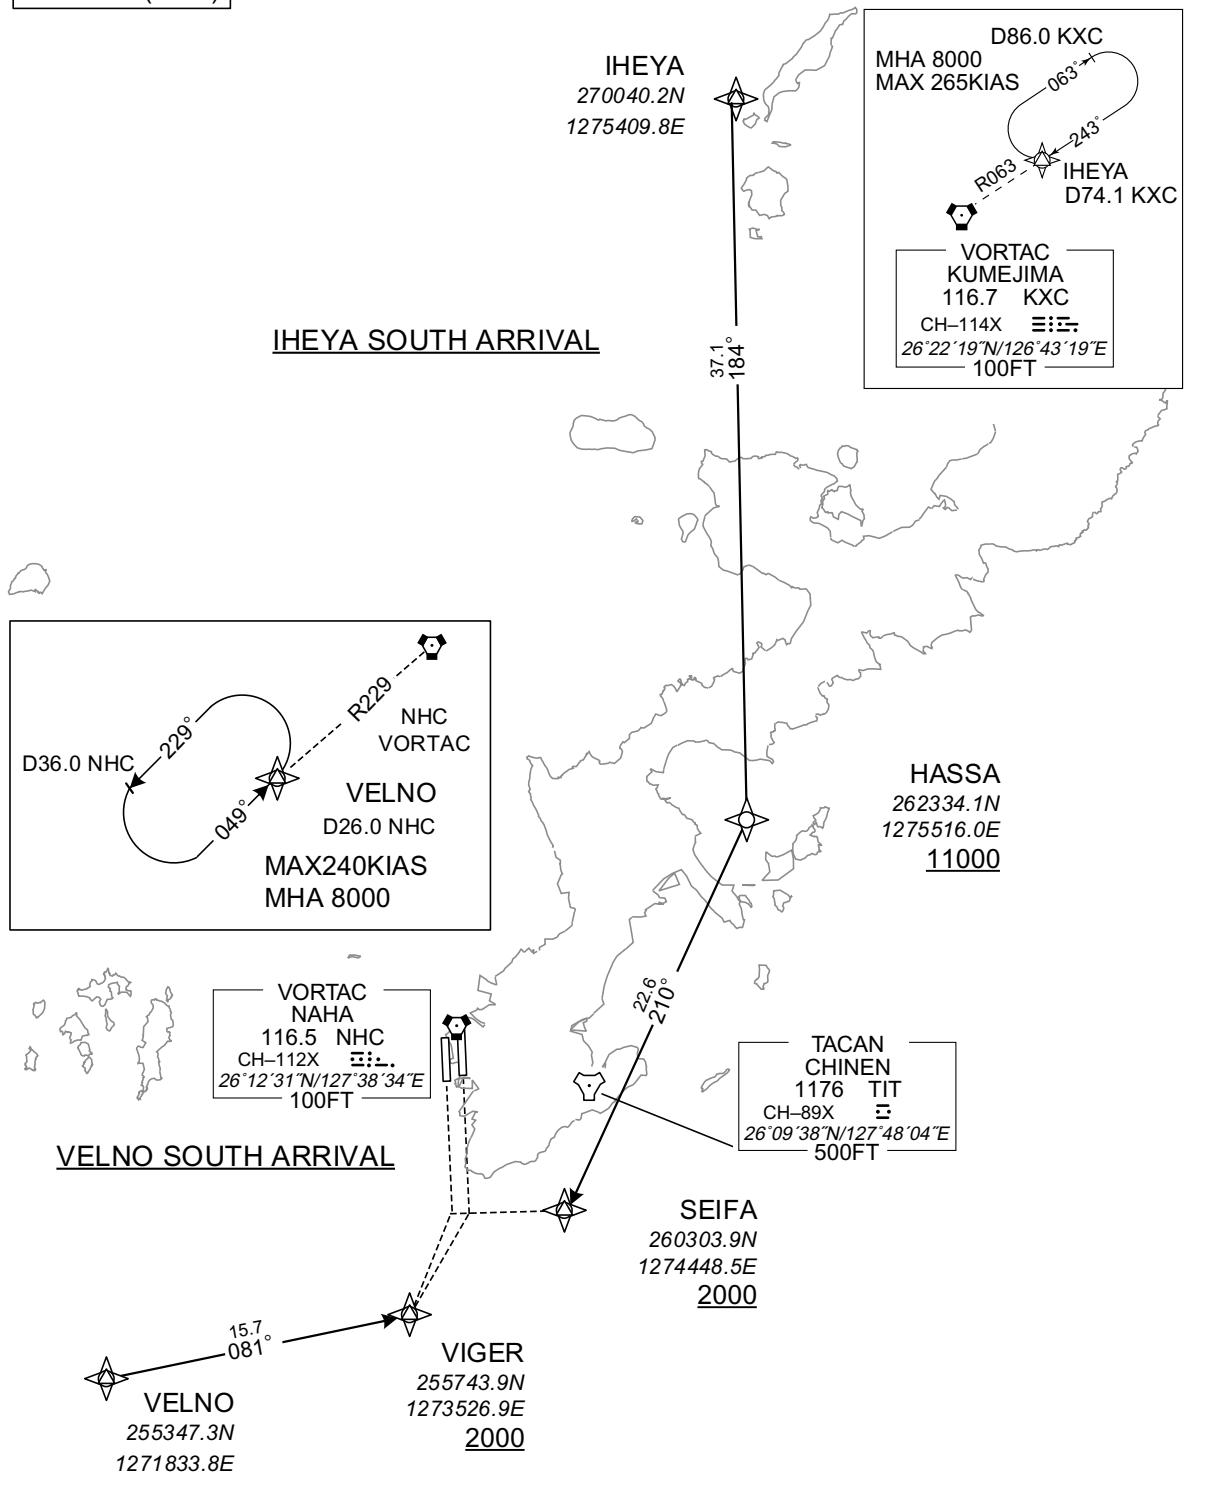

## STANDARD ARRIVAL CHART-INSTRUMENT

ROAH / NAHA

RNAV STAR RWY36

IHEYA SOUTH ARRIVAL

From IHEYA, to HASSA at or above 11000FT , to SEIFA at or above 2000FT.

Critical DME	-
DME GAP	20.0NM to HASSA – SEIFA
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	IHEYA	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	HASSA	-	184 (178.5)	-5.4	37.1	-	+11000	-	-	RNAV1
003	TF	SEIFA	-	210 (204.6)	-5.4	22.6	-	+2000	-	-	RNAV1

VELNO SOUTH ARRIVAL

From VELNO, to VIGER at or above 2000FT.

Critical DME	-
DME GAP	VELNO – VIGER
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	VELNO	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	VIGER	-	081 (075.4)	-5.4	15.7	-	+2000	-	-	RNAV1

CHANGE: New PROC

## STANDARD ARRIVAL CHART-INSTRUMENT

ROAH/NAHA

RNAV STAR RWY36

RESORT SOUTH ARRIVAL



RNAV1

Note 1) DME/DME/IRU or GNSS required.

2) RADAR service required.

3) CDO only.

VAR 5°W (2019)

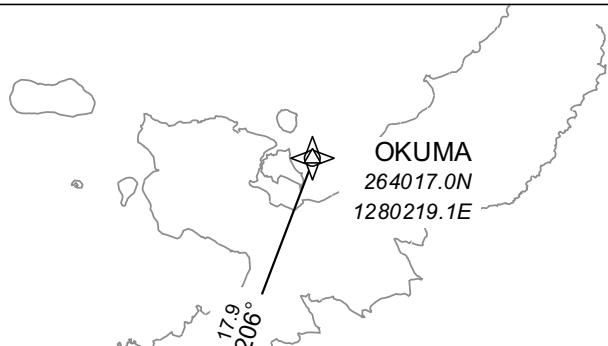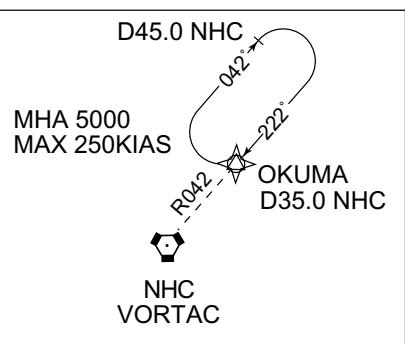RESORT SOUTH ARRIVALRESORT SOUTH ARRIVAL

From OKUMA, to HASSA at or above 11000FT, to SEIFA at or above 2000FT.

Critical DME	-
DME GAP	OKUMA – SEIFA
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	OKUMA	-	-	-5.4	-	-	-	-	-	RNAV1
002	TF	HASSA	-	206 (200.7)	-5.4	17.9	-	+11000	-	-	RNAV1
003	TF	SEIFA	-	210 (204.6)	-5.4	22.6	-	+2000	-	-	RNAV1

CHANGE: New PROC

STANDARD ARRIVAL CHART-INSTRUMENT

ROAH/NAHA

RNAV STAR RWY36

GUPTI SOUTH ARRIVAL  
ENTOK SOUTH ARRIVAL

Basic RNP1

Note 1) GNSS required. 2) CDO only.

VAR 5°W (2019)

GUPTI SOUTH ARRIVAL

GUPTI  
290124.5N  
1280918.7E  
FL200



IHEYA  
270040.2N  
1275409.8E



ENTOK SOUTH ARRIVAL

TACAN  
CHINEN  
1176 TIT  
CH-89X  
26°09'38"N/127°48'04"E  
500FT

HASSA  
262334.1N  
1275516.0E  
11000

VORTAC  
NAHA  
116.5 NHC  
CH-112X  
26°12'31"N/127°38'34"E  
100FT

SEIFA  
260303.9N  
1274448.5E  
2000

ENTOK  
261914.3N  
1245953.8E  
FL170

VIGER  
255743.9N  
1273526.9E  
2000

CHANGE: New PROC

## STANDARD ARRIVAL CHART-INSTRUMENT

ROAH / NAHA

RNAV STAR RWY36

GUPTI SOUTH ARRIVAL

From GUPTI at or above FL200, to IHEYA, to HASSA at or above 11000FT, to SEIFA at or above 2000FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GUPTI	-	-	-5.4	-	-	+FL200	-	-	Basic RNP1
002	TF	IHEYA	-	192 (186.4)	-5.4	121.6	-	-	-	-	Basic RNP1
003	TF	HASSA	-	184 (178.5)	-5.4	37.1	-	+11000	-	-	Basic RNP1
004	TF	SEIFA	-	210 (204.6)	-5.4	22.6	-	+2000	-	-	Basic RNP1


ENTOK SOUTH ARRIVAL

From ENTOK at or above FL170, to VIGER at or above 2000FT.


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ENTOK	-	-	-5.4	-	-	+FL170	-	-	Basic RNP1
002	TF	VIGER	-	104 (098.2)	-5.4	141.4	-	+2000	-	-	Basic RNP1

CHANGE: New PROC


## INSTRUMENT APPROACH CHART

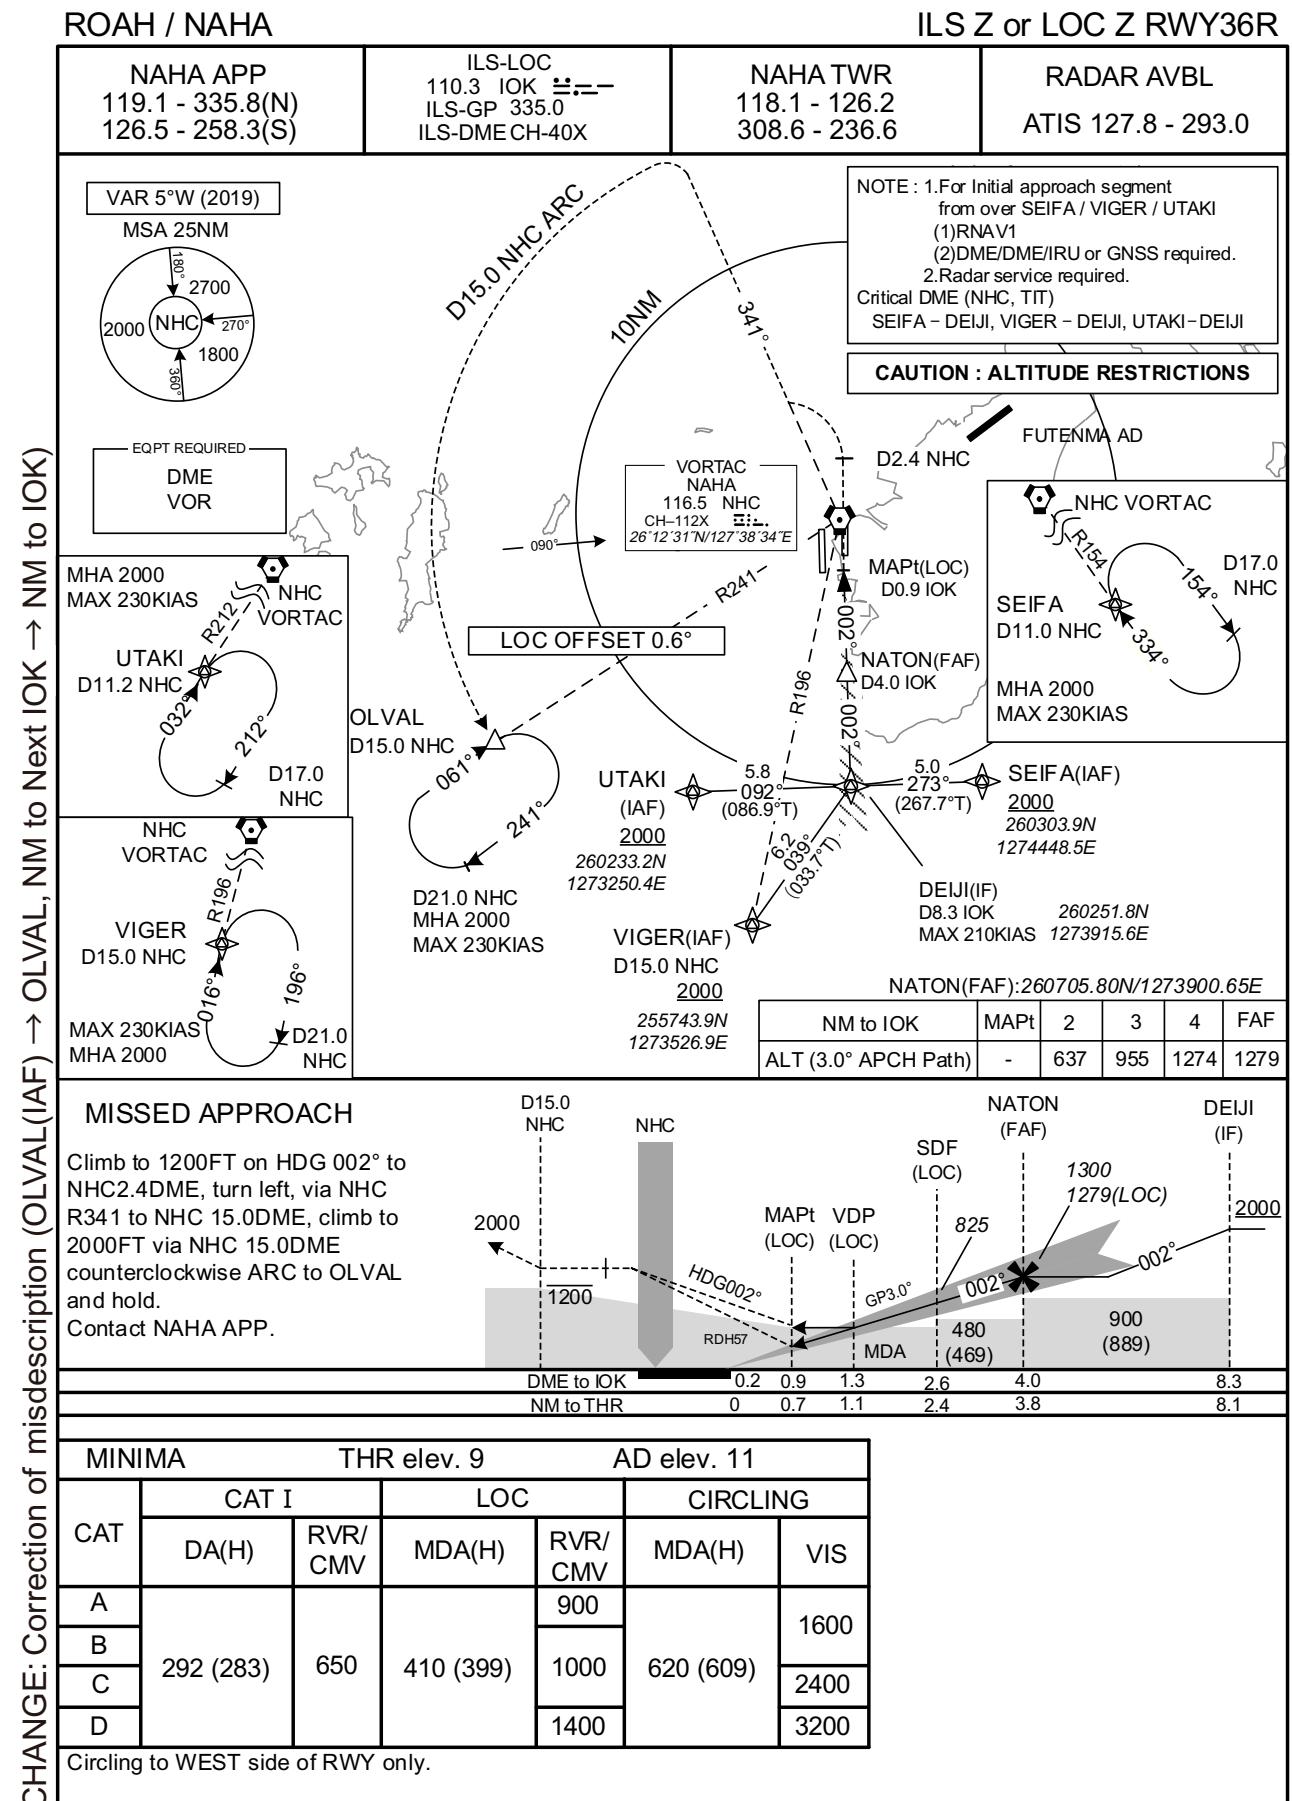

## INSTRUMENT APPROACH CHART

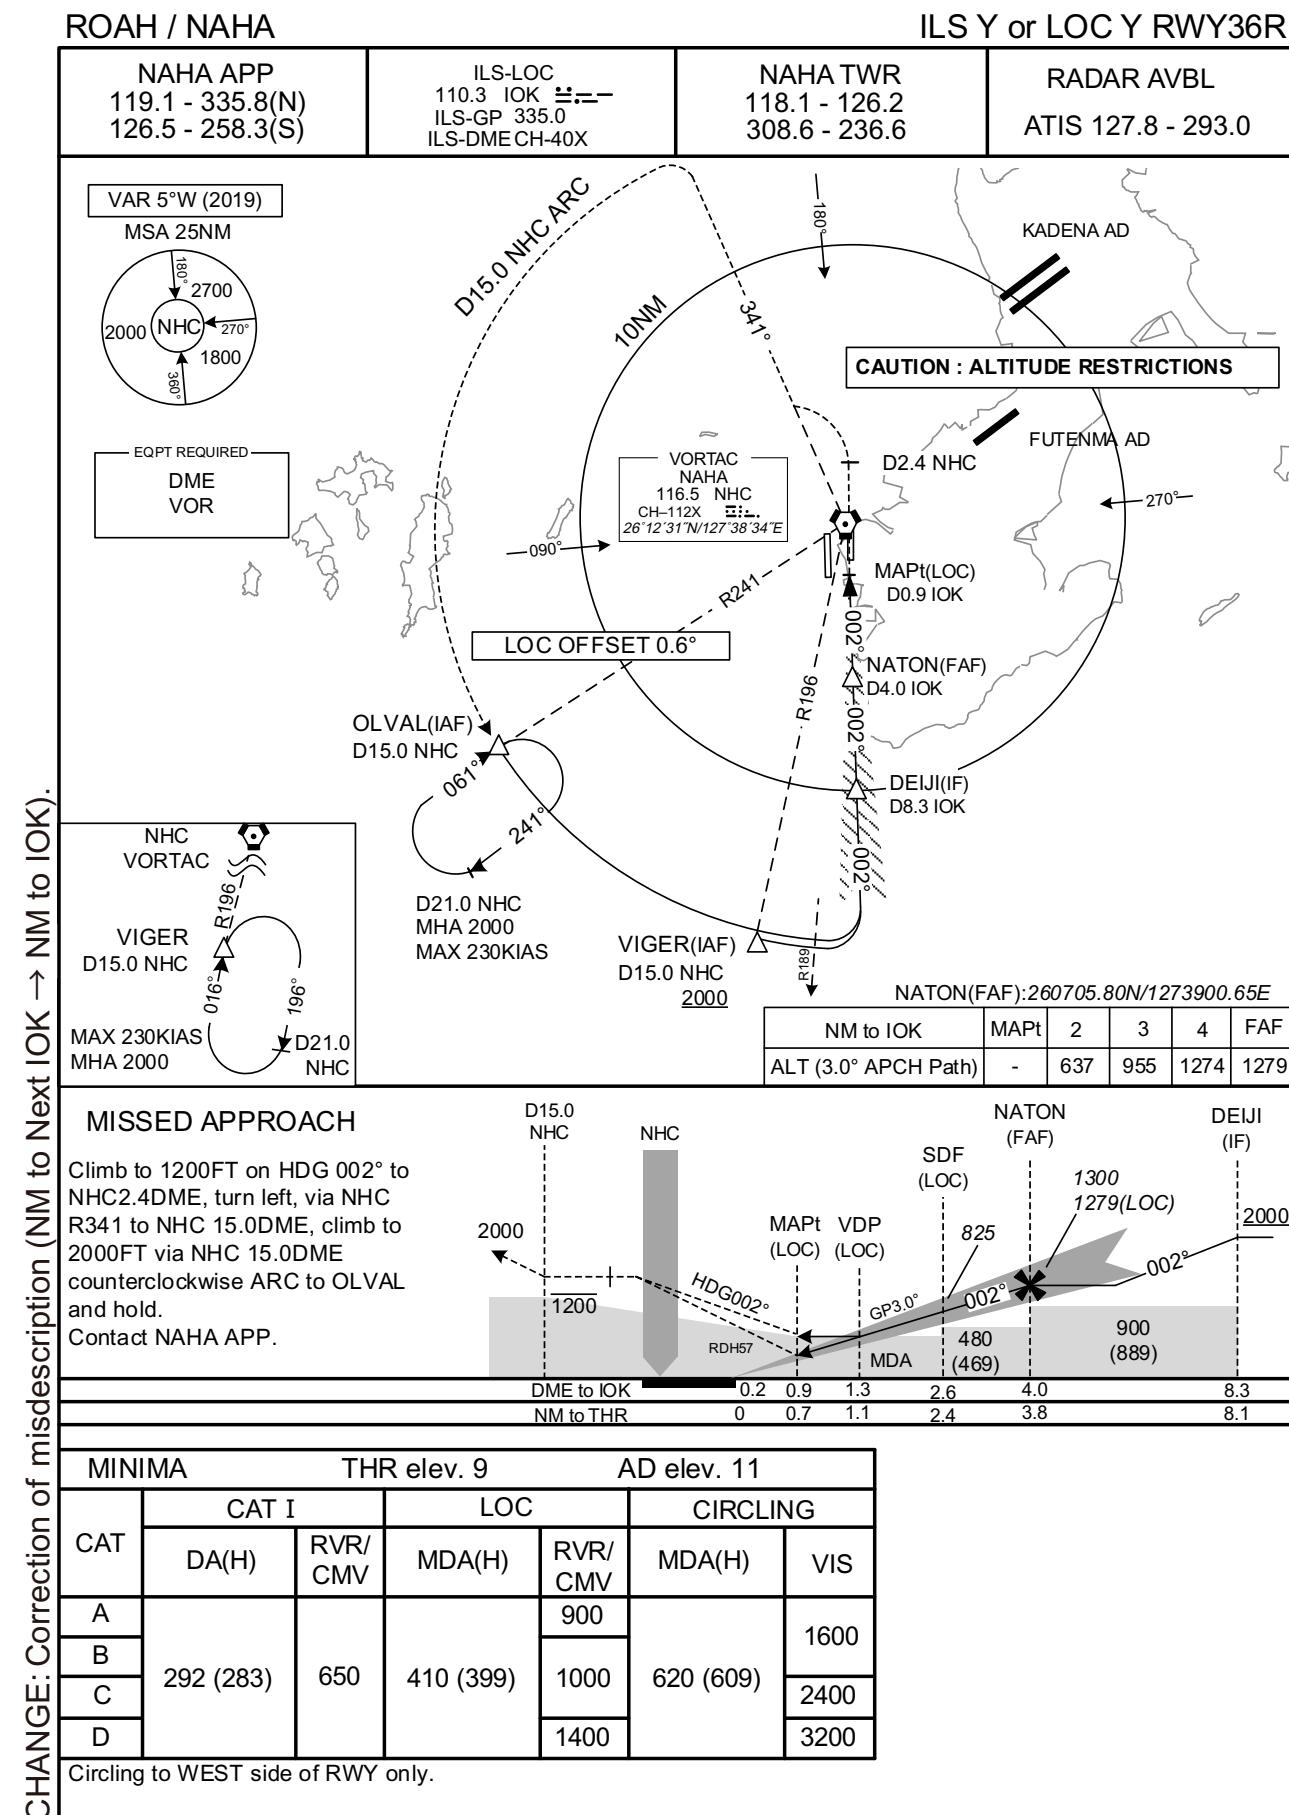

## INSTRUMENT APPROACH CHART

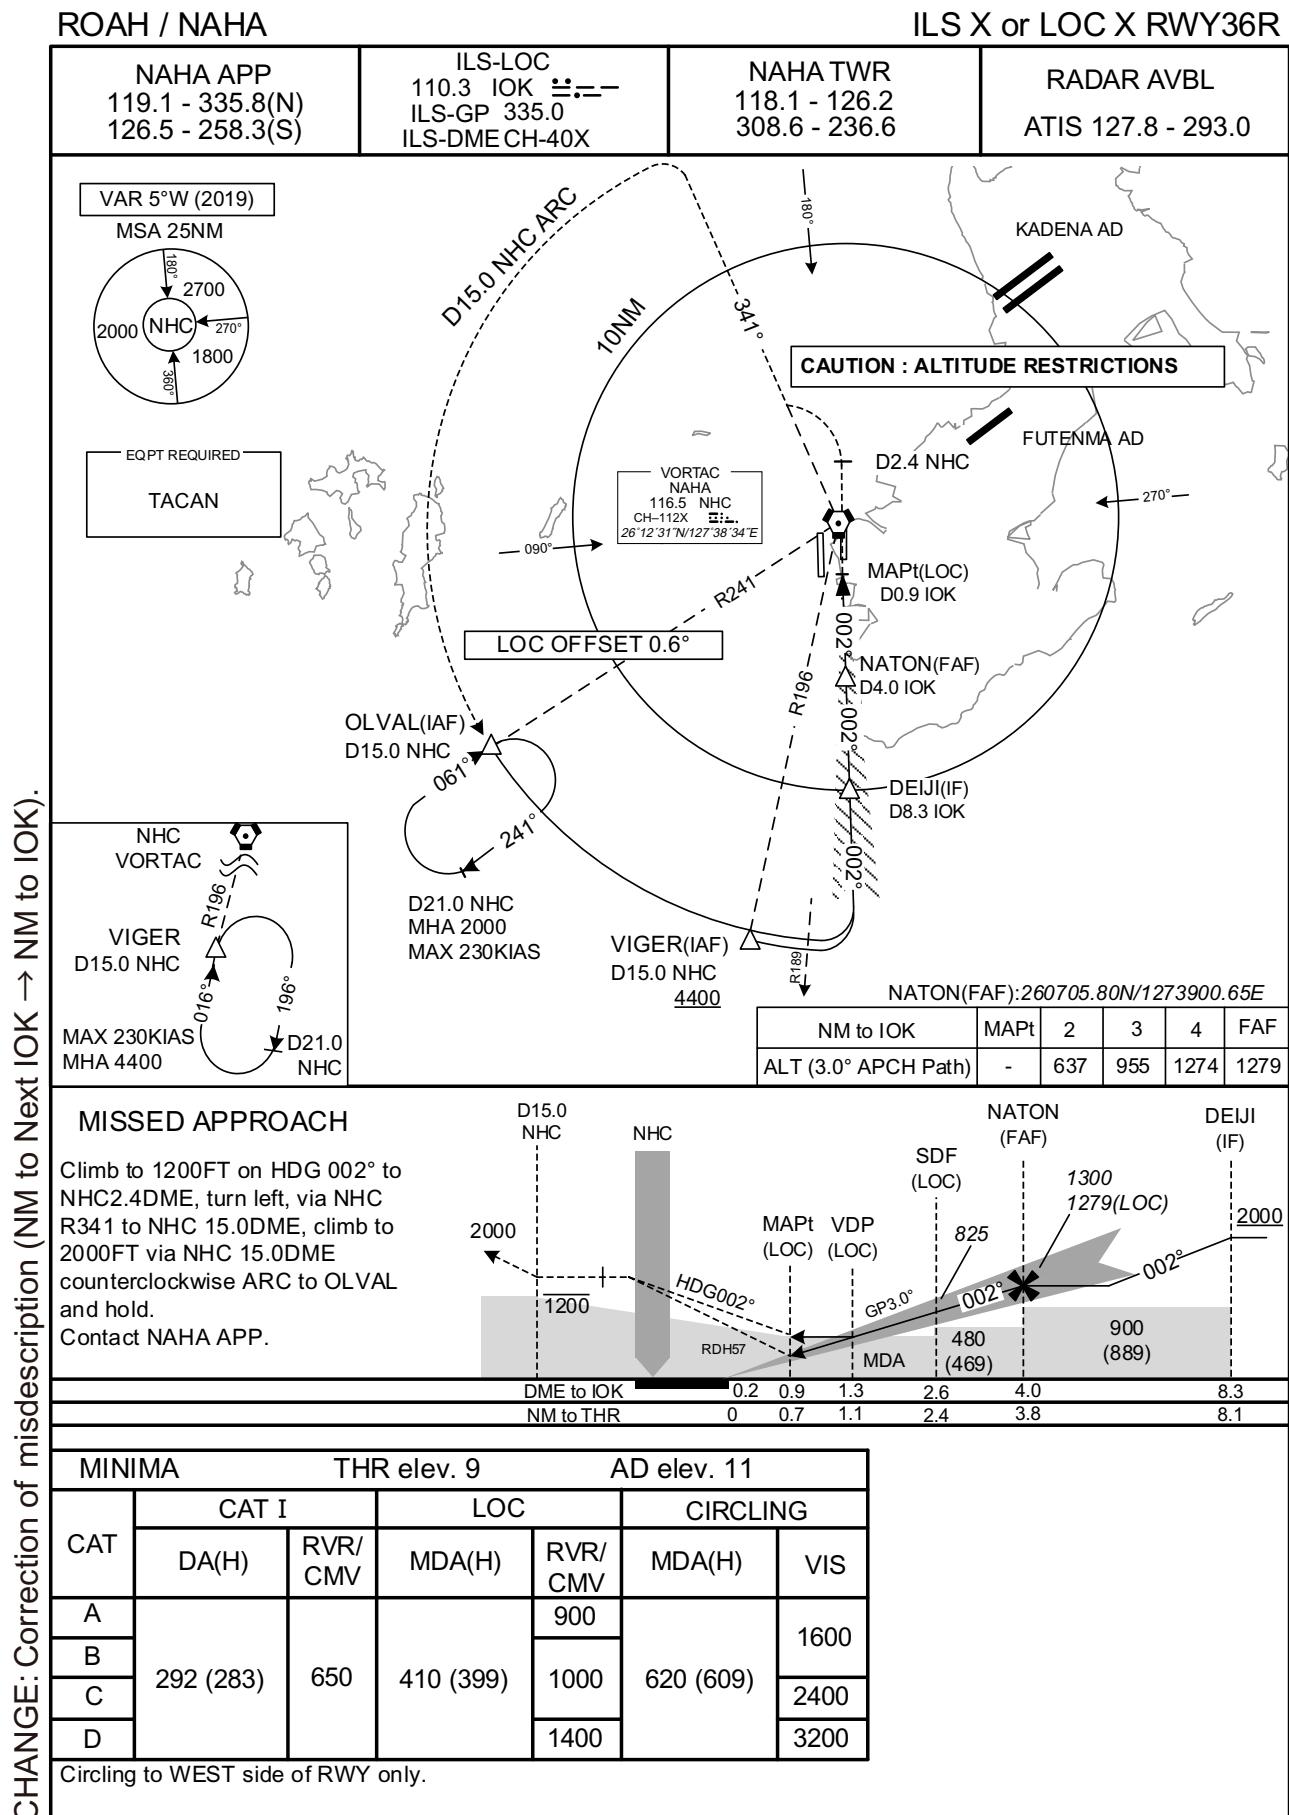

## INSTRUMENT APPROACH CHART

ROAH / NAHA

ILS Z or LOC Z RWY36L

**NAHA APP**  
119.1 - 335.8(N)  
126.5 - 258.3(S)

**ILS-LOC**  
111.7 IOW  
ILS-GP 333.5  
ILS-DME CH-54X

**NAHA TWR**  
118.75 - 126.2  
247.8 - 236.6

**RADAR AVBL**  
ATIS 127.8 - 293.0

**VAR 5°W (2019)**  
MSA 25NM

**CAUTION : ALTITUDE RESTRICTIONS**

**NOTE : 1. For Initial approach segment from over SEIFA / VIGER / UTAKI  
(1)RNAV1  
(2)DME/DME/IRU or GNSS required.  
2.Radar service required.  
Critical DME (NHC, TIT)  
SEIFA - BLISS, VIGER - BLISS, UTAKI - BLISS**

**EQPT REQUIRED**  
DME  
VOR

**D15.0 NHC ARC**

**OLVAL**  
D15.0 NHC

**UTAKI (IAF)**  
2000  
260233.2N  
1273250.4E

**VIGER(IAF)**  
255743.9N D15.0 NHC 2000  
1273526.9E

**MHA 2000**  
MAX 230KIAS  
D21.0 NHC

**MAPt(LOC)**  
D0.6 IOW

**BOOST(FAF)**  
D4.0 IOW

**NHC**  
2000  
MAX 230KIAS  
D17.0 NHC

**SEIFA (IAF)**  
2000  
260303.9N  
1274448.5E

**BLISS(IF)**  
D8.1 IOW  
MAX210KIAS  
260249.3N  
1273823.0E

**NHC VORTAC**  
VIGER  
D15.0 NHC  
MAX 230KIAS  
MHA 2000  
D21.0 NHC

**NOTE : 1. For Initial approach segment from over SEIFA / VIGER / UTAKI  
(1)RNAV1  
(2)DME/DME/IRU or GNSS required.  
2.Radar service required.  
Critical DME (NHC, TIT)  
SEIFA - BLISS, VIGER - BLISS, UTAKI - BLISS**

**MISSSED APPROACH**

Turn left, climb to 1200FT via NHC  
R 308 to NHC 8.5DME, climb to 2000FT  
via NHC R308 to NHC 15.0DME, via  
NHC 15.0DME counterclockwise ARC 2000  
to OLVAL and hold.  
Cross NHC R308/12.0DME at or above  
1400FT.  
Contact NAHA APP.

**BLISS (IF)**  
1300  
1282(LOC)  
2000

**MINIMA**  
THR elev. 14  
AD elev. 11


CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A				900		
B				1000		1600
C	214 (200)	550	430 (419)		620 (609)	2400
D				1400		3200

Circling to WEST side of RWY only.

## INSTRUMENT APPROACH CHART

ROAH / NAHA


ILS Y or LOC Y RWY36L

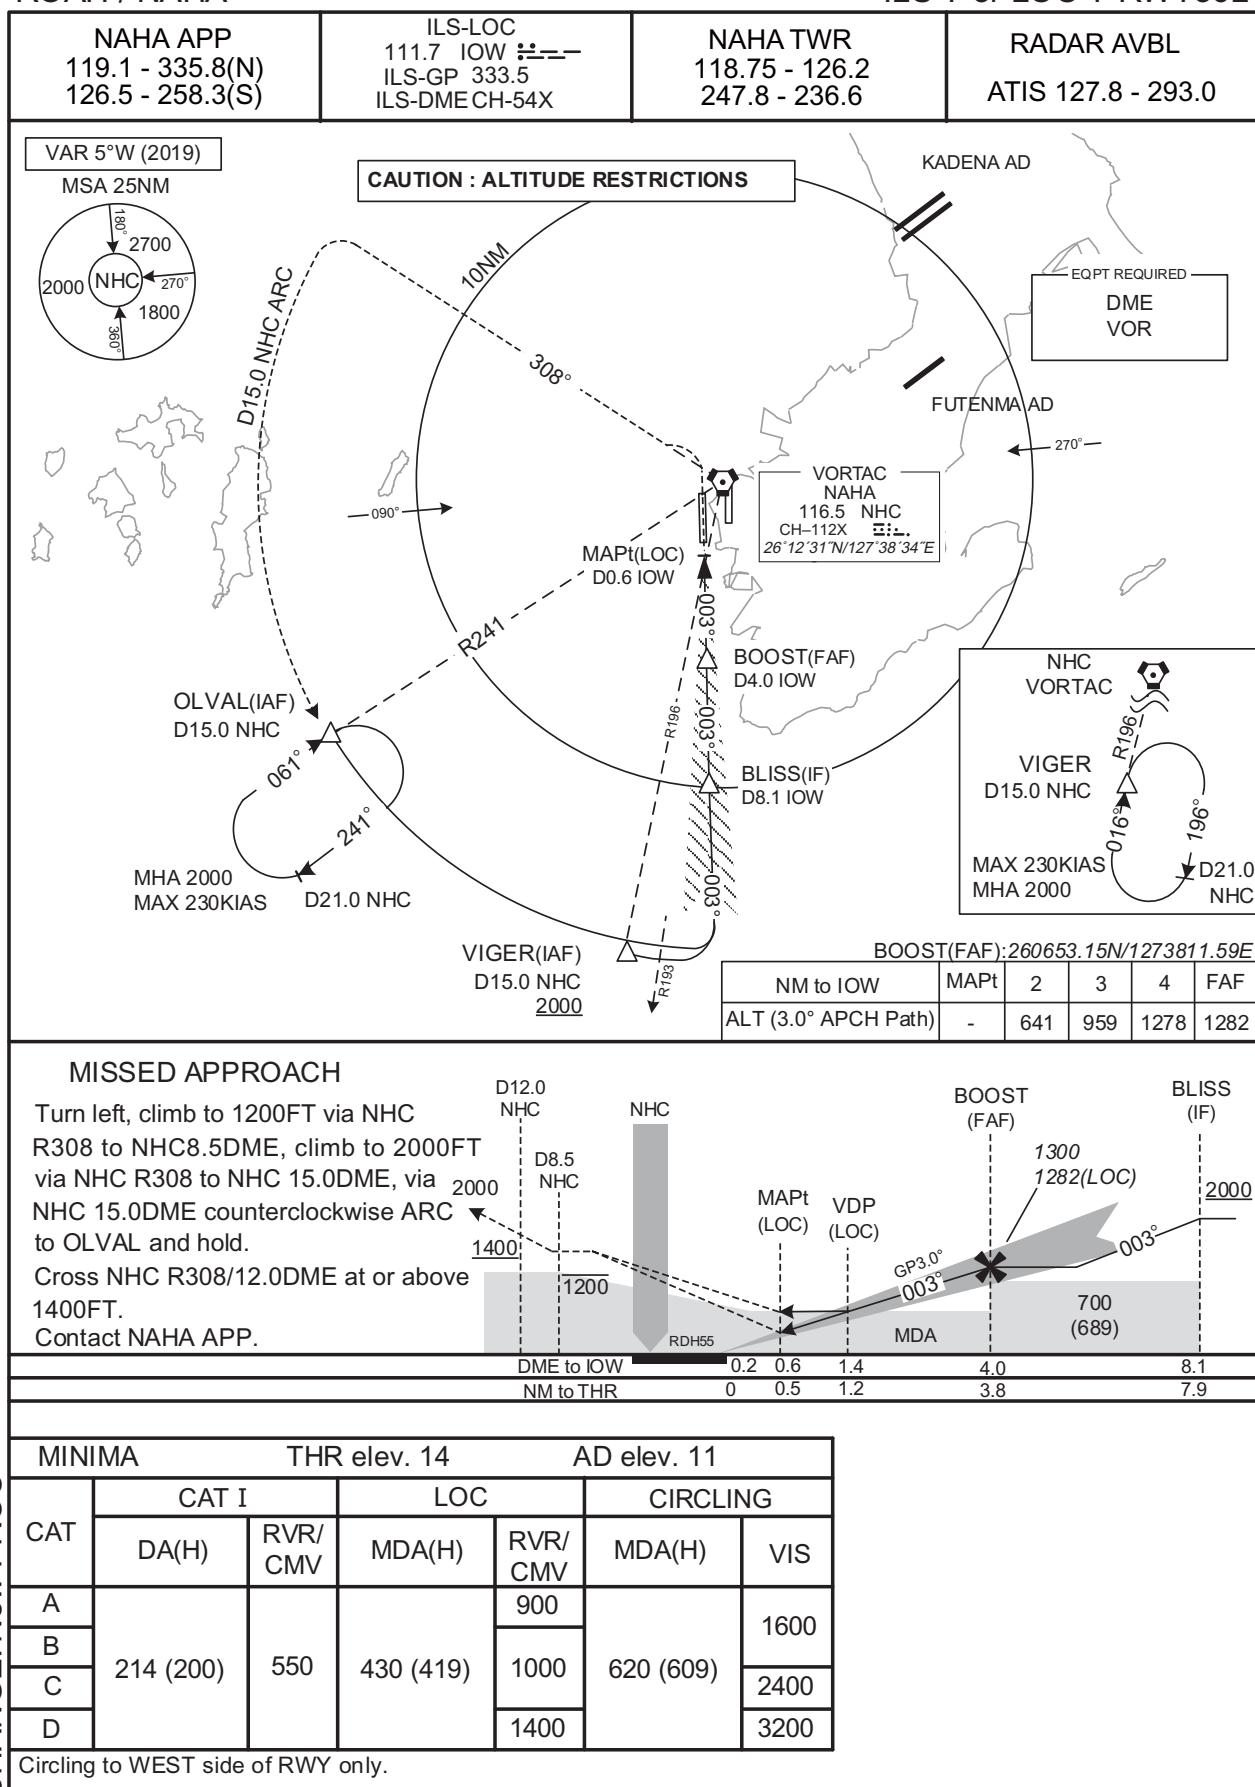

## INSTRUMENT APPROACH CHART

ROAH / NAHA

ILS X or LOC X RWY36L

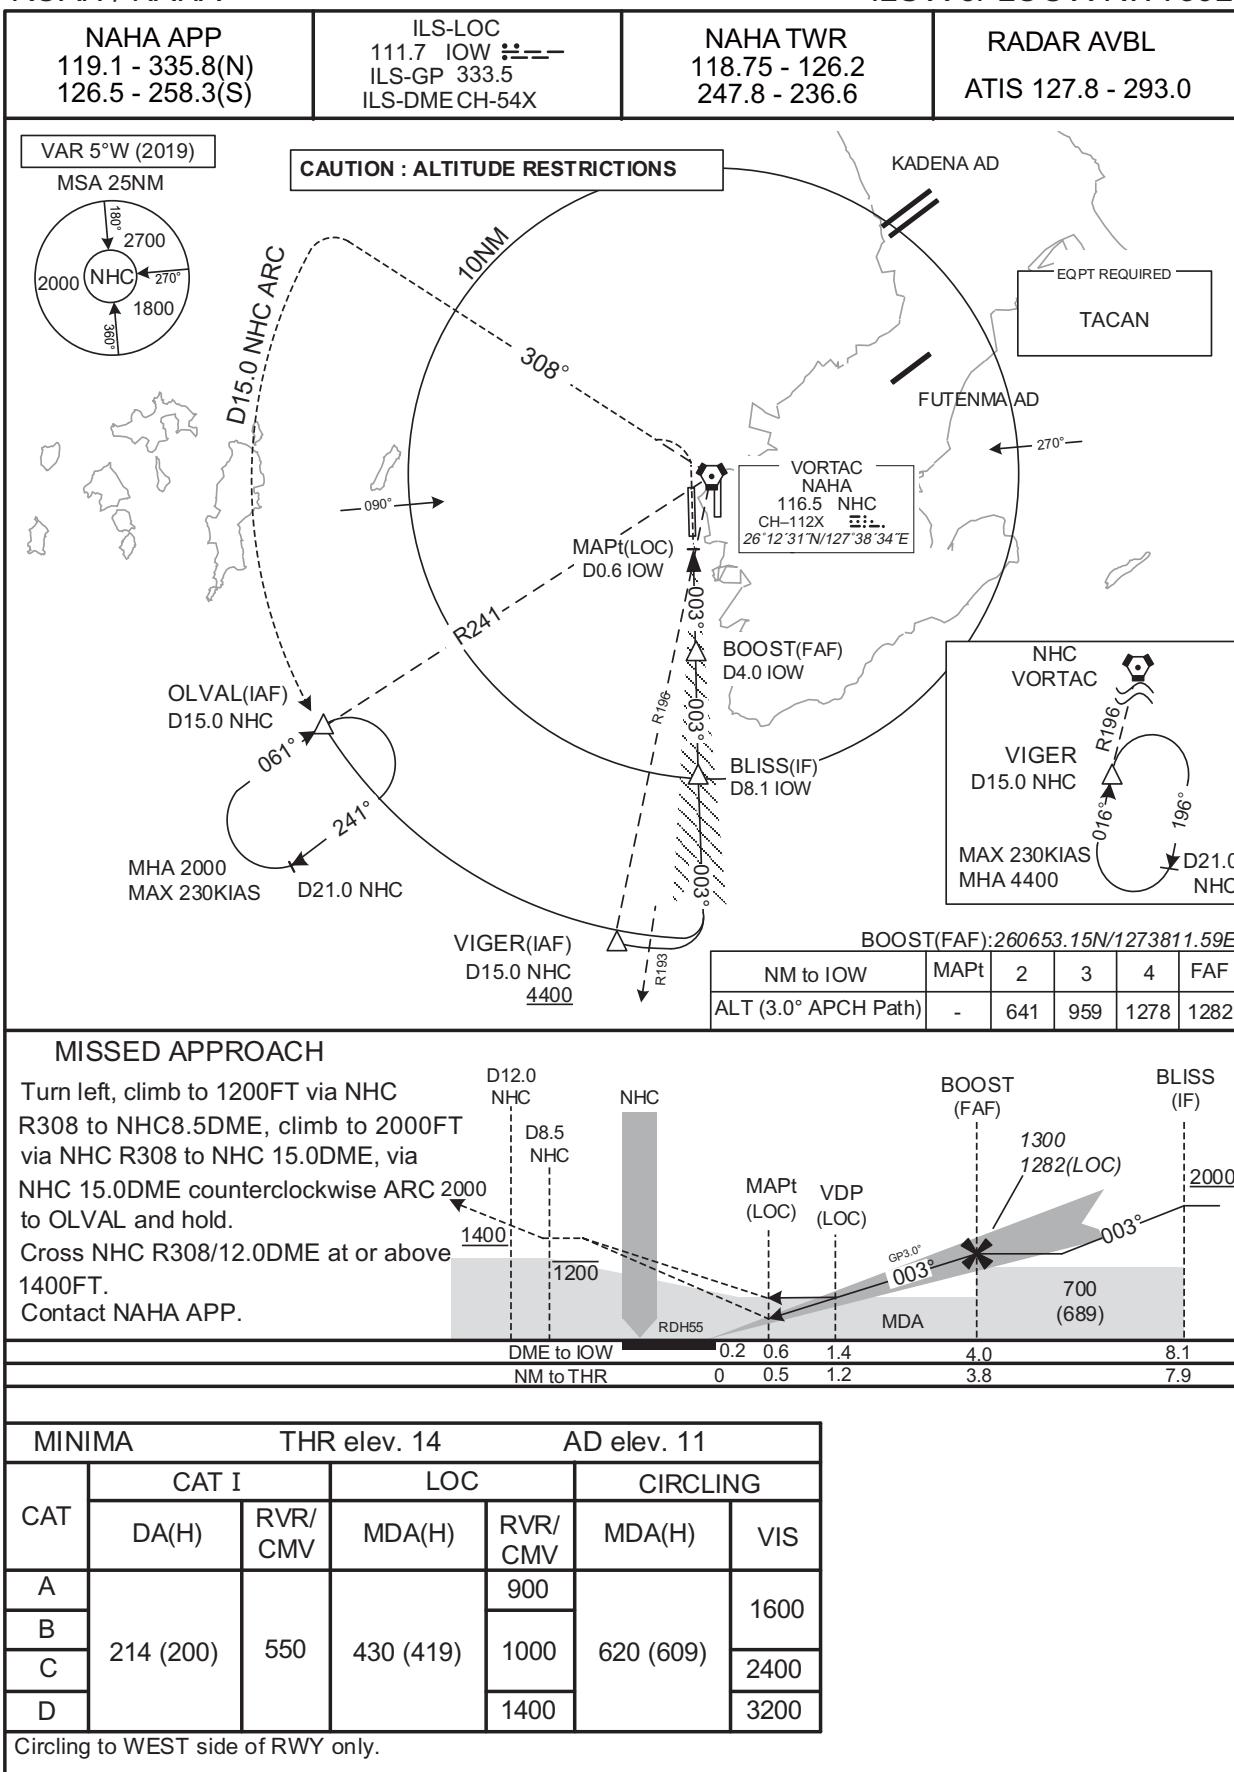

CHANGE: New PROC

## INSTRUMENT APPROACH CHART

ROAH / NAHA

## INSTRUMENT APPROACH CHART

ROAH / NAHA

RNAV(GNSS) RWY36R

## INSTRUMENT APPROACH CHART

ROAH / NAHA


RNAV(GNSS) RWY36L

NAHA APP 119.1 - 335.8(N) 126.5 - 258.3(S)	1. DME/DME not authorized. 2. RADAR service required. 3. GNSS required. For E/TSO-C129() sensor, contingency means required, such as IRU.	NAHA TWR 118.75 - 126.2 247.8 - 236.6	RADAR AVBL ATIS 127.8 - 293.0
Baro-VNAV not authorized below 0°C			
<p><b>CAUTION : ALTITUDE RESTRICTIONS</b></p> <p><b>NAHA VORTAC</b> 116.5 NHC CH-112X 26°12'31"N/127°38'34"E</p> <p><b>Approach and Departure Routes:</b></p> <ul style="list-style-type: none"> <li><b>Approach:</b> GELMA -&gt; H6L50(MAPt) -&gt; KICKS(FAF) -&gt; VIGER(IAF) 2000 -&gt; UTAKI(IAF) 2000 -&gt; SEIFA(IAF) 2000 -&gt; BLISS(IF) -&gt; GELMA.</li> <li><b>Departure:</b> GELMA -&gt; H6L50(MAPt) -&gt; KICKS(FAF) -&gt; VIGER(IAF) 2000 -&gt; UTAKI(IAF) 2000 -&gt; SEIFA(IAF) 2000 -&gt; BLISS(IF) -&gt; GELMA.</li> </ul> <p><b>Altitude Restrictions:</b></p> <ul style="list-style-type: none"> <li>From GELMA to H6L50(MAPt): 10NM, 10.6° (191.8°T) to 19.7° (191.8°T).</li> <li>From H6L50(MAPt) to KICKS(FAF): 10NM, 16.5° (158.9°T) to 16.5° (158.9°T).</li> <li>From KICKS(FAF) to VIGER(IAF) 2000: 10NM, 6.5° (158.9°T) to 19.7° (191.8°T).</li> <li>From VIGER(IAF) 2000 to UTAKI(IAF) 2000: 10NM, 061° to 241°.</li> <li>From UTAKI(IAF) 2000 to SEIFA(IAF) 2000: 5.0 NM, 092° to 273° (267.6°T).</li> <li>From SEIFA(IAF) 2000 to BLISS(IF): 5.8 NM, 033° to 033° (021.4°T).</li> <li>From BLISS(IF) to GELMA: 5.7 NM, 033° to 033° (021.4°T).</li> </ul> <p><b>Navigation Fixes:</b></p> <ul style="list-style-type: none"> <li><b>NAHA VORTAC:</b> 116.5 NHC, CH-112X, 26°12'31"N/127°38'34"E.</li> <li><b>Other Fixes:</b> H6L50(MAPt), KICKS(FAF), VIGER(IAF) 2000, UTAKI(IAF) 2000, SEIFA(IAF) 2000, BLISS(IF), GELMA, LAVON, OLVAL, MHA 2000.</li> </ul> <p><b>Radar AVBL:</b></p> <ul style="list-style-type: none"> <li><b>NAHA TWR:</b> 118.75 - 126.2, 247.8 - 236.6.</li> <li><b>RADAR AVBL:</b> ATIS 127.8 - 293.0.</li> </ul> <p><b>Baro-VNAV:</b> Not authorized below 0°C.</p>			

## MISSED APPROACH

Turn left direct to GELMA at or below 1200FT, to LAVON, to OLVAL and hold at 2000FT.

Contact NAHA APP.

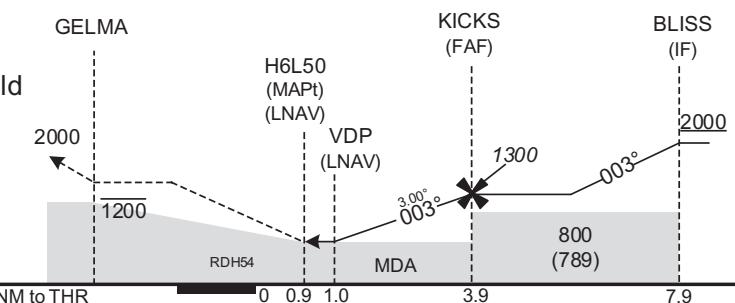


MINIMA		THR elev. 14		AD elev. 11		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A	370 (356)	900	370 (359)	900	620 (609)	1600
B		1000		1000		2400
C		1400		1400		3200
D						

## INSTRUMENT APPROACH CHART

## ROAH / NAHA


## RNAV(GNSS) RWY18R

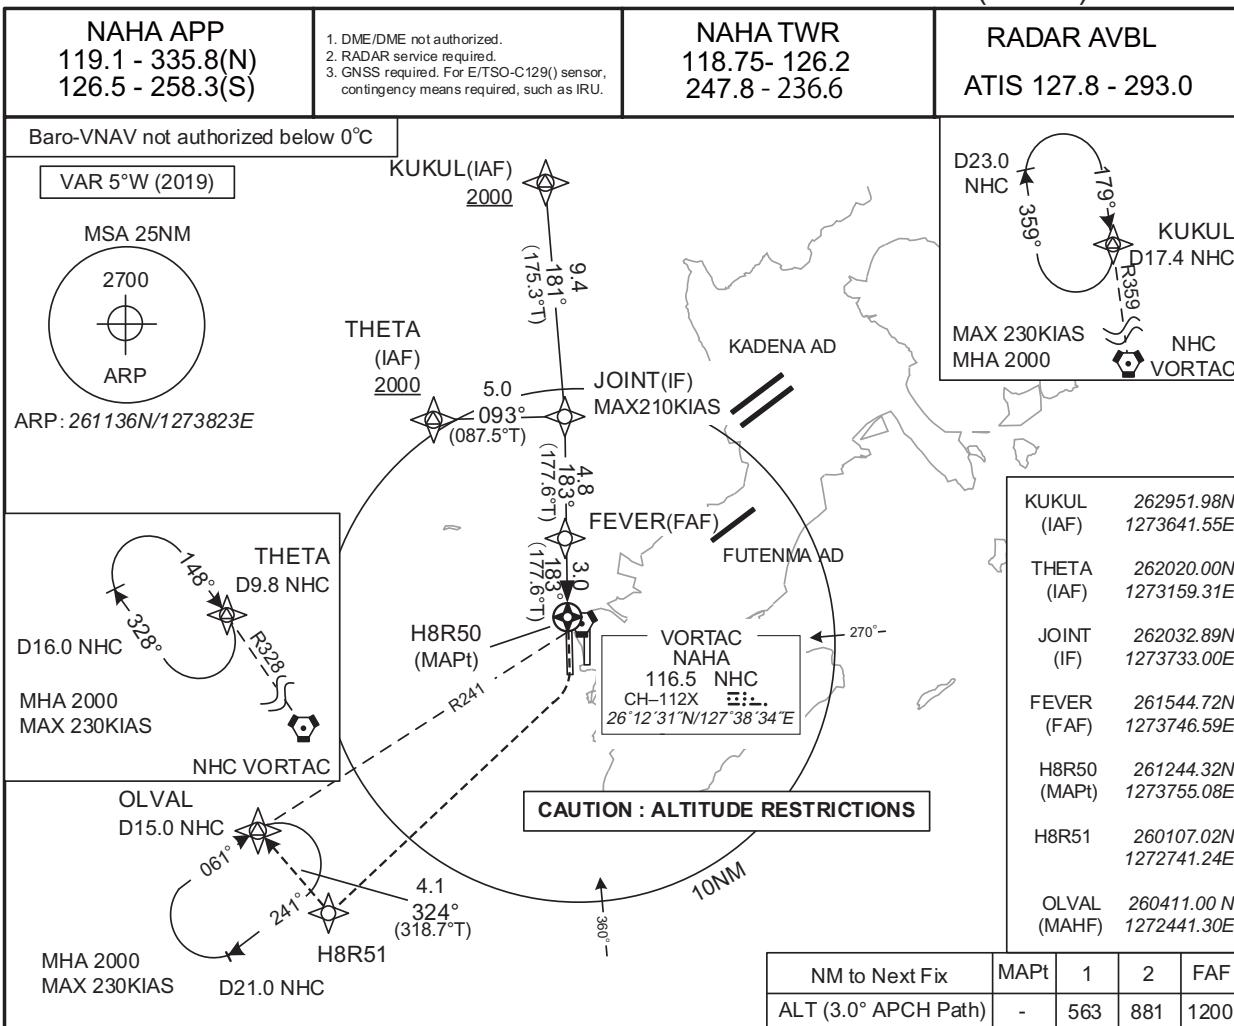

## MISSSED APPROACH

Turn right direct to H8R51 at or below 1200FT, to OLVAL and hold at 2000FT.

Contact NAHA APP.

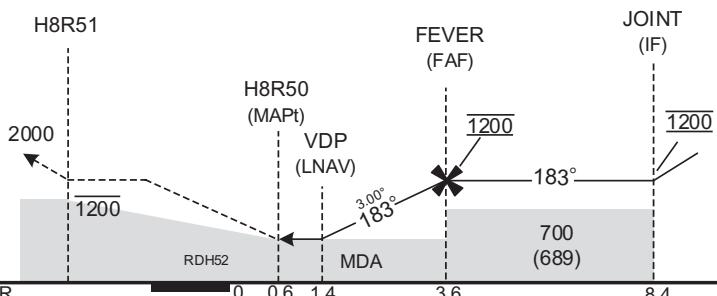

## MINIMA THR elev. 16 AD elev. 11


CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS
A		1000		1000		1600
B		1200		1200		620 (609)
C	490 (474)		490 (479)			2400
D		1600		1600		3200

Circling to WEST side of RWY only.

## INSTRUMENT APPROACH CHART


## ROAH / NAHA

## RNAV(GNSS) RWY18L

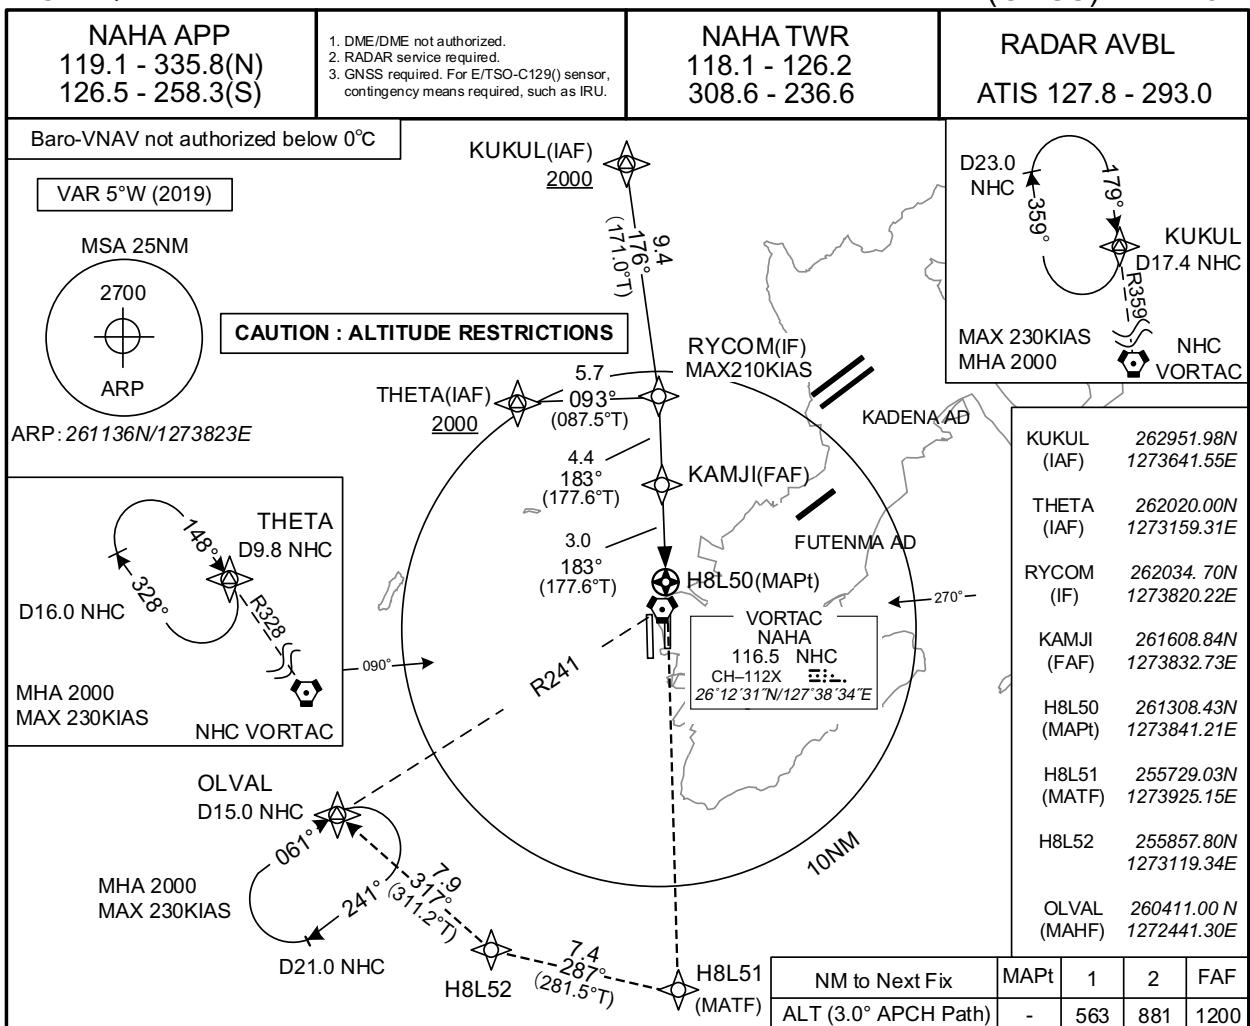

## INSTRUMENT APPROACH CHART


## ROAH / NAHA

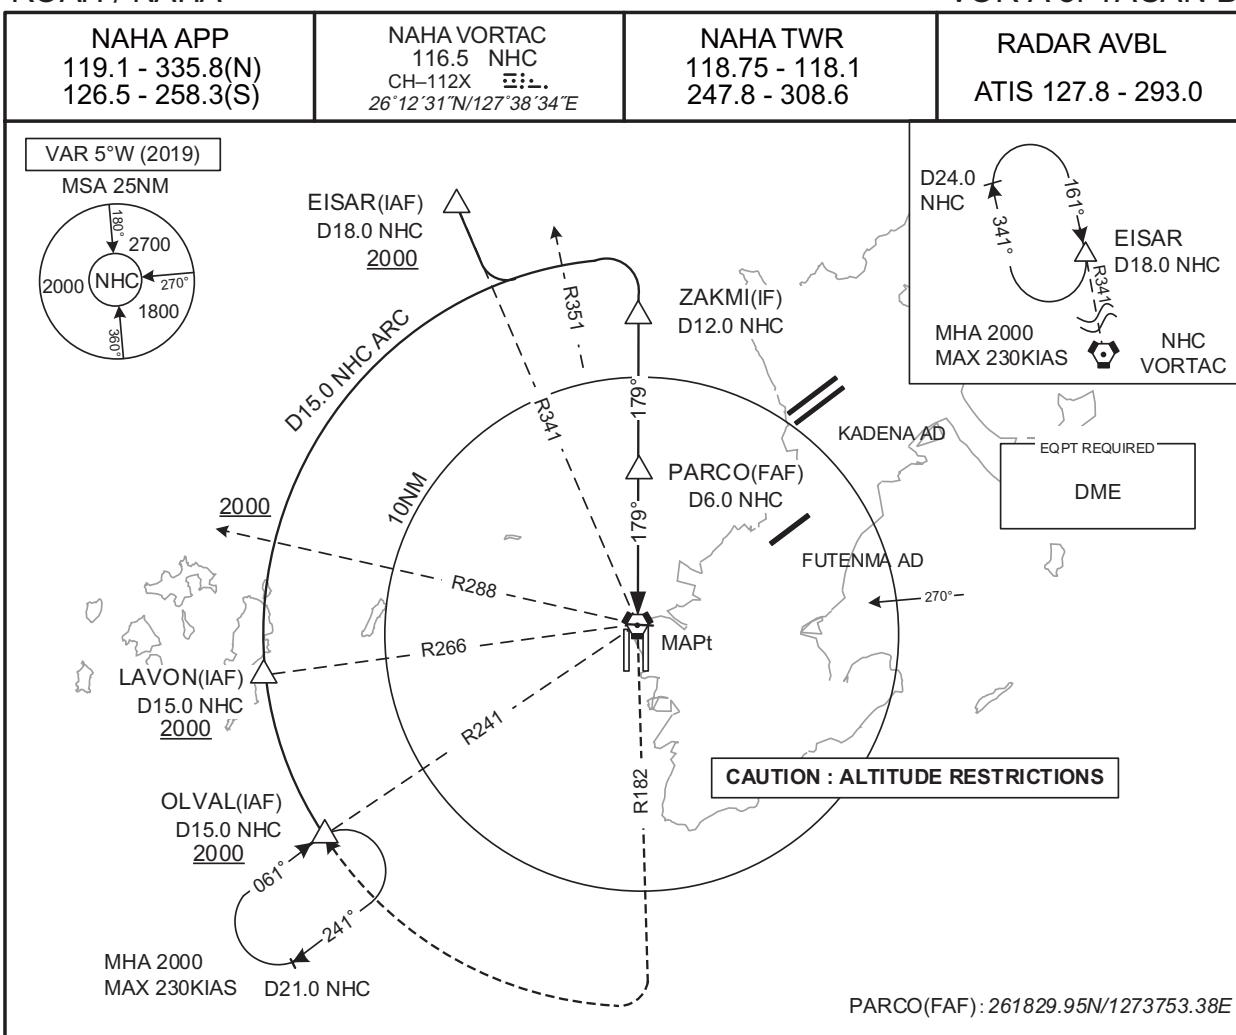

## MISSSED APPROACH

Climb to 1200FT via NHC R182 to NHC 15.0DME, climb to 2000FT via NHC 15.0DME clockwise ARC to OLVAL and hold.  
Contact NAHA APP.

Timing not authorized for defining the MAPt.

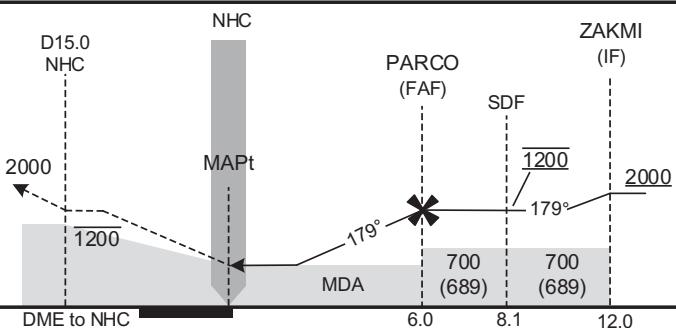

CHANGE: New PROC

MINIMA AD elev. 11		
CAT	CIRCLING	
	MDA(H)	VIS
A		1600
B	620 (609)	2400
C		3200
D		


Circling to WEST side of RWY only.

## INSTRUMENT APPROACH CHART

ROAH / NAHA

VOR C

NAHA APP 119.1 - 335.8(N) 126.5 - 258.3(S)	NAHA VORTAC 116.5 NHC CH-112X  26°12'31"N/127°38'34"E	NAHA TWR 118.75 - 118.1 247.8 - 308.6	RADAR AVBL ATIS 127.8 - 293.0
--------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------	----------------------------------

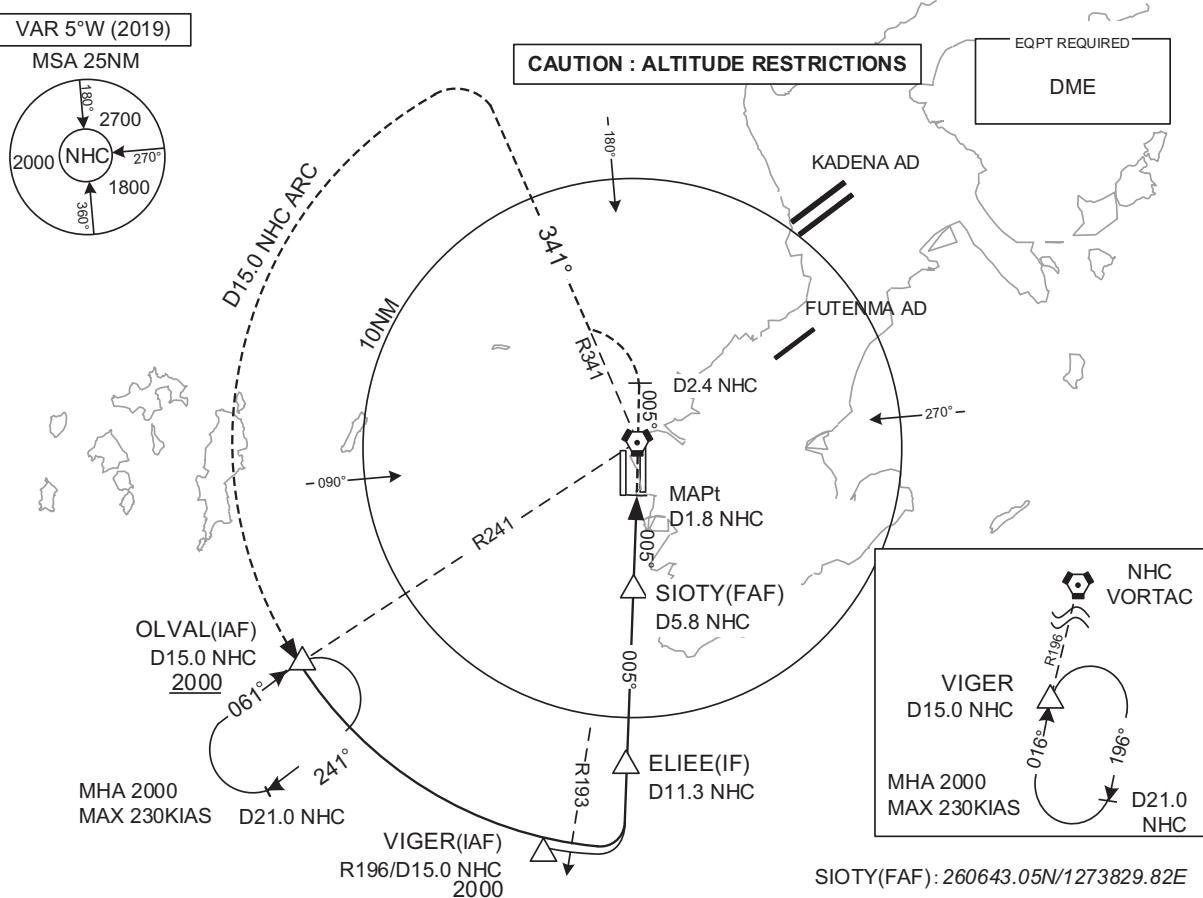


## MISSED APPROACH

Climb to 1200FT via NHC R005 to NHC 2.4DME, turn left proceed via NHC R341 to NHC 15.0DME, climb to 2000FT via NHC 15.0 DME counterclockwise ARC to QLVAL and hold.

Contact NAHA APP

Timing not authorized for defining the MAPt.

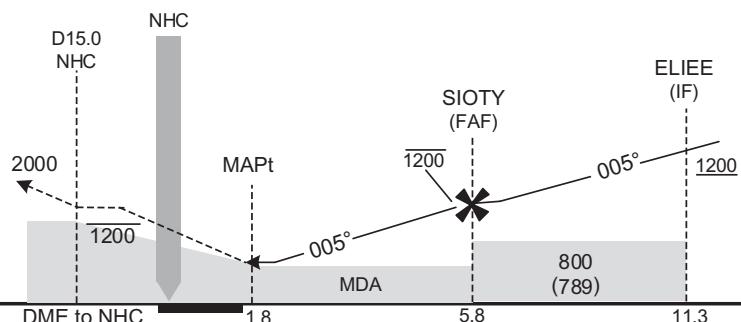


MINIMA		AD elev. 11
CAT	CIRCLING	
	MDA(H)	VIS
A	620 (609)	1600
B		2400
C		3200
D		

Circling to WEST side of RWY only.

## INSTRUMENT APPROACH CHART

ROAH / NAHA

NAHA APP 119.1 - 335.8(N) 126.5 - 258.3(S)	NAHA VORTAC 116.5 NHC CH-112X  26°12'31"N/127°38'34"E	NAHA TWR 118.75 - 118.1 247.8 - 308.6	RADAR AVBL ATIS 127.8 - 293.0
--------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------	----------------------------------

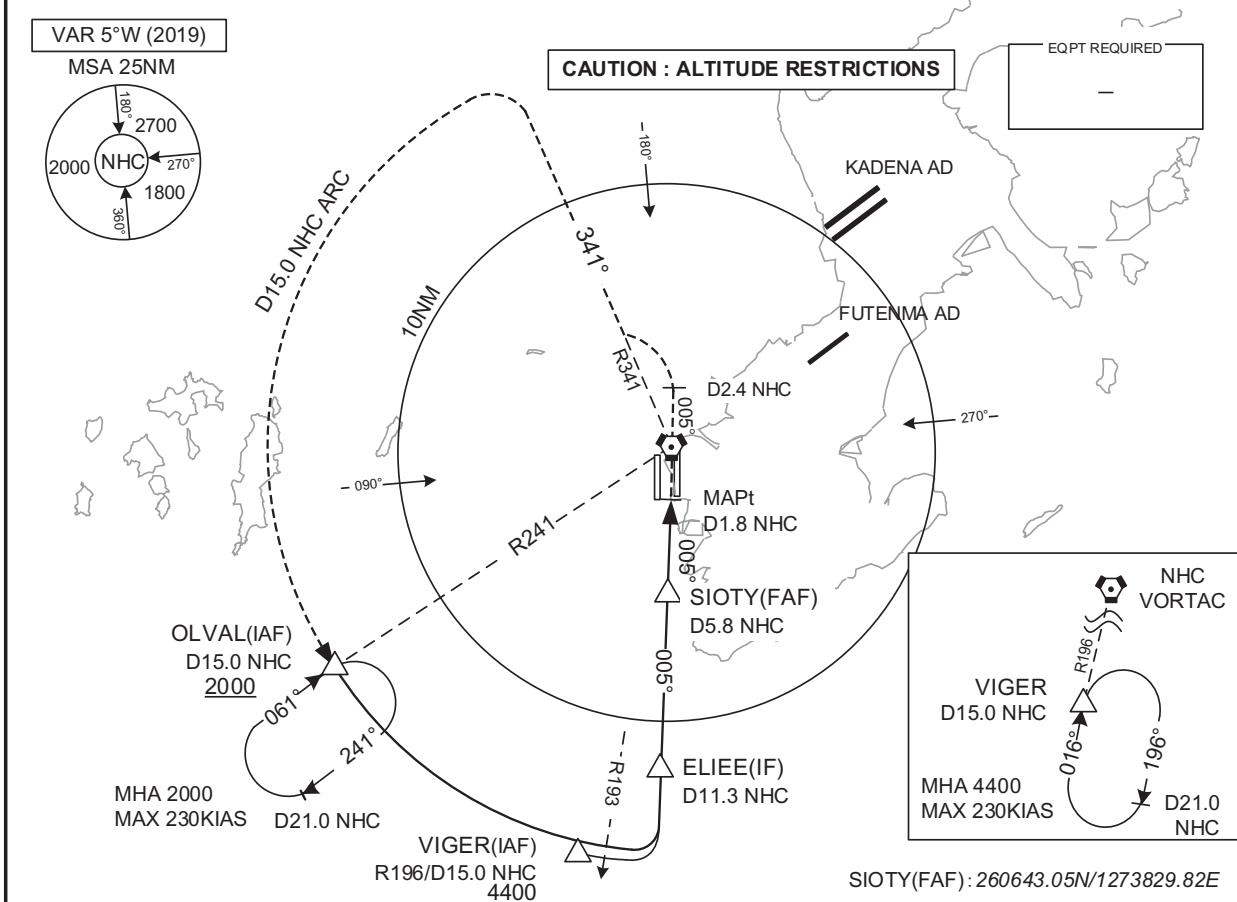


## MISSED APPROACH

Climb to 1200FT via NHC R005 to NHC 2.4DME, turn left proceed via NHC R341 to NHC 15.0DME, climb to 2000FT via NHC 15.0 DME counterclockwise ARC to QL VAL and hold

Contact NAHA APP

Timing not authorized for defining the MAPT

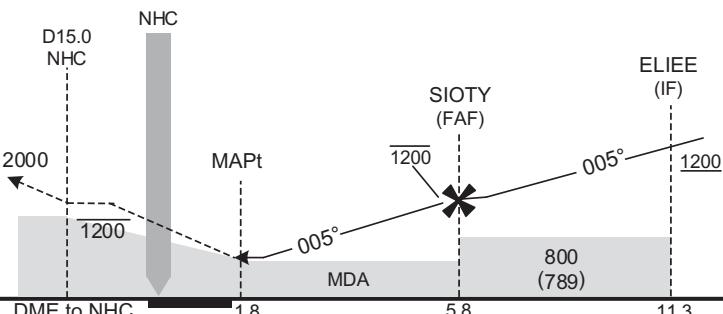


MINIMA		AD elev. 11
CAT	CIRCLING	
	MDA(H)	VIS
A	700 (689)	1600
B		2400
C		3200
D		

Circling to WEST side of RWY only.

ROAH / NAHA

Visual REP

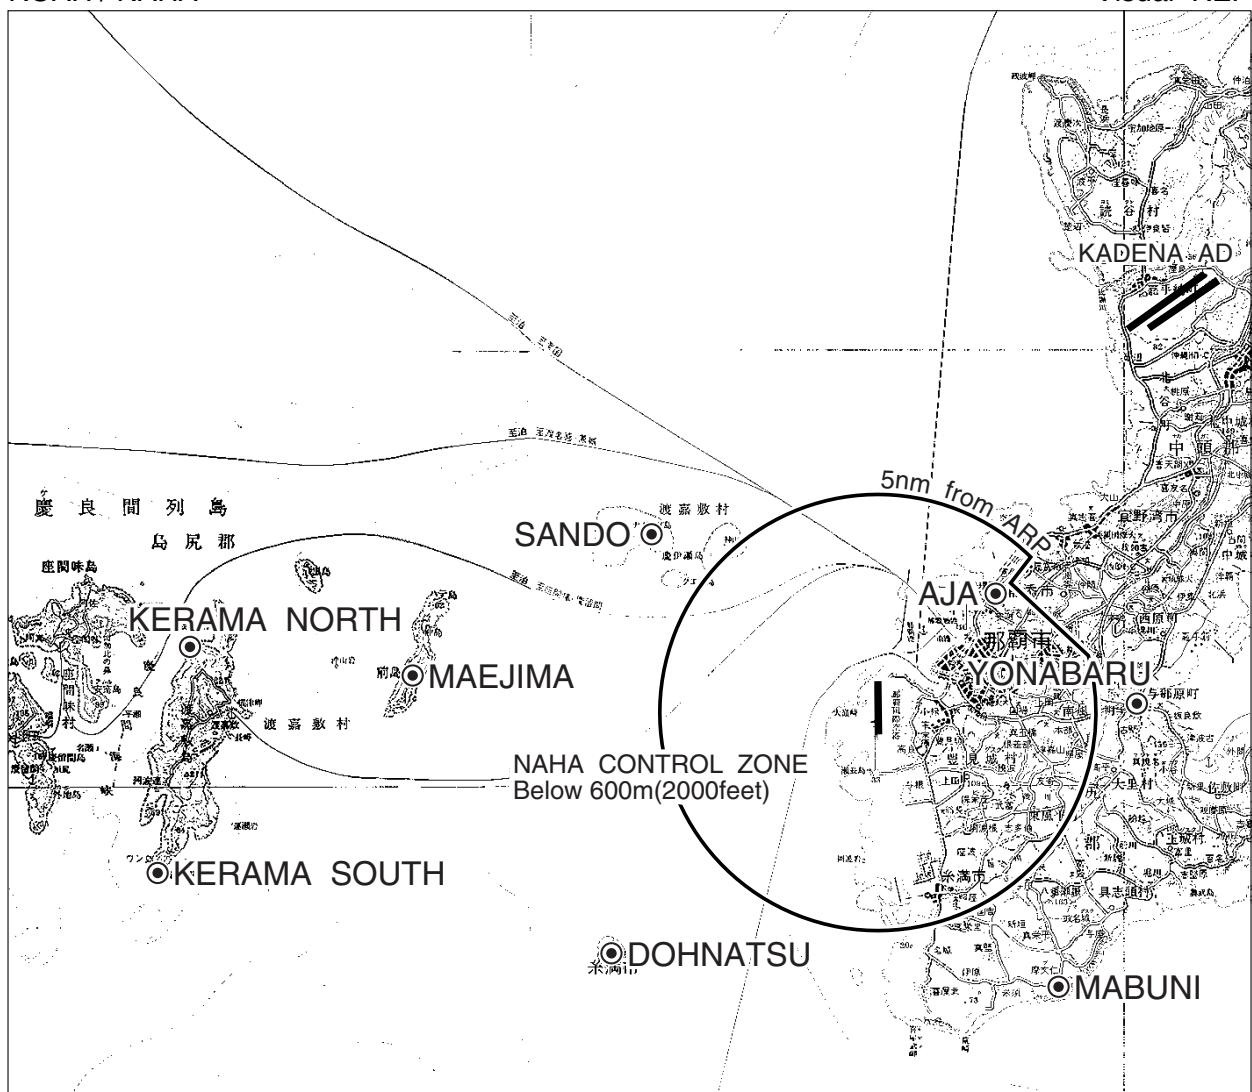


Call sign	BRG / DIST from ARP	Remarks
サンド Sando	310° / 6.7NM	ナガンヌ島 Island
前島 Maejima	277° / 10.8NM	前島 Island
慶良間ノース Kerama North	277° / 15.5NM	渡嘉敷島北端 North edge of island
慶良間サウス Kerama South	258° / 16.5NM	渡嘉敷島南端 South edge of island
ドーナツ Dohnatsu	230° / 8.5NM	ルカン礁 Coral reef
摩文仁 Mabuni	150° / 7.4NM	平和祈念公園 Park
与那原 Yonabaru	090° / 6.2NM	国道329号線与那原交叉点 Intersection
安謝 Aja	045° / 3.5NM	国道58号線安謝橋 Bridge

ROAH / NAHA

Minimum Vectoring Altitude CHART

VAR 5°W (2011)

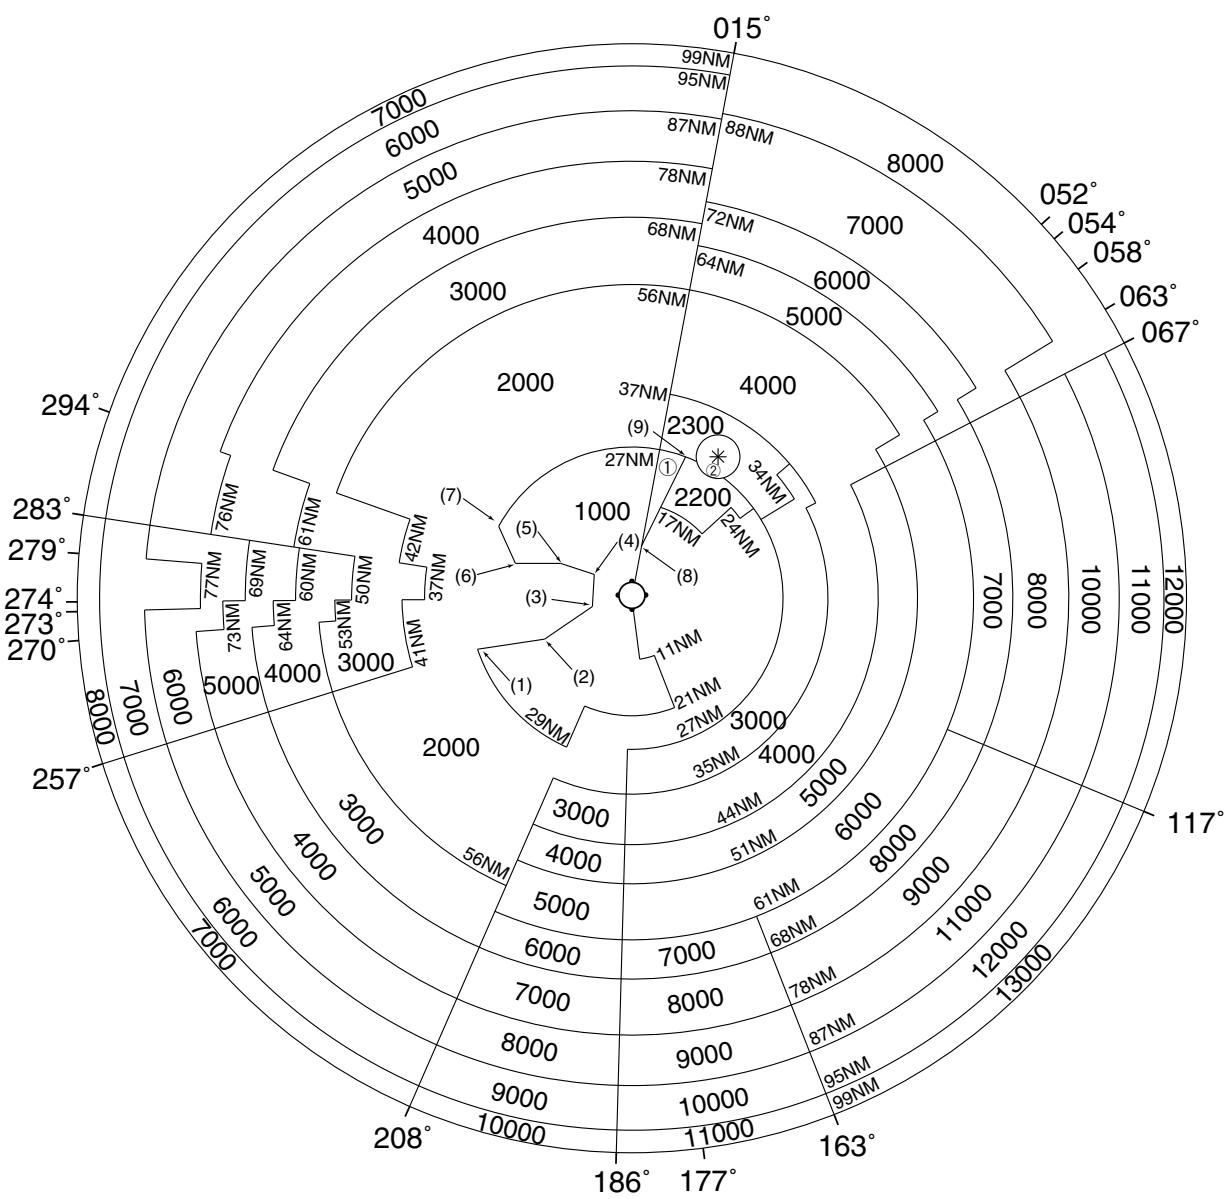

- ① 1500 (1) 260301N/1270807E  
 ② 2600 (2) 260459N/1272121E  
 (3) 261057N/1273045E  
 (4) 261640N/1273102E  
 (5) 261835N/1272422E

- (6) 261829N/1271524E  
 (7) 262505N/1271157E  
 (8) 262154N/1274025E  
 (9) 263755N/1274900E

CENTER: 261231N/1273834E (NHC)

\* : 263759N/1275528E

RADIUS 3.9NM