

RJER / RISHIRI

AD CHART



**INTENTIONALLY LEFT BLANK**

STANDARD DEPARTURE CHART-INSTRUMENT

RJER / RISHIRI

SID

RISHIRI REVERSAL TWO DEPARTURE

RWY07 : Climb RWY HDG to 600FT, turn left...

RWY25 : Climb RWY HDG to 600FT, turn right HDG 080°...

... to intercept and proceed via RSE R035 to 4000FT,  
turn left, direct to RSE VOR/DME.


Cross RSE VOR/DME at or above 8000FT.

Note RWY25 : 5.2% climb gradient required up to 1000FT.

OBST ALT 262FT located at 0.6NM 225° FM end of RWY25.

OBST ALT 722FT located at 1.3NM 157° FM end of RWY25.

CHANGE : PROC renamed. Turning altitude designated. HDG to intercept RSE R035. Turning altitude to RSE. Note added.

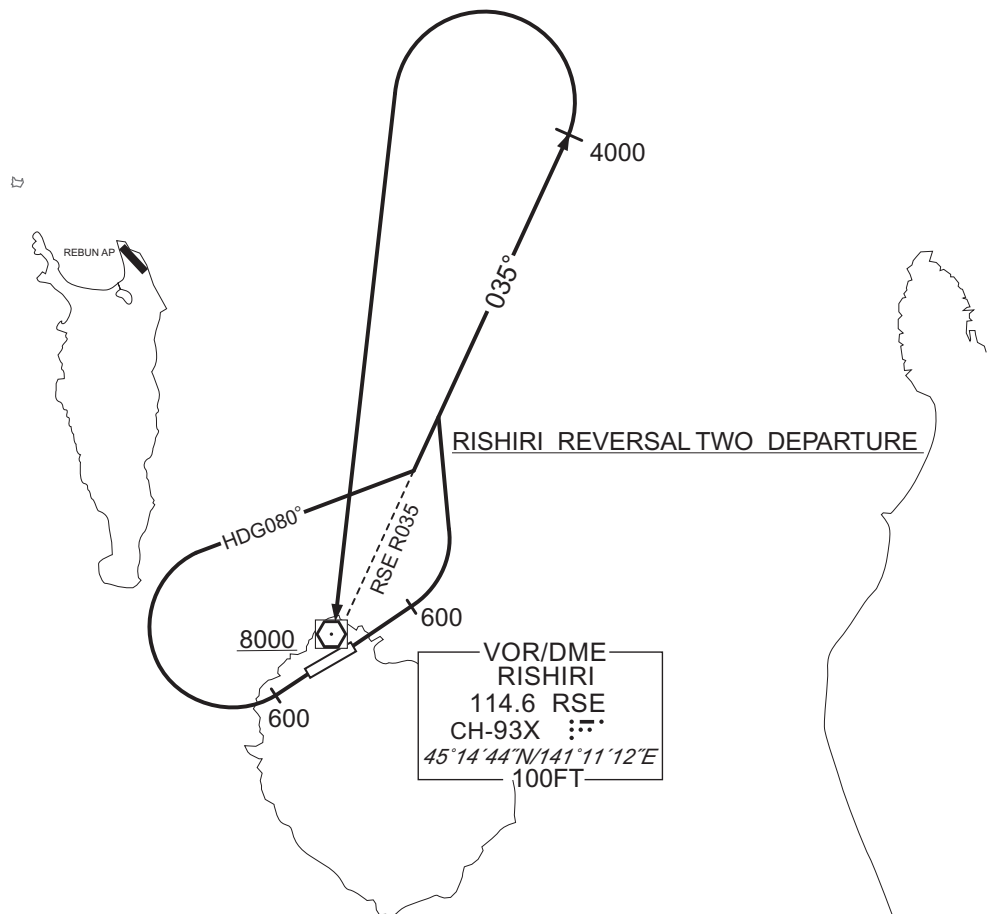

## STANDARD DEPARTURE CHART-INSTRUMENT

RJER / RISHIRI

RNAV SID

## LEDAX ONE DEPARTURE

Basic RNP1

Note GNSS required.

LEDAX ONE DEPARTURE

RWY07 : Climb on HDG067° at or above 600FT, direct to ER700, to ER701, to LEDAX at or above 8000FT.

RWY25 : Climb on HDG247° at or above 600FT, turn right direct to ER500, to ER701, to LEDAX at or above 8000FT.

Note RWY25 : 5.2% climb gradient required up to 600FT.

OBST ALT 262FT located at 0.6NM 225°FM end of RWY25.

CHANGE : New PROC

## STANDARD DEPARTURE CHART-INSTRUMENT

RJER / RISHIRI

RNAV SID

LEDAX ONE DEPARTURE

## RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	067 (056.9)	-10.4	-	-	+600	-	-	Basic RNP1
002	DF	ER700	-	-	-10.4	-	-	-	-	-	Basic RNP1
003	TF	ER701	-	158 (147.3)	-10.4	8.0	-	-	-	-	Basic RNP1
004	TF	LEDAX	-	172 (161.1)	-10.4	8.4	-	+8000	-	-	Basic RNP1

## RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	247 (236.9)	-10.4	-	-	+600	-	-	Basic RNP1
002	DF	ER500	-	-	-10.4	-	R	-	-	-	Basic RNP1
003	TF	ER701	-	126 (115.9)	-10.4	15.0	-	-	-	-	Basic RNP1
004	TF	LEDAX	-	172 (161.1)	-10.4	8.4	-	+8000	-	-	Basic RNP1

CHANGE : New PROC

INSTRUMENT APPROACH CHART

RJER / RISHIRI

LOC RWY25



CHANGE : Call sign(REMOTE→RADIO). AFIS unit added.

## INSTRUMENT APPROACH CHART

RJER / RISHIRI

VOR A

SAPPORO CONTROL  
132.6 – 255.2  
134.25 – 260.4RISHIRI VOR/DME  
114.6 RSE  
CH-93X  
45°14'44"N/141°11'12"ERISHIRI RADIO  
122.7  
AFIS provided  
by New Chitose Airport Office

NO RADAR

VAR 10°W (2020)

MSA 25NM



6700

RSE

ORISU  
(IAF/MAHF)  
R349/D14.2 RSE  
3000

REBUN AP

10NM

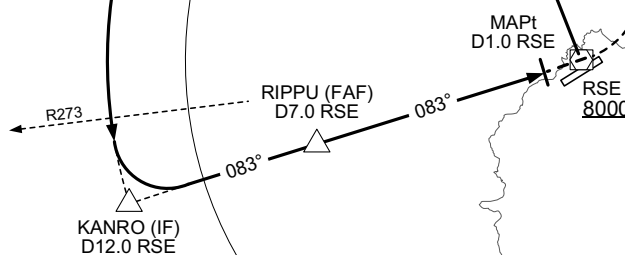EQPT REQUIRED  
DME

RIPPU(FAF) : 451239.21N / 1410144.85E

KANRO  
(IF)

2700

RIPPU  
(FAF)

2000

MAPt

RSE

MISSED APPROACH

Turn left to intercept and proceed  
via RSE R349 to ORISU and hold at  
3000FT.  
Contact RISHIRI RADIO.

Timing not authorized for defining the MAPt.

12.0

7.0

1.0

DME to RSE

MINIMA

AD elev. 99

CAT	CIRCLING	
	MDA(H)	VIS
A	610(511)	1600
B	610(511)	1600
C	630(531)	2400
D	-	-

Circling to NORTH side of RWY only.

CHANGE : Call sign(REMOTE→RADIO). AFIS unit added.

## INSTRUMENT APPROACH CHART

## RJER / RISHIRI

## RNAV(GNSS) RWY25



CHANGE : Call sign(REMOTE→RADIO). AFIS unit added.




## RJER / RISHIRI

SAPPORO CONTROL  
132.6 - 255.2  
134.25 - 260.4

1. DME/DME RNP0.3 not authorized.
2. RNP 0.3 required.
3. GNSS required.

RISHIRI RADIO  
122.7  
AFIS provided  
by New Chitose Airport Office

NO RADAR

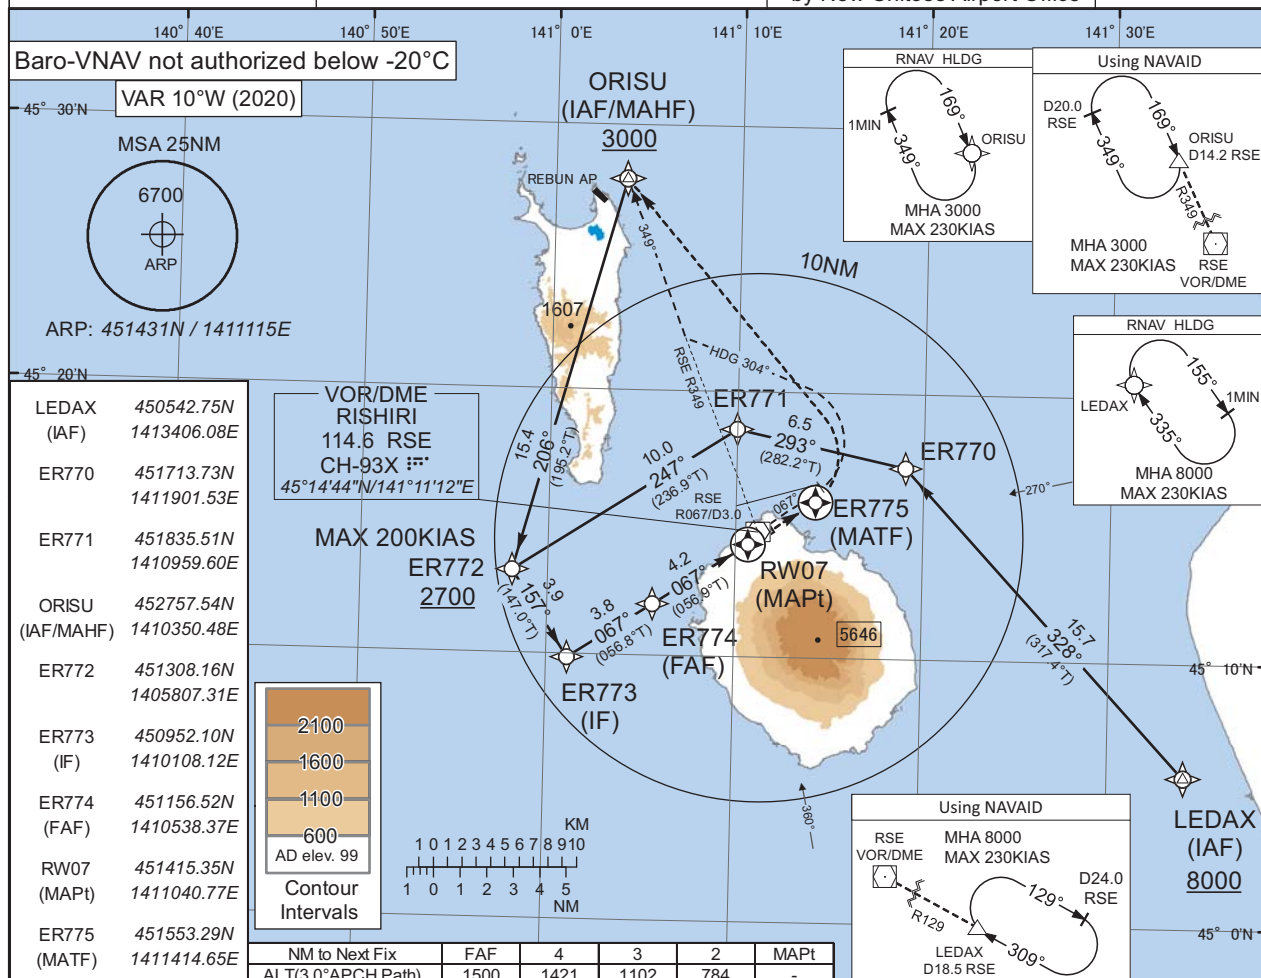

Direct to ER775, turn left direct  
to ORISU and hold at 3000FT.  
Contact RISHIRI RADIO.


(For using VOR/DME)  
Climb via RSE R067 to 3.0DME,  
turn left HDG304° to intercept  
and proceed via RSE R349 to  
ORISU and hold at 3000FT.  
Contact RISHIRI RADIO.

MINIMA		THR elev. 98	AD elev. 99			
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	610(512)	1500	610(511)	1500	610(511)	1600
B		2000		2000	630(531)	2400
C						
D	-	-	-	-	-	-

Circling to NORTH side of RWY only.

## RJR / RISHIRI

## Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
姫沼 Himenuma	110°T / 2.7NM	姫沼 Pond
沓形 Kutsugata	217°T / 4.2NM	沓形岬 Cape

Note : In the SE through SW of the airport, A/G COM from Rishiri Radio is blinded by Mt. Rishiri(1,721m/5,646ft).

RJER / RISHIRI

Minimum Vectoring Altitude CHART

