


RJDT / TSUSHIMA

AD CHART

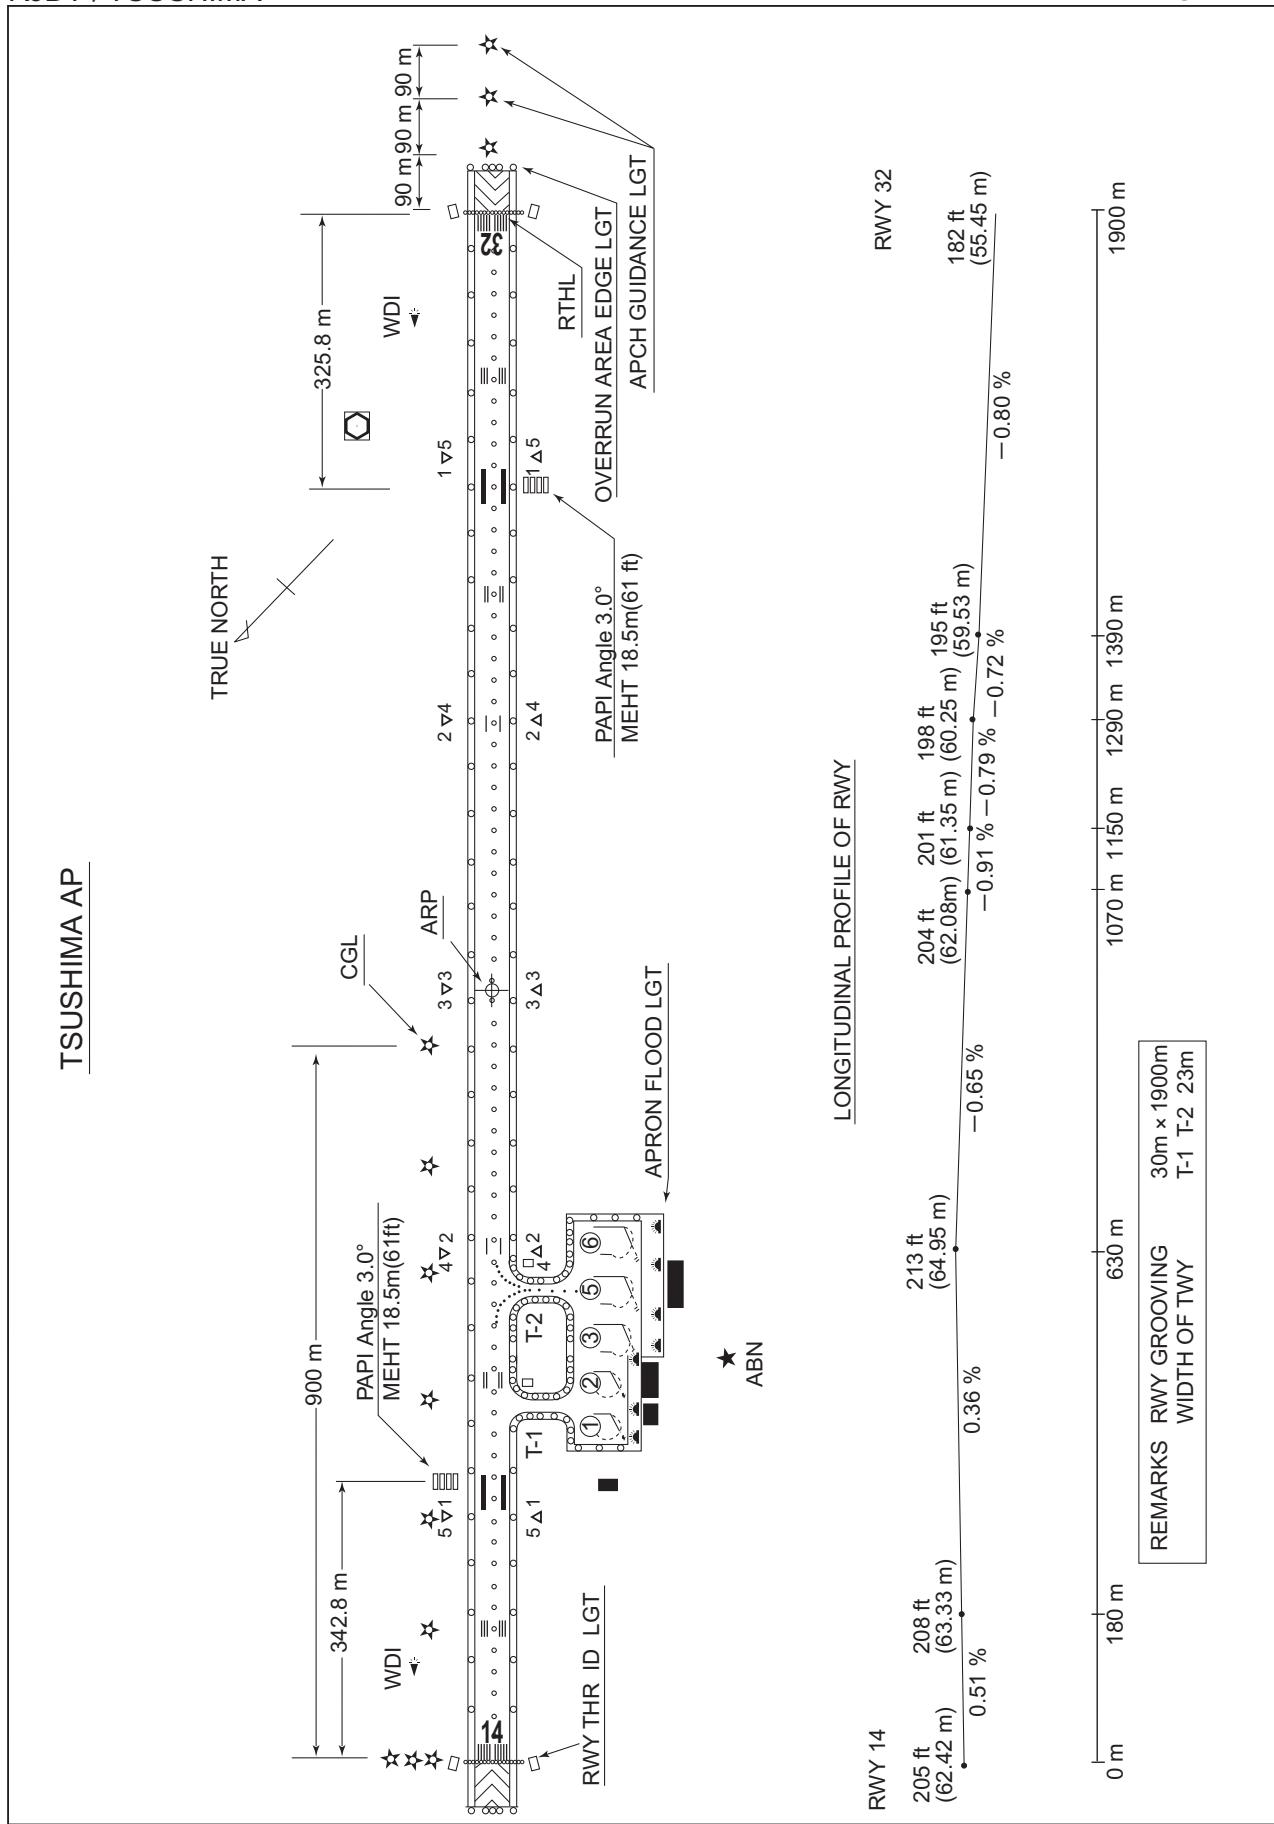

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART - INSTRUMENT

RJDT / TSUSHIMA

SID

IKISHIMA FIVE DEPARTURE

RWY 14 : Climb RWY HDG to 900FT,...

RWY 32 : Climb on HDG 338° to 900FT, turn right HDG 198°,...

...to intercept and proceed via VCE R153 to IKE VOR/DME.

Cross VCE R153/20.0DME at or above 4000FT.

Note RWY 32 : 3.9% climb gradient required up to 900FT.

OBST ALT 525FT located at 1.9NM 306° FM end of RWY 32.

LAGER TWO DEPARTURE

RWY 14 : Climb RWY HDG to 900FT, turn left,...

RWY 32 : Climb on HDG 338° to 900FT, turn right HDG 170°,...

...to intercept and proceed via VCE R125 to LAGER.

Note RWY 32 : 3.9% climb gradient required up to 900FT.

OBST ALT 525FT located at 1.9NM 306° FM end of RWY 32.

CHANGE : IKISHIMA FIVE DEPARTURE, LAGER TWO DEPARTURE



STANDARD DEPARTURE CHART - INSTRUMENT

RJDT / TSUSHIMA


RNAV SID

BAIRI ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 8°W (2020)

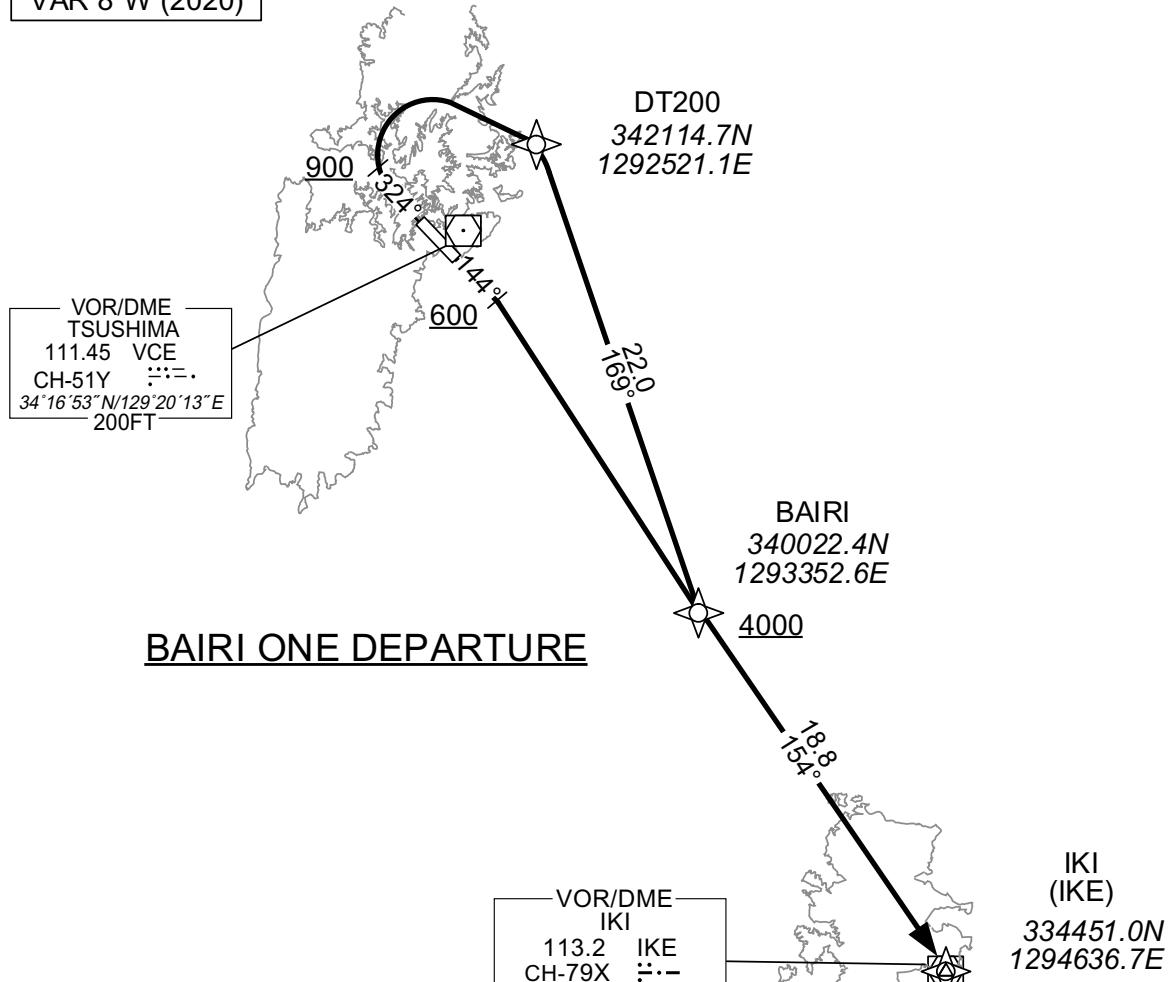BAIRI ONE DEPARTUREBAIRI ONE DEPARTURE

RWY14 : Climb on HDG144° at or above 600FT, turn right direct to BAIRI at or above 4000FT, to IKE.

RWY32 : Climb on HDG324° at or above 900FT, turn right direct to DT200, to BAIRI at or above 4000FT,to IKE.

Note RWY32 : 5.2% climb gradient required up to 900FT.

OBST ALT 262FT located at 0.2NM 292° FM end of RWY32.

CHANGE : New PROC

STANDARD DEPARTURE CHART - INSTRUMENT

RJDT / TSUSHIMA

RNAV SID

BAIRI ONE DEPARTURE

RWY14

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	144 (136.2)	-7.9	—	—	+600	—	—	Basic RNP1
002	DF	BAIRI	—	—	-7.9	—	R	+4000	—	—	Basic RNP1
003	TF	IKE	—	154 (145.7)	-7.9	18.8	—	—	—	—	Basic RNP1

RWY32

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	324 (316.2)	-7.9	—	—	+900	—	—	Basic RNP1
002	DF	DT200	—	—	-7.9	—	R	—	—	—	Basic RNP1
003	TF	BAIRI	—	169 (161.3)	-7.9	22.0	—	+4000	—	—	Basic RNP1
004	TF	IKE	—	154 (145.7)	-7.9	18.8	—	—	—	—	Basic RNP1

CHANGE : New PROC

STANDARD DEPARTURE CHART - INSTRUMENT

RJDT / TSUSHIMA

RNAV SID

SIYAT ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 8°W (2020)

SIYAT ONE DEPARTURE

RWY14 : Climb on HDG144° at or above 900FT, turn left direct to SIYAT, to LAGER.

RWY32 : Climb on HDG324° at or above 900FT, turn right direct to DT200, to SIYAT, to LAGER.

Note RWY32 : 5.2% climb gradient required up to 900FT.

OBST ALT 262FT located at 0.2NM 292° FM end of RWY32.

CHANGE : New PROC

STANDARD DEPARTURE CHART - INSTRUMENT

RJDT / TSUSHIMA

RNAV SID

SIYAT ONE DEPARTURE

RWY14

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	144 (136.2)	-7.9	—	—	+900	—	—	Basic RNP1
002	DF	SIYAT	—	—	-7.9	—	L	—	—	—	Basic RNP1
003	TF	LAGER	—	126 (118.0)	-7.9	36.8	—	—	—	—	Basic RNP1

RWY32

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	324 (316.2)	-7.9	—	—	+900	—	—	Basic RNP1
002	DF	DT200	—	—	-7.9	—	R	—	—	—	Basic RNP1
003	TF	SIYAT	—	150 (142.0)	-7.9	14.3	—	—	—	—	Basic RNP1
004	TF	LAGER	—	126 (118.0)	-7.9	36.8	—	—	—	—	Basic RNP1

CHANGE : New PROC

INSTRUMENT APPROACH CHART

RJDT / TSUSHIMA

FUKUOKA CONTROL
118.9 – 303.8
134.25 – 315.5

LOC
108.7 IVC LOC-DME CH-24X

TSUSHIMA REMOTE
124.3 – 126.2

NO RADAR

VAR 7°W (2014)

EQPT REQUIRED
DME
VOR

MSA 25NM

VCE VOR/DME
MHA 3000 MAX 230KIAS

MHA 3000 MAX 250KIAS

AGATA (IF)

HAZEL(FAF) : 341406.42N/1292321.90E

LOC OFFSET 0.7°

LOC IVC
108.7 IVC LOC-DME CH-24X

MAPt
D1.8 IVC

HAZEL(FAF)
D4.8 IVC

AGATA (IF)

VCE

VDP
D1.8 IVC (CAT A, B, C)
D1.9 IVC (CAT D)

MDA
700 (518)

3000

Timing not authorized for defining the MAPt.

	NM to IVC	MAPt	2	3	4	FAF
ALT (3.0° APCH Path)	–	507	825	1143	1348	

MISSED APPROACH

Climb via VCE R330 to 3000FT, turn left, direct to VCE VOR/DME and hold. Contact TSUSHIMA REMOTE.


MINIMA THR elev. 182 AD elev. 207

CAT	CIRCLING			
	MDA(H)	CMV	MDA(H)	VIS
A	440 (258)	1500	690 (483)	1600
B			760 (553)	
C	450 (268)	1600	1090 (883)	2400
D	470 (288)	1800		3200


Circling to EAST side of RWY only.

INSTRUMENT APPROACH CHART

RJDT / TSUSHIMA

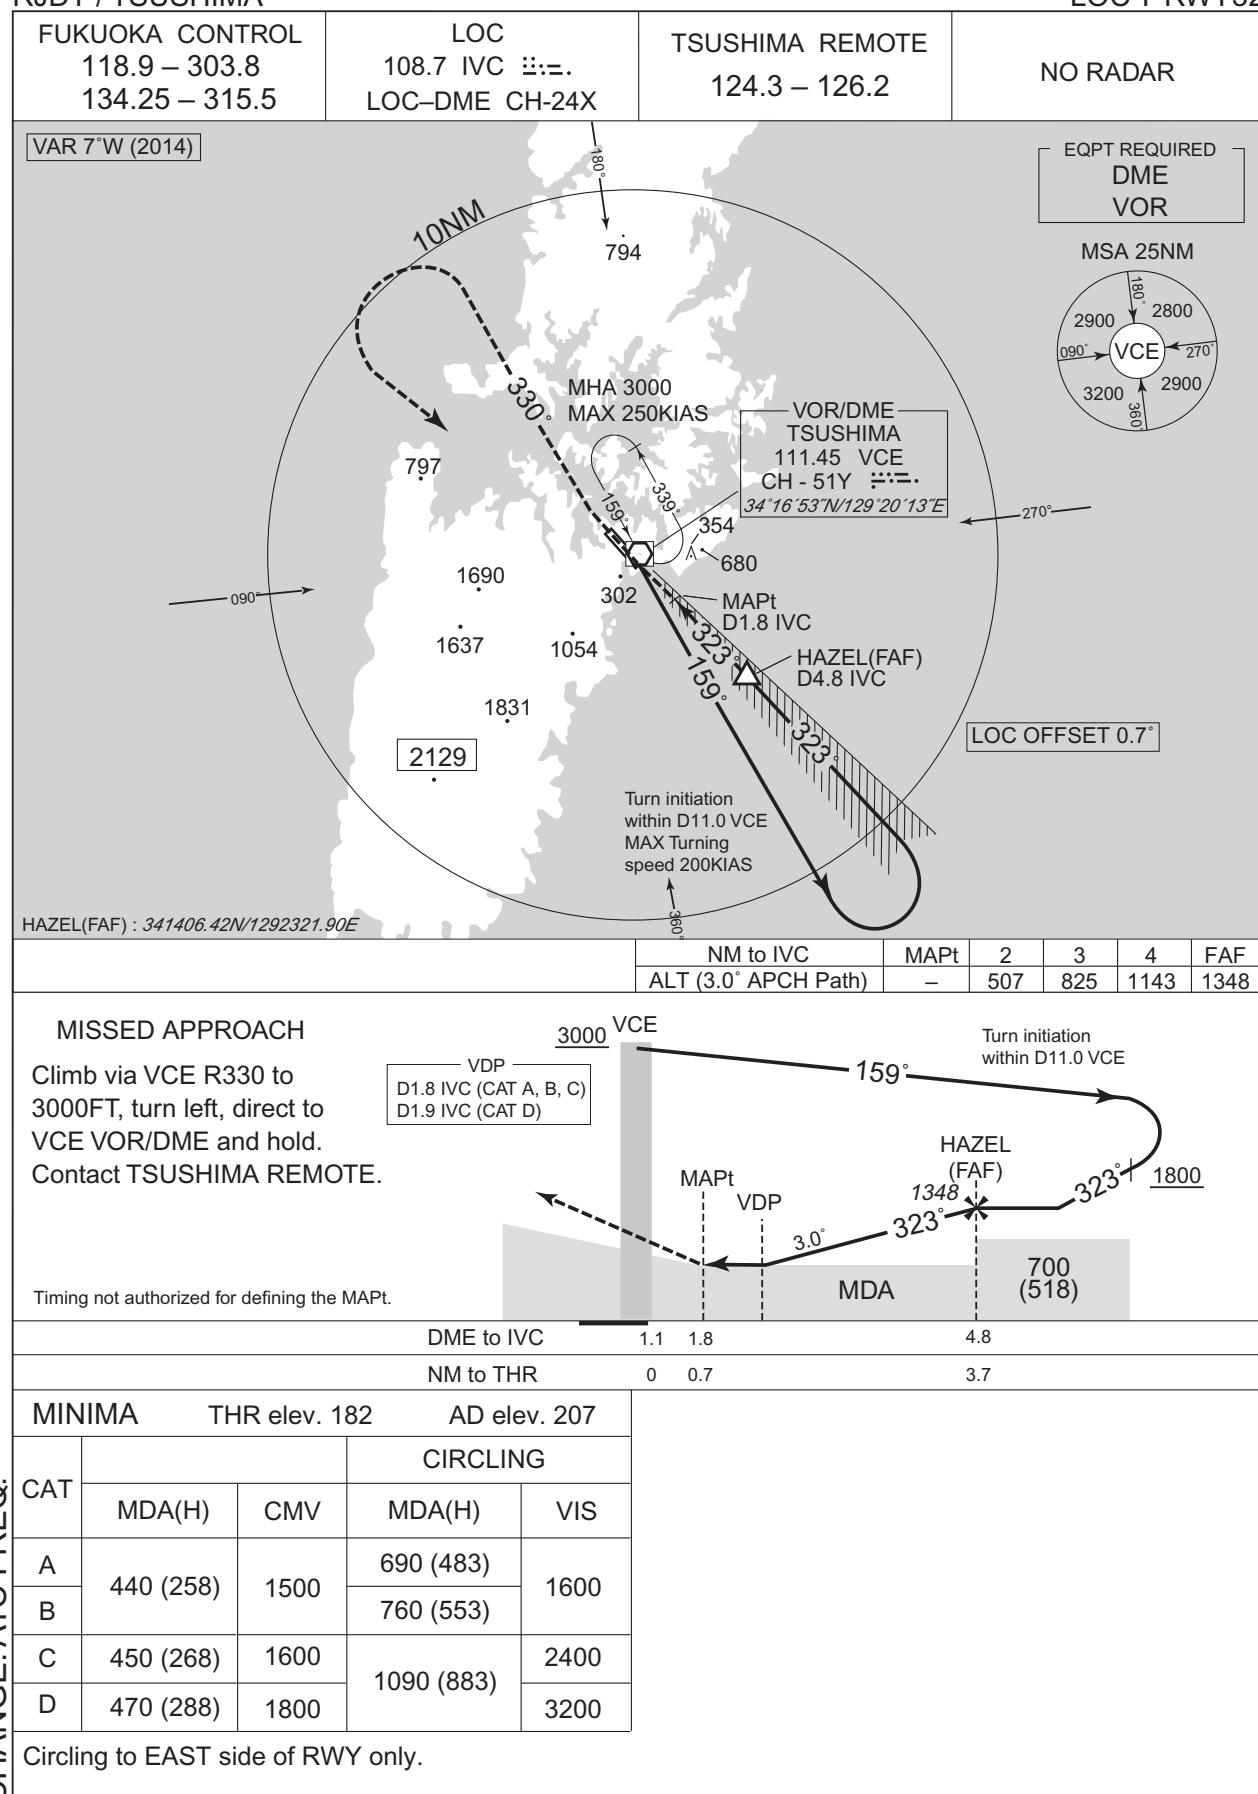


INSTRUMENT APPROACH CHART

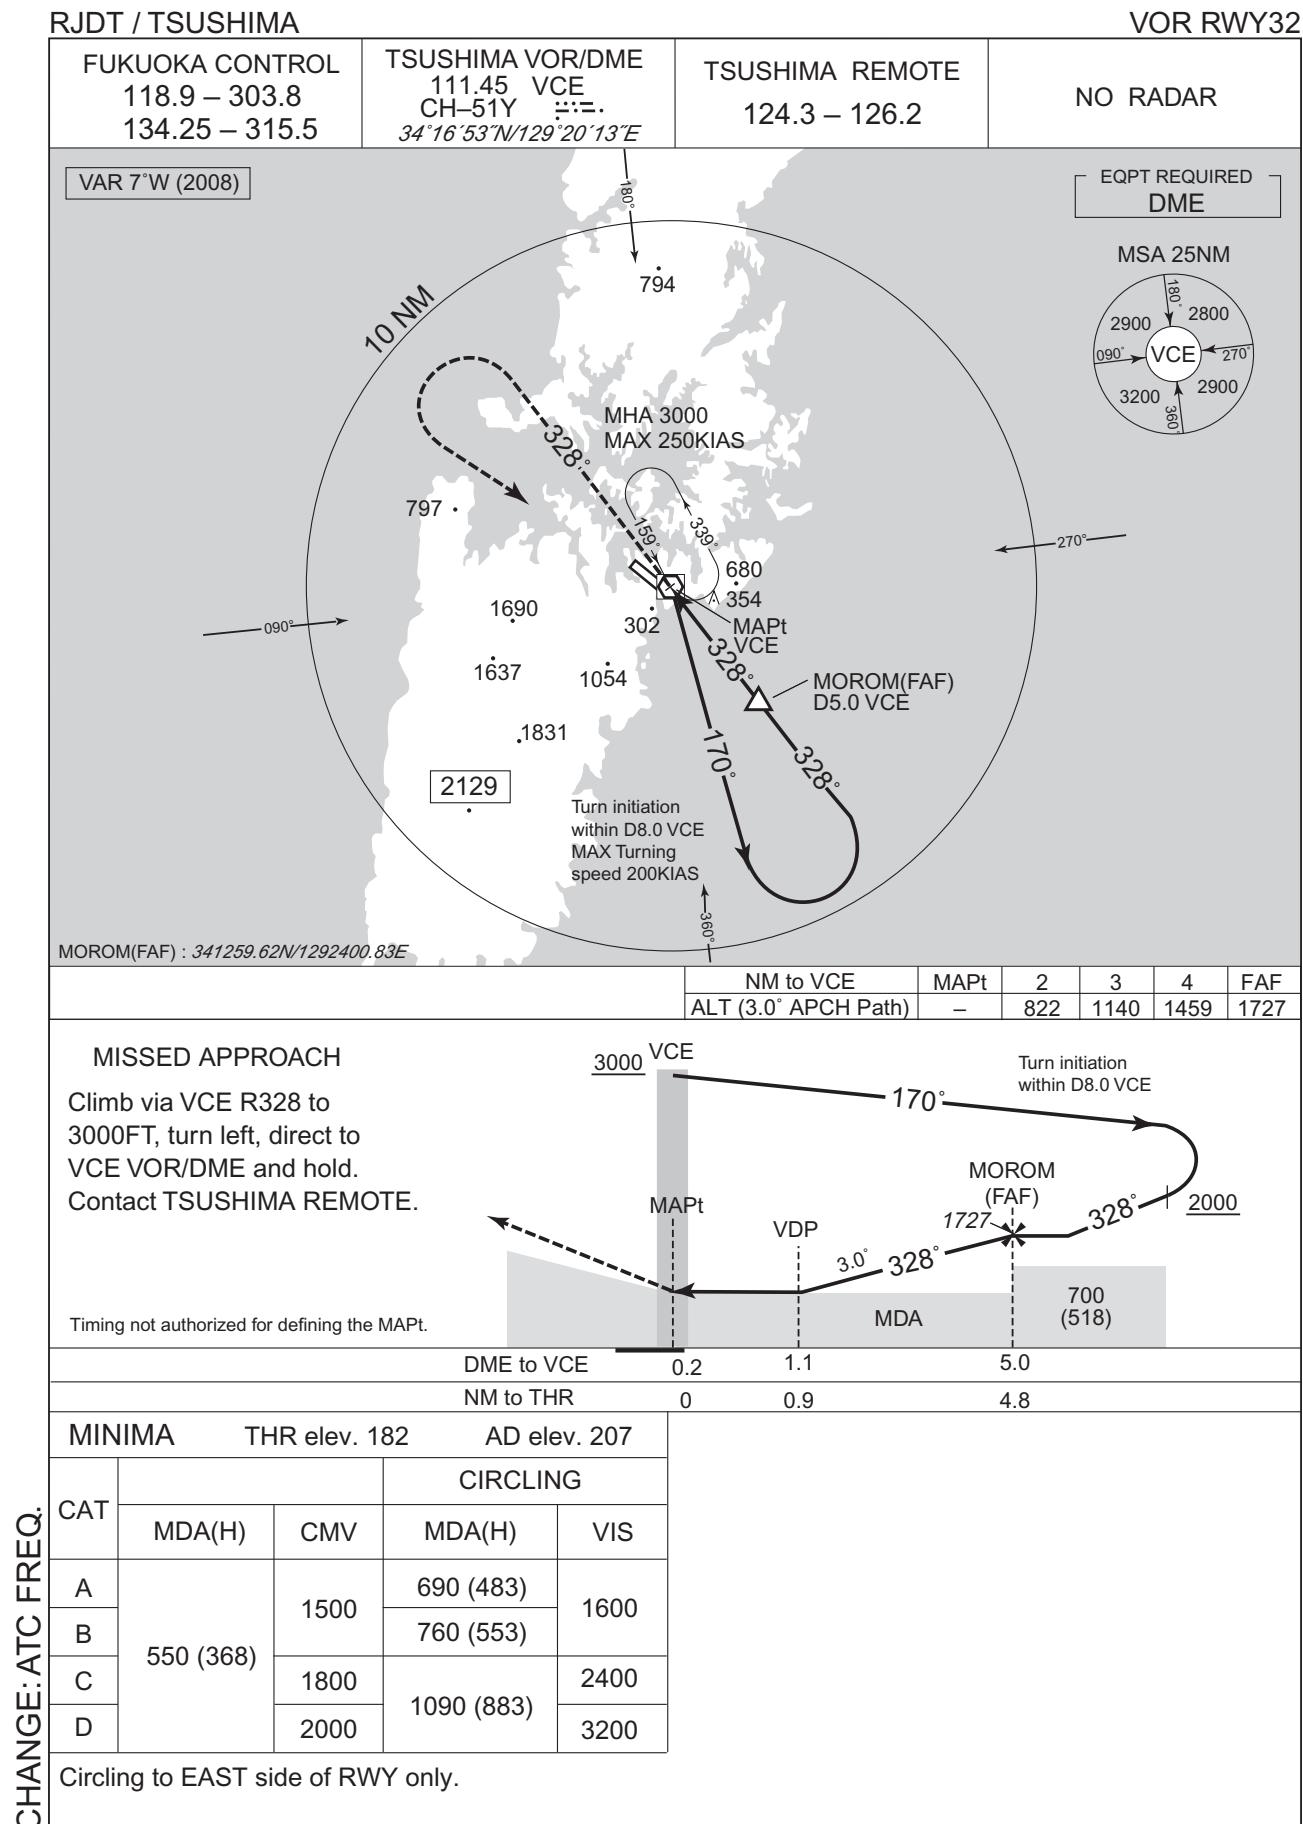

INSTRUMENT APPROACH CHART


RJDT / TSUSHIMA

VOR RWY14

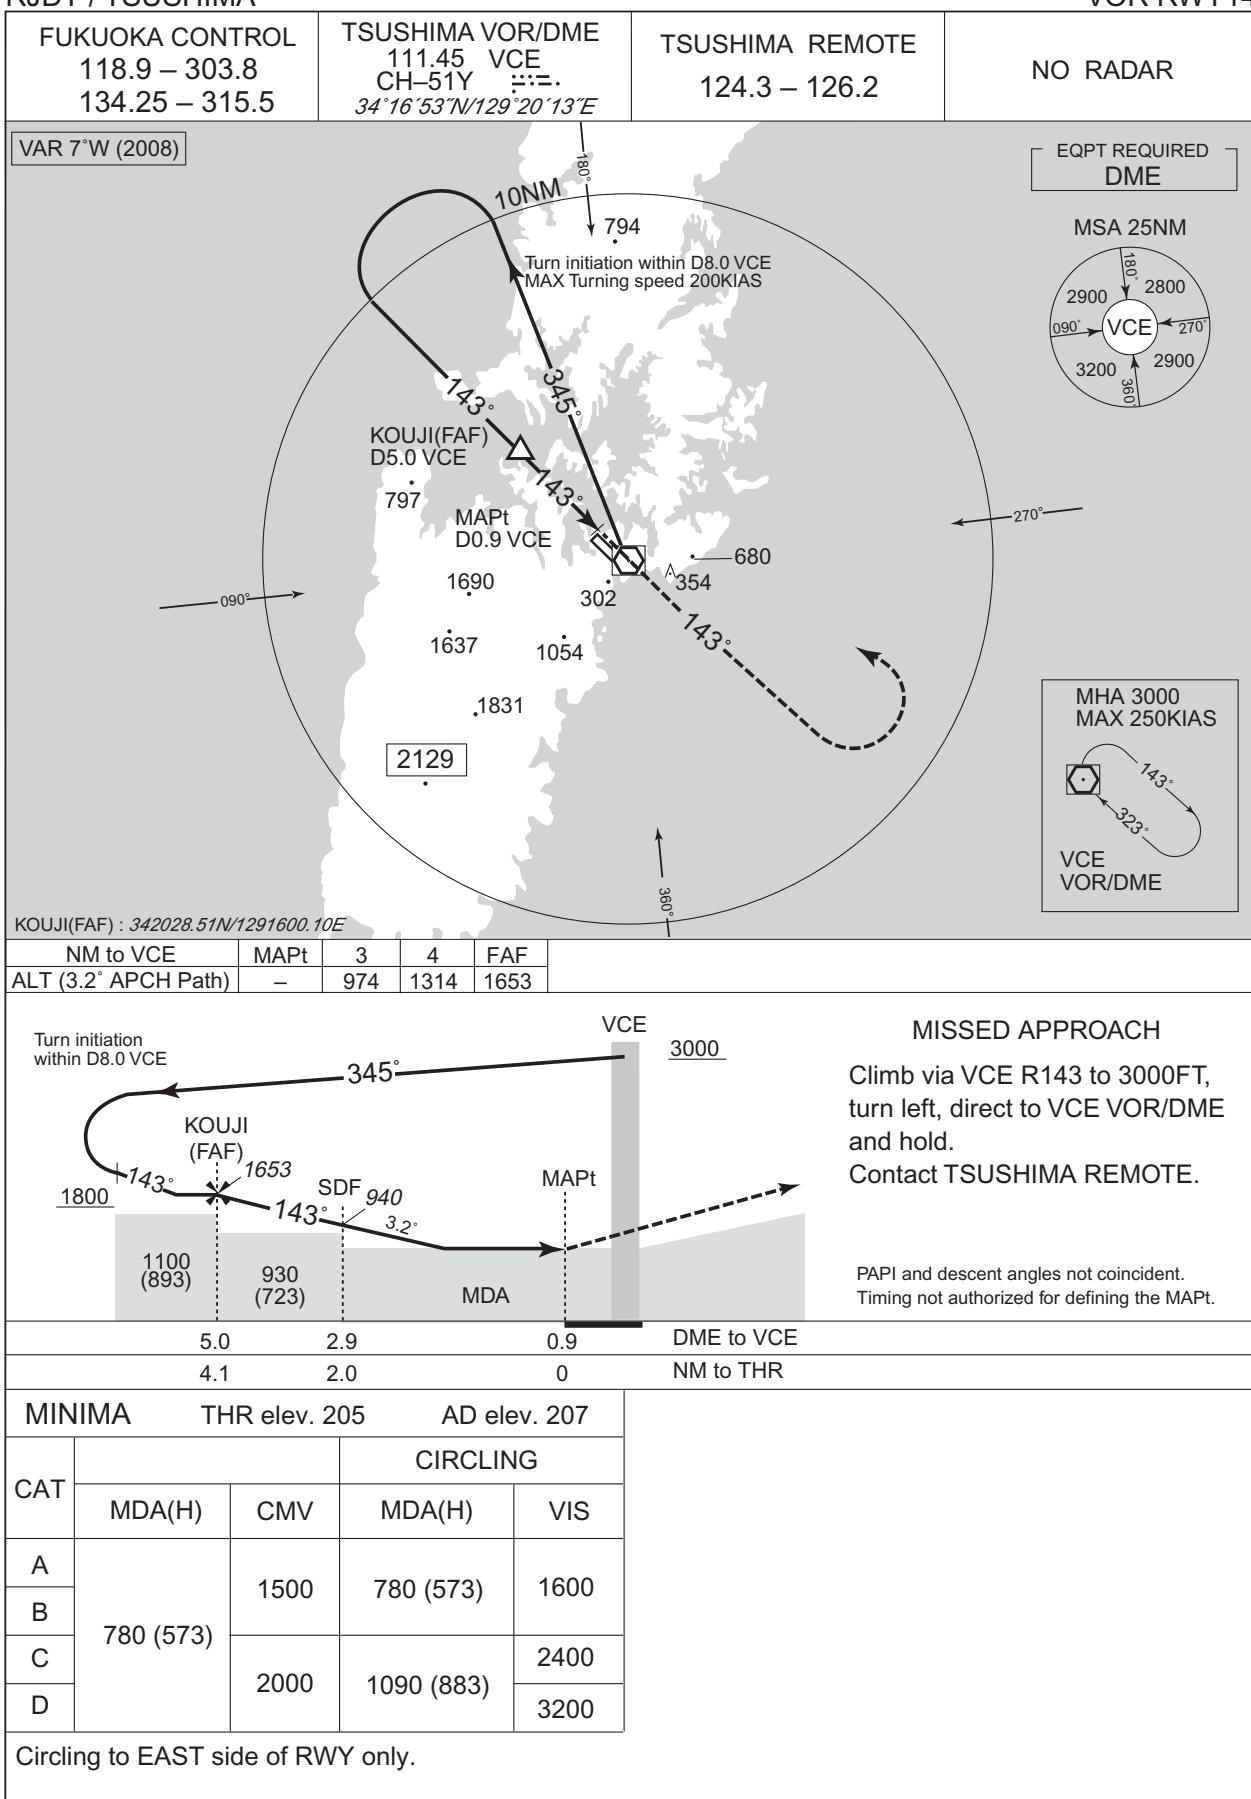

CHANGE:ATC FREQ.

INSTRUMENT APPROACH CHART

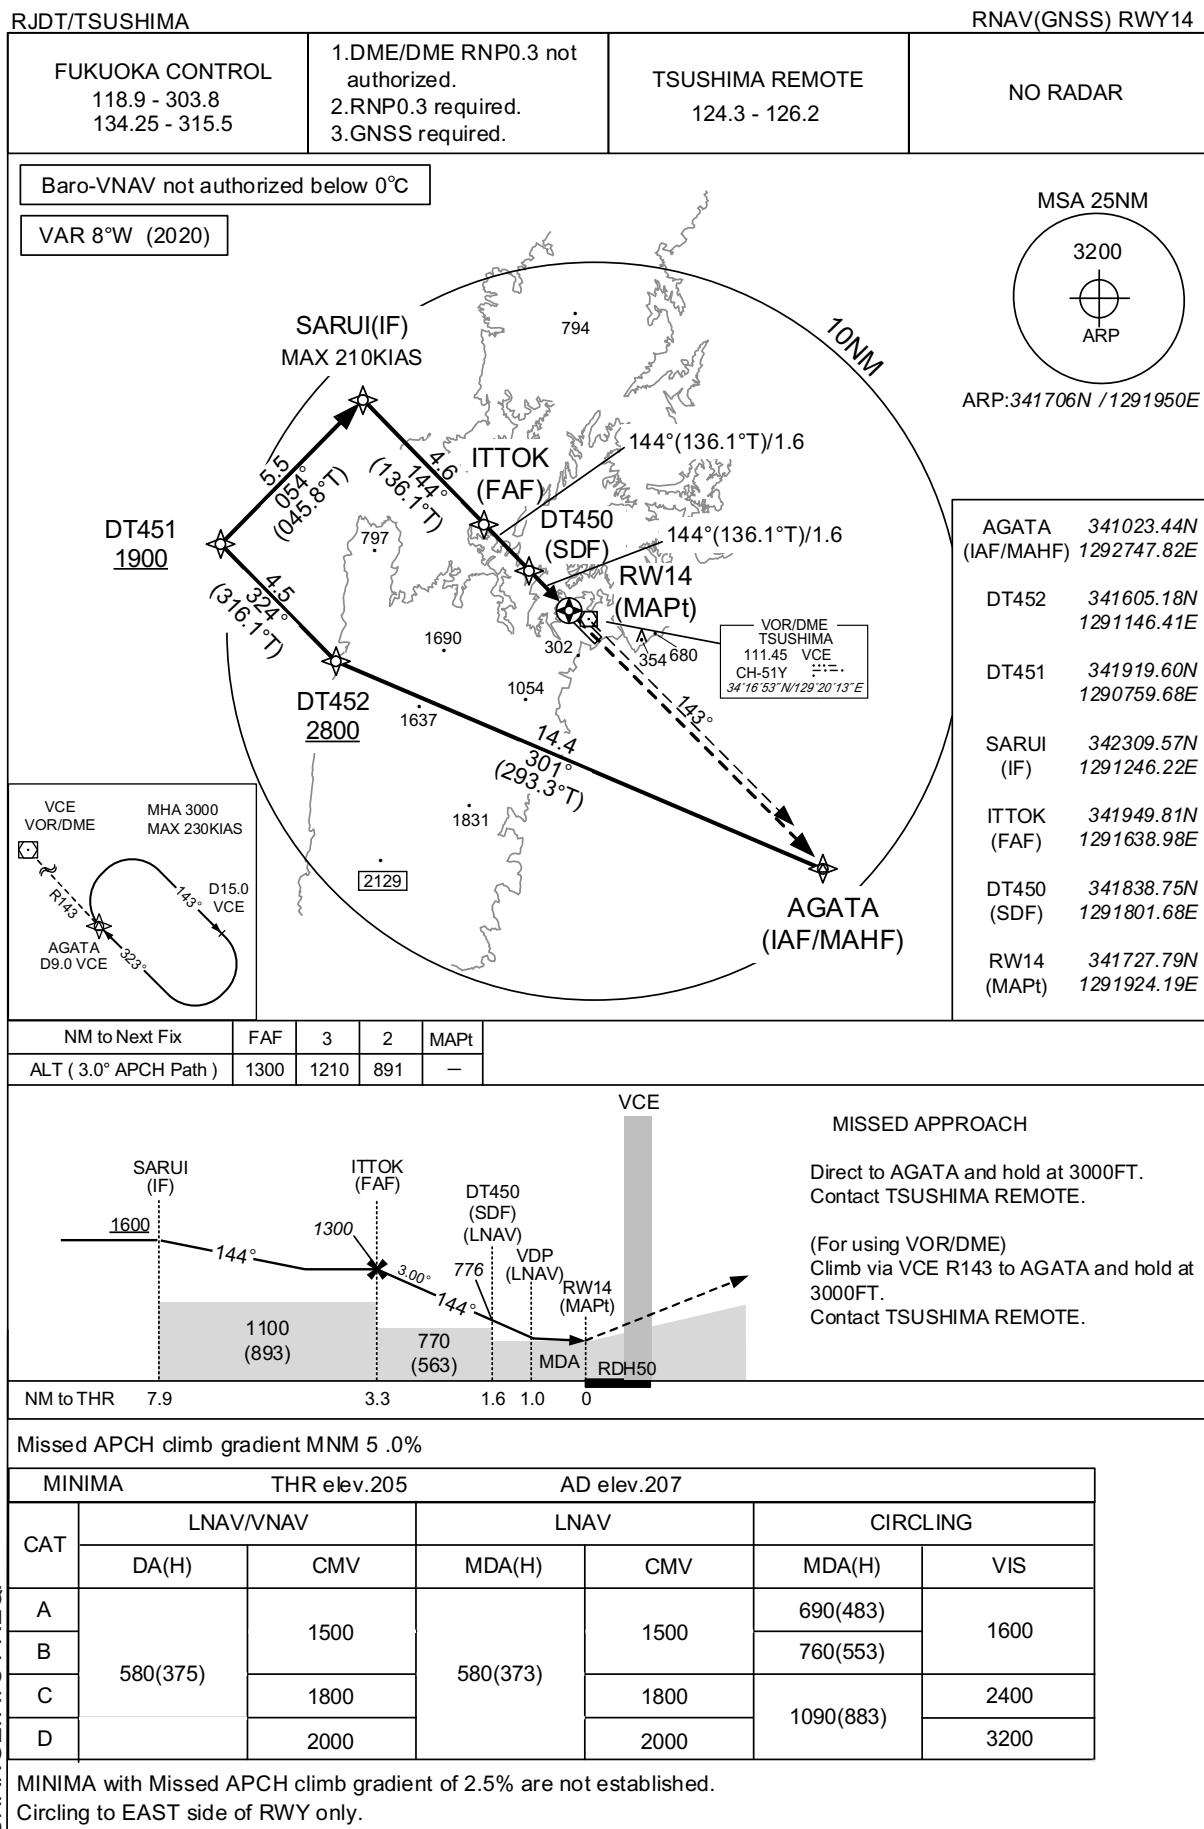

INTENTIONALLY LEFT BLANK

RJDT/TSUSHIMA

Visual REP



Call sign	BRG / DIST from ARP	Remarks
10NM SE	135°/10.0NM	海上 Over the sea
厳原 Izuhara	208°/ 6.0NM	港 Harbor
長崎鼻 Nagasakihana	031°/ 8.0NM	灯台 Lighthouse

RJDT / TSUSHIMA

LDG CHART



RJDT / TSUSHIMA

Minimum Vectoring Altitude CHART

