


RJDT / TSUSHIMA


AD CHART

CHANGE : VAR.

TSUSHIMA AP

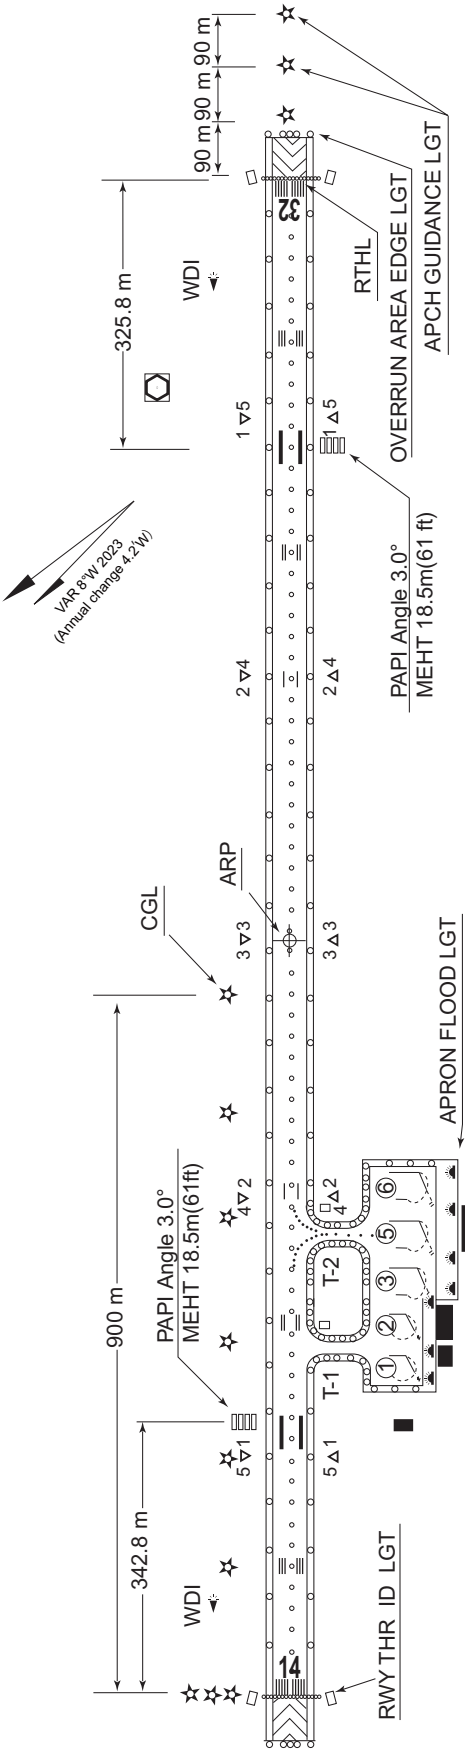

LONGITUDINAL PROFILE OF RWY



REMARKS RWY GROOVING 30m x 1900m  
WIDTH OF TWY T-1 T-2 23m

**INTENTIONALLY LEFT BLANK**

## STANDARD DEPARTURE CHART - INSTRUMENT

RJDT / TSUSHIMA

SID

IKISHIMA FIVE DEPARTURE

RWY 14 : Climb RWY HDG to 900FT,...

RWY 32 : Climb on HDG 338° to 900FT, turn right HDG 198°,...  
...to intercept and proceed via VCE R153 to IKE VOR/DME.  
Cross VCE R153/20.0DME at or above 4000FT.

Note RWY 32 : 3.9% climb gradient required up to 900FT.

OBST ALT 525FT located at 1.9NM 306° FM end of RWY 32.


LAGER TWO DEPARTURE

RWY 14 : Climb RWY HDG to 900FT, turn left,...

RWY 32 : Climb on HDG 338° to 900FT, turn right HDG 170°,...  
...to intercept and proceed via VCE R125 to LAGER.

Note RWY 32 : 3.9% climb gradient required up to 900FT.

OBST ALT 525FT located at 1.9NM 306° FM end of RWY 32.

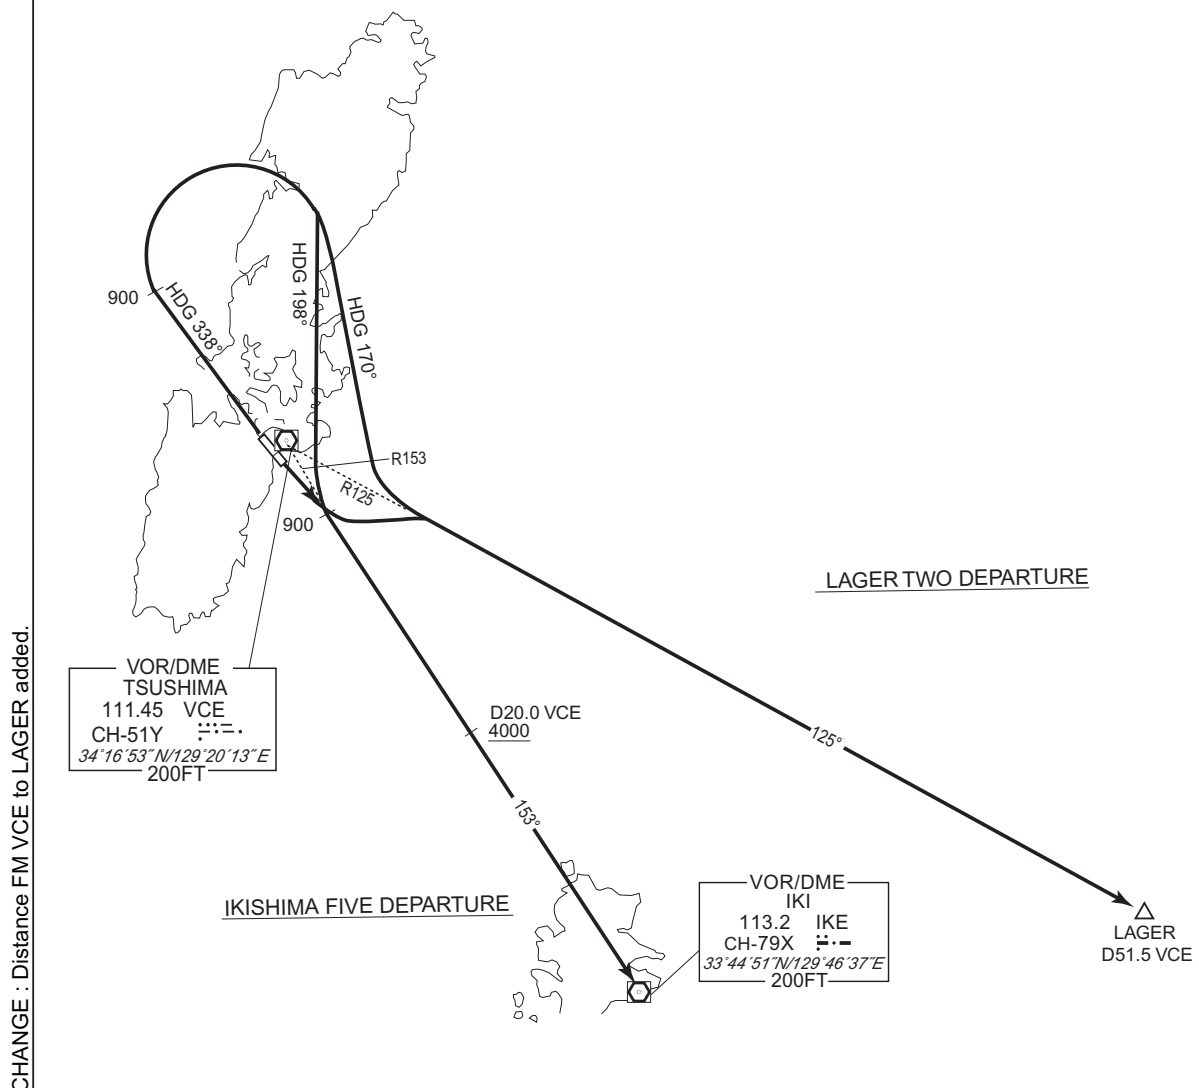

## STANDARD DEPARTURE CHART - INSTRUMENT

RJDT / TSUSHIMA


RNAV SID

FRAIZ ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 8°W

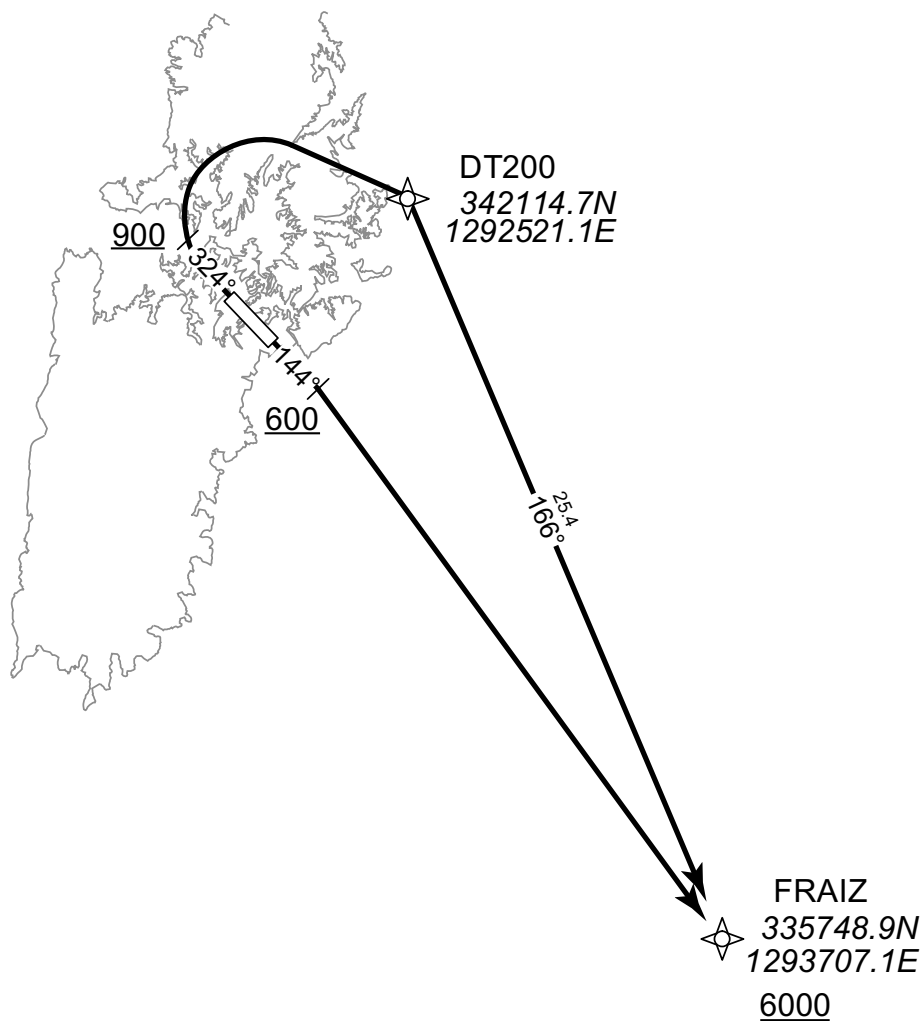

RWY14 : Climb on HDG144° at or above 600FT, turn right direct to FRAIZ at or above 6000FT.

RWY32 : Climb on HDG324° at or above 900FT, turn right direct to DT200, to FRAIZ at or above 6000FT.

Note RWY32 :5.2% climb gradient required up to 900FT.

OBST ALT 262FT located at 0.2NM 292° FM end of RWY32.

CHANGE : New PROC.

STANDARD DEPARTURE CHART - INSTRUMENT

RJDT / TSUSHIMA

RNAV SID

FRAIZ ONE DEPARTURE

RWY14

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	144 (136.2)	-8.2	-	-	+600	-	-	Basic RNP1
002	DF	FRAIZ	-	-	-8.2	-	R	+6000	-	-	Basic RNP1

RWY32

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	324 (316.2)	-8.2	-	-	+900	-	-	Basic RNP1
002	DF	DT200	-	-	-8.2	-	R	-	-	-	Basic RNP1
003	TF	FRAIZ	-	166 (157.4)	-8.2	25.4	-	+6000	-	-	Basic RNP1

CHANGE : New PROC.

## STANDARD DEPARTURE CHART - INSTRUMENT

RJDT / TSUSHIMA


RNAV SID

SIYAT ONE DEPARTURE

Basic RNP1

Note GNSS required.

VAR 8°W (2020)

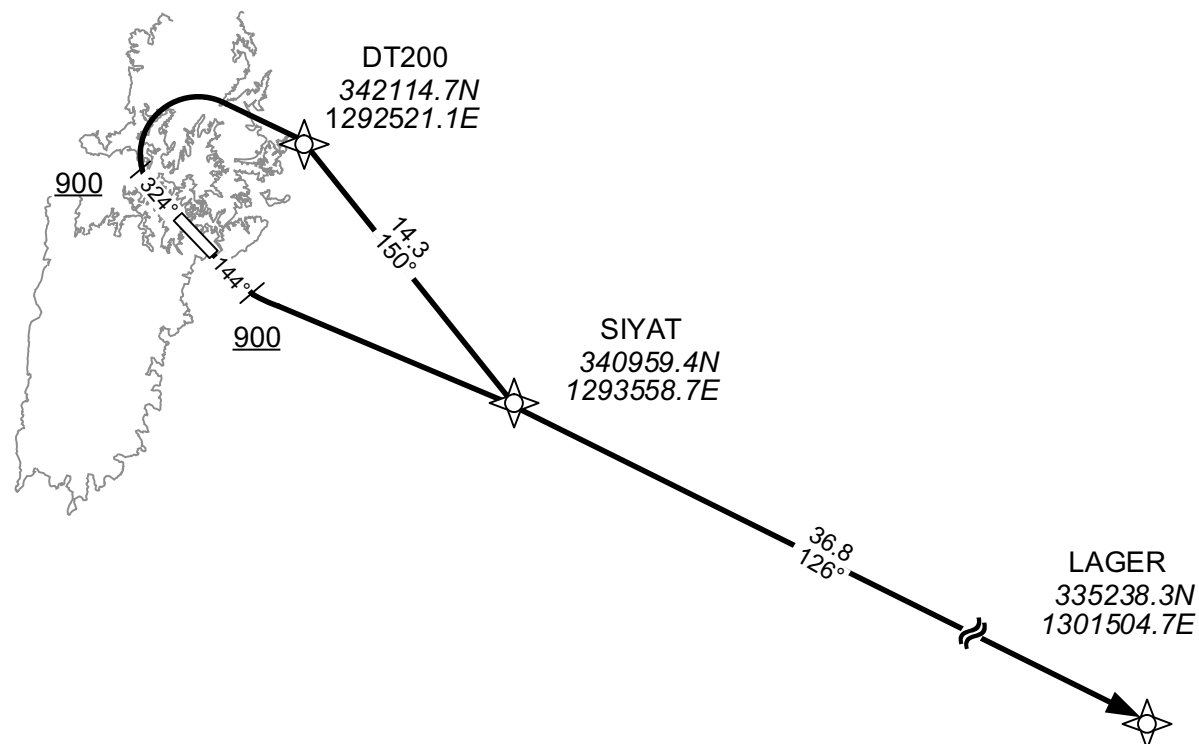

RWY14 : Climb on HDG144° at or above 900FT, turn left direct to SIYAT, to LAGER.

RWY32 : Climb on HDG324° at or above 900FT, turn right direct to DT200, to SIYAT, to LAGER.

Note RWY32 : 5.2% climb gradient required up to 900FT.

OBST ALT 262FT located at 0.2NM 292° FM end of RWY32.

CHANGE : Description of PROC name.

## STANDARD DEPARTURE CHART - INSTRUMENT

RJDT / TSUSHIMA

RNAV SID

SIYAT ONE DEPARTURE

## RWY14

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	144 (136.2)	-7.9	—	—	+900	—	—	Basic RNP1
002	DF	SIYAT	—	—	-7.9	—	L	—	—	—	Basic RNP1
003	TF	LAGER	—	126 (118.0)	-7.9	36.8	—	—	—	—	Basic RNP1

## RWY32


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	324 (316.2)	-7.9	—	—	+900	—	—	Basic RNP1
002	DF	DT200	—	—	-7.9	—	R	—	—	—	Basic RNP1
003	TF	SIYAT	—	150 (142.0)	-7.9	14.3	—	—	—	—	Basic RNP1
004	TF	LAGER	—	126 (118.0)	-7.9	36.8	—	—	—	—	Basic RNP1

CHANGE : New PROC

STANDARD ARRIVAL CHART - INSTRUMENT

RJDT / TSUSHIMA


RNAV STAR

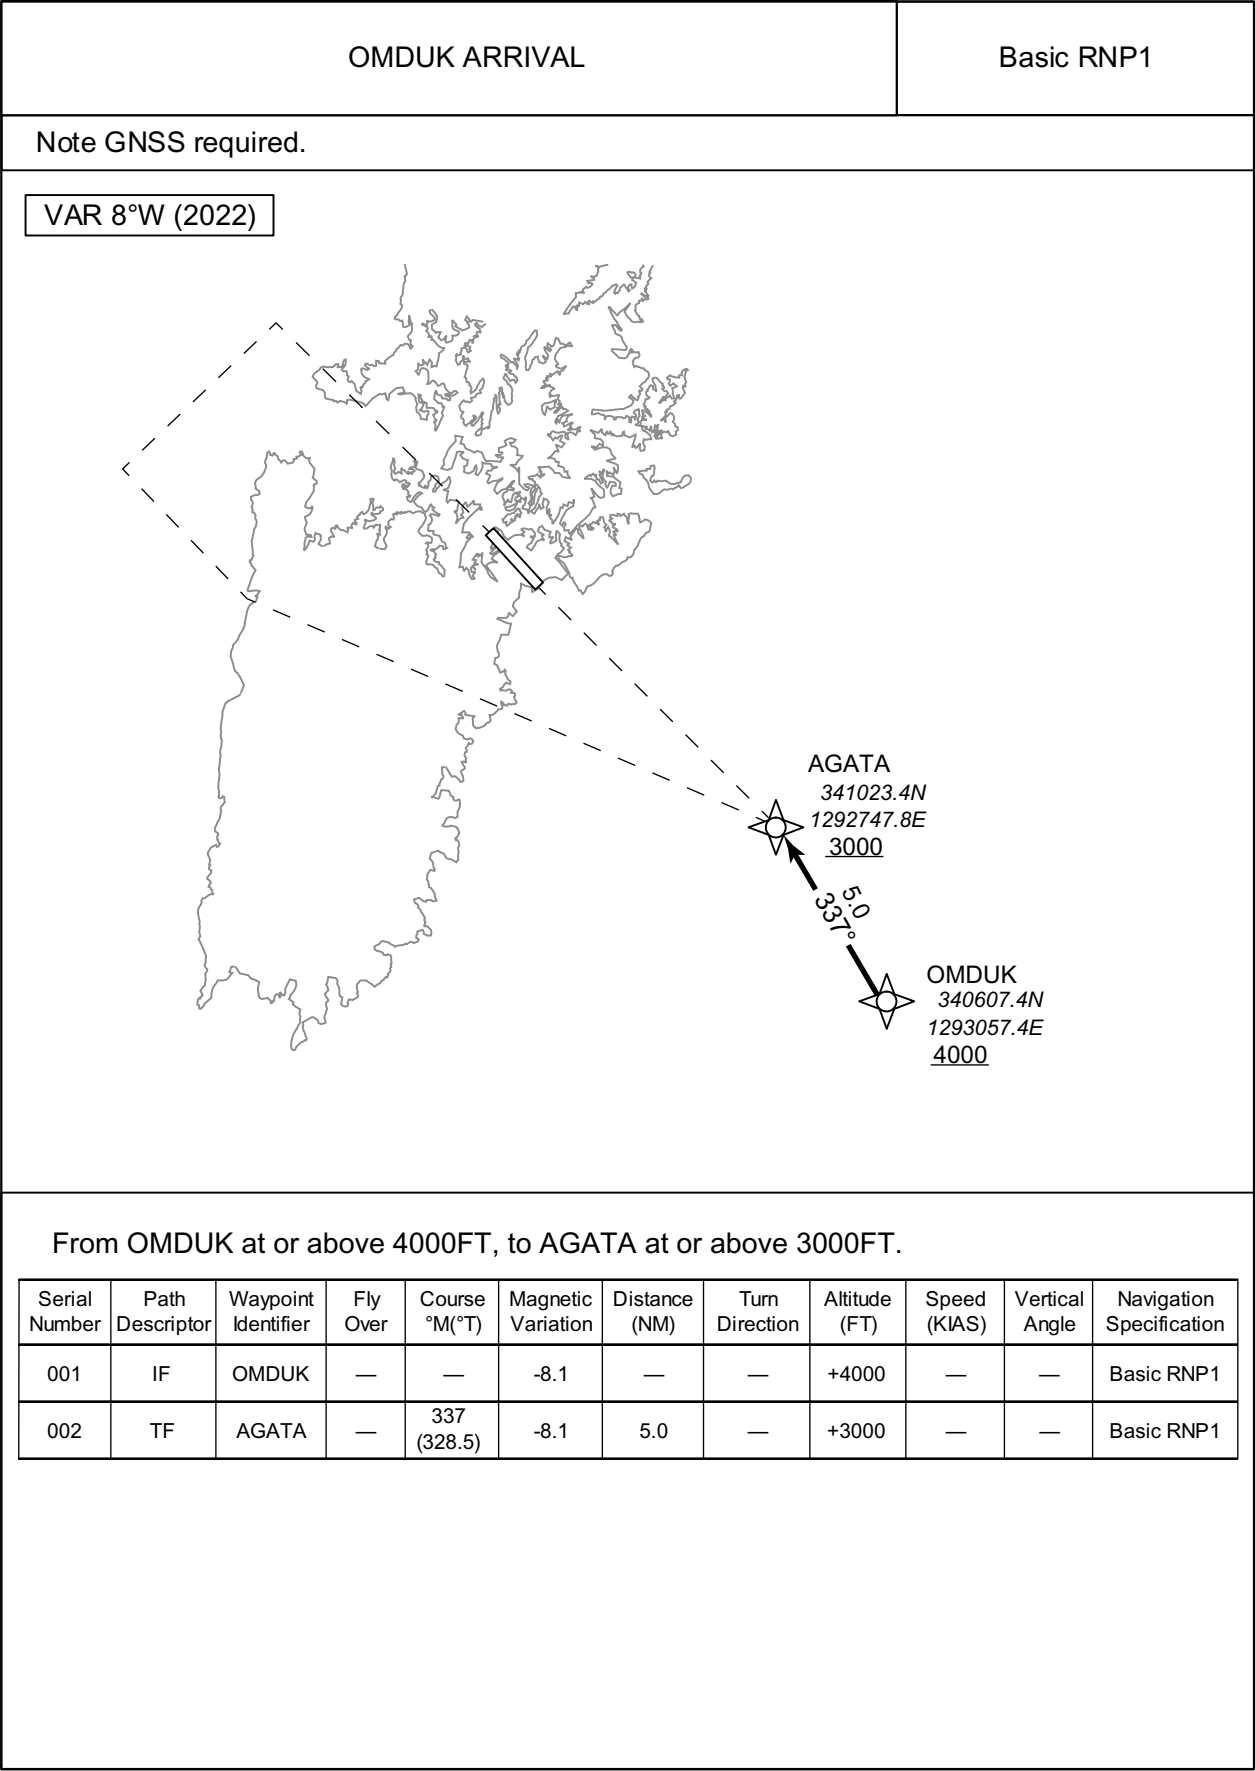



**INTENTIONALLY LEFT BLANK**


INSTRUMENT APPROACH CHART

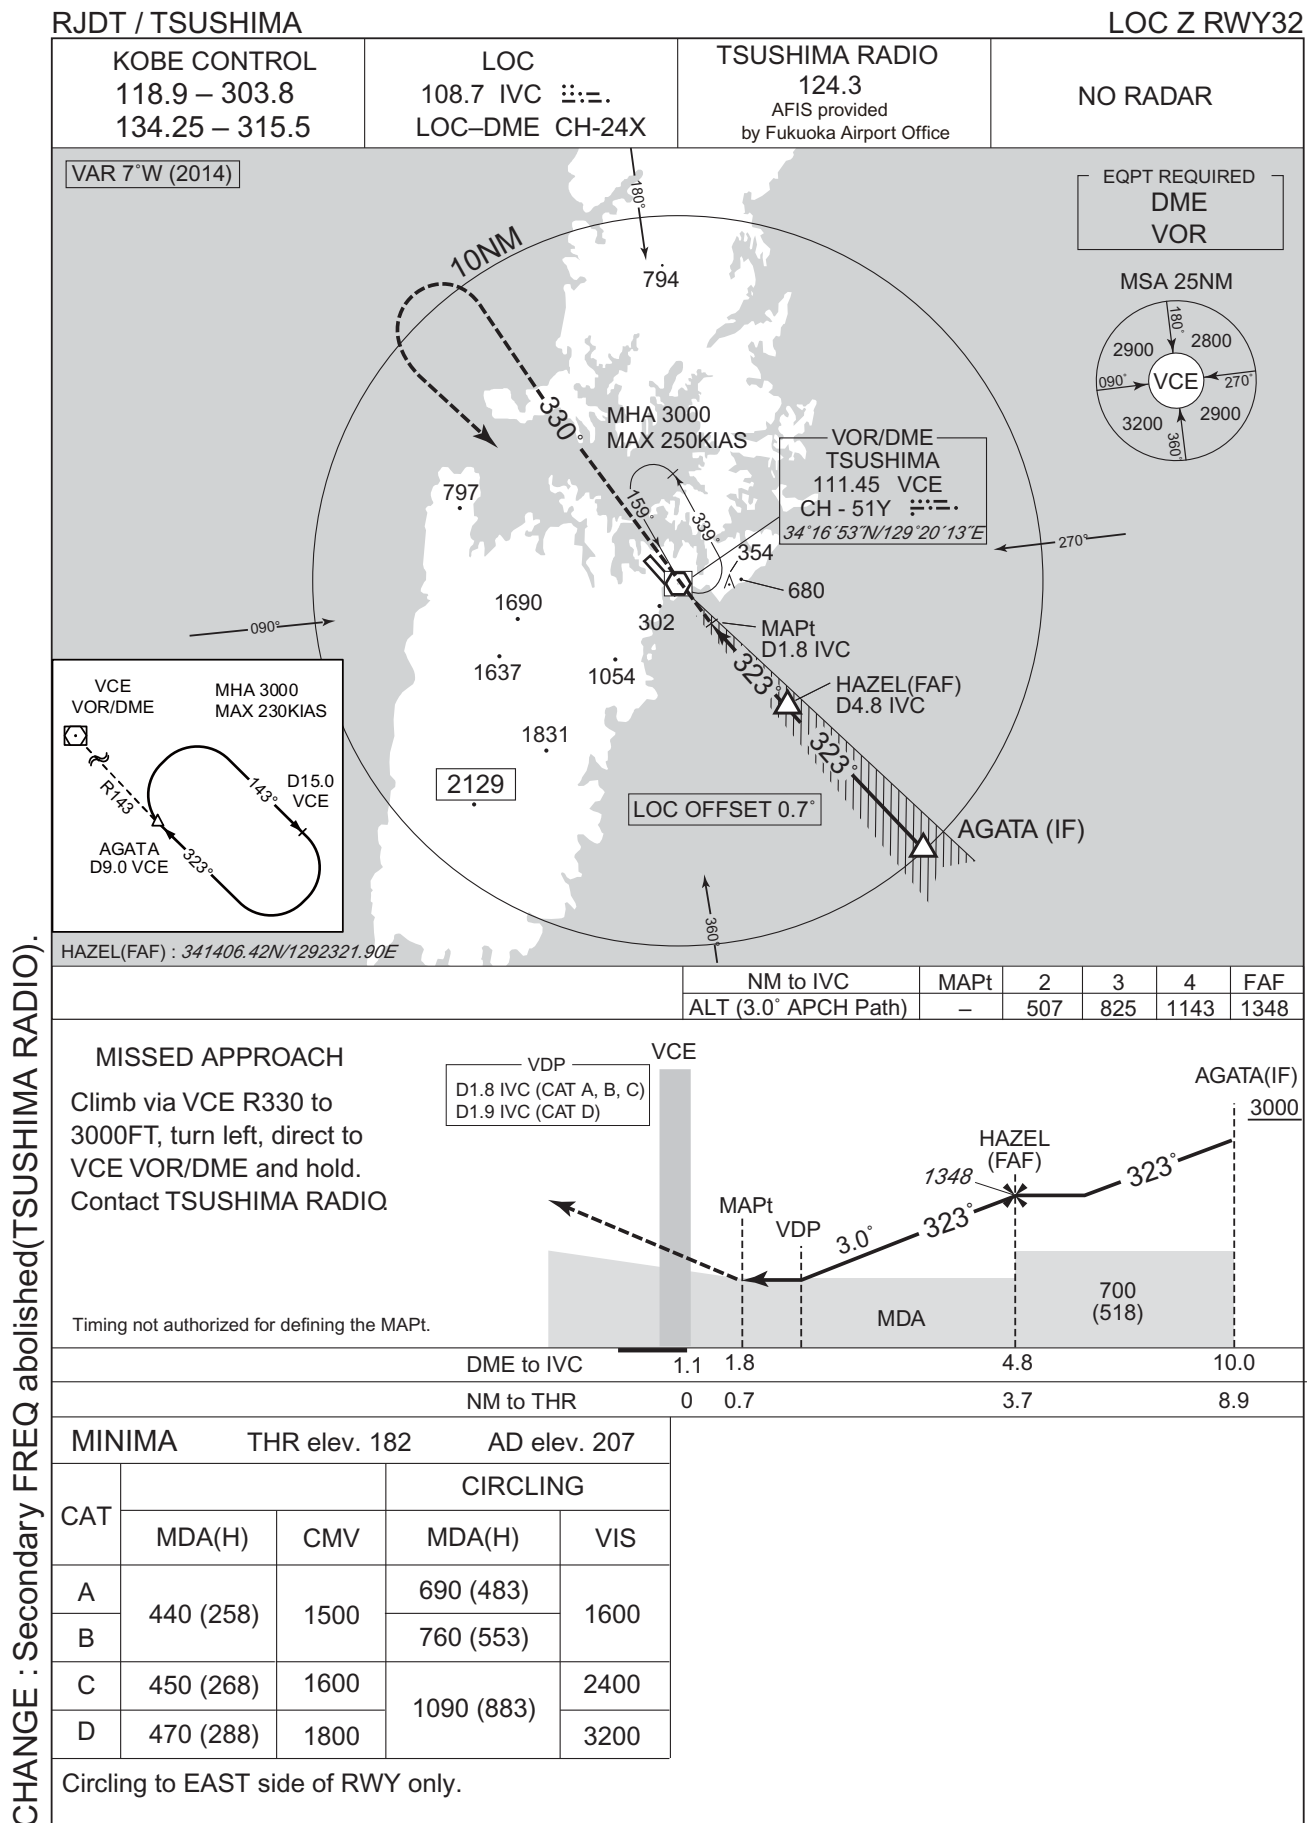

## INSTRUMENT APPROACH CHART


RJDT / TSUSHIMA

LOC Y RWY32

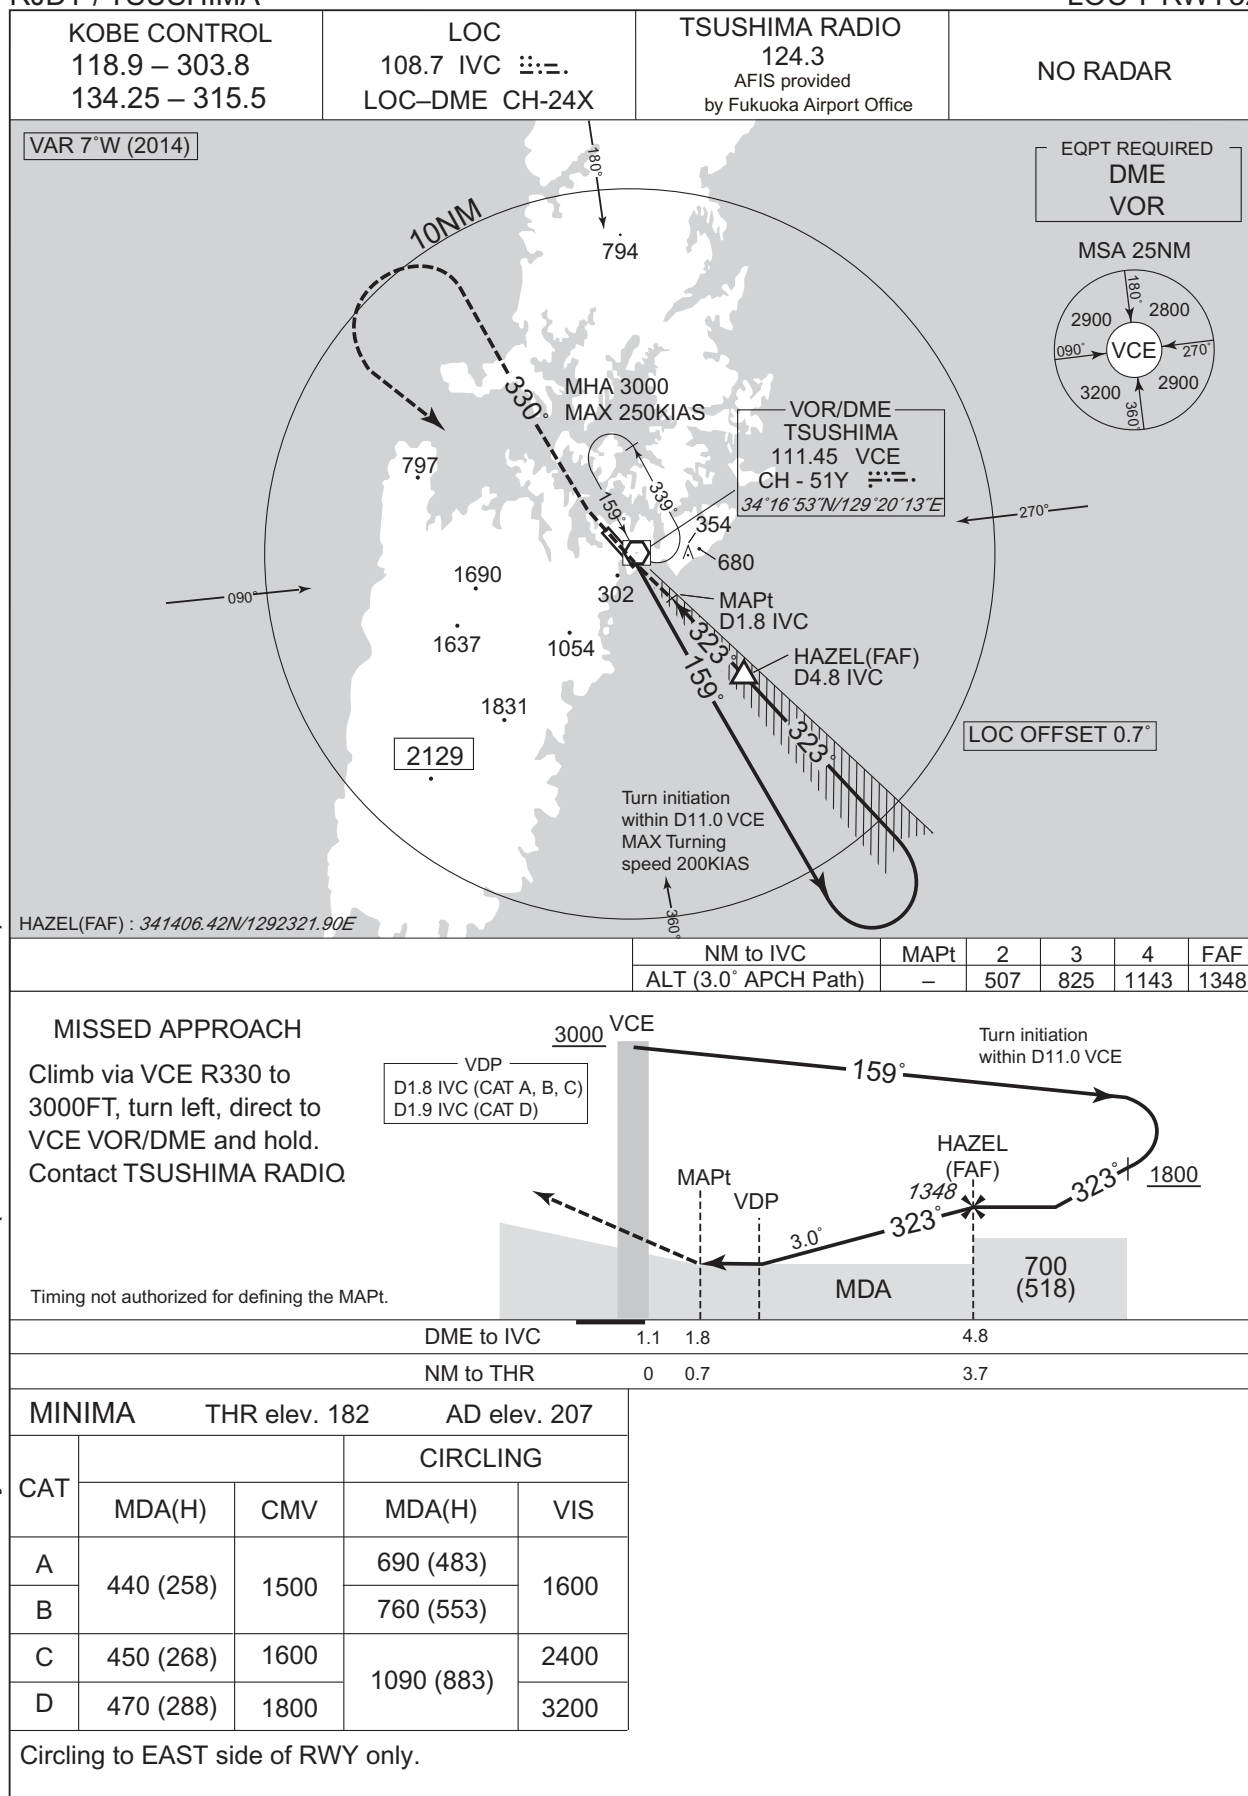

CHANGE : Secondary FREQ abolished(TSUSHIMA RADIO).

INSTRUMENT APPROACH CHART

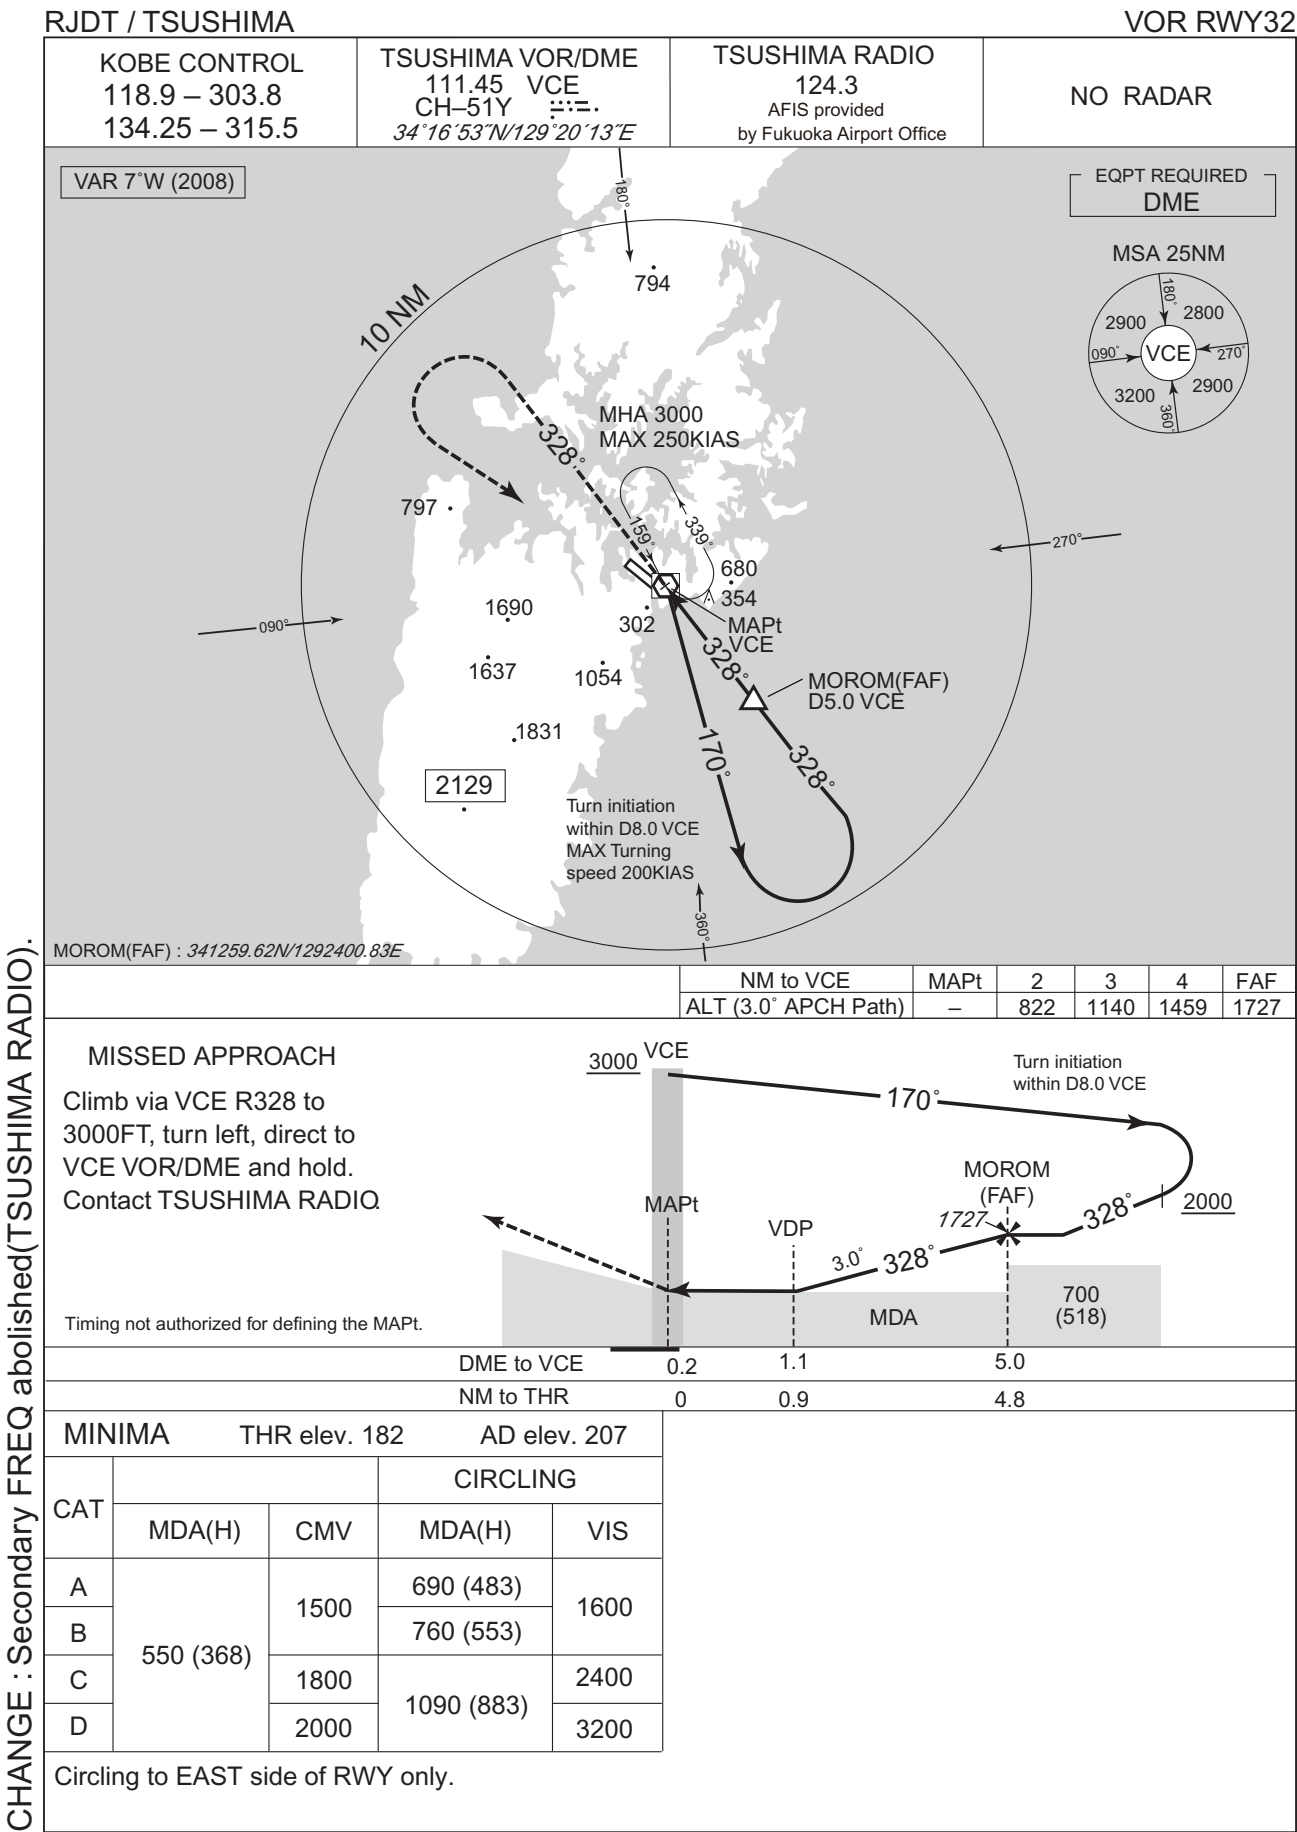

## INSTRUMENT APPROACH CHART

RJDT / TSUSHIMA

VOR RWY14


KOBE CONTROL  
118.9 – 303.8  
134.25 – 315.5TSUSHIMA VOR/DME  
111.45 VCE  
CH-51Y  
34°16'53"N/129°20'13"ETSUSHIMA RADIO  
124.3  
AFIS provided  
by Fukuoka Airport Office

NO RADAR

VAR 7°W (2008)


EQPT REQUIRED  
DME

MSA 25NM

MHA 3000  
MAX 250KIAS

KOUJI(FAF) : 342028.51N/1291600.10E

NM to VCE	MAPt	3	4	FAF
ALT (3.2° APCH Path)	—	974	1314	1653

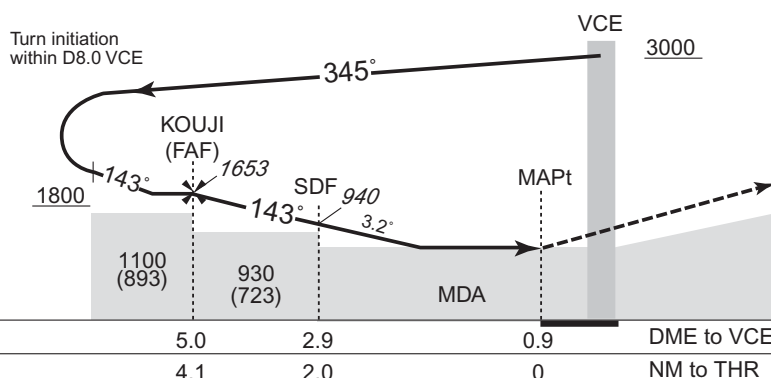

## MISSED APPROACH

Climb via VCE R143 to 3000FT,  
turn left, direct to VCE VOR/DME  
and hold.  
Contact TSUSHIMA RADIO.

PAPI and descent angles not coincident.  
Timing not authorized for defining the MAPt.

DME to VCE	NM to THR
5.0	4.1
2.9	2.0
0.9	0

MINIMA		THR elev. 205	AD elev. 207	
CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
A	780 (573)	1500	780 (573)	1600
B				2400
C		2000	1090 (883)	3200
D				


Circling to EAST side of RWY only.

CHANGE : Secondary FREQ abolished(TSUSHIMA RADIO).

## INSTRUMENT APPROACH CHART

RJDT/TSUSHIMA

RNP RWY 32

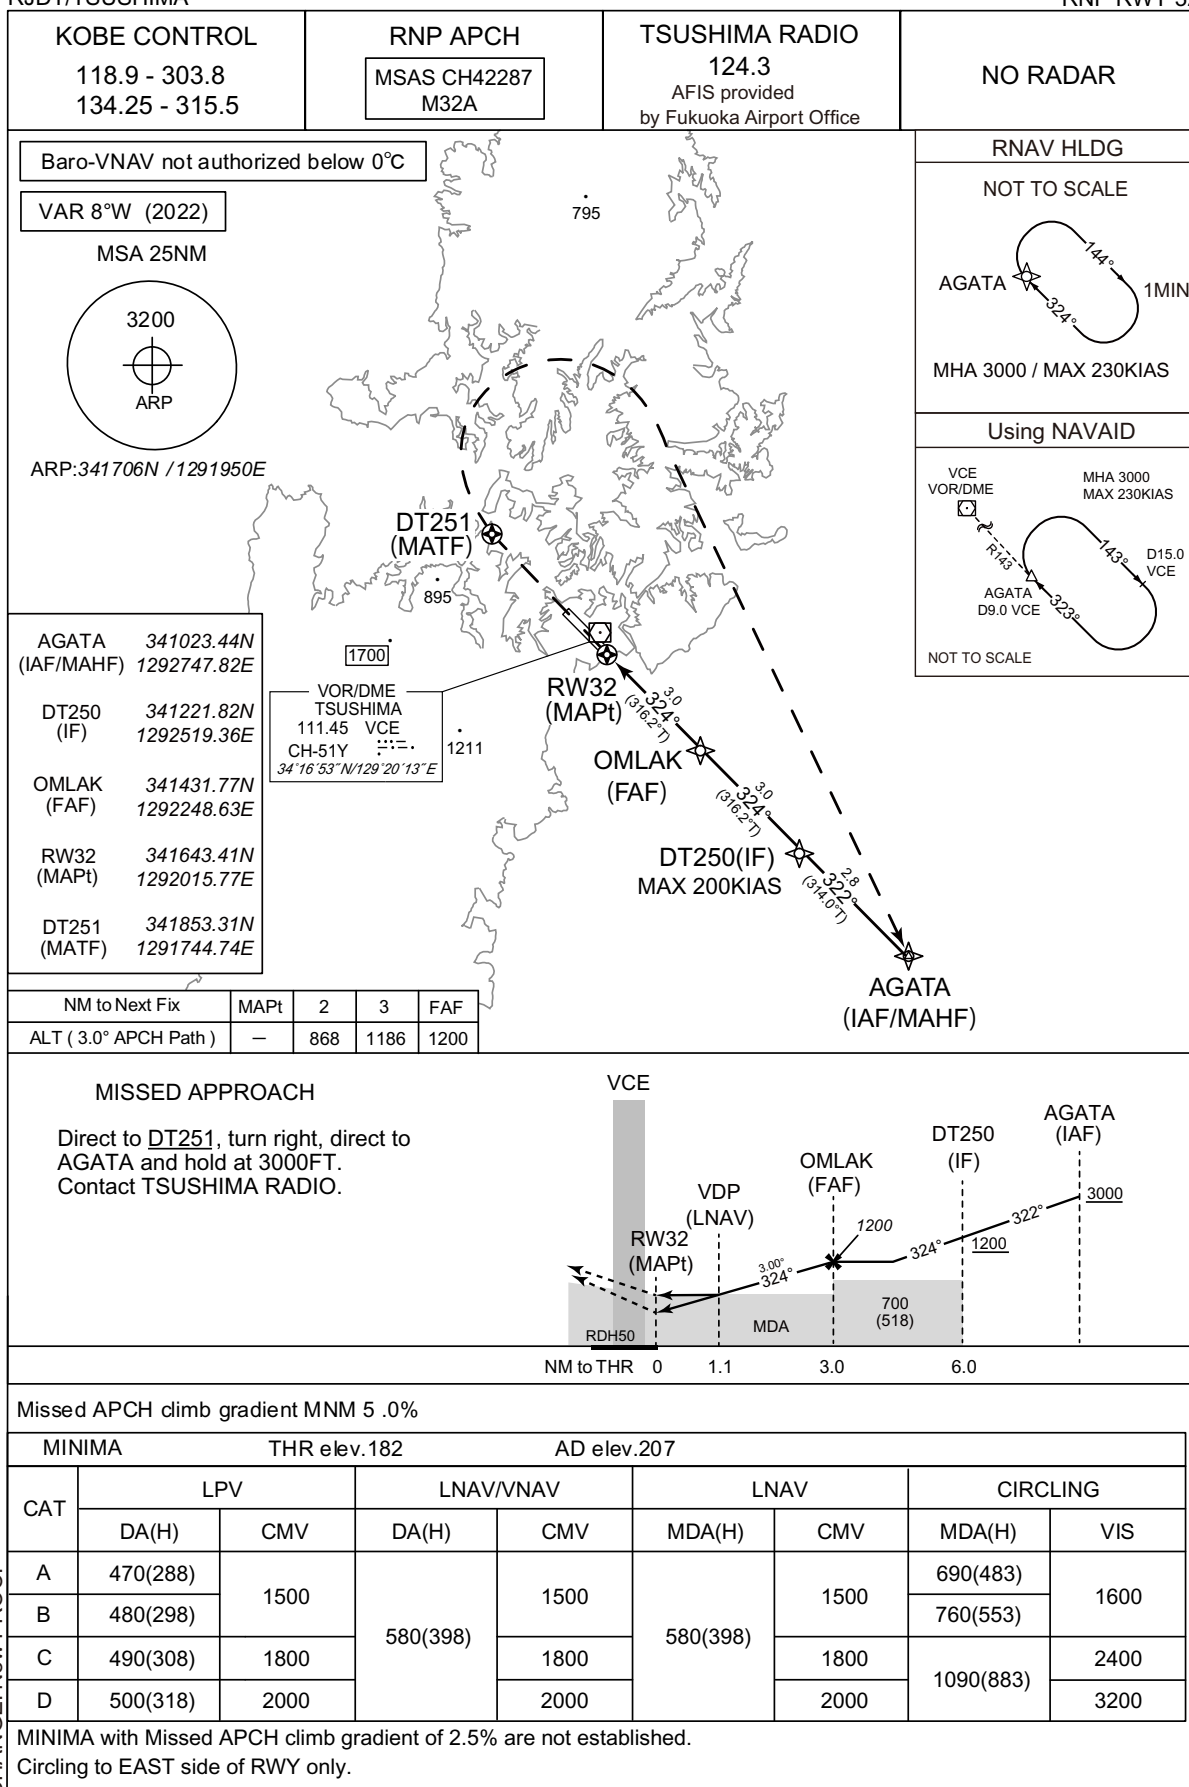

CHANGE: New PROC.

INSTRUMENT APPROACH CHART

RJDT / TSUSHIMA

RNP RW Y32

FAS DATA BLOCK


Operation type	0	LTP/FTP ellipsoidal height	+00861
SBAS service provider identifier	2	FPAP latitude	341727.7595N
Airport identifier	RJDT	FPAP longitude	1291924.2050E
Runway	32	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M32A	∟ length offset	0000
LTP/FTP latitude	341643.3790N	HAL	40.0
LTP/FTP longitude	1292015.7765E	VAL	50.0
CRC remainder	EA5E957D		

Required additional data

LTP/FTP orthometric height	55.4
----------------------------	------

CHANGE : Description of FAS DATA BLOCK ITEM(CRC remainder).

## INSTRUMENT APPROACH CHART

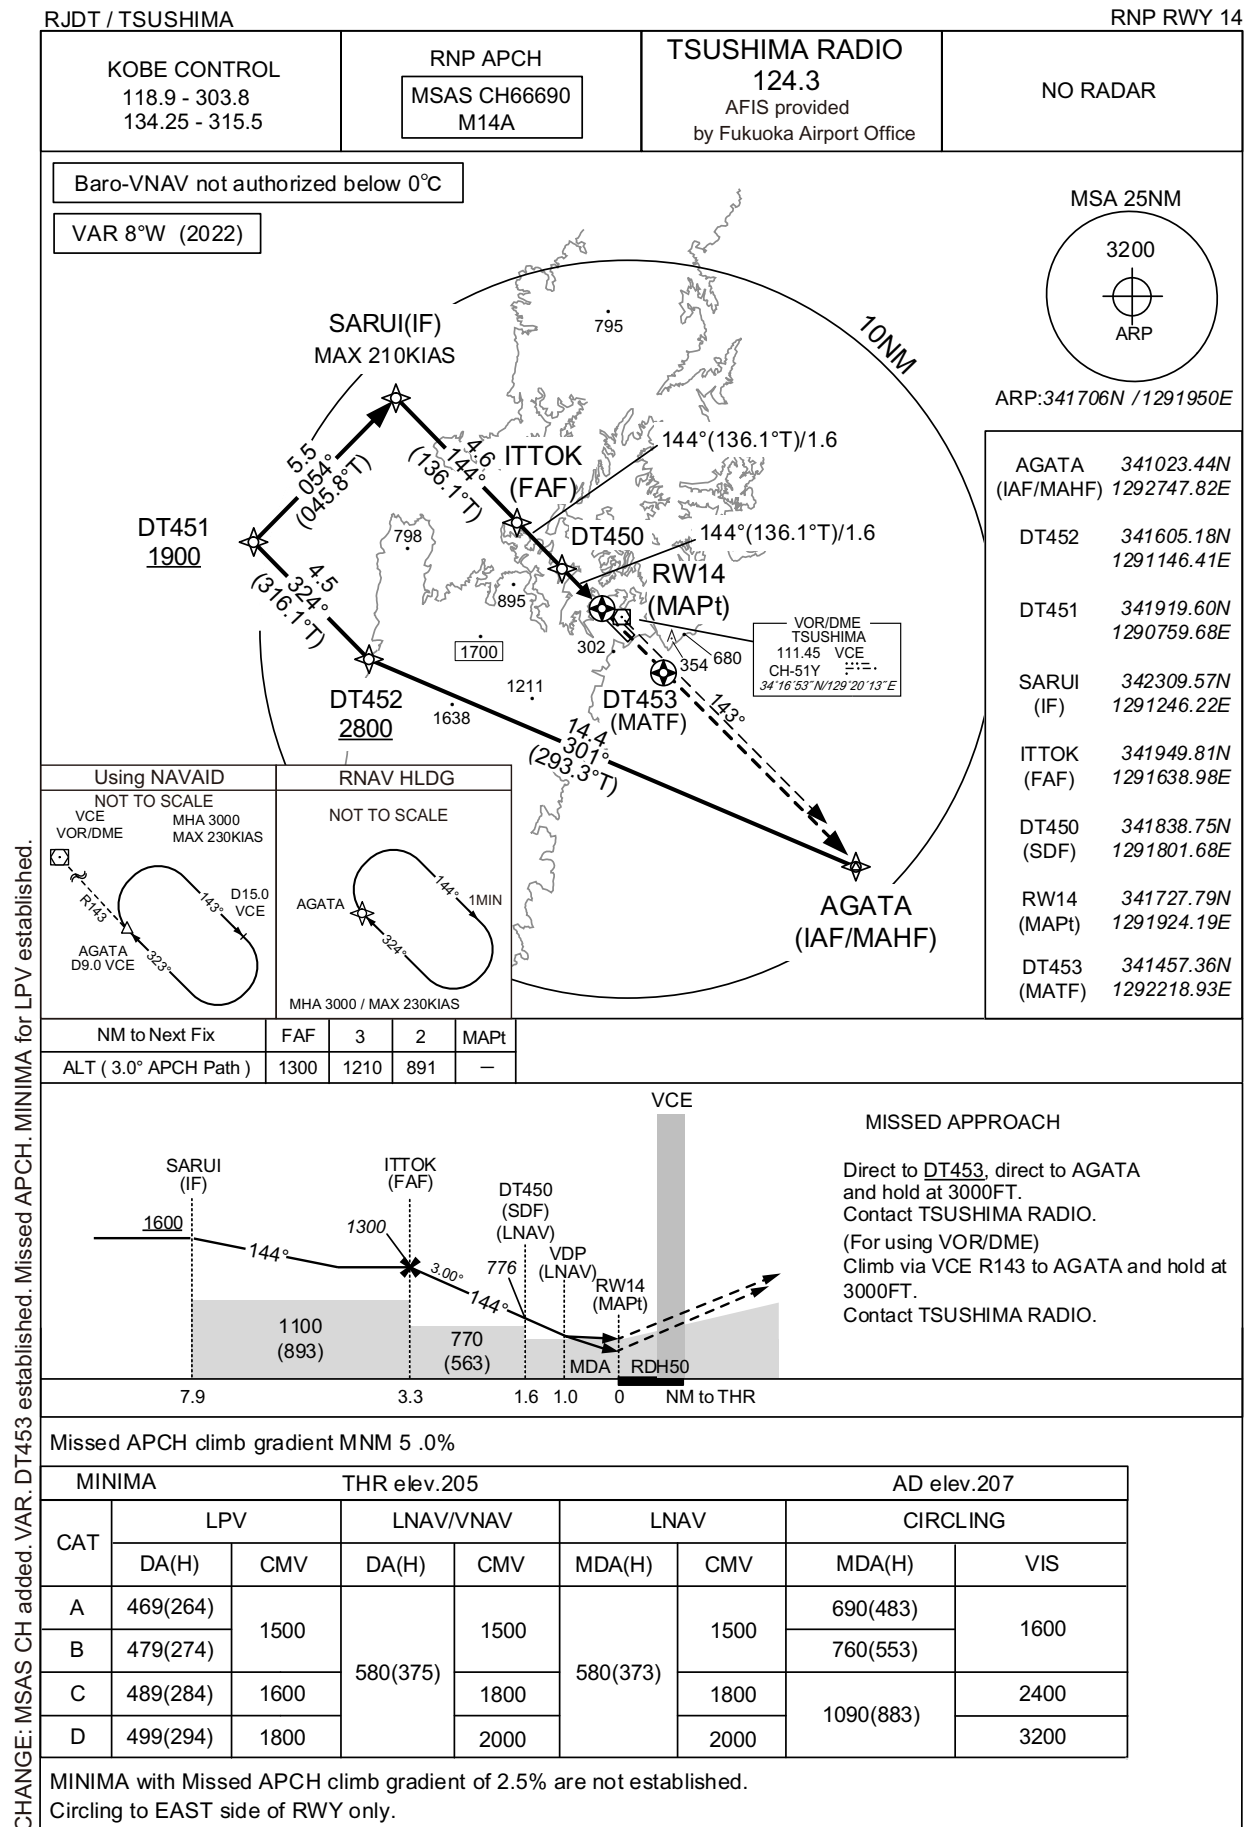



INSTRUMENT APPROACH CHART

RJDT / TSUSHIMA

RNP RWY14

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00930
SBAS service provider identifier	2	FPAP latitude	341643.3790N
Airport identifier	RJDT	FPAP longitude	1292015.7765E
Runway	14	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M14A	∟ length offset	0000
LTP/FTP latitude	341727.7595N	HAL	40.0
LTP/FTP longitude	1291924.2050E	VAL	50.0
CRC remainder	1534DDCD		

Required additional data

LTP/FTP orthometric height	62.3
----------------------------	------

CHANGE : Description of FAS DATA BLOCK ITEM(CRC remainder).

RJDT / TSUSHIMA


Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
長崎鼻 Nagasakibana	023°T / 8.3NM	灯台 Lighthouse
厳原 Izuhara	200°T / 5.7NM	港 Harbor
10NM SE	135°T / 10.0NM	海上 Over the Sea

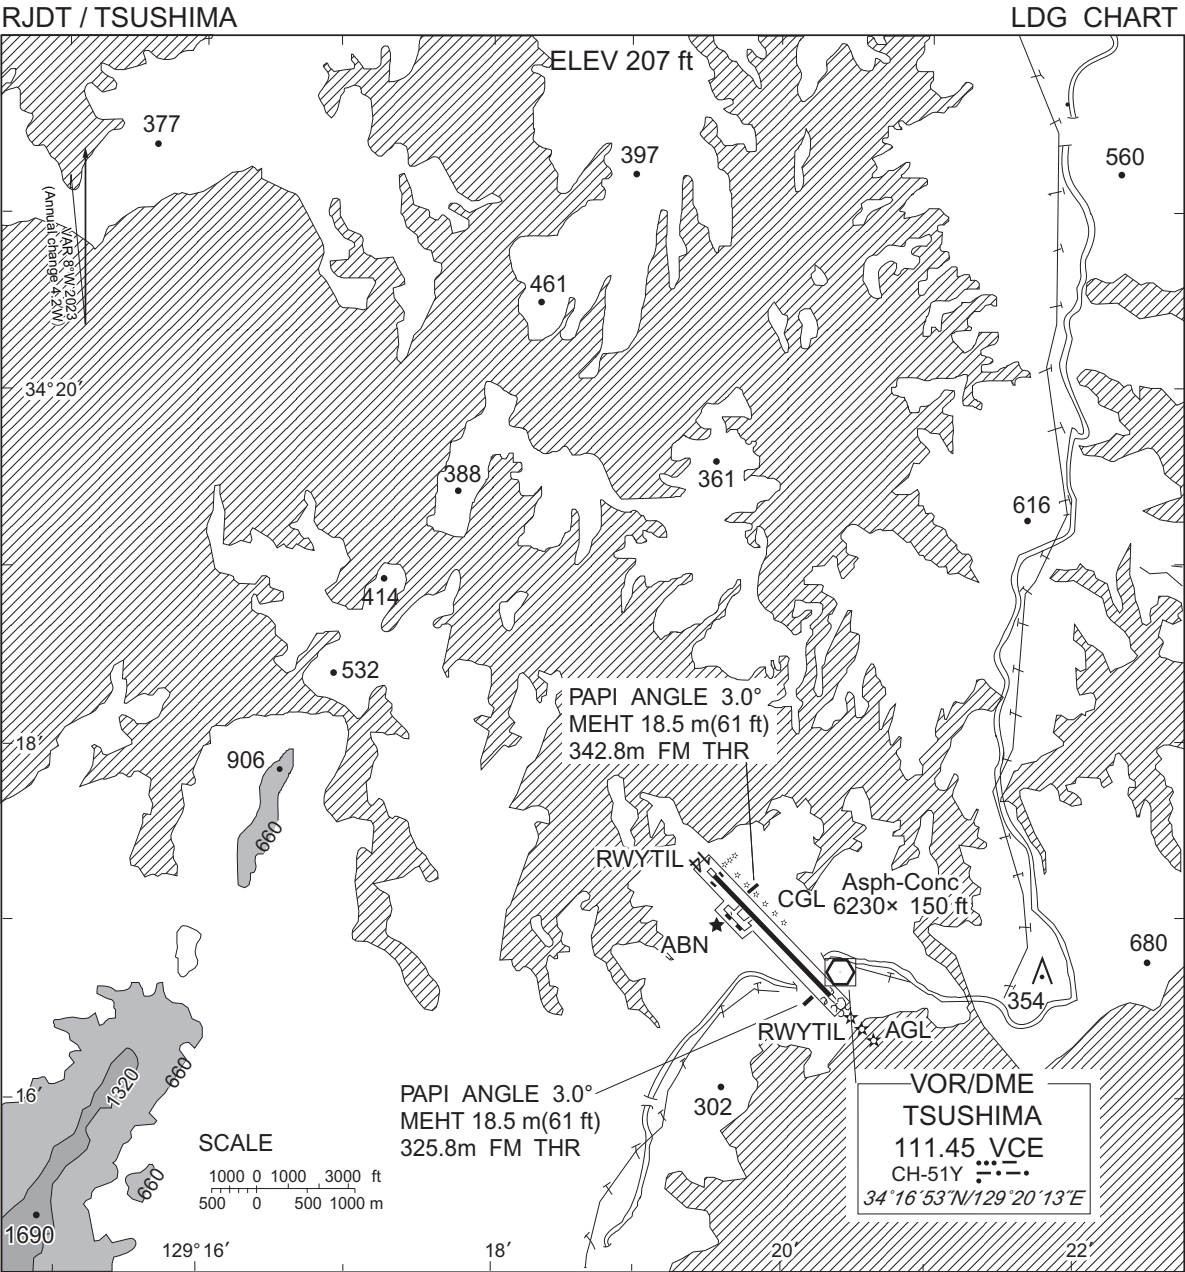

CHANGE : VAR.

RJDT / TSUSHIMA

Minimum Vectoring Altitude CHART

