


RJCB / OBIHIRO

AD CHART

CHANGE : MANDATORY INSTRUCTION MARKING added.

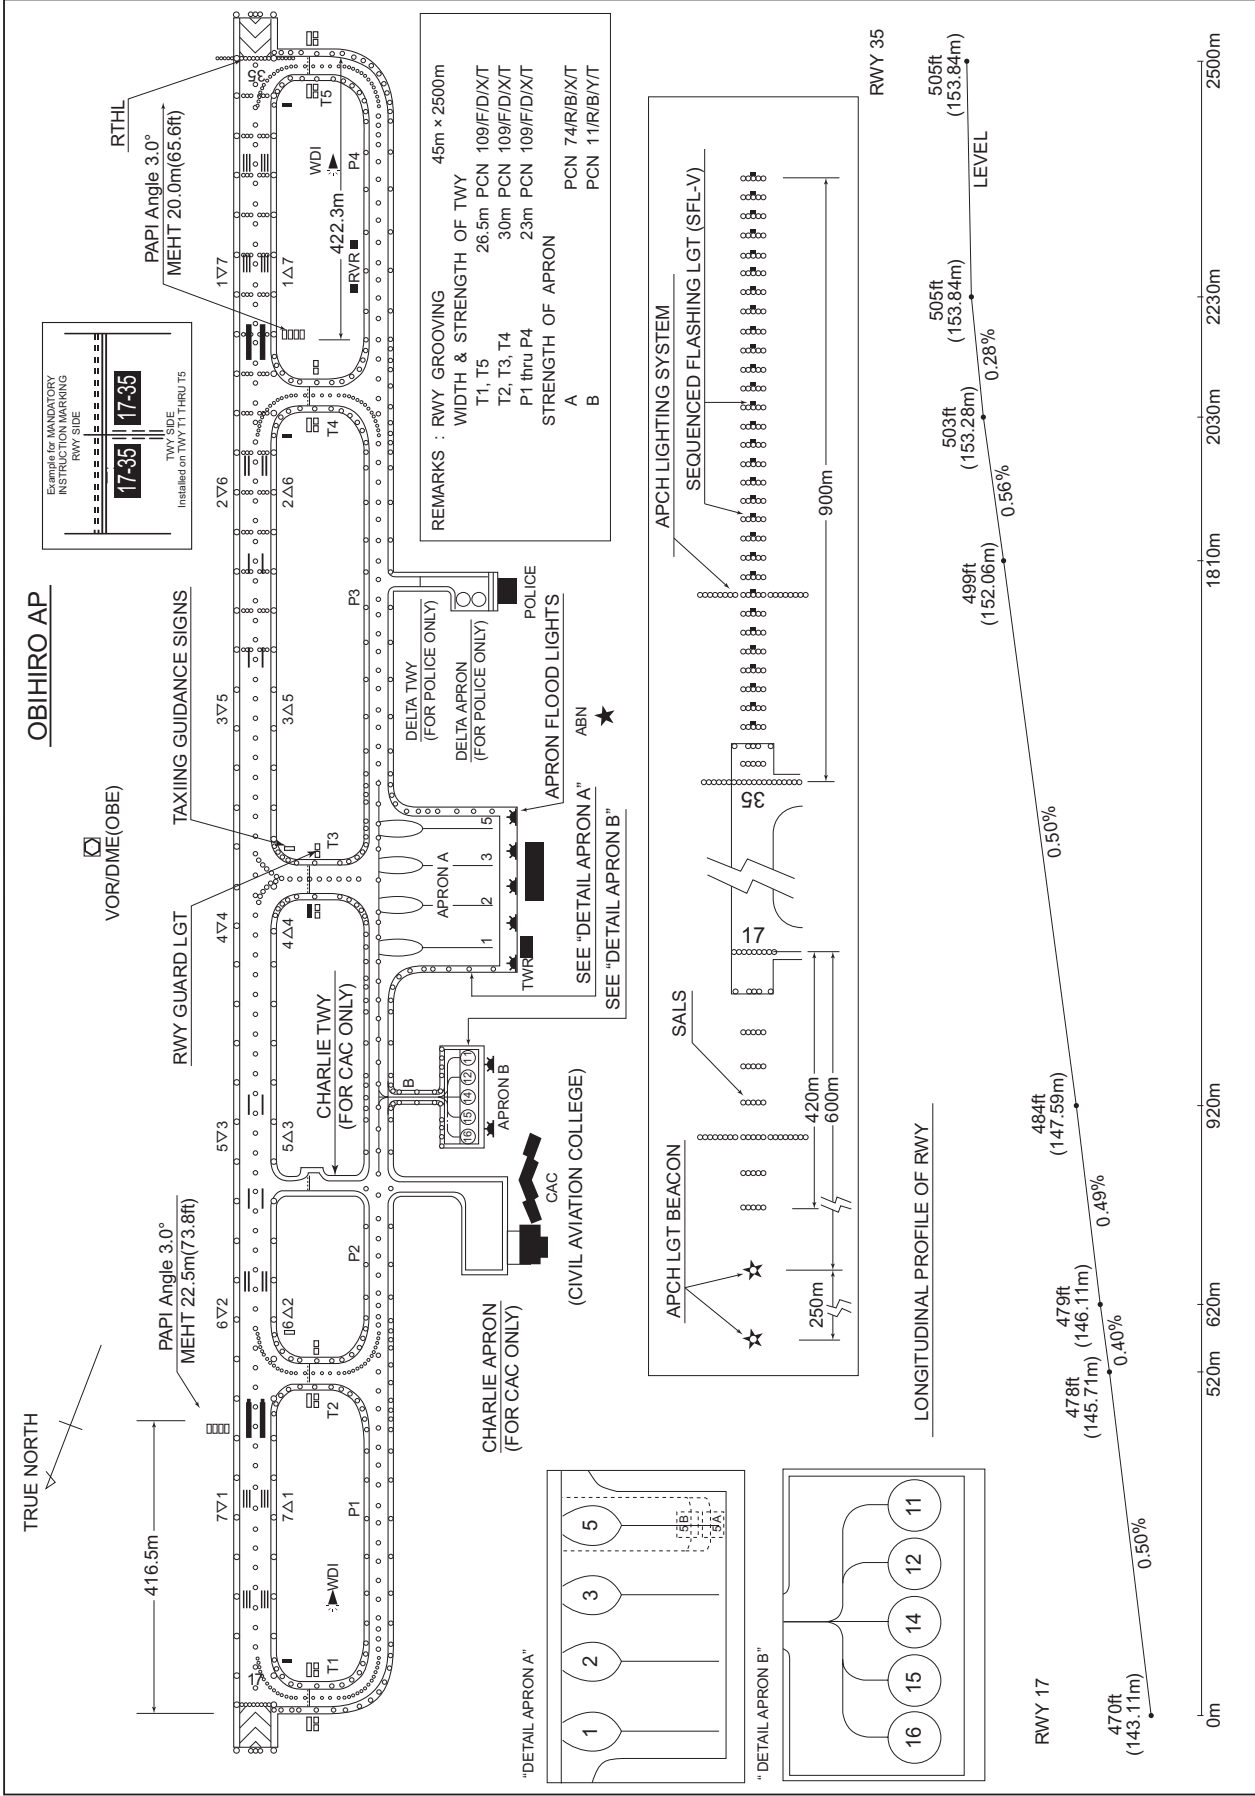

STANDARD DEPARTURE CHART-INSTRUMENT


RJCB / OBIHIRO

SID

NODUK ONE DEPARTURE

RWY 17 : Climb RWY HDG to 1000FT, turn left HDG 300° to intercept and proceed...
RWY 35 : Climb RWY HDG to 900FT, ...
...via OBE R345 to NODUK.
Cross NODUK at or above 6000FT.

Note RWY 35 : 5.0% climb gradient required up to 1500FT.

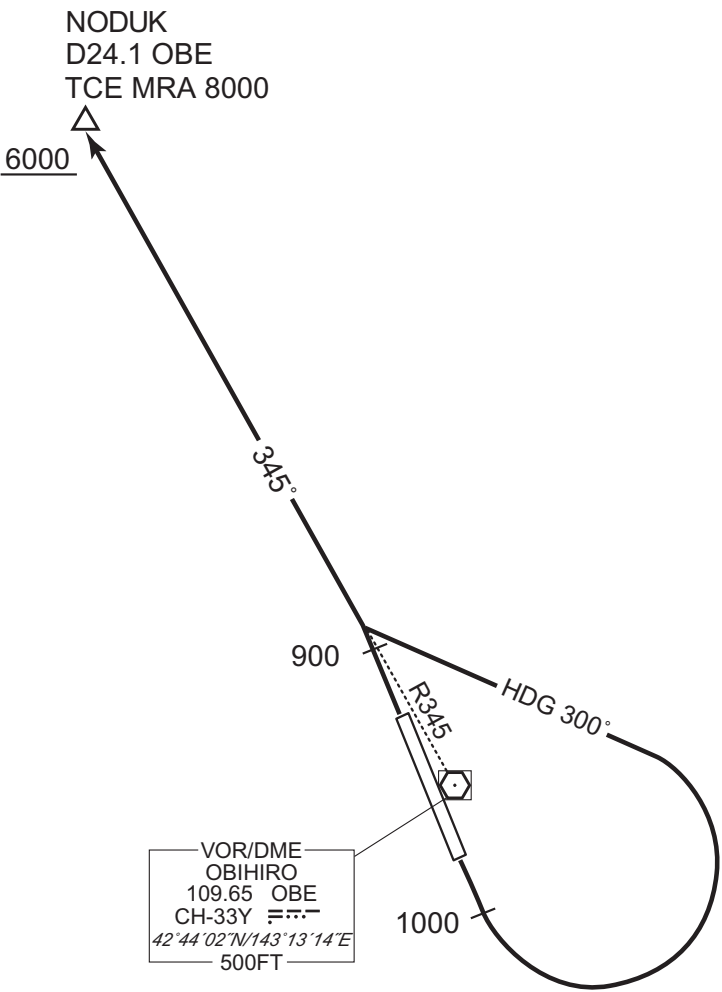

CHANGE : New PROC.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCB / OBIHIRO

SID

KUSHIRO FIVE DEPARTURE

RWY 17 : Climb RWY HDG to 1000FT, turn left HDG 030° to intercept and proceed...


RWY 35 : Climb RWY HDG to 900FT, turn right HDG 120° to intercept and proceed...

...via OBE R075 to TCE VOR/DME.

Cross OBE R075/20.0DME at or above 5000FT.

Note RWY 35 : 5.0% climb gradient required up to 1500FT.

CHANGE : PROC renamed. PROC course. KUSHIRO VOR/DME(KSE → TCE).

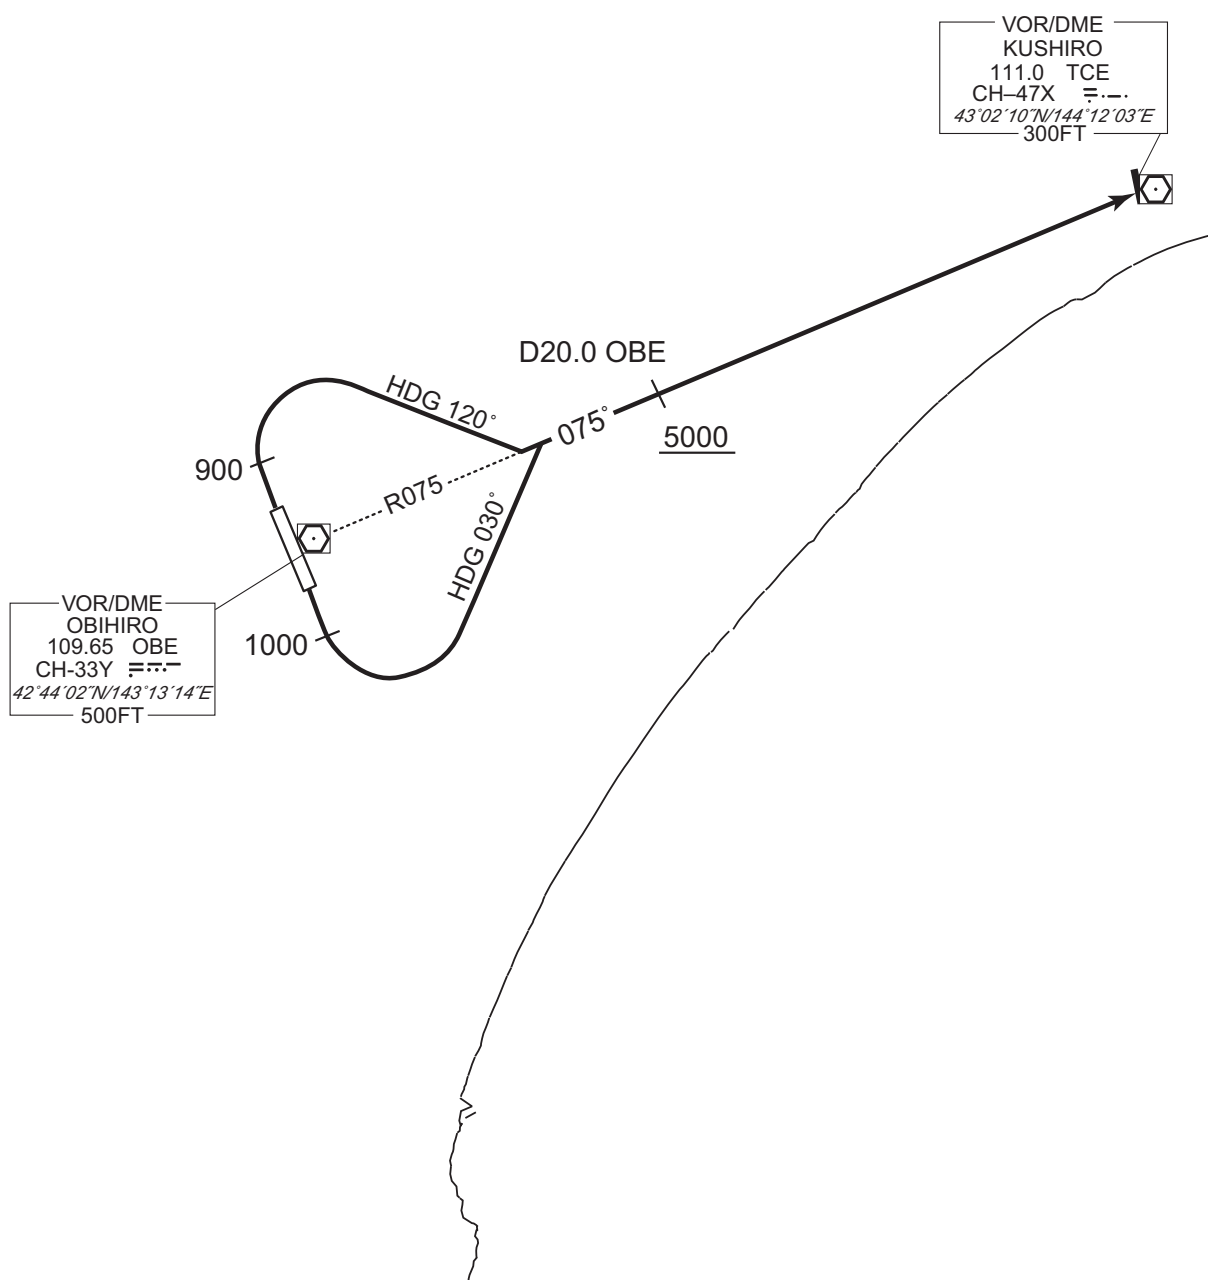

STANDARD DEPARTURE CHART-INSTRUMENT

RJCB / OBIHIRO


SID

RUGMO ONE DEPARTURE

RWY 17 : Climb RWY HDG to 1000FT, turn left HDG 354° to intercept and proceed...
RWY 35 : Climb RWY HDG to 900FT, turn right,...
...via OBE R039 to RUGMO.
Cross RUGMO at or above 6000FT.

Note RWY 35 : 5.0% climb gradient required up to 1500FT.

CHANGE : New PROC.

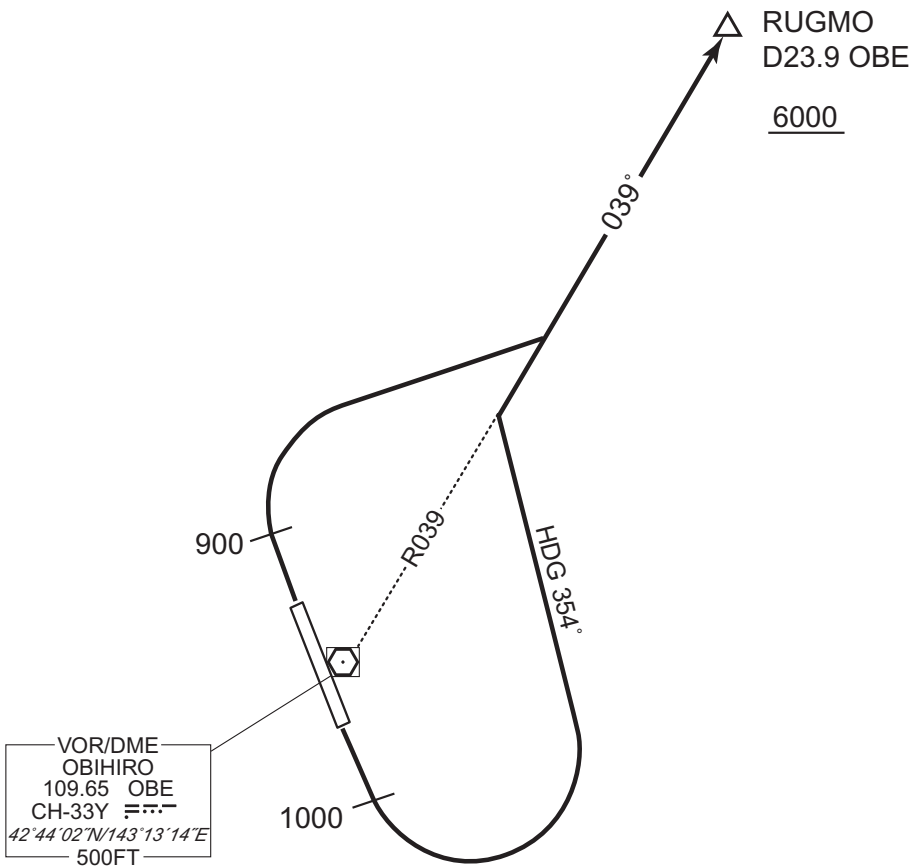

STANDARD DEPARTURE CHART-INSTRUMENT

RJCB / OBIHIRO

SID

OBIHIRO REVERSAL SEVEN DEPARTURE

RWY 17 : Climb RWY HDG to 1000FT, turn left, via OBE R130 to 3000FT, turn left,...
RWY 35 : Climb RWY HDG to 900FT, turn right, via OBE R039 to 3000FT, turn right,...
...direct to OBE VOR/DME.
Cross OBE VOR/DME at or above 6000FT.

Note RWY 35 : 5.0% climb gradient required up to 1500FT.

OBIHIRO REVERSAL SEVEN DEPARTURE

STANDARD DEPARTURE CHART-INSTRUMENT

RJCB / OBIHIRO

SID

RACKO TWO DEPARTURE

RWY 17 : Climb...

RWY 35 : Climb RWY HDG to 900FT, turn right HDG 214° to intercept and proceed...
...via OBE R169 to RACKO.

Cross RACKO at or above 10000FT.

Note RWY 35 : 5.0% climb gradient required up to 1500FT.



STANDARD DEPARTURE CHART-INSTRUMENT

RJCB / OBIHIRO


RNAV SID

OTTER TWO DEPARTURE

Basic RNP1

Note GNSS required.

VAR 9°W

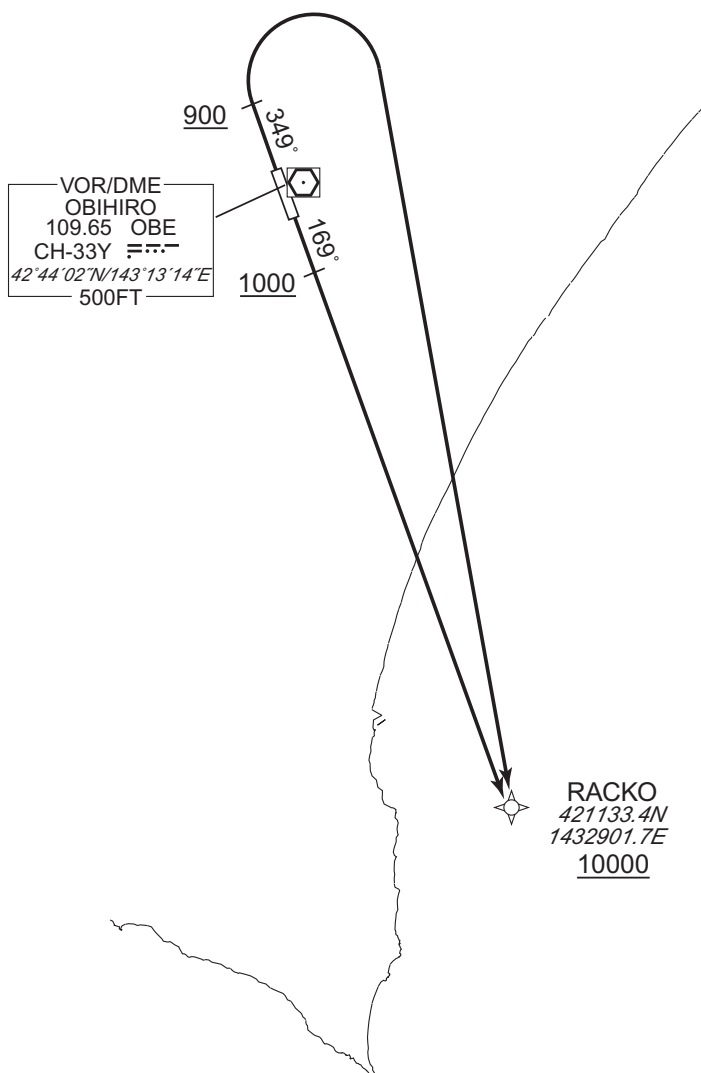

RWY17 : Climb on HDG169° at or above 1000FT, direct to RACKO at or above 10000FT.

RWY35 : Climb on HDG349° at or above 900FT, turn right direct to RACKO at or above 10000FT.

NOTE RWY35 : 5.0% climb gradient required up to 1500FT.

CHANGE : PROC renamed. PROC course.

STANDARD DEPARTURE CHART-INSTRUMENT

RJCB / OBIHIRO RNAV SID

OTTER TWO DEPARTURE

RWY17


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	169 (159.4)	-9.4	—	—	+1000	—	—	Basic RNP1
002	DF	RACKO	—	—	-9.4	—	—	+10000	—	—	Basic RNP1

RWY35

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	349 (339.4)	-9.4	—	—	+900	—	—	Basic RNP1
002	DF	RACKO	—	—	-9.4	—	R	+10000	—	—	Basic RNP1

CHANGE : PROC renamed. PROC course. VAR.


INSTRUMENT APPROACH CHART

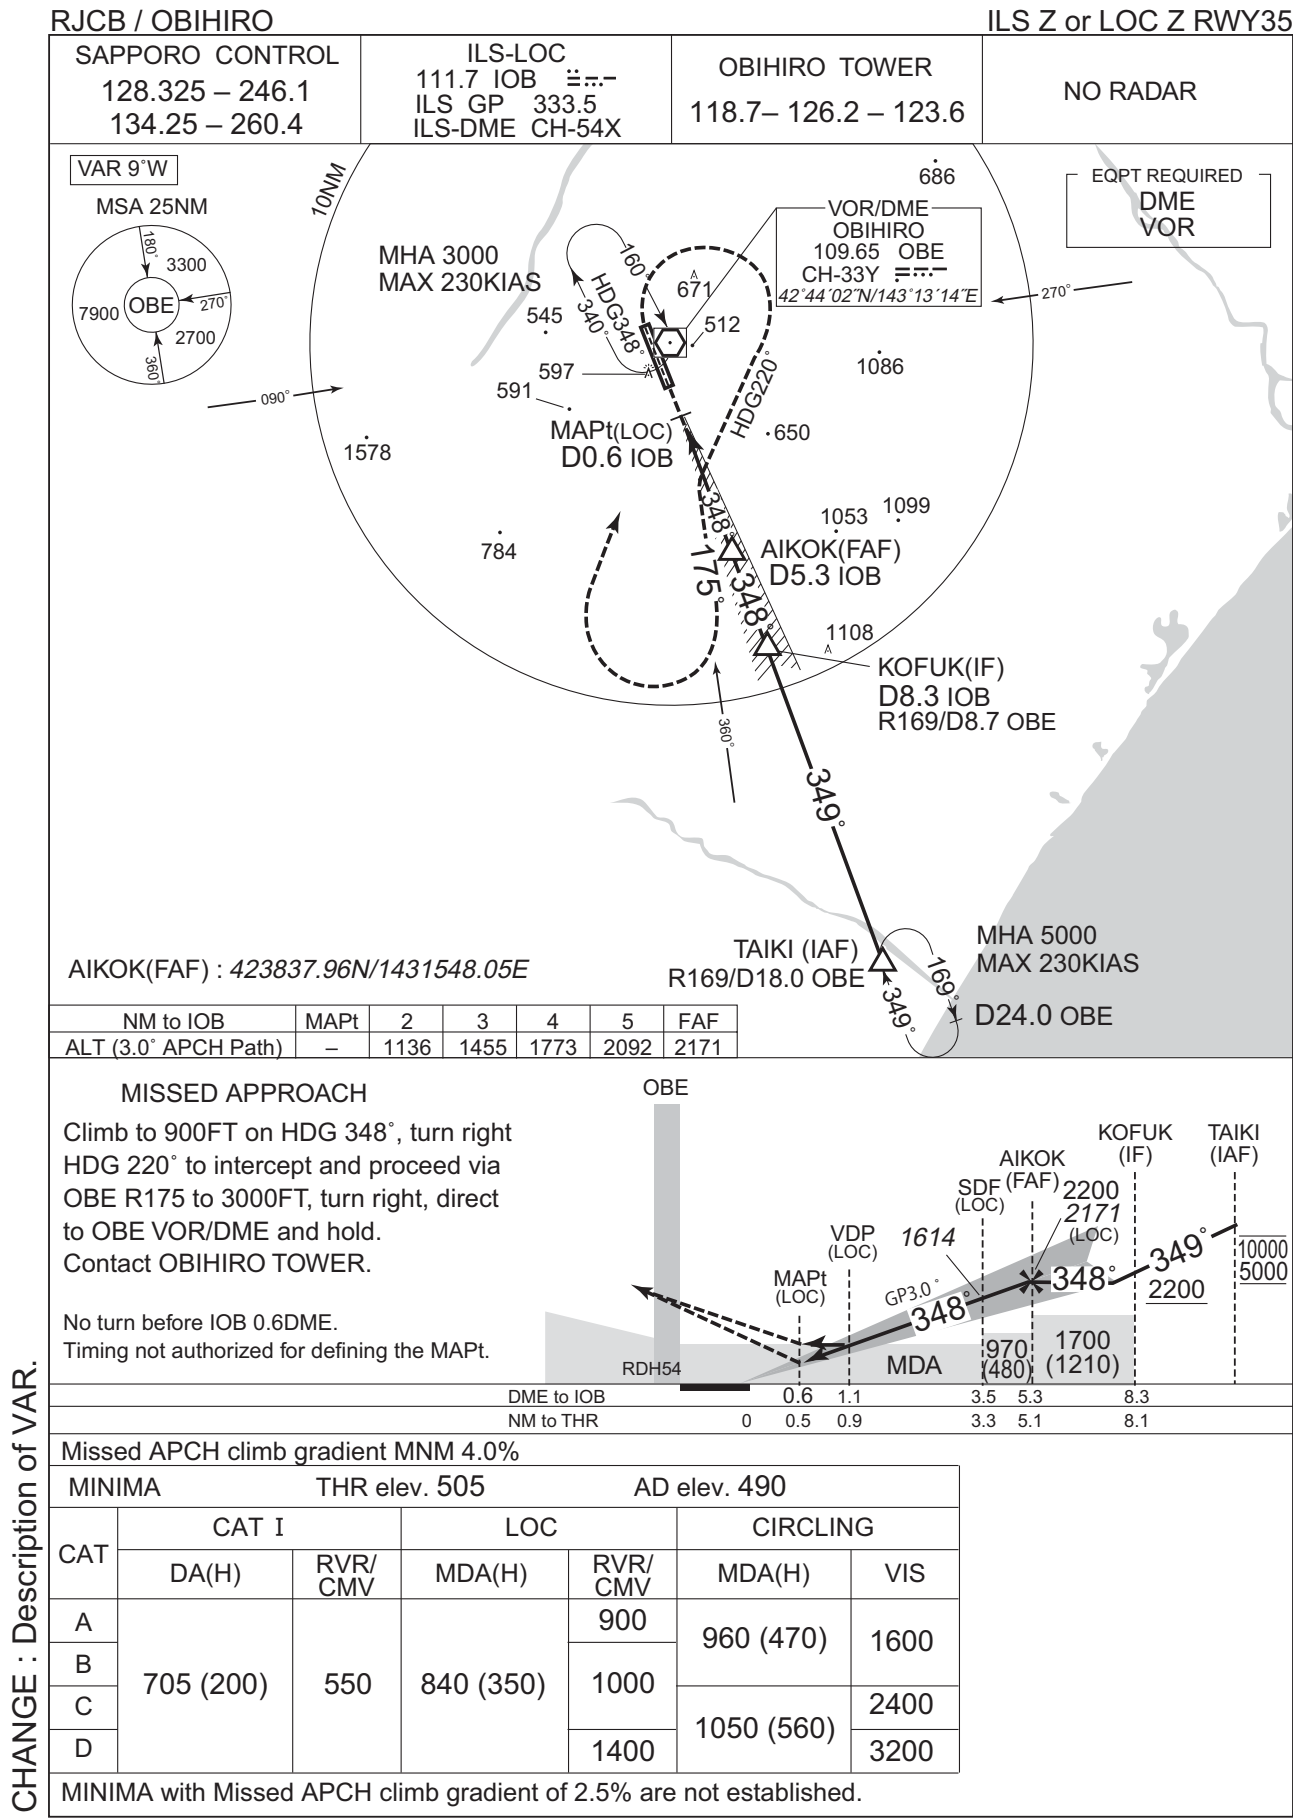

INSTRUMENT APPROACH CHART

RJCB / OBIHIRO


ILS Y or LOC Y RWY35

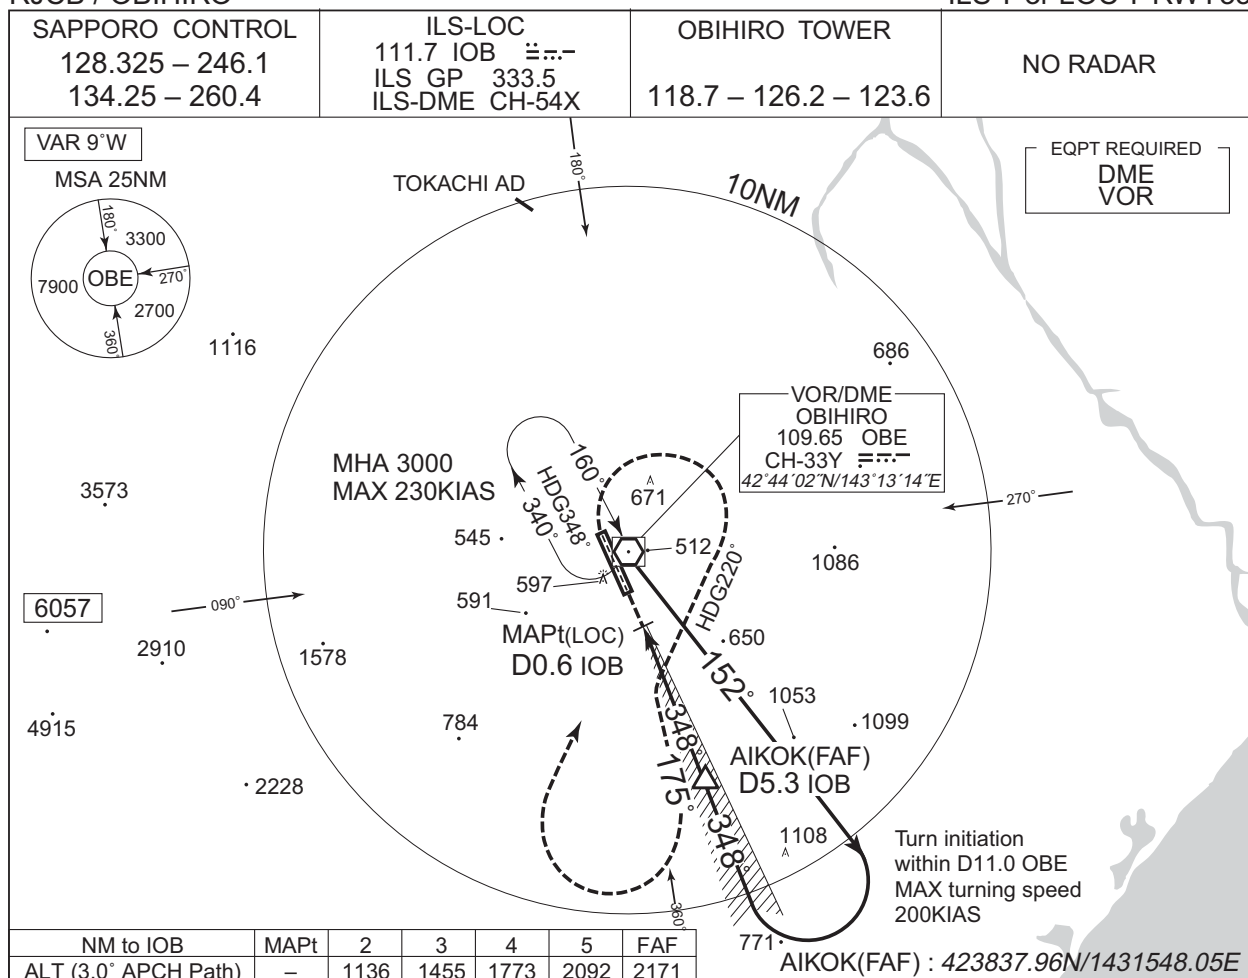

MISSED APPROACH

Climb to 900FT on HDG 348°, turn right HDG 220° to intercept and proceed via OBE R175 to 3000FT, turn right, direct to OBE VOR/DME and hold. Contact OBIHIRO TOWER.

No turn before IOB 0.6DME.
Timing not authorized for defining the MAPt.

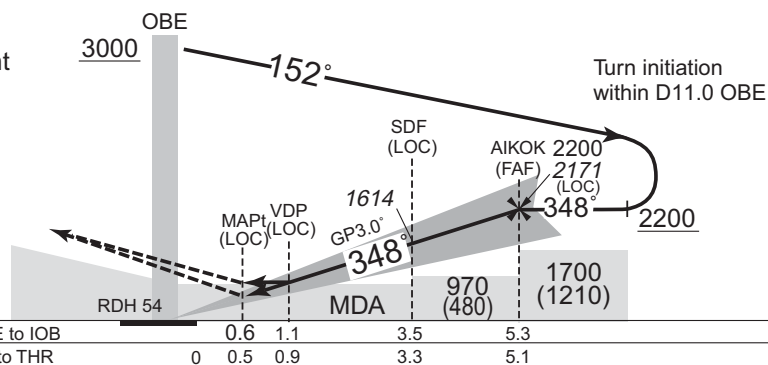


Missed APCH climb gradient MNM 4.0%

MINIMA		THR elev. 505		AD elev. 490		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	705 (200)	550	840 (350)	900	960 (470)	1600
B				1000		
C					1050 (560)	2400
D						

MINIMA with Missed APCH climb gradient of 2.5% are not established.

CHANGE : Description of VAR.

INSTRUMENT APPROACH CHART

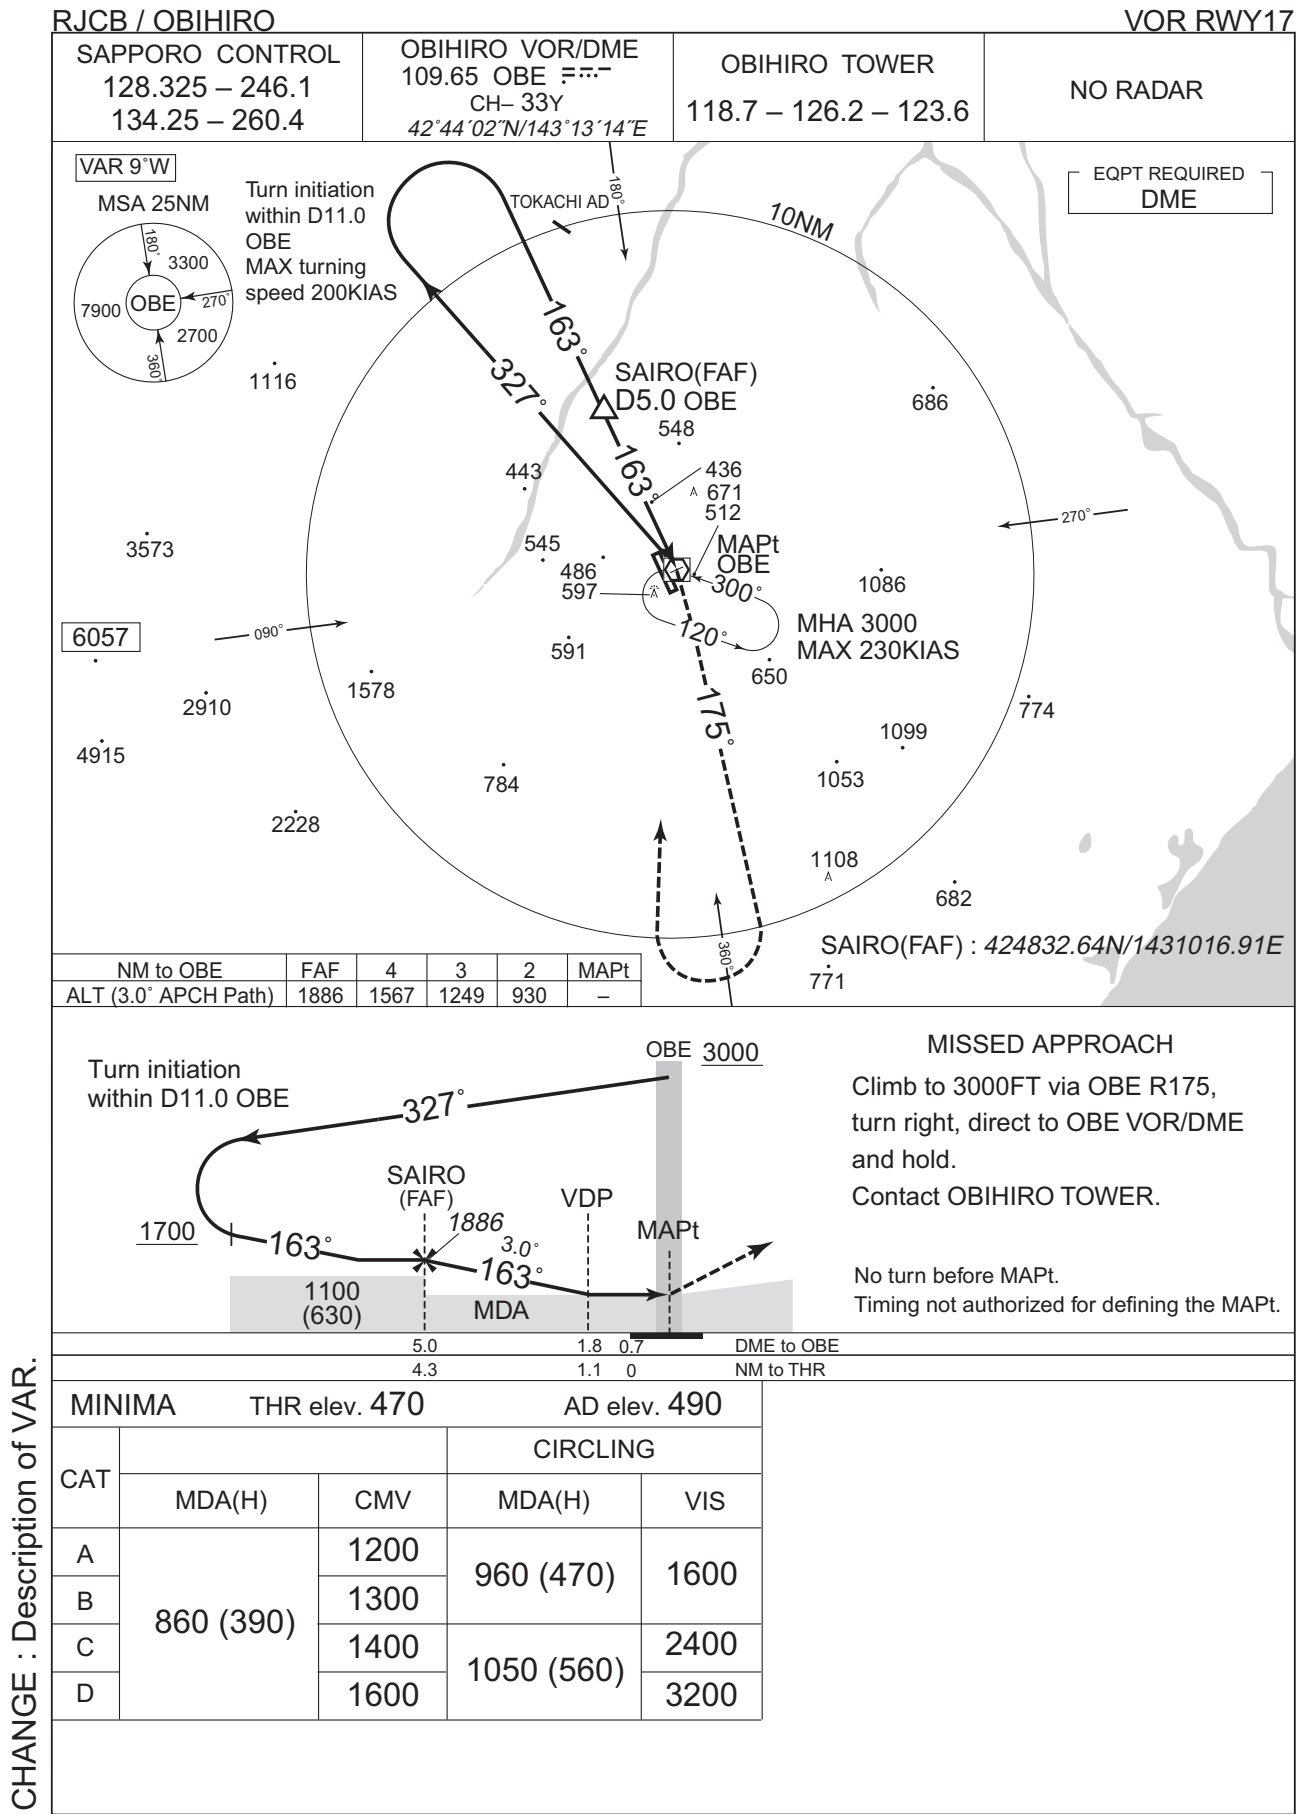


RJCB / OBIHIRO

SAPPORO CONTROL
128.325 – 246.1
134.25 – 260.4

OBIHIRO VOR/DME
109.65 OBE 7.3.7
CH-33Y
42°44'02"N/143°13'14"E


OBIHIRO TOWER
118.7 – 126.2 – 123.6

NO RADAR

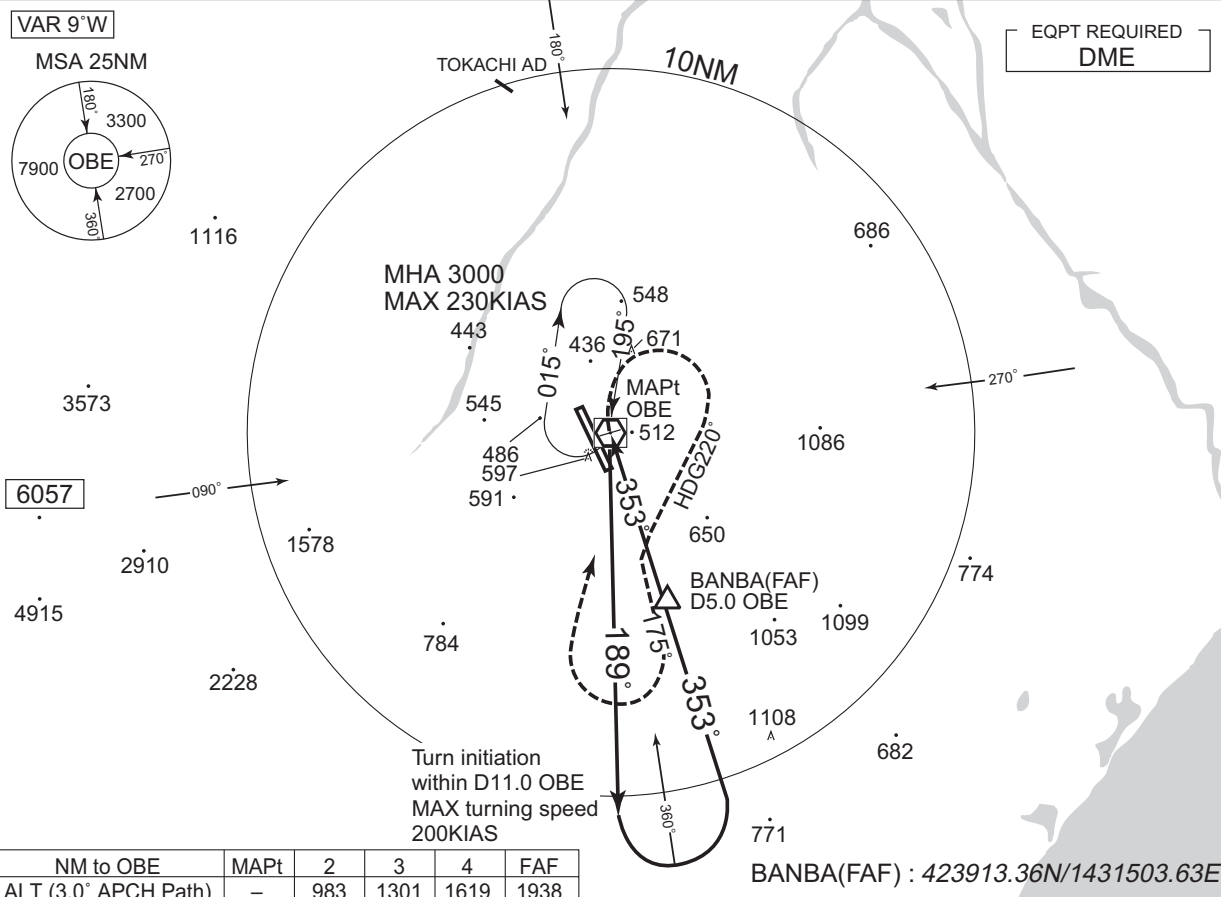

Turn right, climb on HDG 220°
to intercept and proceed via
OBE R175 to 3000FT, turn right,
direct to OBE VOR/DME and hold.
Contact OBIHIRO TOWER.

No turn before MAPt.
Timing not authorized for defining the MAPt.

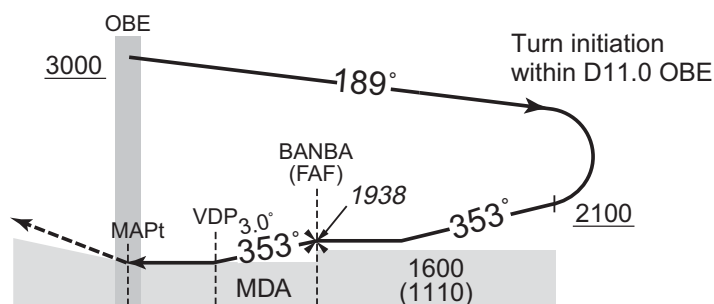

DME to OBE	0.7	1.9	5.0
NM to THR	0	1.2	4.3


MINIMA		THR elev. 505	AD elev. 490	
CAT			CIRCLING	
	MDA(H)	RVR/ CMV	MDA(H)	VIS
A	930 (440)	900	960 (470)	1600
B		1000		
C			1050 (560)	2400
D				1400

CHANGE : Description of VAR.

RJCB / OBIHIRO

RNP RWY17(AR)

For uncompensated Baro-VNAV systems, procedure not authorized below -30°C / above 45°C



Climb to 5000FT,
to TALKI and hold.
Contact OBIHIRO
TOWER.

MINIMA	THR elev. 470	AD elev. 490
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B		
C	770(300)	1400
D	774(304)	1600

Authorization Required

INSTRUMENT APPROACH CHART

RJCB / OBIHIRO

RNP RWY17(AR)

Coding Table


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	TAIKI	-	-	-9.4	-	-	+5000	-	-	-
002	TF	CB750	-	337 (327.6)	-9.4	15.8	-	+4000	-	-	1.0
003	TF	HAPPY	-	337 (327.5)	-9.4	3.0	-	3800	-165	-	1.0
004	TF	CB751	-	337 (327.4)	-9.4	1.4	-	3345	-	-3.00	0.3
005	RF Center: CBRF1 r=2.18NM	CB752	-	-	-9.4	7.3	R	1020	-	-3.00	0.3
006	TF	RW17	Y	169 (159.4)	-9.4	1.6	-	520	-	-3.00/50	0.3
007	TF	TAIKI	-	169 (159.8)	-9.4	18.7	-	5000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	TAIKI	350 (340.3)	-9.4	1.0 (-14000)	R	5000	FL140	-230 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
TAIKI	422706.29N / 1432128.22E	CBRF1	424520.85N / 1430911.91E
CB750	424026.47N / 1430956.82E		
HAPPY	424258.09N / 1430745.16E		
CB751	424410.25N / 1430642.42E		
CB752	424607.16N / 1431158.01E		
RW17	424438.86N / 1431243.31E		

CHANGE : VAR. PROC course. RNAV HLDG established.

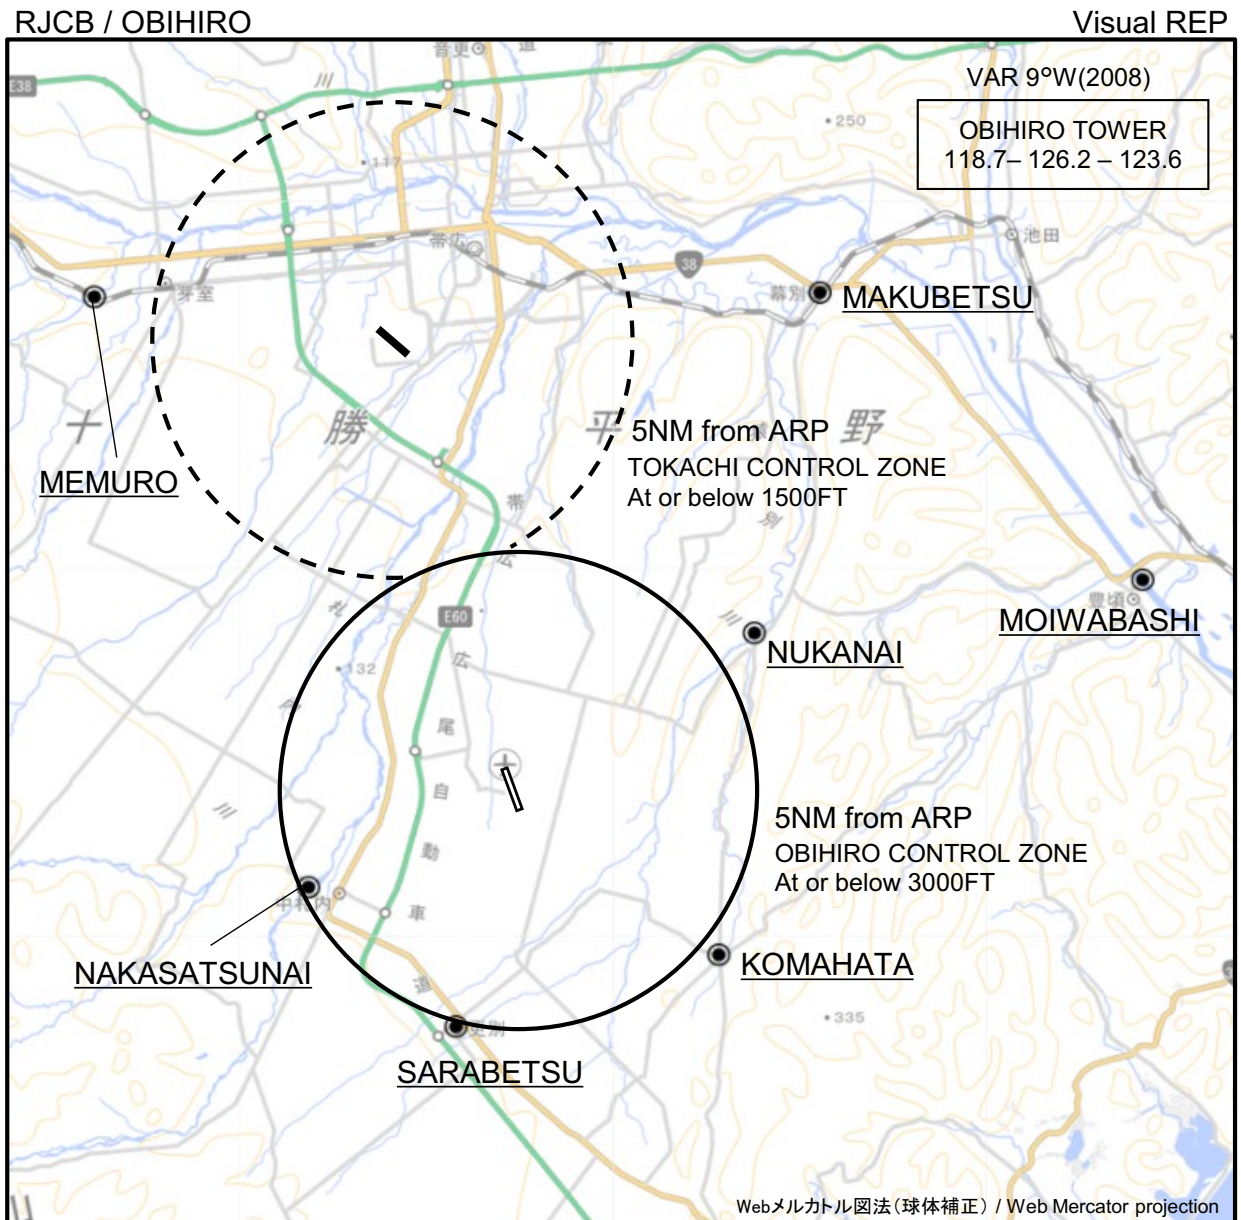

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
幕別 Makubetsu	031°T / 12.2NM	JR駅 JR Station
芽室 Memuro	320°T / 13.6NM	JRの鉄橋(芽室駅から西1.5NM) Bridge
茂岩橋 Moiwabashi	071°T / 13.7NM	十勝川の茂岩橋 Bridge
糠内 Nukanai	056°T / 5.9NM	猿別川と糠内川の合流点 The confluence of the Sarubetsu and Nukanai rivers
中札内 Nakasatsunai	245°T / 4.9NM	札内川の中札内橋 Bridge
駒畠 Komahata	130°T / 5.4NM	五差路 Intersection
更別 Sarabetsu	195°T / 5.1NM	更別村役場 Sarabetsu Village office

RJCB / OBIHIRO

Minimum Vectoring Altitude CHART

VAR 9°W (2009)



CENTER : 424402N/1431314E (OBE VOR/DME)

CHANGE : Bearing FM KSE deleted.