

## AD CHART




STANDARD DEPARTURE CHART - INSTRUMENT

RORS / SHIMOJISHIMA SID

ANNIE FIVE DEPARTURE

RWY17 : Climb RWY HDG to 500FT, turn right HDG036° to intercept and proceed ...  
RWY35 : Climb ...  
          ... via SJE R351 to ANNIE.  
          Cross ANNIE at assigned altitude.  
Note RWY17 : 5.0% climb gradient required up to 500FT.  
              OBST ALT 93FT located at 0.2NM 161° FM end of RWY17.

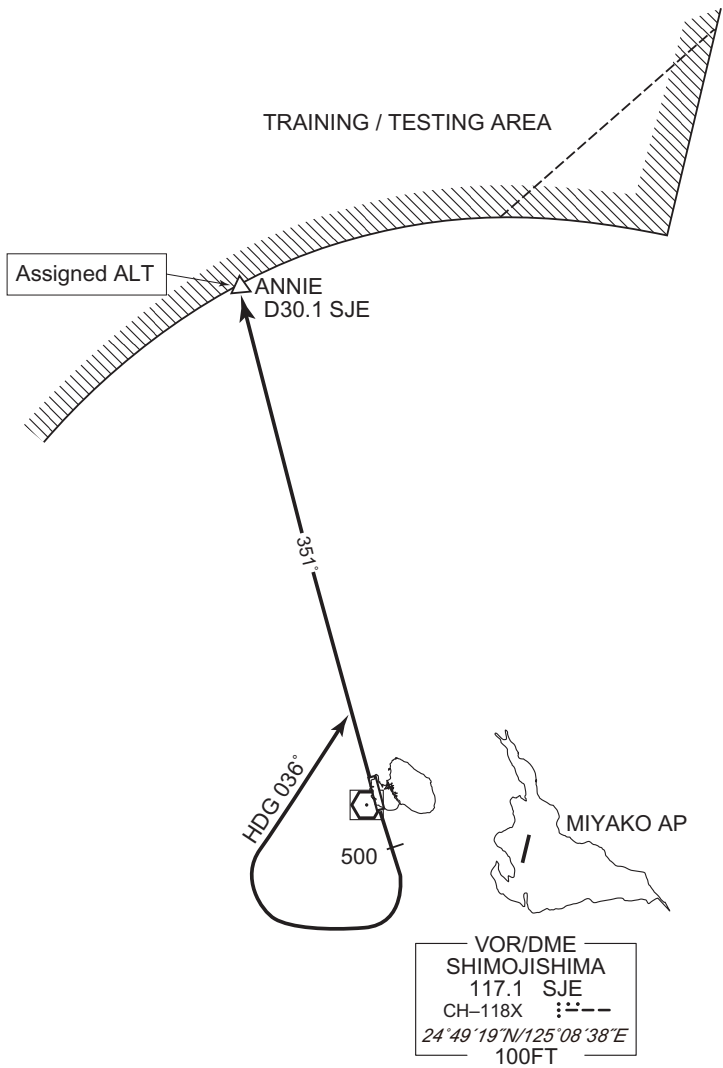

CHANGE : Description of PROC name.


STANDARD DEPARTURE CHART - INSTRUMENT

RORS / SHIMOJISHIMA

SID

BETTY FIVE DEPARTURE

RWY17 : Climb RWY HDG to 500FT ...  
RWY35 : Climb RWY HDG to 500FT, turn left HDG 126° to intercept and  
          proceed ...  
          ... via SJE R171 to BETTY.  
          Cross BETTY at assigned altitude.  
Note RWY17 : 5.0% climb gradient required up to 500FT.  
              OBST ALT 93FT located at 0.2NM 161° FM end of RWY17.

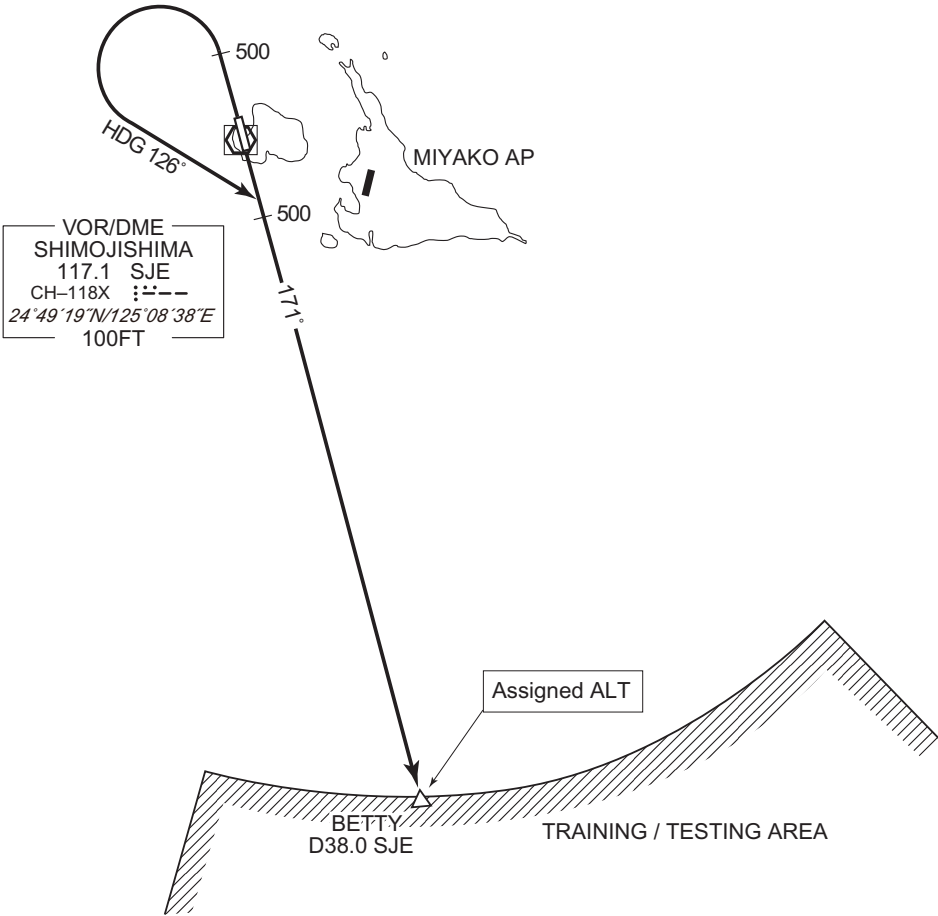

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART - INSTRUMENT

RORS / SHIMOJISHIMA

SID

MIYAKOJIMA FOUR DEPARTURE


RWY17 : Climb RWY HDG to 500FT, turn left,...

RWY35 : Climb RWY HDG to 500FT, turn right,...

...direct to MJC VORTAC. Cross MJC VORTAC at or above 3000FT.

Note RWY17 : 5.0% climb gradient required up to 500FT.

OBST ALT 93FT located at 0.2NM 161° FM end of RWY17.

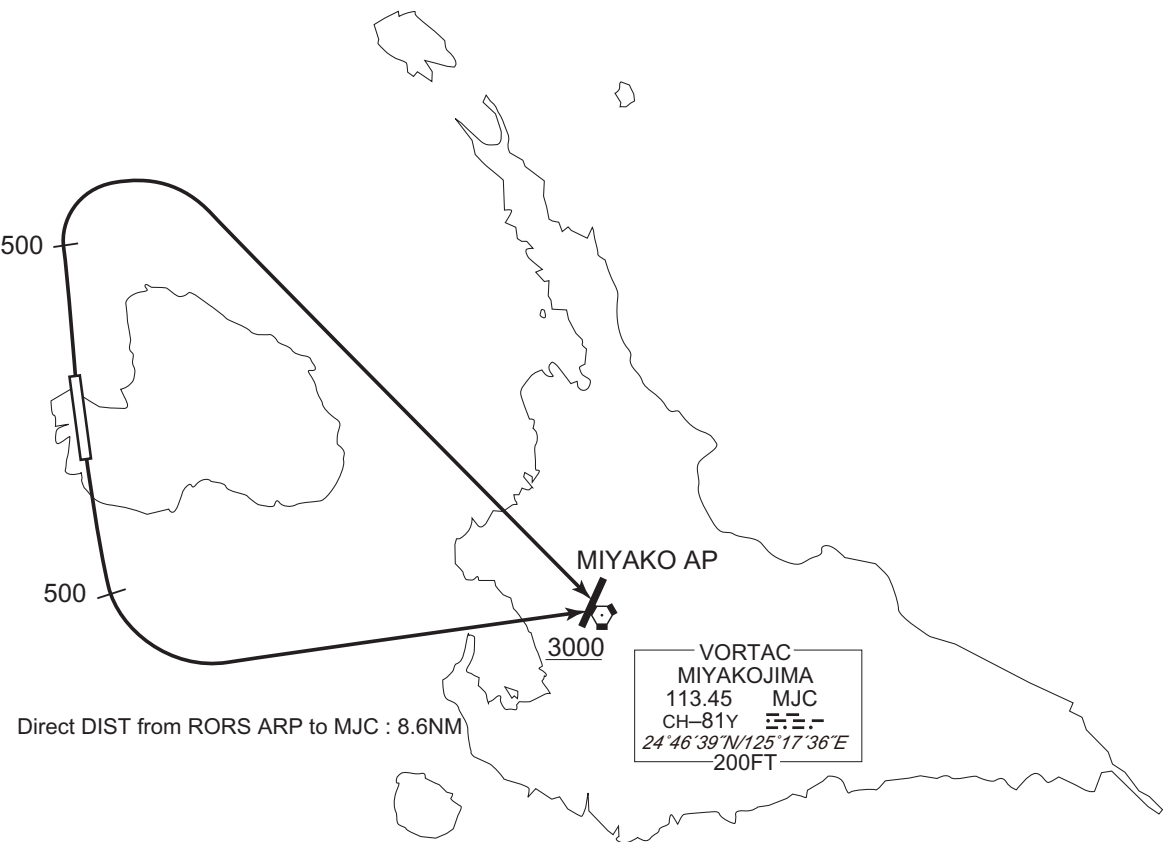


CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART - INSTRUMENT

RORS / SHIMOJISHIMA

RNAV SID

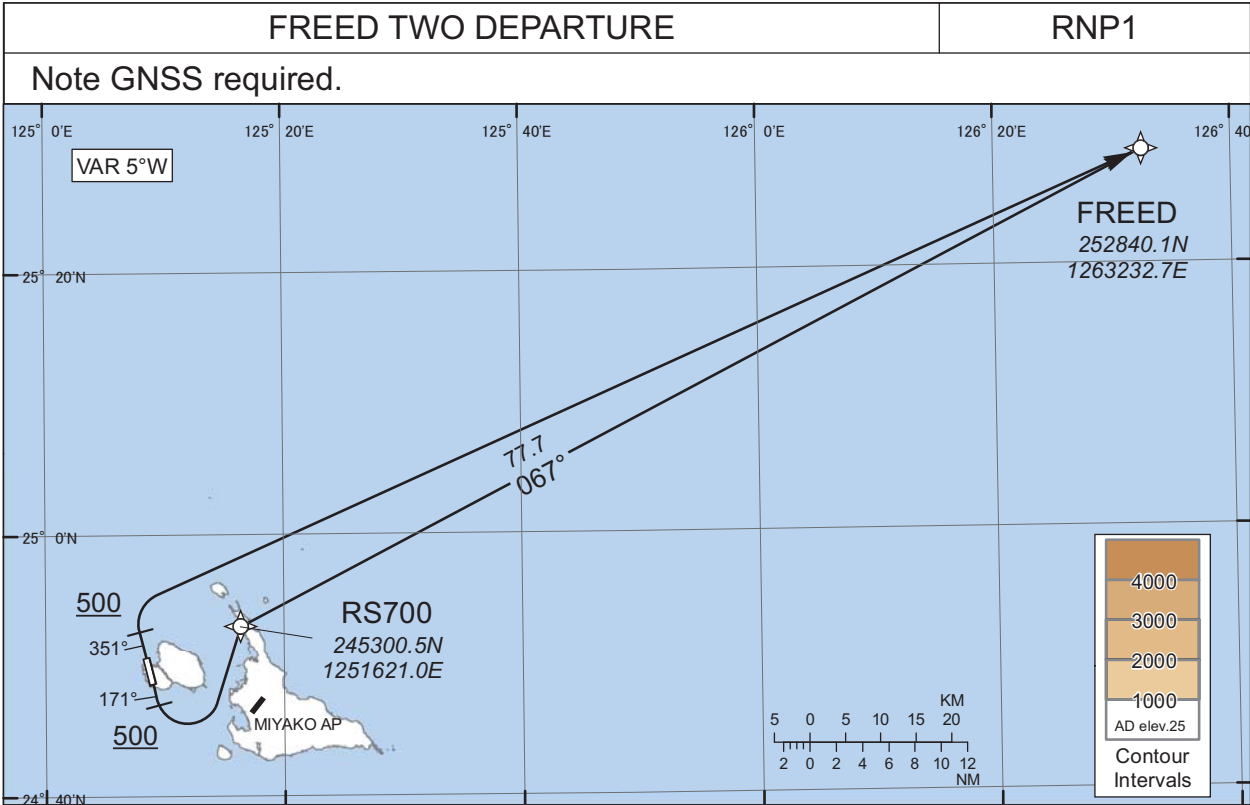

RWY17 : Climb on HDG171° at or above 500FT, turn left direct to RS700, to FREED.  
RWY35 : Climb on HDG351° at or above 500FT, turn right direct to FREED.

Note RWY17 : 5.0% climb gradient required up to 500FT.  
OBST ALT 93FT located at 0.2NM 161° FM end of RWY17.

RWY17

Serial Number	Path Descriptor	Way point Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	171 (166.1)	-5.1	-	-	+500	-	-	RNP1
002	DF	RS700	-	-	-5.1	-	L	-	-	-	RNP1
003	TF	FREED	-	067 (062.4)	-5.1	77.7	-	-	-	-	RNP1

RWY35


Serial Number	Path Descriptor	Way point Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	351 (346.1)	-5.1	-	-	+500	-	-	RNP1
002	DF	FREED	-	-	-5.1	-	R	-	-	-	RNP1

CHANGE : Description of PROC name and VAR.

## RORS / SHIMOJISHIMA

STAR

From over ANNIE, proceed via SJE R351 to DIANA.  
Cross DIANA at or above 1600FT.

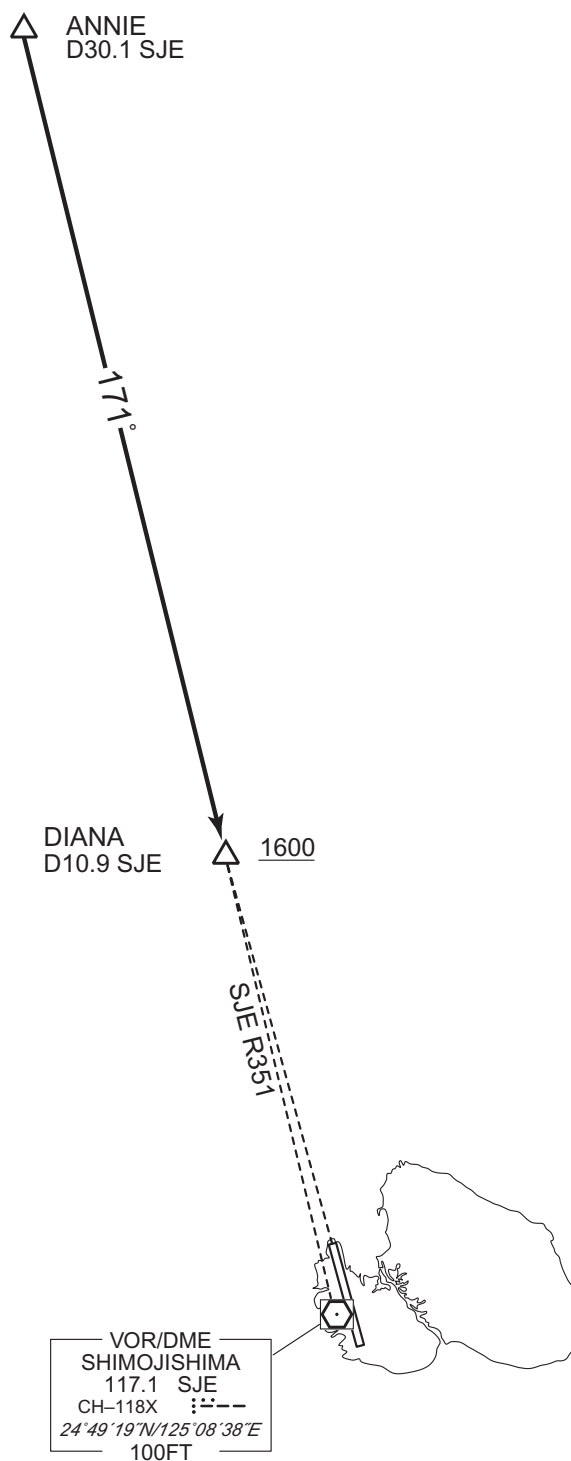

CHANGE : Description of PROC name.


STANDARD ARRIVAL CHART - INSTRUMENT

RORS / SHIMOJISHIMA

STAR


BETTY ARRIVAL

From over BETTY, proceed via MJC R184 to intercept and proceed via SJE R169 to CHIMI.  
Cross CHIMI at or above 1600FT.

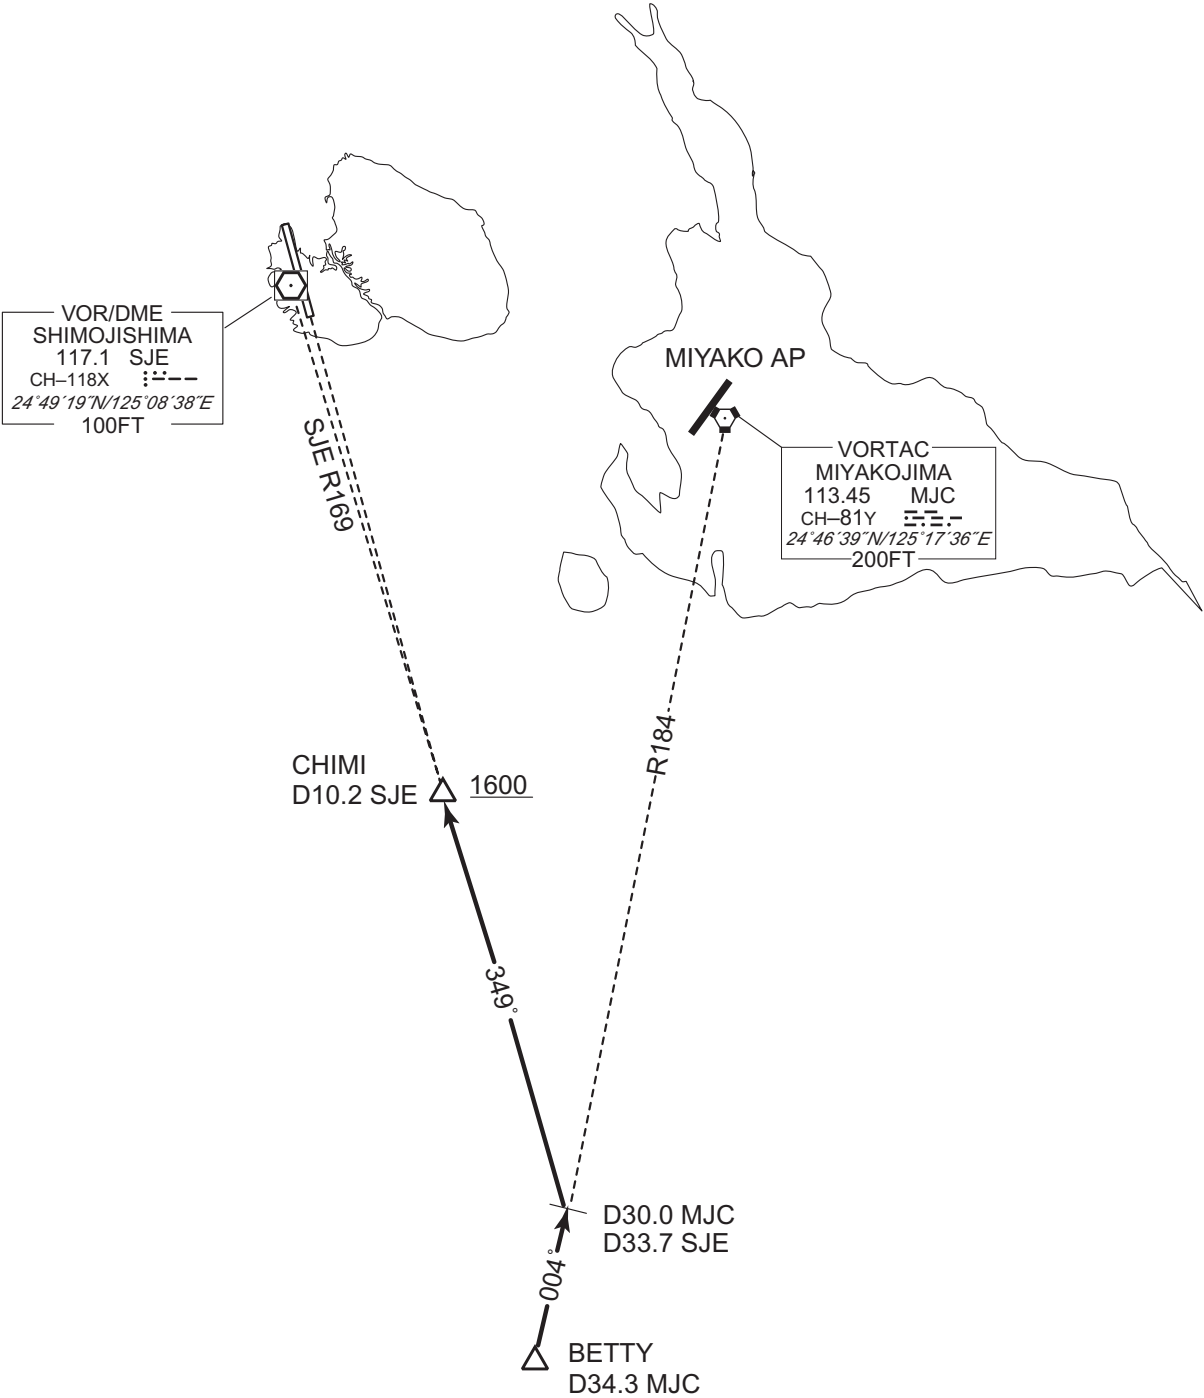


CHANGE : Description of PROC name.

INSTRUMENT APPROACH CHART

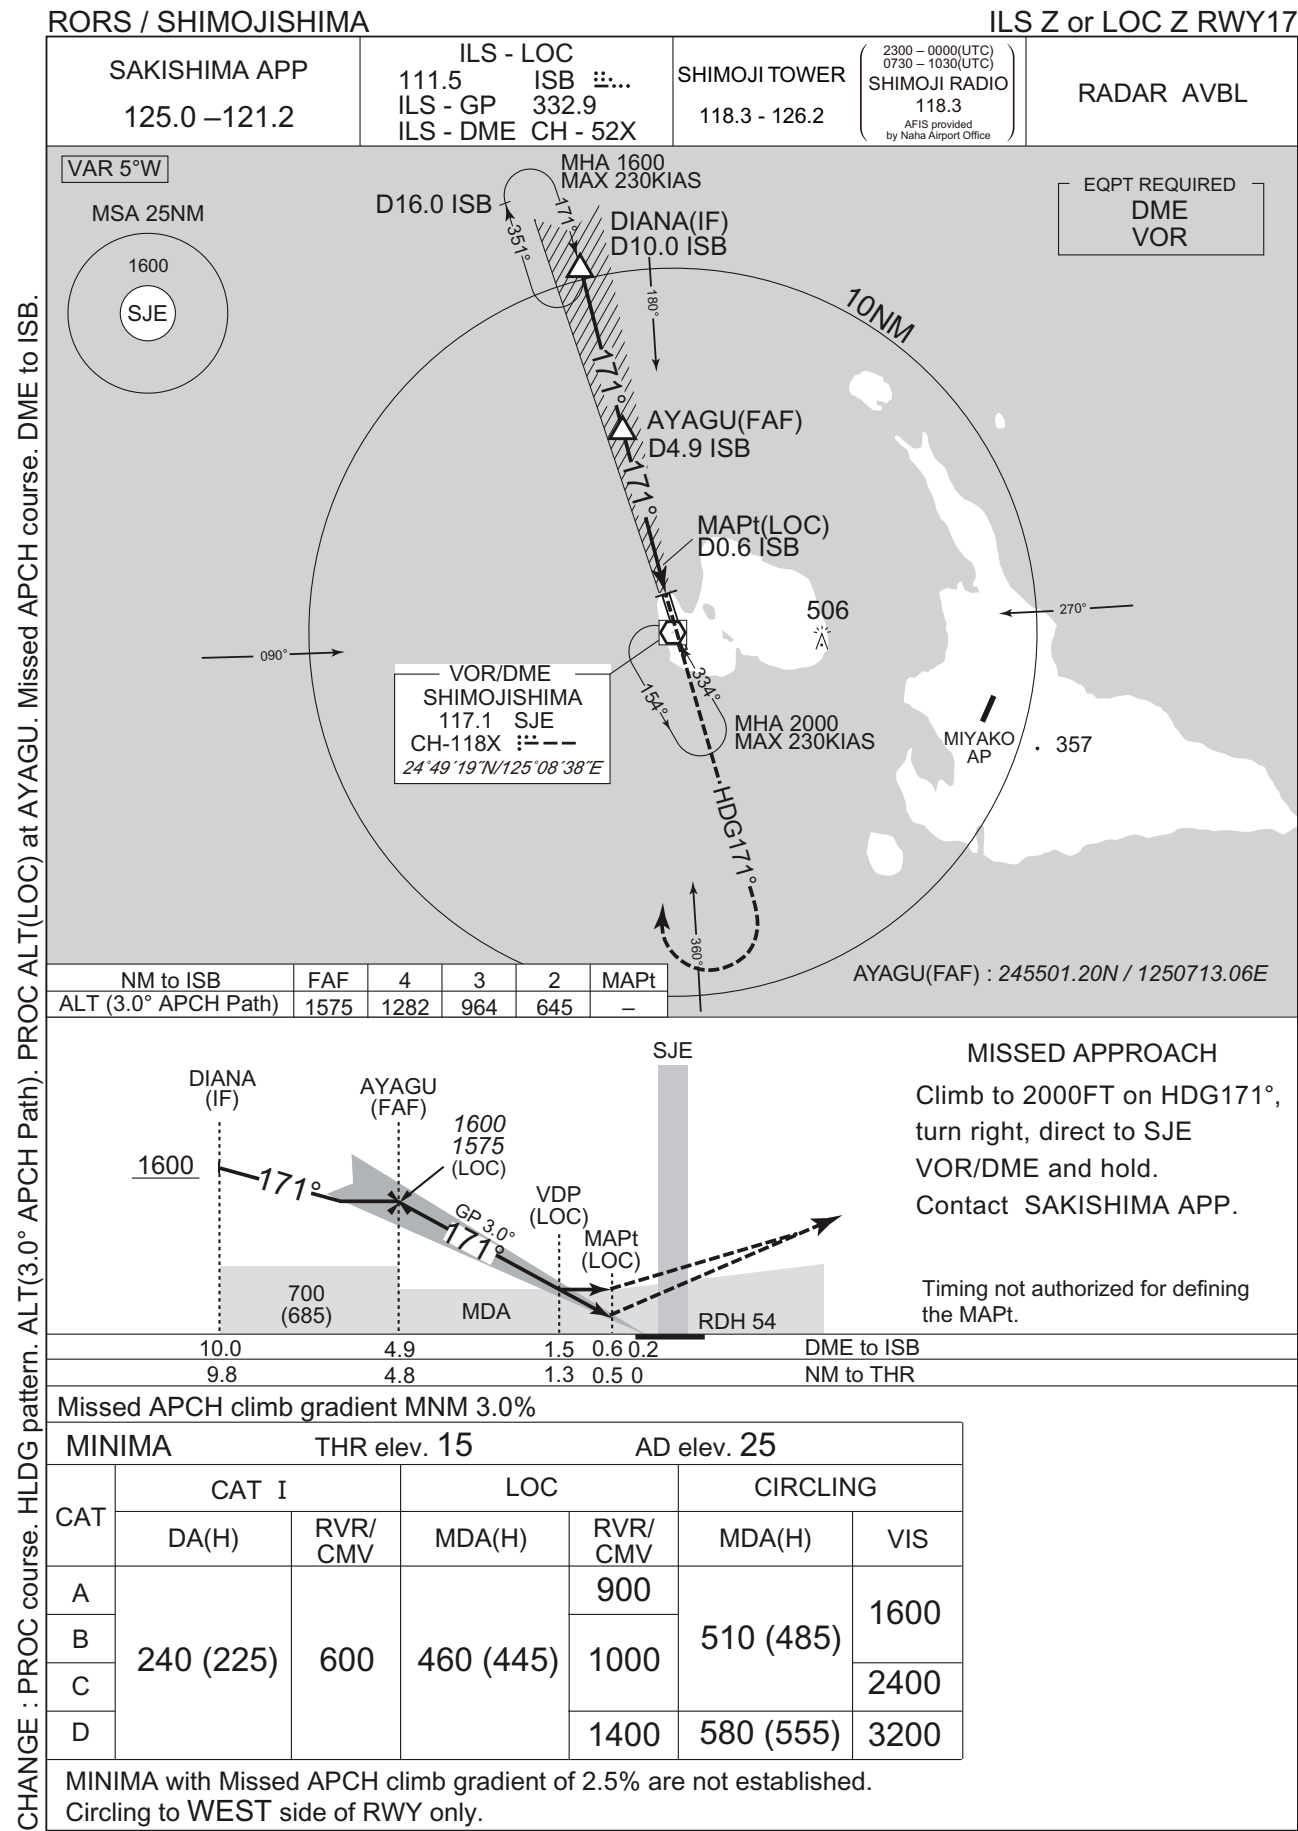




INSTRUMENT APPROACH CHART

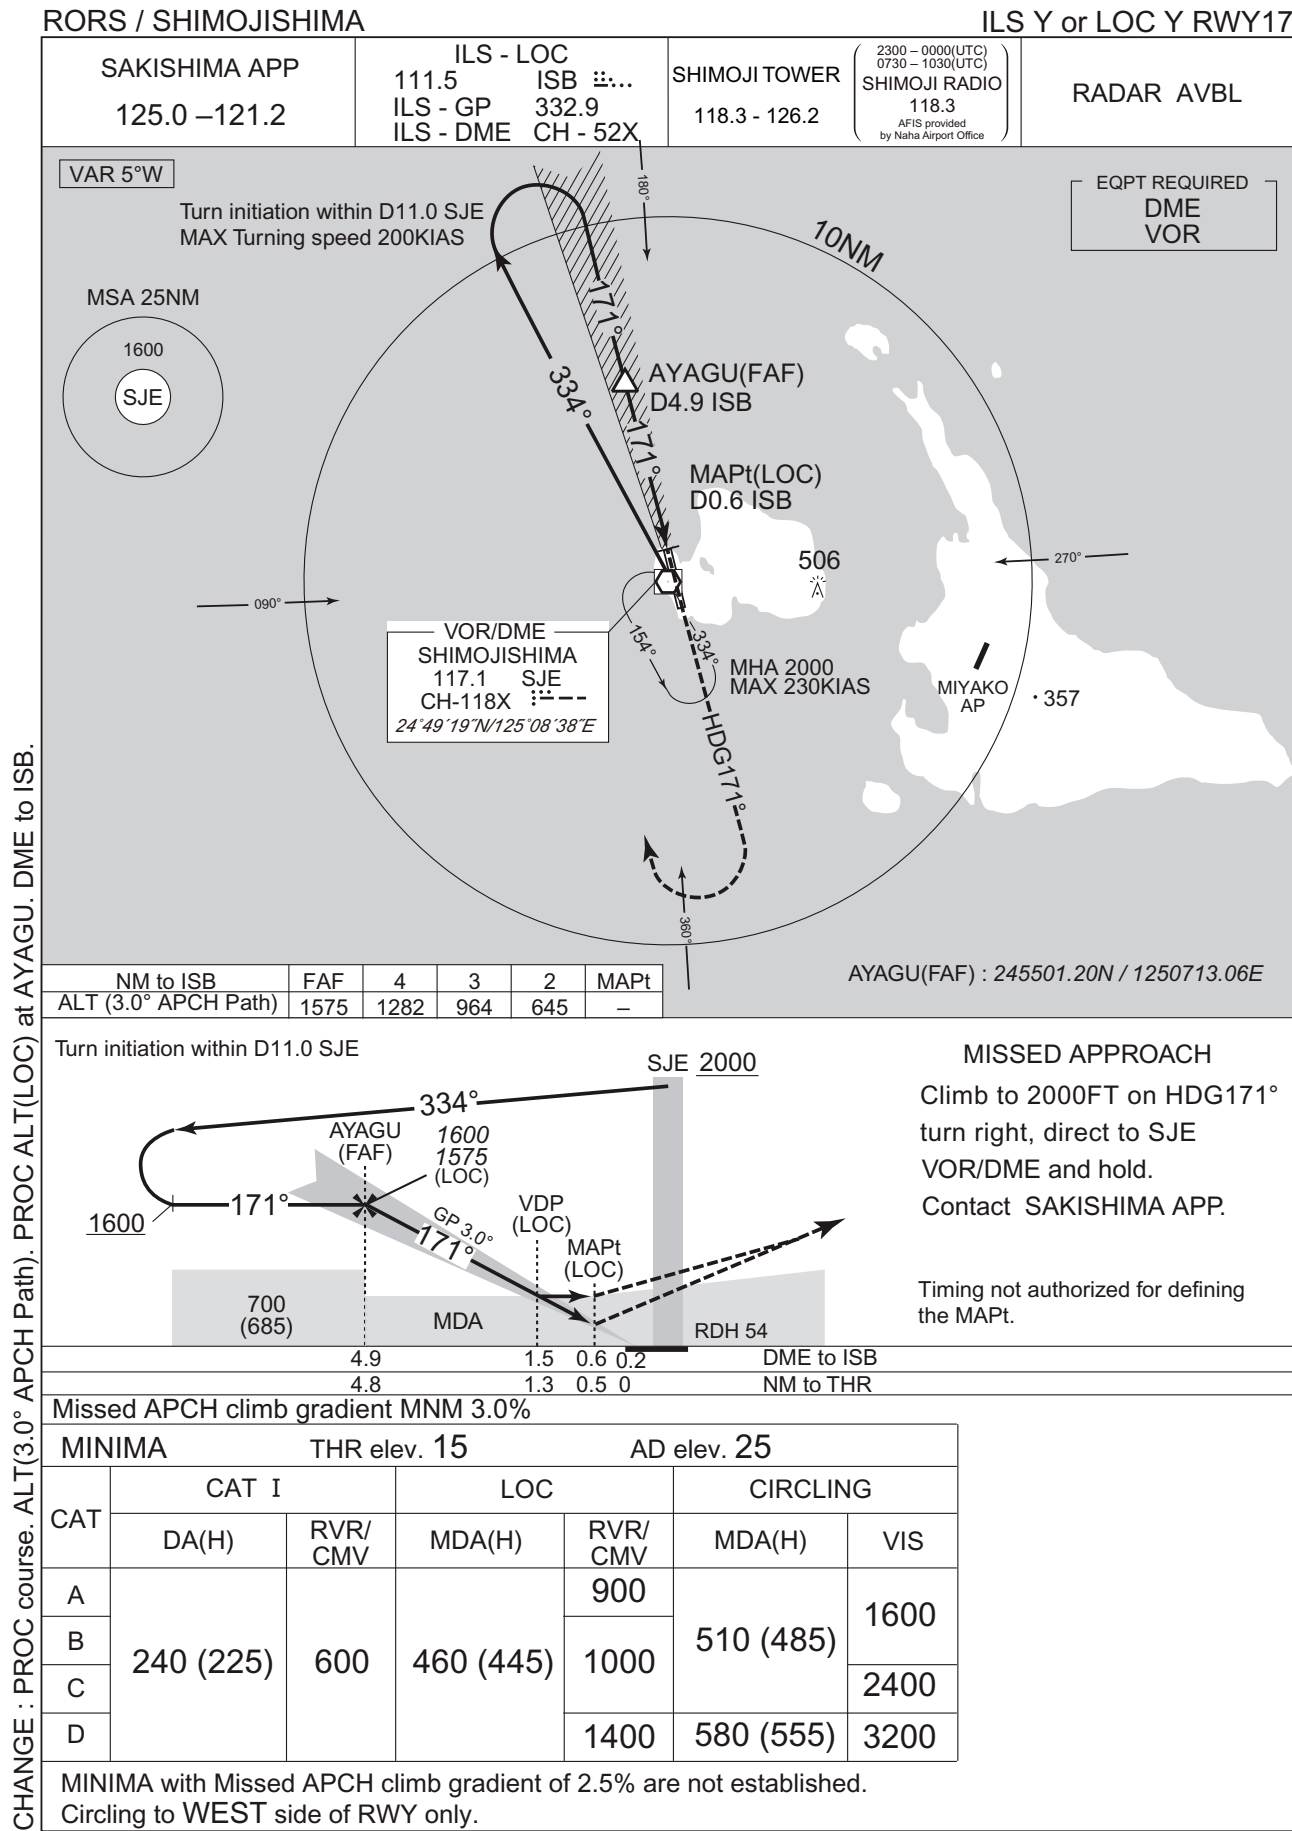

INSTRUMENT APPROACH CHART


RORS / SHIMOJISHIMA

VOR RWY17

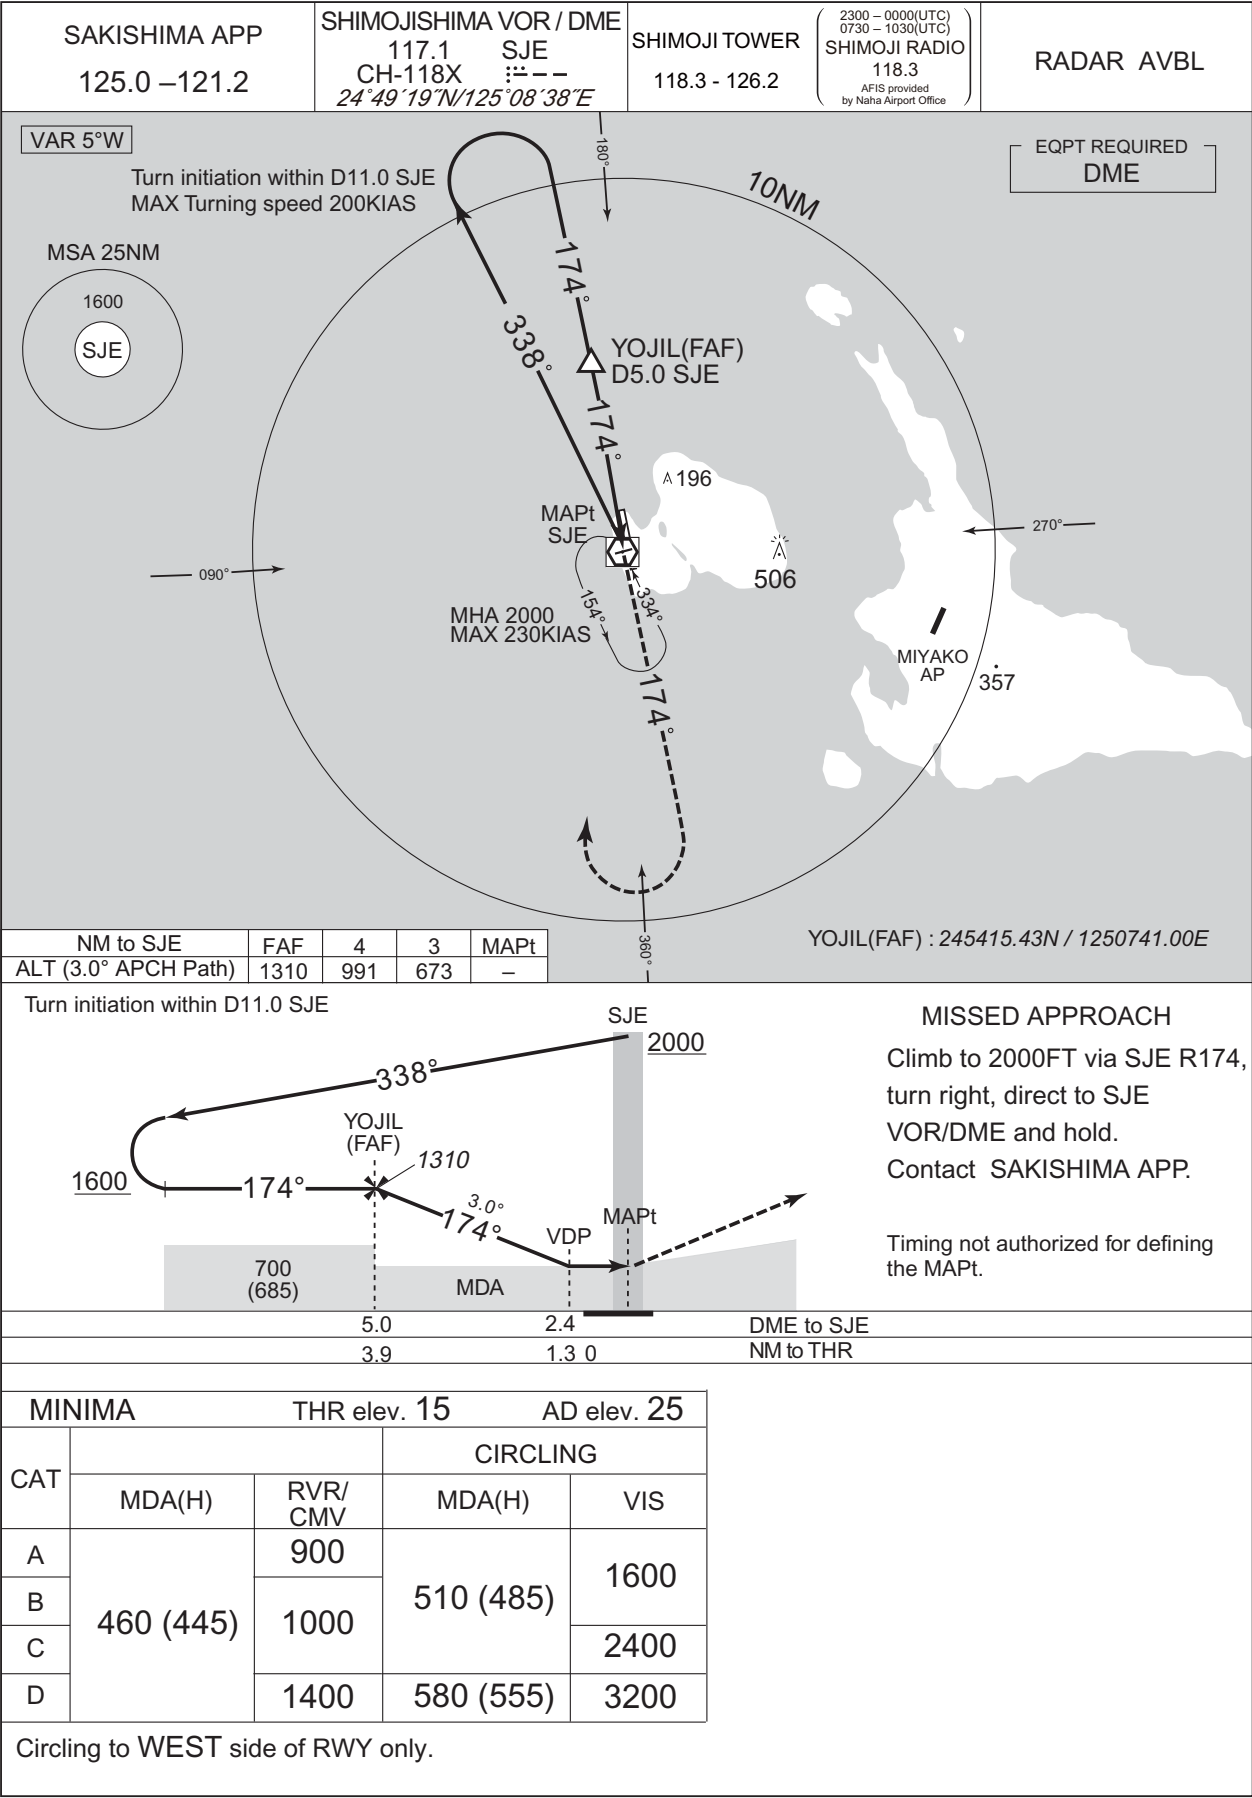

CHANGE : VAR.


VOR RWY35

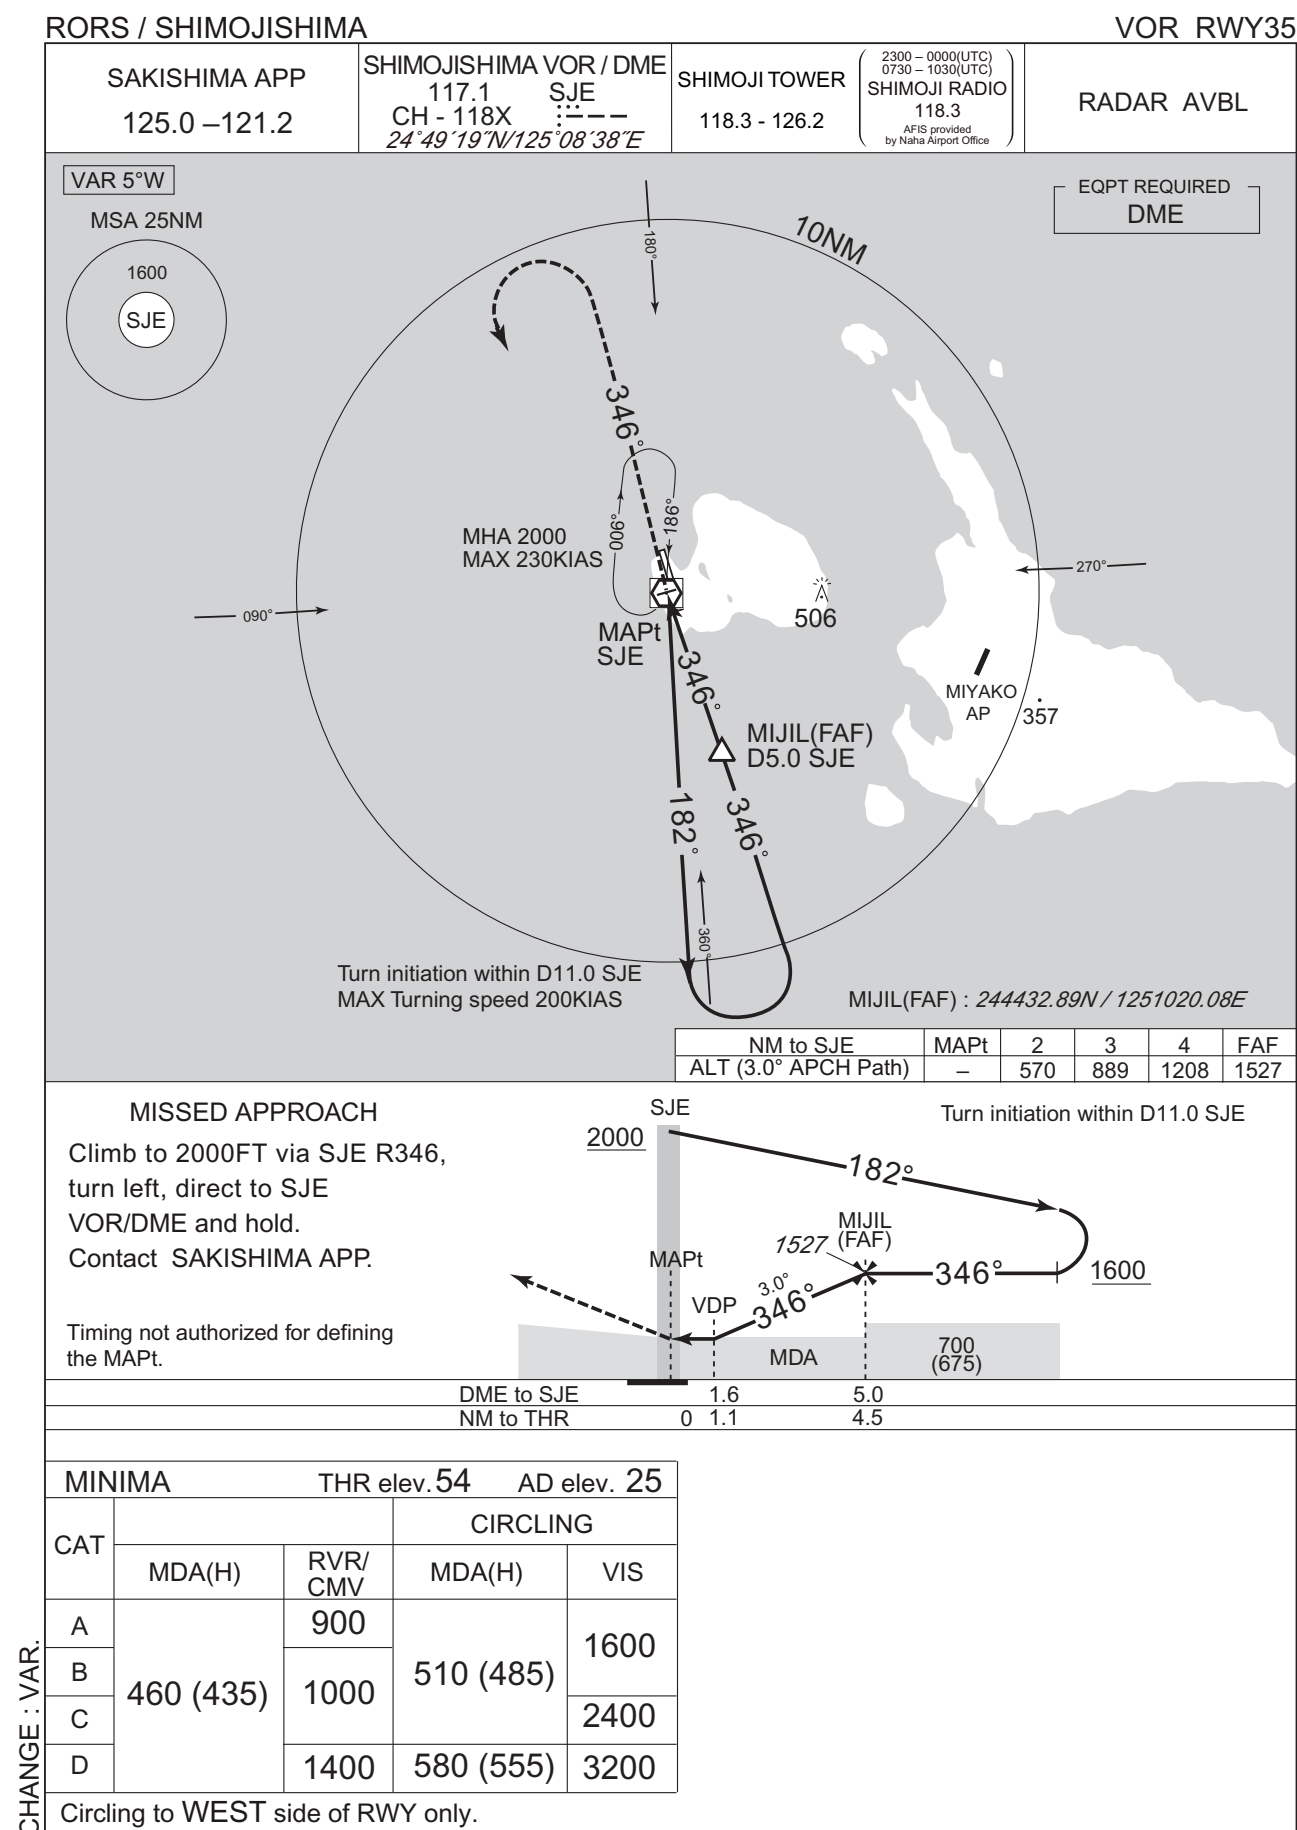

INSTRUMENT APPROACH CHART

RORS / SHIMOJISHIMA


RNP RWY17

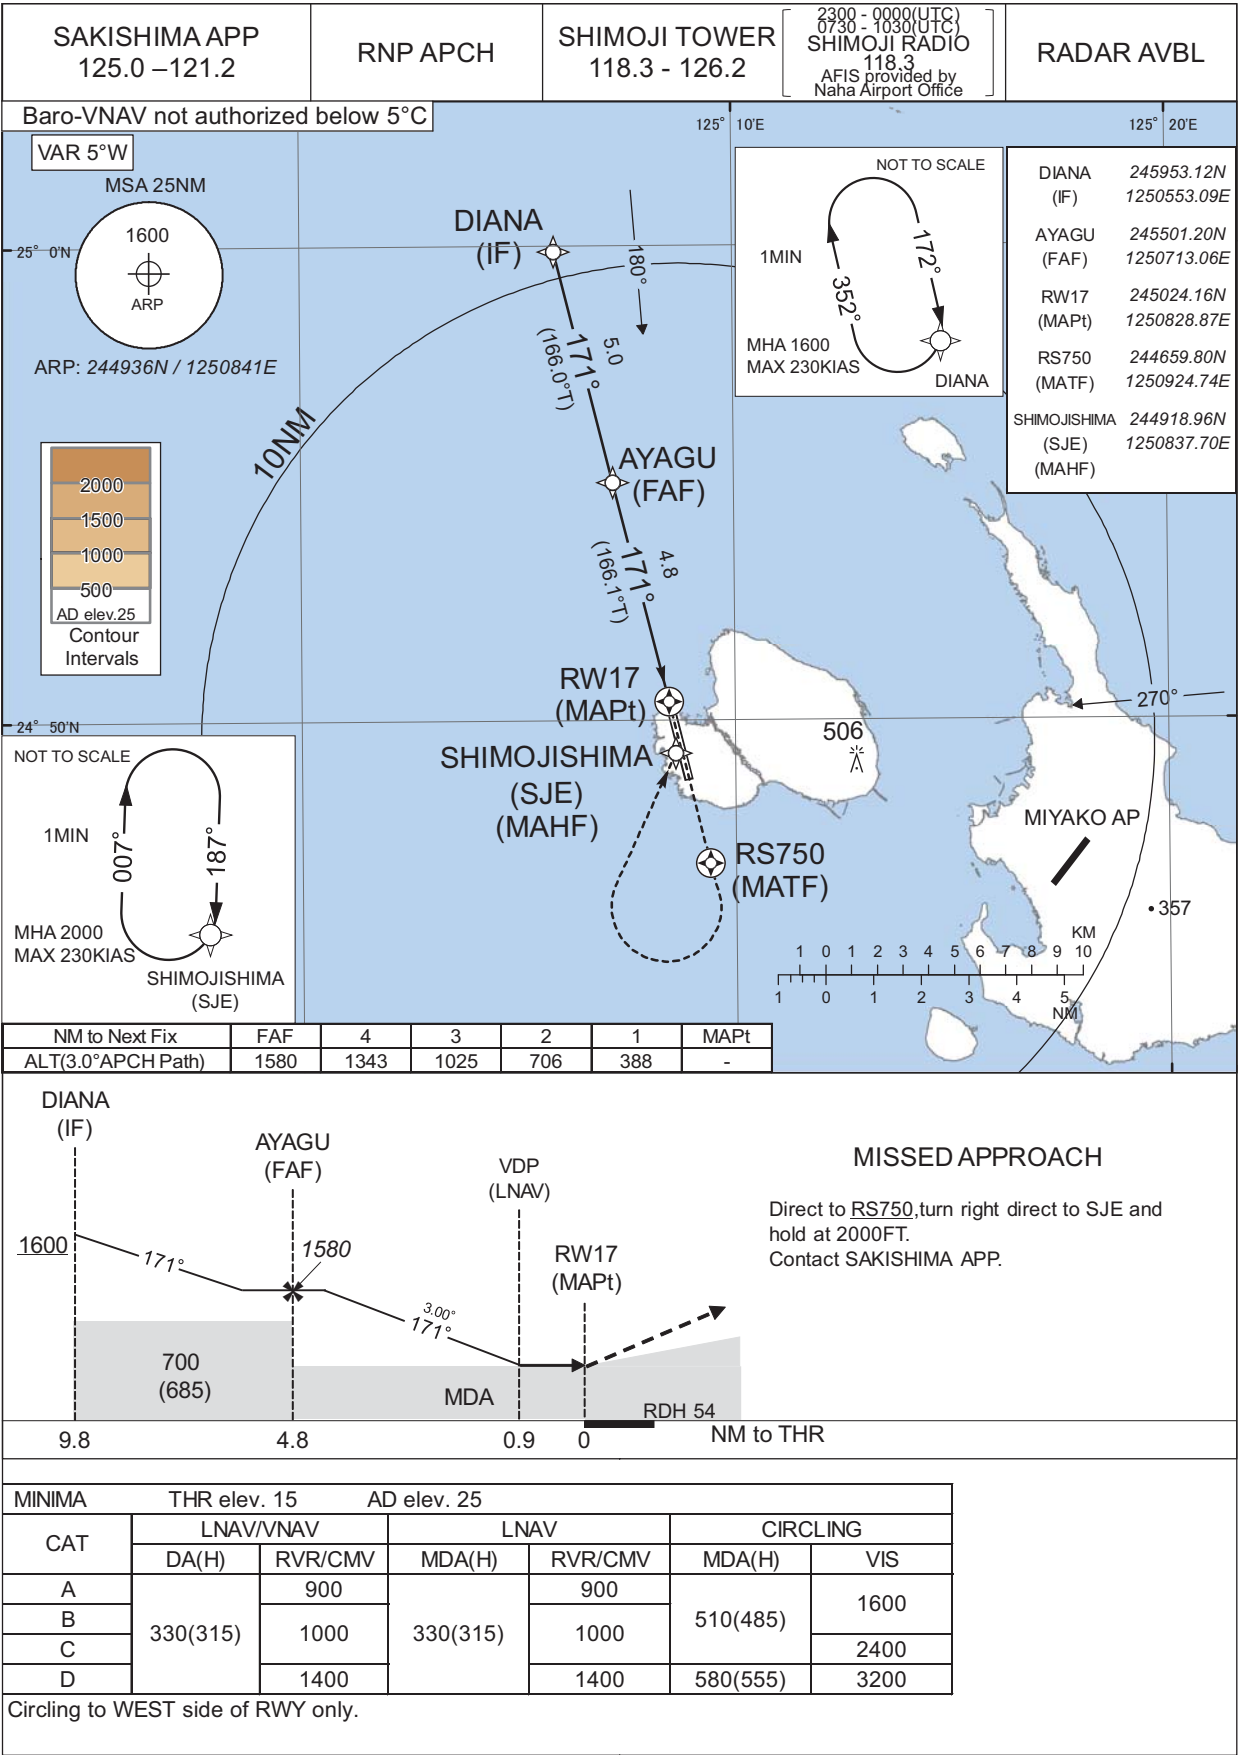

INSTRUMENT APPROACH CHART

RORS / SHIMOJISHIMA


RNP RWY35

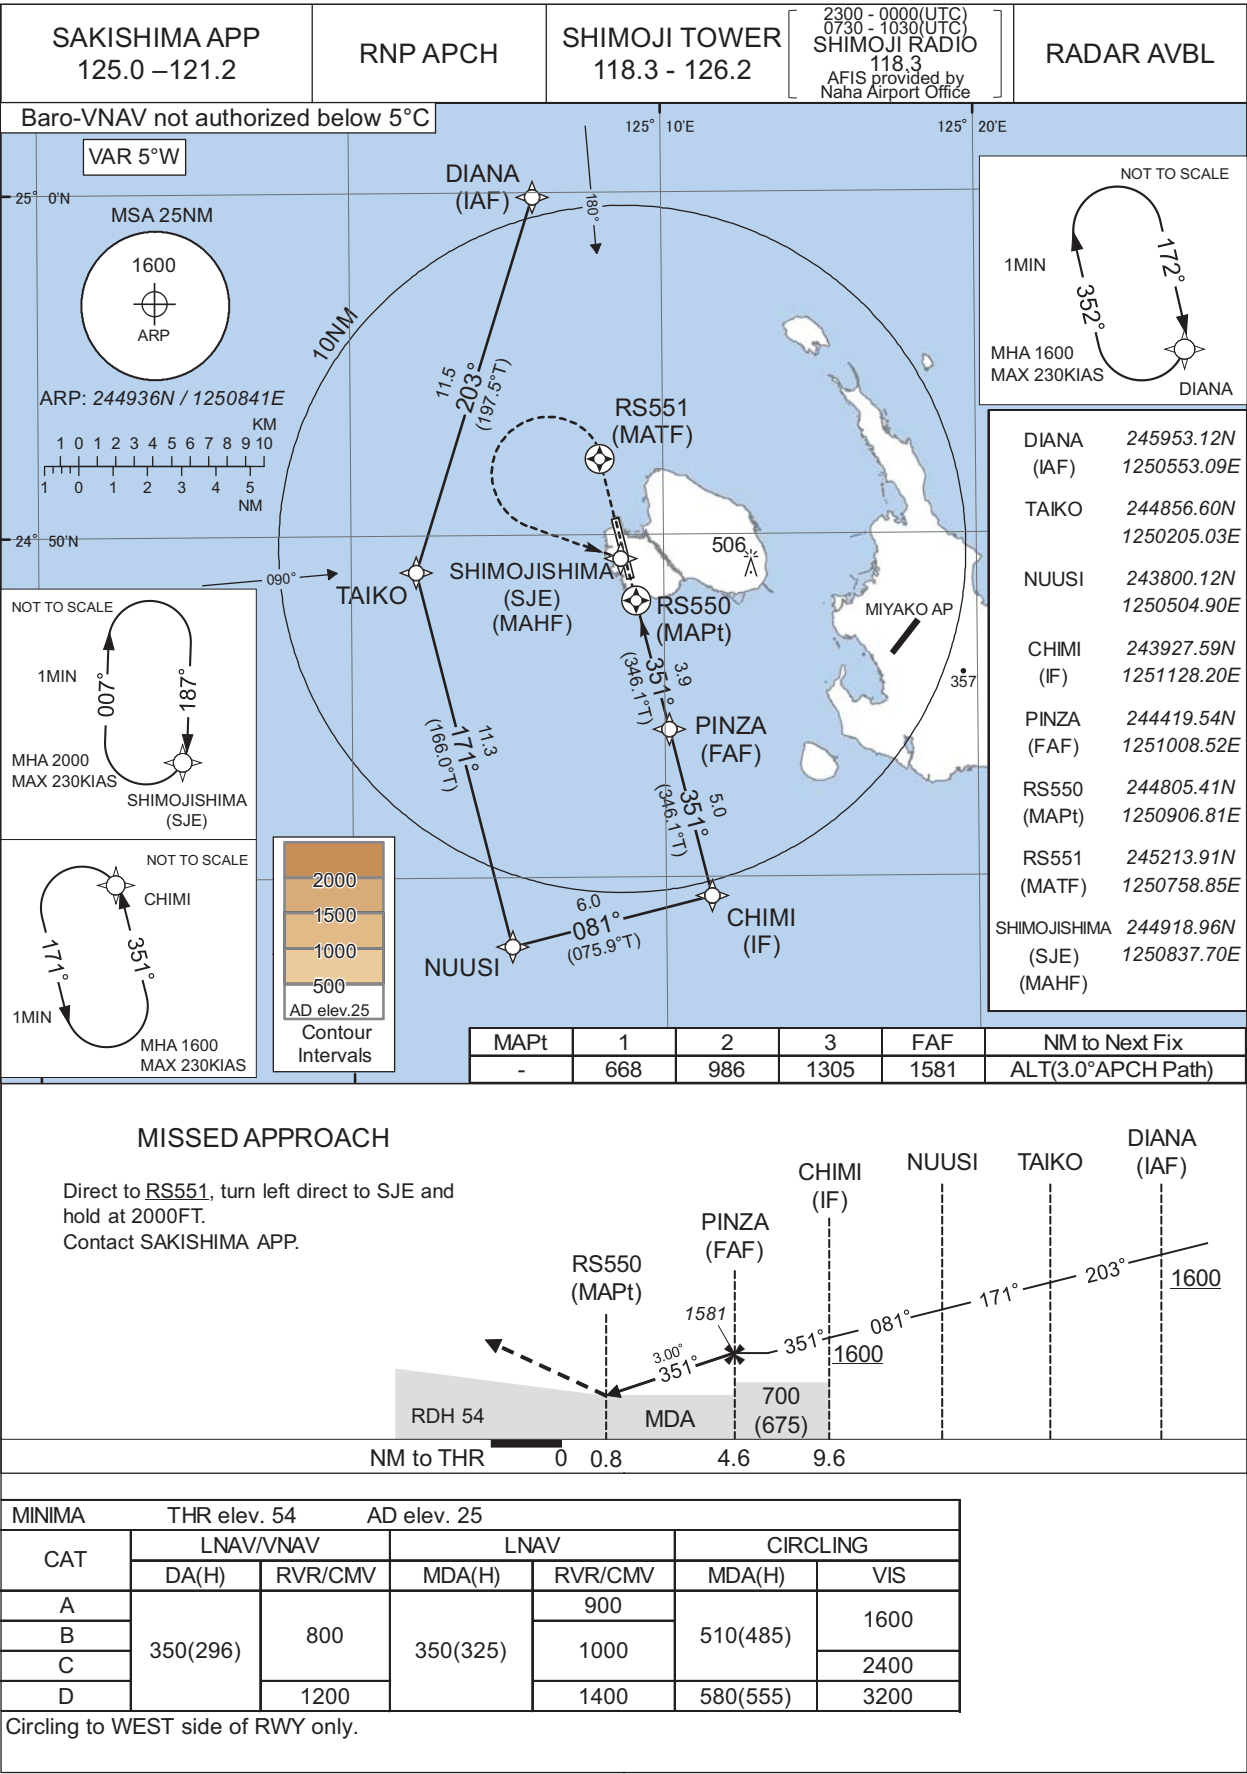

CHANGE : Missed APCH for using VOR/DME abolished.

RORS / SHIMOJISHIMA

Visual REP

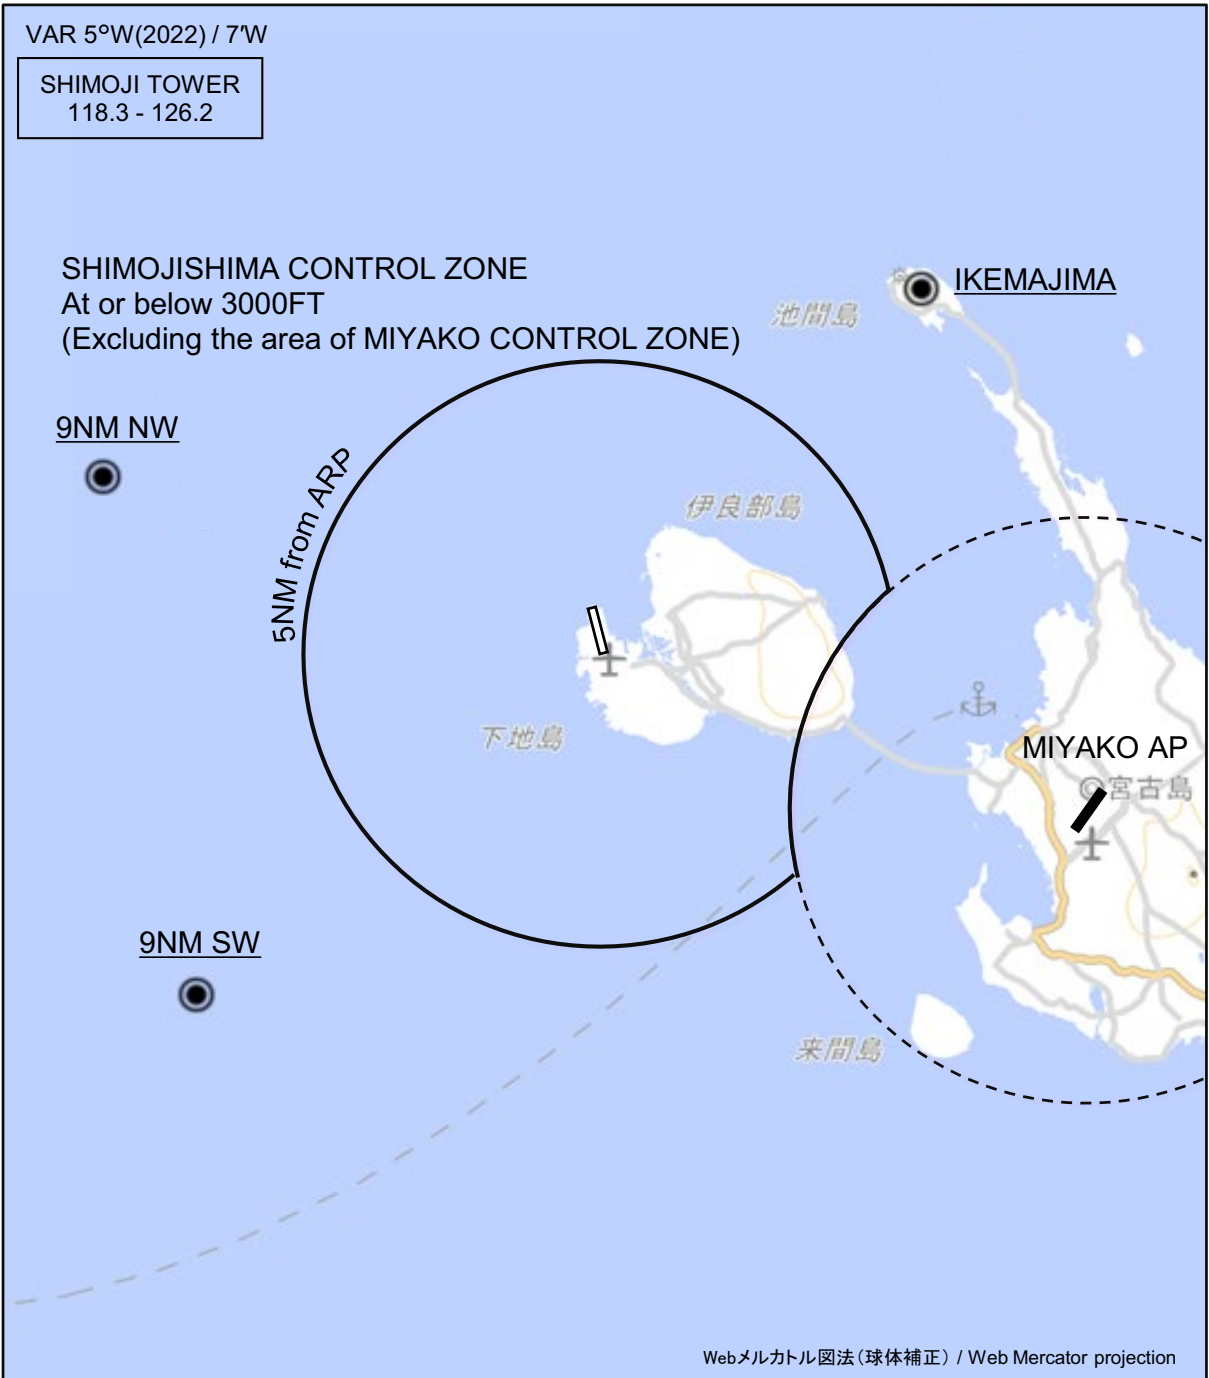

CHANGE : Map updated. BRG/DIST from ARP.

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
池間島 Ikemajima	040°T / 8.2NM	島 Island
9NM NW	290°T / 9.0NM	海上 Over the sea
9NM SW	230°T / 9.0NM	海上 Over the sea



RORS / SHIMOJISHIMA

LDG CHART



RORS / SHIMOJISHIMA

Minimum Vectoring Altitude CHART

