



AD CHART

FUKUSHIMA AP
ELEV 372m (1,220ft)

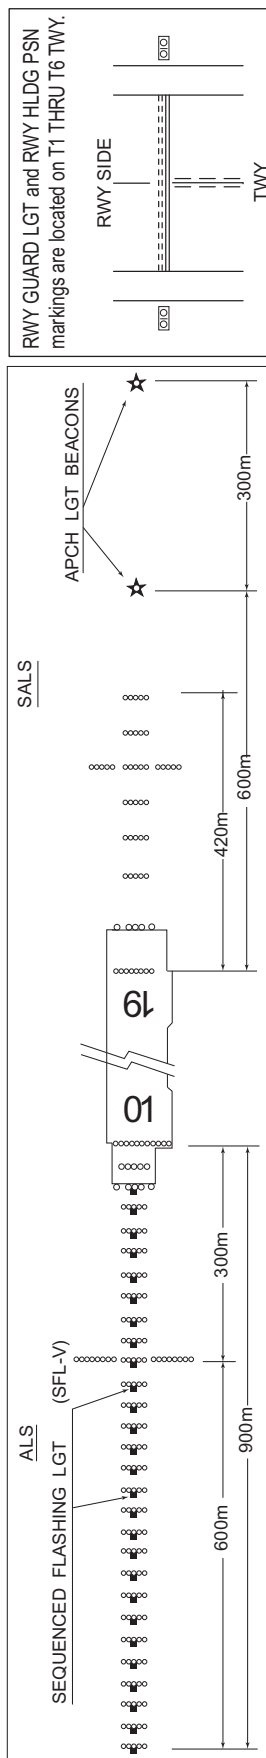

LONGITUDINAL PROFILE OF RWY

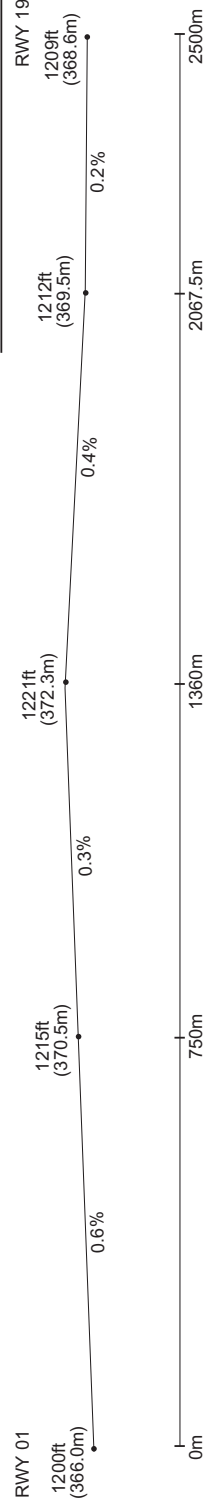

STANDARD DEPARTURE CHART-INSTRUMENT

RJSF / FUKUSHIMA


SID

NASNO THREE DEPARTURE

RWY01 : Climb RWY HDG to 1700FT, turn left HDG175°...

RWY19 : Climb RWY HDG to 1700FT, turn right...

...to intercept and proceed via FKE R220 to NASNO via FURAH.
Cross NASNO at or above 11000FT.

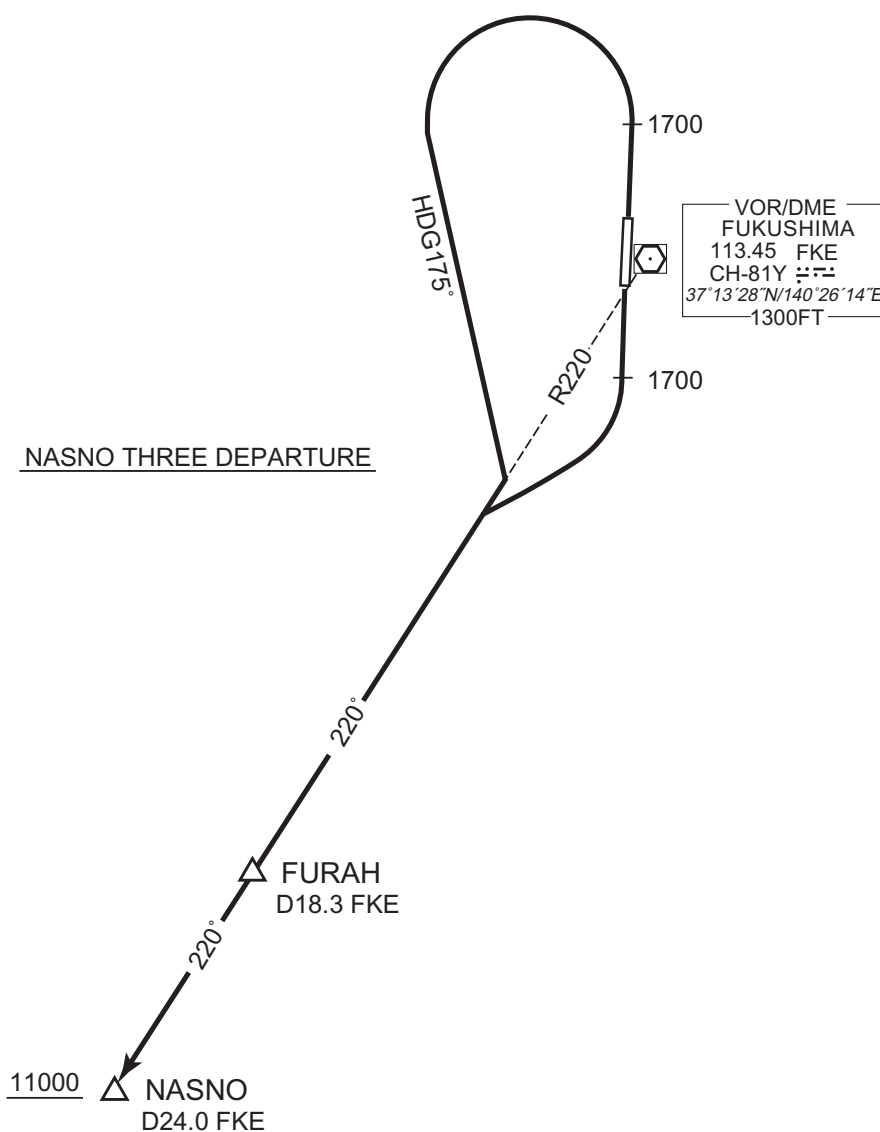

CHANGE : PROC renamed. PROC course.

STANDARD DEPARTURE CHART-INSTRUMENT

RJSF / FUKUSHIMA

SID

FUKUSHIMA REVERSAL TWO DEPARTURE

RWY 01 : Climb RWY HDG to 1700FT, turn left, ...

RWY 19 : Climb RWY HDG to 1700FT, turn right, ...

... via FKE R208 to 4000FT, turn left, direct to FKE VOR/DME.

Cross FKE VOR/DME at or above 7000FT.



CHANGE : PROC renamed. Radial FM FKE.

STANDARD DEPARTURE CHART-INSTRUMENT

RJSF / FUKUSHIMA

TRANSITION

HATRI TRANSITION

From over FKE VOR/DME, climb via FKE R313 to HATRI. Cross FKE R313/9.0DME at or above 9000FT.



CHANGE : DME FM FKE added(HATRI).

STANDARD DEPARTURE CHART-INSTRUMENT


RJSF / FUKUSHIMA

RNAV SID

SOUTH ONE DEPARTURE	RNP1
---------------------	------

Note GNSS required.

VAR 8°W (2016)

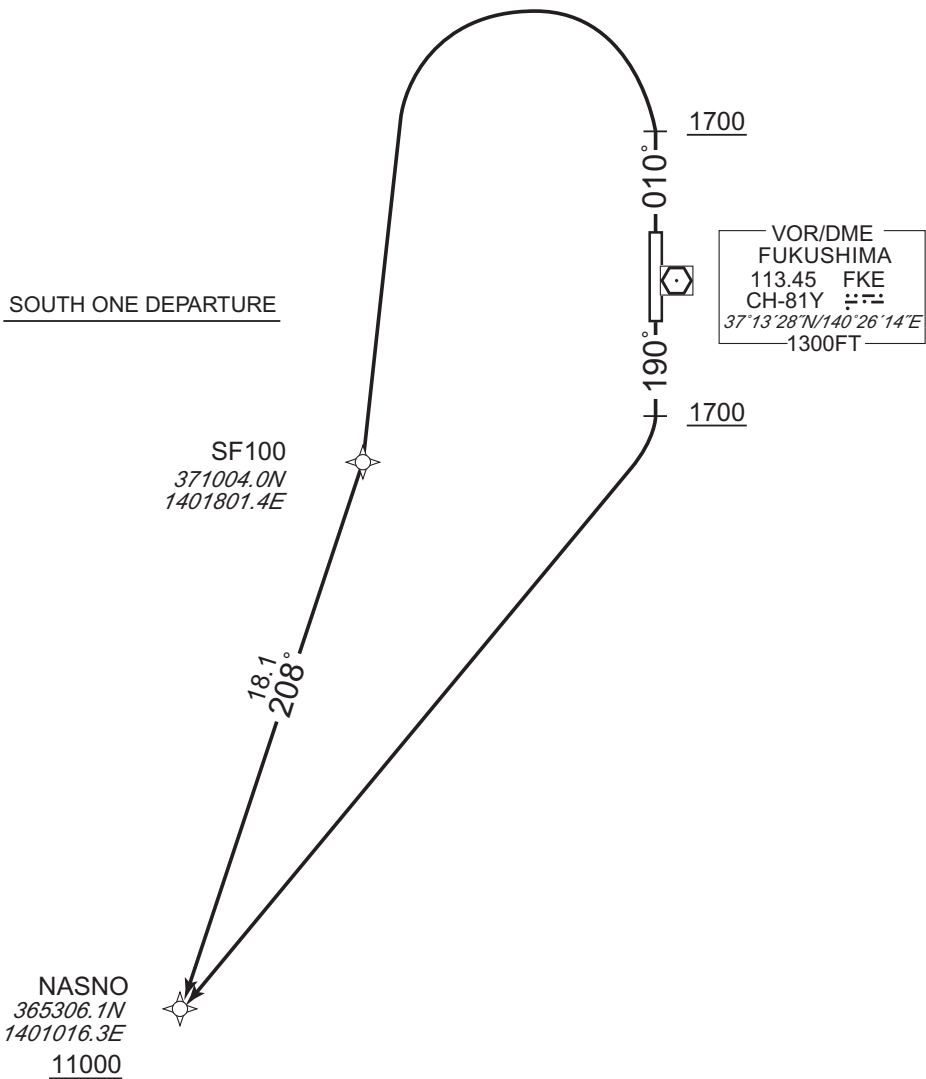

SOUTH ONE DEPARTURE

RWY01 : Climb on HDG010° at or above 1700FT, turn left direct to SF100, to NASNO at or above 11000FT.

RWY19 : Climb on HDG190° at or above 1700FT, turn right direct to NASNO at or above 11000FT.

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART-INSTRUMENT

RJSF / FUKUSHIMA

RNAV SID

SOUTH ONE DEPARTURE

RWY01

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	010 (002.2)	-7.8	-	-	+1700	-	-	RNP1
002	DF	SF100	-	-	-7.8	-	L	-	-	-	RNP1
003	TF	NASNO	-	208 (200.1)	-7.8	18.1	-	+11000	-	-	RNP1

RWY19

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	190 (182.2)	-7.8	-	-	+1700	-	-	RNP1
002	DF	NASNO	-	-	-7.8	-	R	+11000	-	-	RNP1

STANDARD DEPARTURE CHART-INSTRUMENT

RJSF / FUKUSHIMA


RNAV SID

WEST ONE DEPARTURE	RNP1
--------------------	------

Note GNSS required.

VAR 8°W (2016)

WEST ONE DEPARTURE

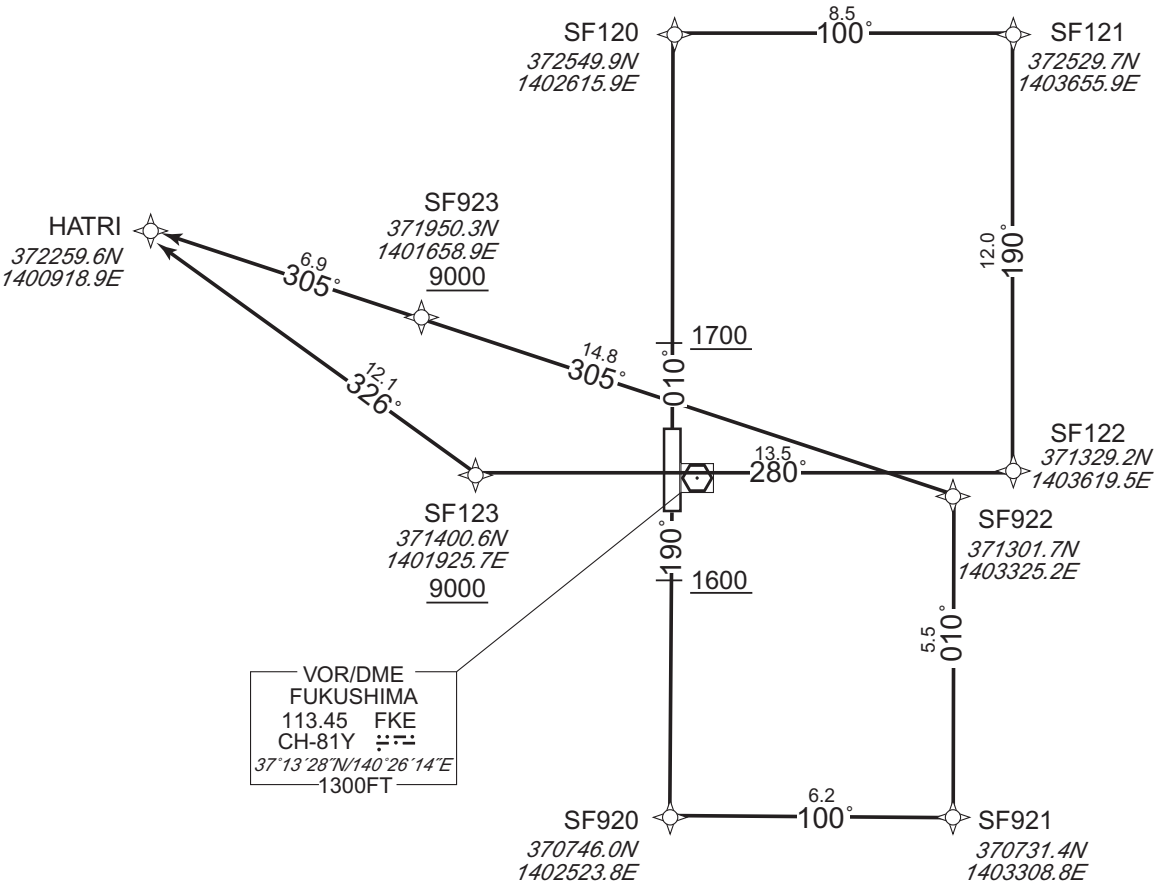

WEST ONE DEPARTURE

RWY01 : Climb on HDG010° at or above 1700FT, direct to SF120, to SF121, to SF122, to SF123 at or above 9000FT, to HATRI.

RWY19 : Climb on HDG190° at or above 1600FT, direct to SF920, to SF921, to SF922, to SF923 at or above 9000FT, to HATRI.

Note RWY19 : 3.9% climb gradient required up to 2800FT.
OBST ALT 2577FT located at 7.1NM 144° FM end of RWY19.

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART-INSTRUMENT

RJSF / FUKUSHIMA

RNAV SID

WEST ONE DEPARTURE

RWY01

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	010 (002.2)	-7.8	-	-	+1700	-	-	RNP1
002	DF	SF120	-	-	-7.8	-	-	-	-	-	RNP1
003	TF	SF121	-	100 (092.2)	-7.8	8.5	-	-	-	-	RNP1
004	TF	SF122	-	190 (182.3)	-7.8	12.0	-	-	-	-	RNP1
005	TF	SF123	-	280 (272.3)	-7.8	13.5	-	+9000	-	-	RNP1
006	TF	HATRI	-	326 (318.2)	-7.8	12.1	-	-	-	-	RNP1

RWY19

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	190 (182.2)	-7.8	-	-	+1600	-	-	RNP1
002	DF	SF920	-	-	-7.8	-	-	-	-	-	RNP1
003	TF	SF921	-	100 (092.2)	-7.8	6.2	-	-	-	-	RNP1
004	TF	SF922	-	010 (002.3)	-7.8	5.5	-	-	-	-	RNP1
005	TF	SF923	-	305 (297.6)	-7.8	14.8	-	+9000	-	-	RNP1
006	TF	HATRI	-	305 (297.4)	-7.8	6.9	-	-	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART-INSTRUMENT

RJSF / FUKUSHIMA

STAR

OKUJI ARRIVAL

From over OKUJI, via IXE R241 to intercept and proceed via FKE R192 to SOUMA.
Cross SOUMA at or above 4600FT.




STANDARD ARRIVAL CHART-INSTRUMENT

RJSF / FUKUSHIMA RNAV STAR RWY01/19

WAKAH NORTH ARRIVAL SOUMA NORTH ARRIVAL	RNP1
--	------

Note GNSS required.

VAR 8°W (2016)

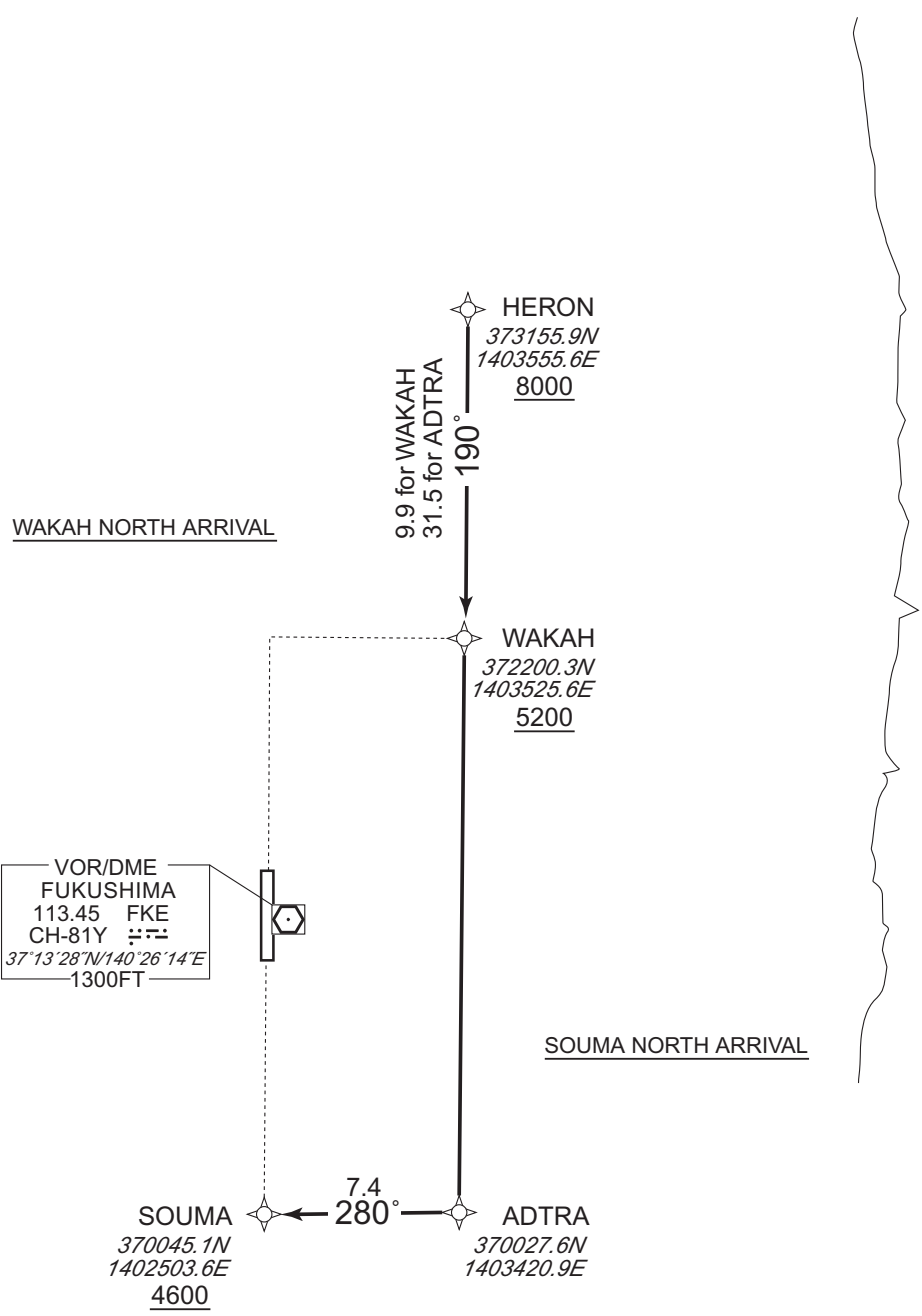

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART-INSTRUMENT

RJSF / FUKUSHIMA RNAV STAR RWY01/19

WAKAH NORTH ARRIVAL

From HERON at or above 8000FT, to WAKAH at or above 5200FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	HERON	-	-	-7.8	-	-	+8000	-	-	RNP1
002	TF	WAKAH	-	190 (182.3)	-7.8	9.9	-	+5200	-	-	RNP1

SOUMA NORTH ARRIVAL

From HERON at or above 8000FT, to ADTRA, to SOUMA at or above 4600FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	HERON	-	-	-7.8	-	-	+8000	-	-	RNP1
002	TF	ADTRA	-	190 (182.3)	-7.8	31.5	-	-	-	-	RNP1
003	TF	SOUMA	-	280 (272.3)	-7.8	7.4	-	+4600	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).


STANDARD ARRIVAL CHART-INSTRUMENT

RJSF / FUKUSHIMA RNAV STAR RWY01/19

WAKAH SOUTH ARRIVAL SOUMA SOUTH ARRIVAL	RNP1
--	------

Note GNSS required.

VAR 8°W (2016)

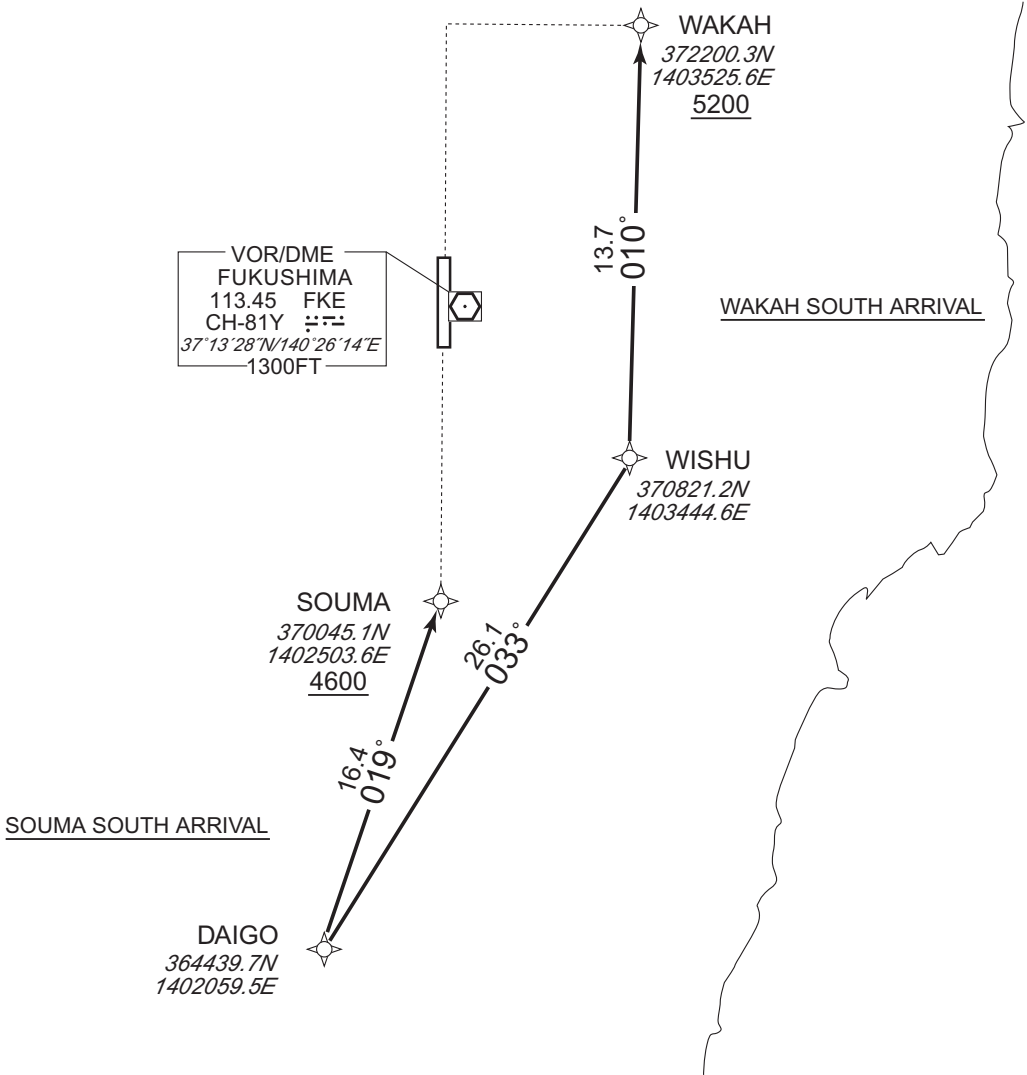

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD ARRIVAL CHART-INSTRUMENT

RJSF / FUKUSHIMA

RNAV STAR RWY01/19

WAKAH SOUTH ARRIVAL

From DAIGO, to WISHU, to WAKAH at or above 5200FT.

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	DAIGO	-	-	-7.8	-	-	-	-	-	RNP1
002	TF	WISHU	-	033 (024.8)	-7.8	26.1	-	-	-	-	RNP1
003	TF	WAKAH	-	010 (002.3)	-7.8	13.7	-	+5200	-	-	RNP1

SOUMA SOUTH ARRIVAL

From DAIGO, to SOUMA at or above 4600FT.


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	DAIGO	-	-	-7.8	-	-	-	-	-	RNP1
002	TF	SOUMA	-	019 (011.4)	-7.8	16.4	-	+4600	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

INSTRUMENT APPROACH CHART

RJSF / FUKUSHIMA

ILS Z or LOC Z RWY01

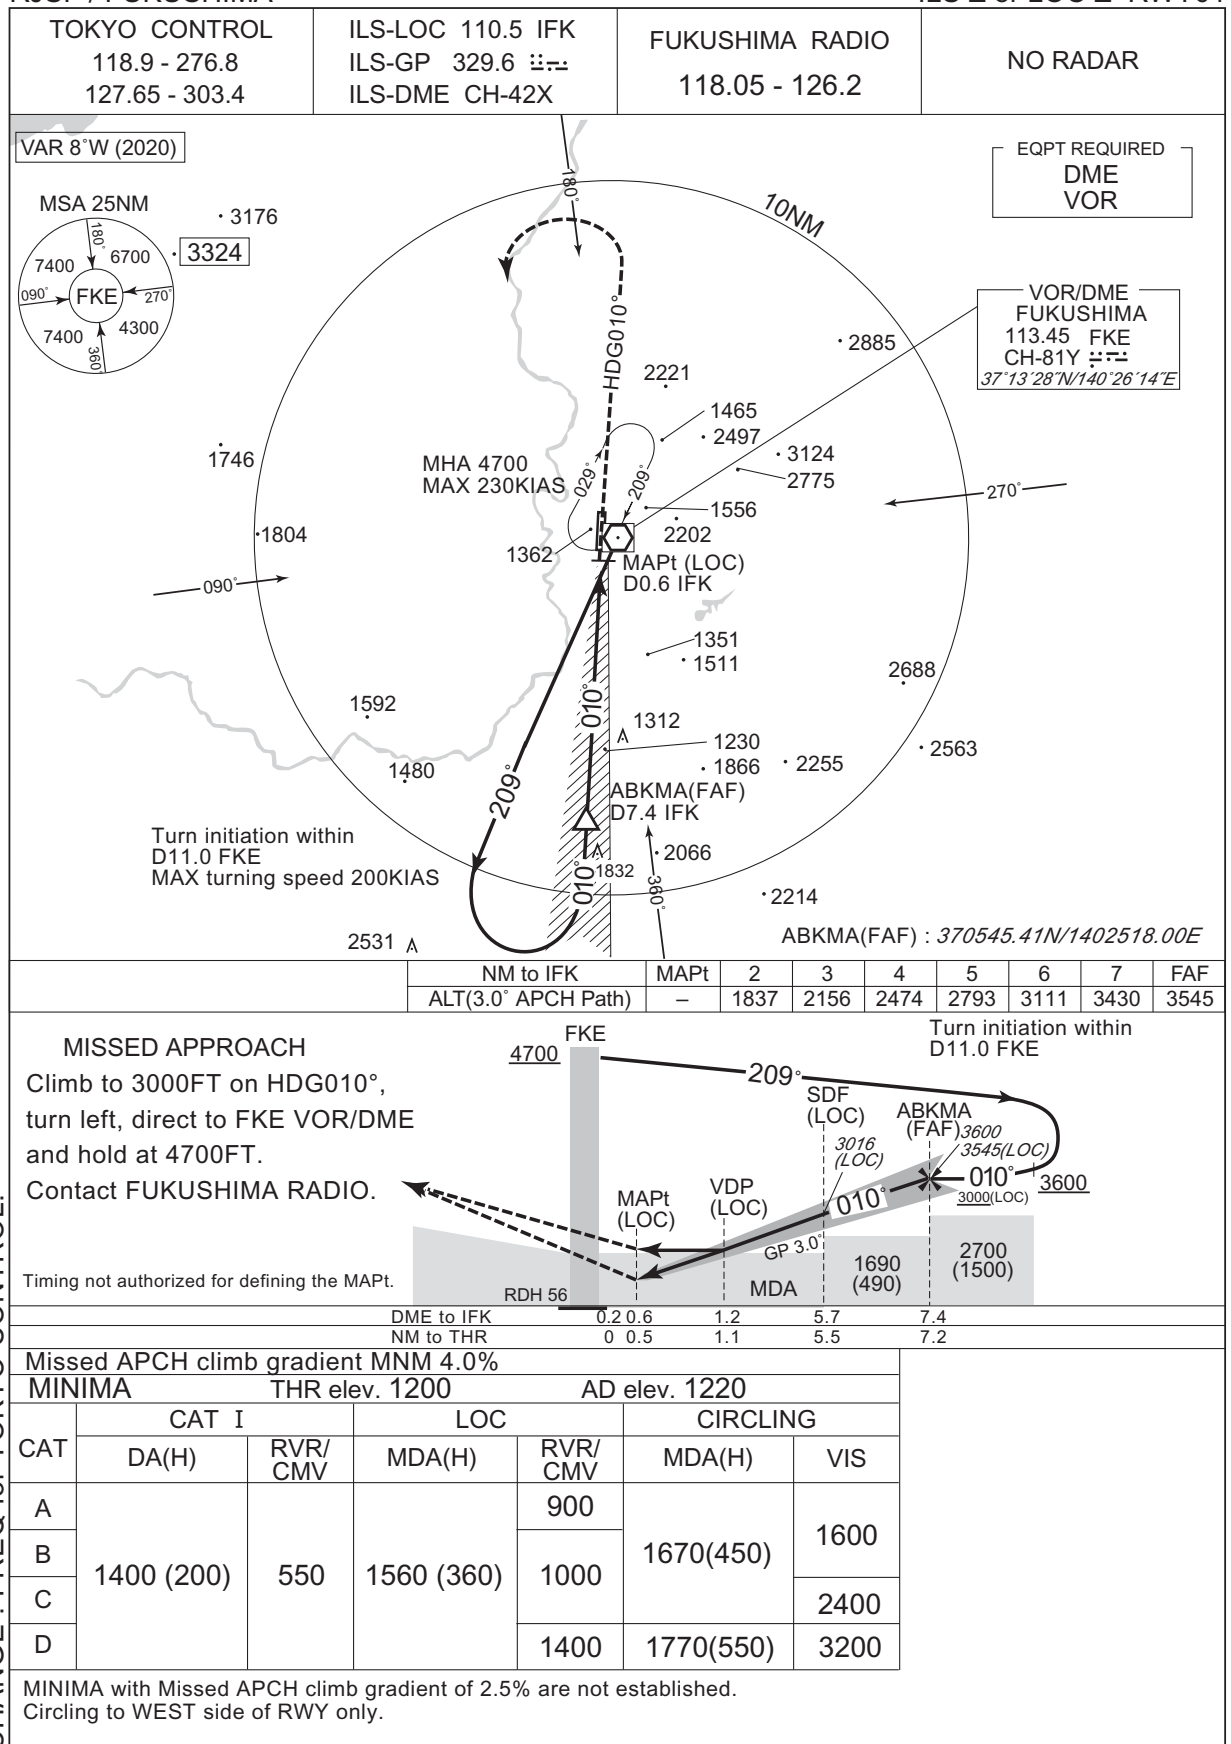


CHANGE : FREQ for TOKYO CONTROL.

RJSF / FUKUSHIMA


ILS Y or LOC Y RWY01

TOKYO CONTROL 118.9 - 276.8 127.65 - 303.4	ILS-LOC 110.5 IFK ILS-GP 329.6 ④ ILS-DME CH-42X	FUKUSHIMA RADIO 118.05 - 126.2	NO RADAR
--	---	-----------------------------------	----------

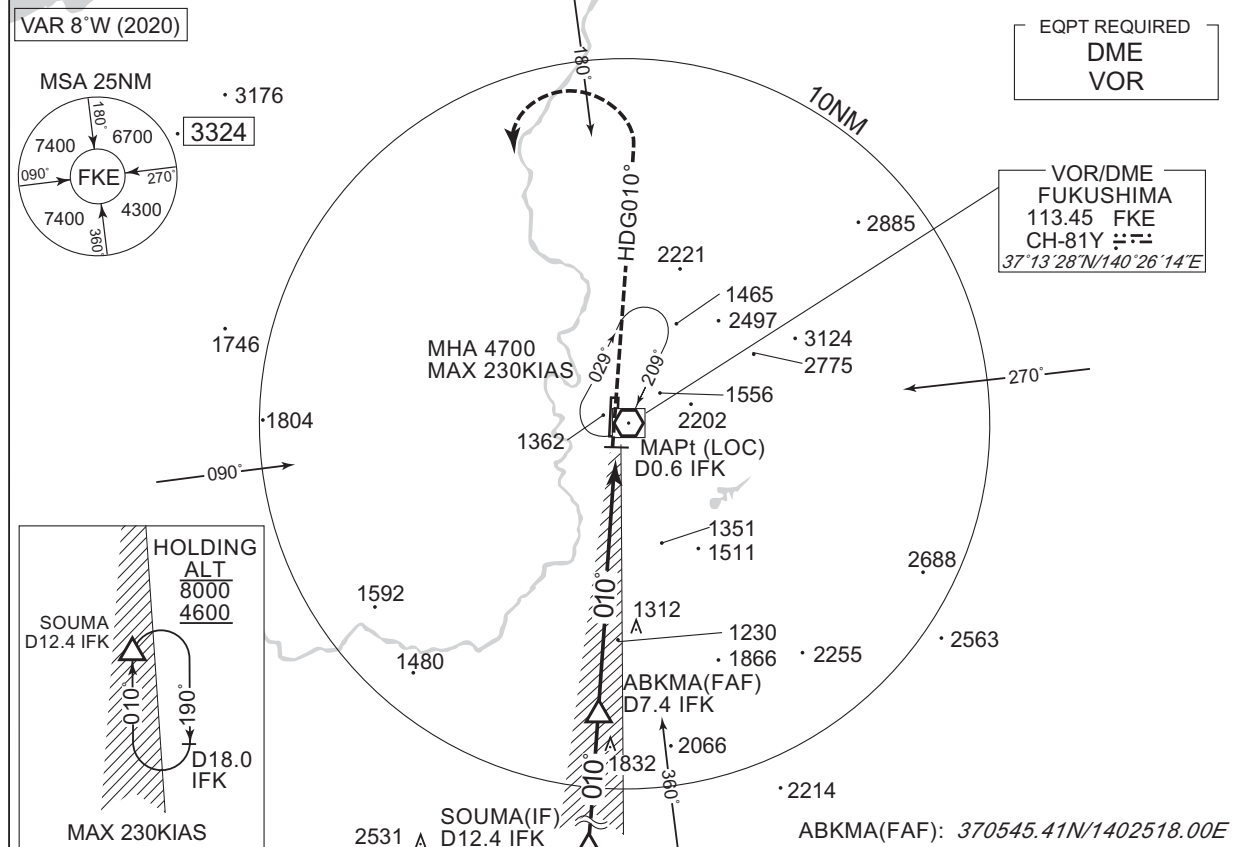

NM to IFK	MAPt	2	3	4	5	6	7	FAF
ALT(3.0° APCH Path)	–	1837	2156	2474	2793	3111	3430	3545

MISSED APPROACH
Climb to 3000FT on HDG010°,
turn left, direct to FKE VOR/DME
and hold at 4700FT.
Contact FUKUSHIMA RADIO. ➤

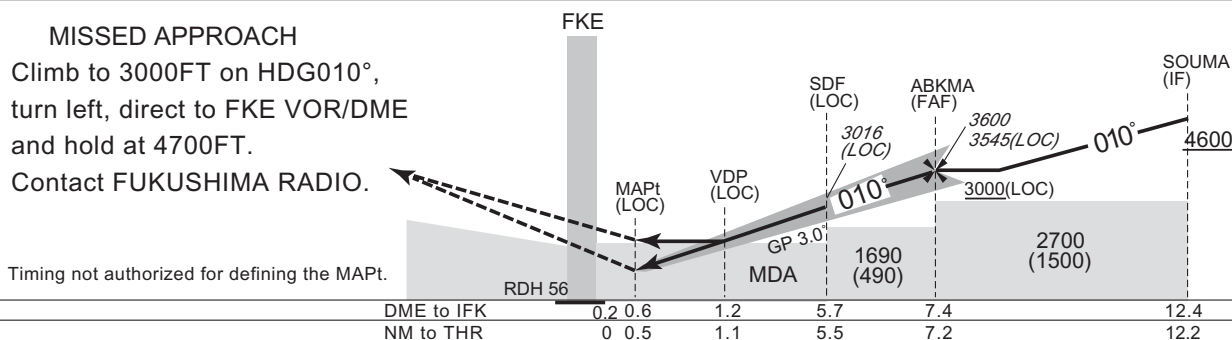


Missed APCH climb gradient MNM 4.0%						
MINIMA		THR elev. 1200		AD elev. 1220		
CAT	CAT I		LOC		CIRCLING	
	DA(H)	RVR/ CMV	MDA(H)	RVR/ CMV	MDA(H)	VIS
	1400 (200)	550	1560 (360)	900	1670(450)	1600
				1000		
				2400		
1400				1770(550)	3200	

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to WEST side of RWY only.

CHANGE : FREQ for TOKYO CONTROL.

RJSF / FUKUSHIMA

VOR RWY19

VAR 8°W (2020)

4700 FKE

011°

Turn initiation within D10.0 FKE

MAHOK (FAF)

3193

175°

3400

MAPt

VDP

3.0°

MDA

1700 (491)

VDP
CAT A 1.9DME
CAT B 2.0DME
CAT C 2.1DME
CAT D 2.2DME

* Timing not authorized for defining the MAPt.


DME to FKE	0.9 1.7	7
NM to THR	0 0.8	6

MINIMA		THR elev. 1209	AD elev. 1220	
CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
A	1550 (341)	1200	1670(450)	1600
B	1590 (381)	1300		
C	1620 (411)	1400		2400
D	1640 (431)	1600	1770(550)	3200

Circling to WEST side of RWY only.

CHANGE : FREQ for TOKYO CONTROL.

INSTRUMENT APPROACH CHART

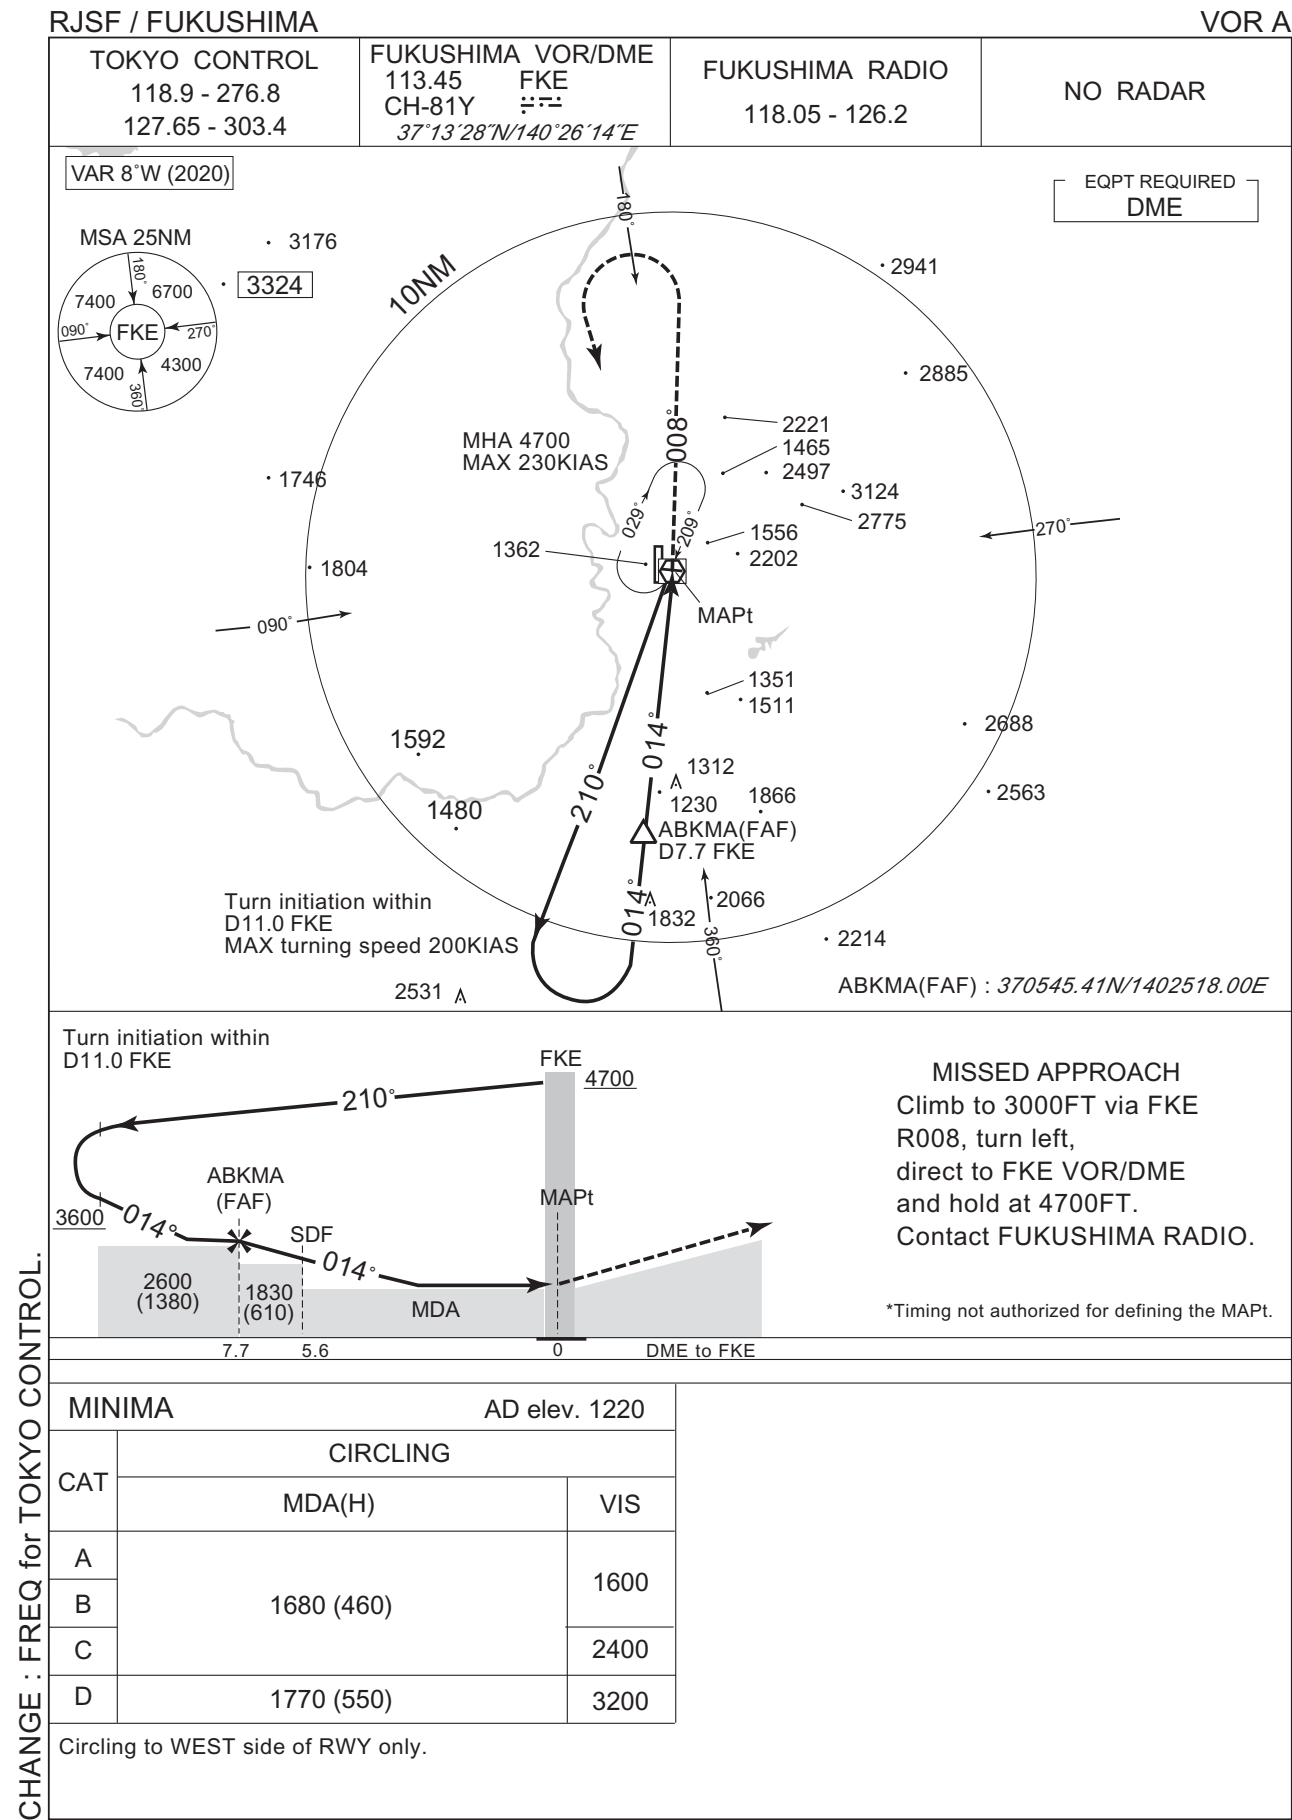


CHANGE : FREQ for TOKYO CONTROL.

INSTRUMENT APPROACH CHART

RJSF / FUKUSHIMA

RNP RWY19

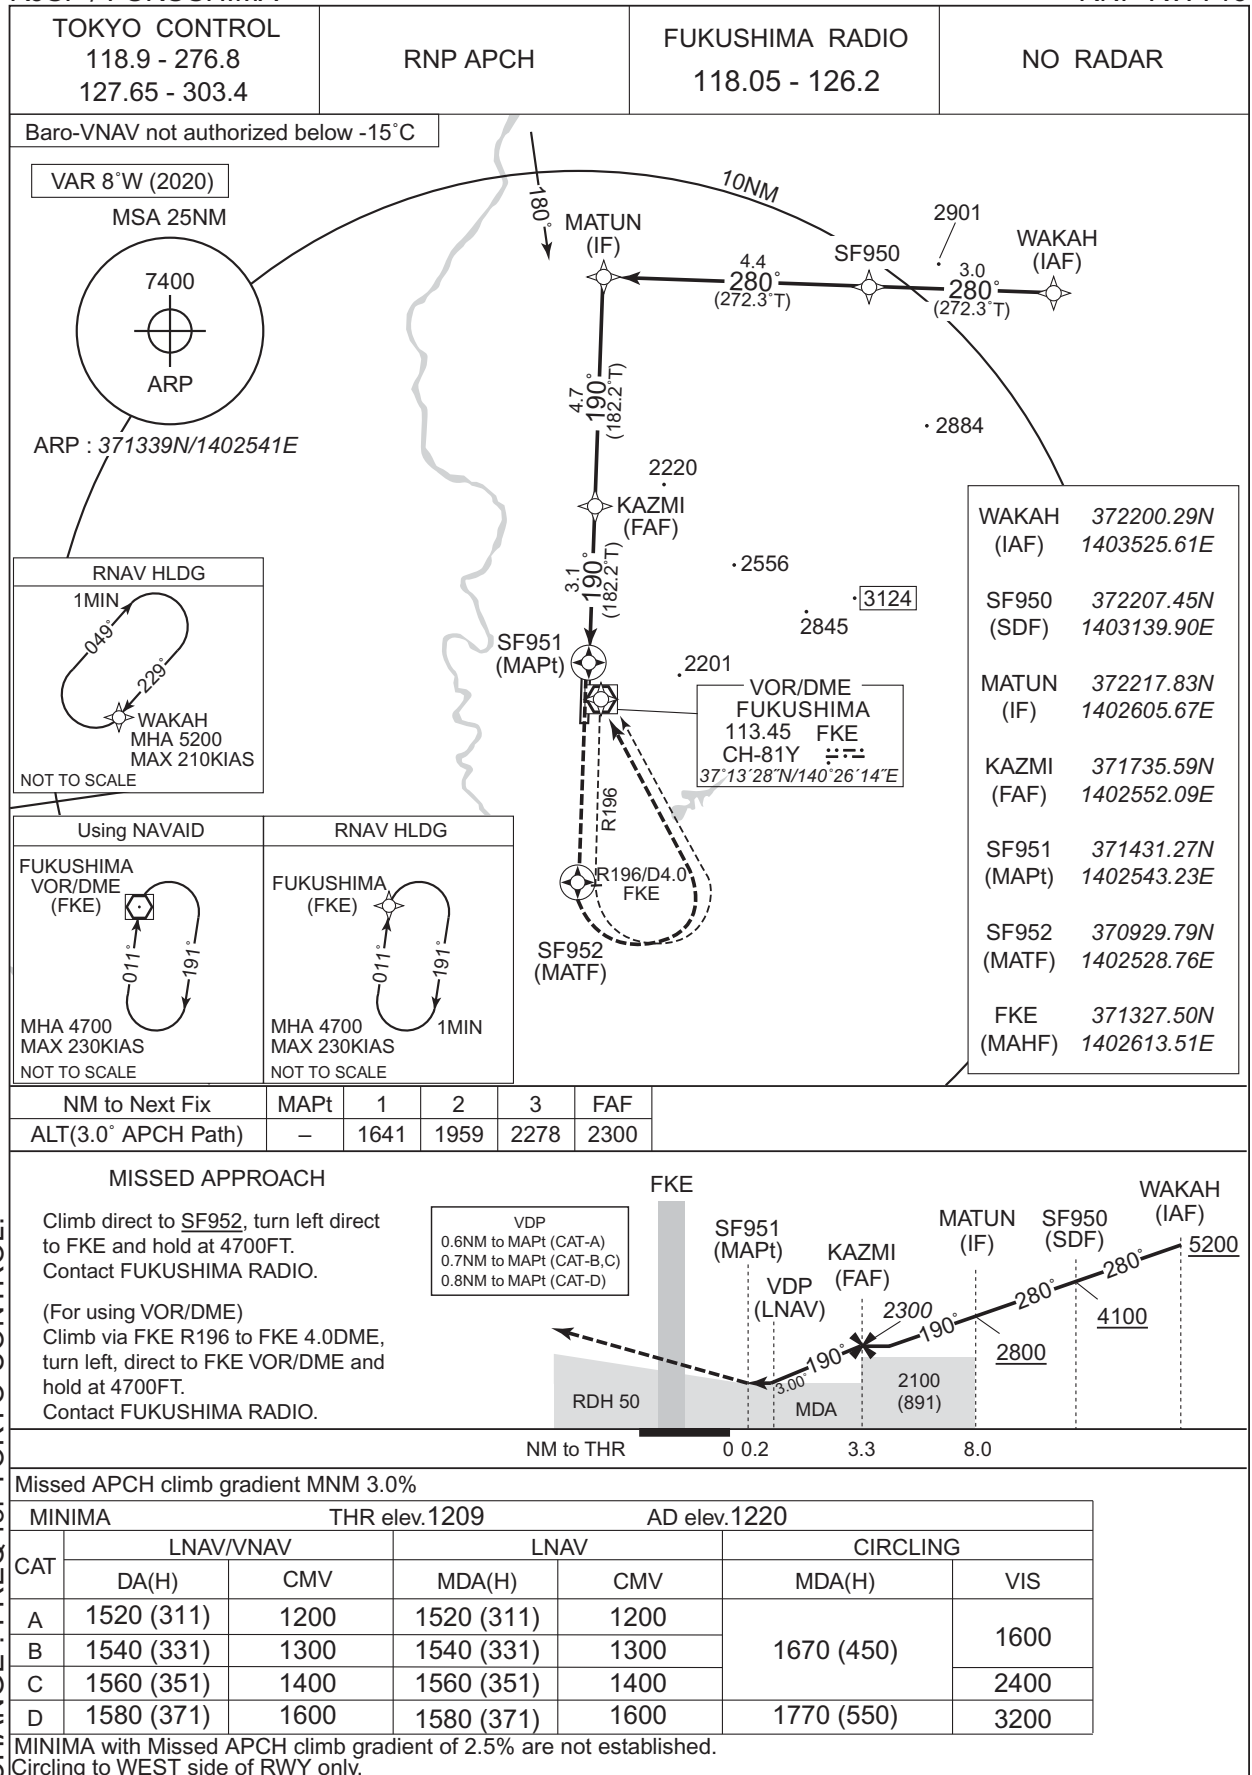

CHANGE : FREQ for TOKYO CONTROL.

RJSF / FUKUSHIMA

Visual REP



CHANGE : Map updated. BRG/DIST from ARP.

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

Call sign	BRG / DIST from ARP	Remarks
郡山 Koriyama	326°T / 10.1NM	郡山南IC Interchange
須賀川 Sukagawa	316°T / 5.3NM	須賀川IC Interchange
小野 Ono	074°T / 10.4NM	JR小野新町駅 Station
白河 Shirakawa	242°T / 14.3NM	白河IC Interchange



Note : RWY may be invisible on down-wind leg of westside traffic pattern depending on altitude.

RJSF / FUKUSHIMA

Minimum Vectoring Altitude CHART

CHANGE : Shape of Minimum Vectoring Altitude.

