

AD CHART

TANEGASHIMA AP

TRUE NORTH

WIND SPEED METER

WDI

RVR 303601N 1310001E

CEILO METER

RTHL

327m

PAPI Angle 3.0°

MEHT 16.7m(55ft)

ARP 303618N 1305930E

303636N 1305858E

OVERRUN AREA EDGE LGT.

APRON FLOOD LGT.

ABN

1 2 3

TERMINAL BLD

FIRE STATION

WIND SPEED METER

WDI

RTHL

323.1m

PAPI Angle 3.0°

MEHT 14.9m(49ft)

303618N 1305930E

303636N 1305858E

OVERRUN AREA EDGE LGT.

REMARKS :

RWY GROOVING	2000m x 30m	PCN 42/F/A/X/T
WIDTH & STRENGTH OF RWY	2000m x 45m	PCN 42/F/A/X/T
WIDTH & STRENGTH OF TWY	23m	PCN 53/R/C/X/T
DIMENSION & STRENGTH OF APRON	185m x 90m	PCN 53/R/C/X/T

LONGITUDINAL PROFILE OF RWY

RWY 13

237.00m (778ft)

RWY 31

231.00m (758ft)

0.3%

0m

2000m

APCH LGT BEACONS

SALS

600.0m

420.0m

270.0m

ALS

300.0m

600.0m

900.0m

SEQUENCED FLASHING LGT (SFL-V)

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART - INSTRUMENT

RJFG / TANEGASHIMA

SID

QUEEN TWO DEPARTURE

RWY13: Climb RWY HDG until 1NM from RWY end/TGE 1.5DME, turn left,...

RWY31: Climb RWY HDG until 1NM from RWY end/TGE 1.7DME, turn right,...

...Climb via TGE R-045 to QUEEN.
Cross TGE R-045/27DME at or above 7,000ft, cross QUEEN at assigned altitude.

KINKO TWO DEPARTURE

RWY13: Climb RWY HDG until 1NM from RWY end/TGE 1.5DME, turn left,...

RWY31: Climb RWY HDG until 1NM from RWY end/TGE 1.7DME, turn right,...

...Climb via TGE R-349 to KINKO.
Cross TGE R-349/19DME at or above 6,000ft.


TANEGASHIMA REVERSAL TWO DEPARTURE

RWY13: Climb RWY HDG until 1NM from RWY end/TGE 1.5DME, turn left,...

RWY31: Climb RWY HDG until 1NM from RWY end/TGE 1.7DME, turn right,...

...Climb via TGE R-349, then turn left proceed to TGE VOR/DME within TGE 10DME.

CHANGE: PROC renamed. Radial FM TGE.

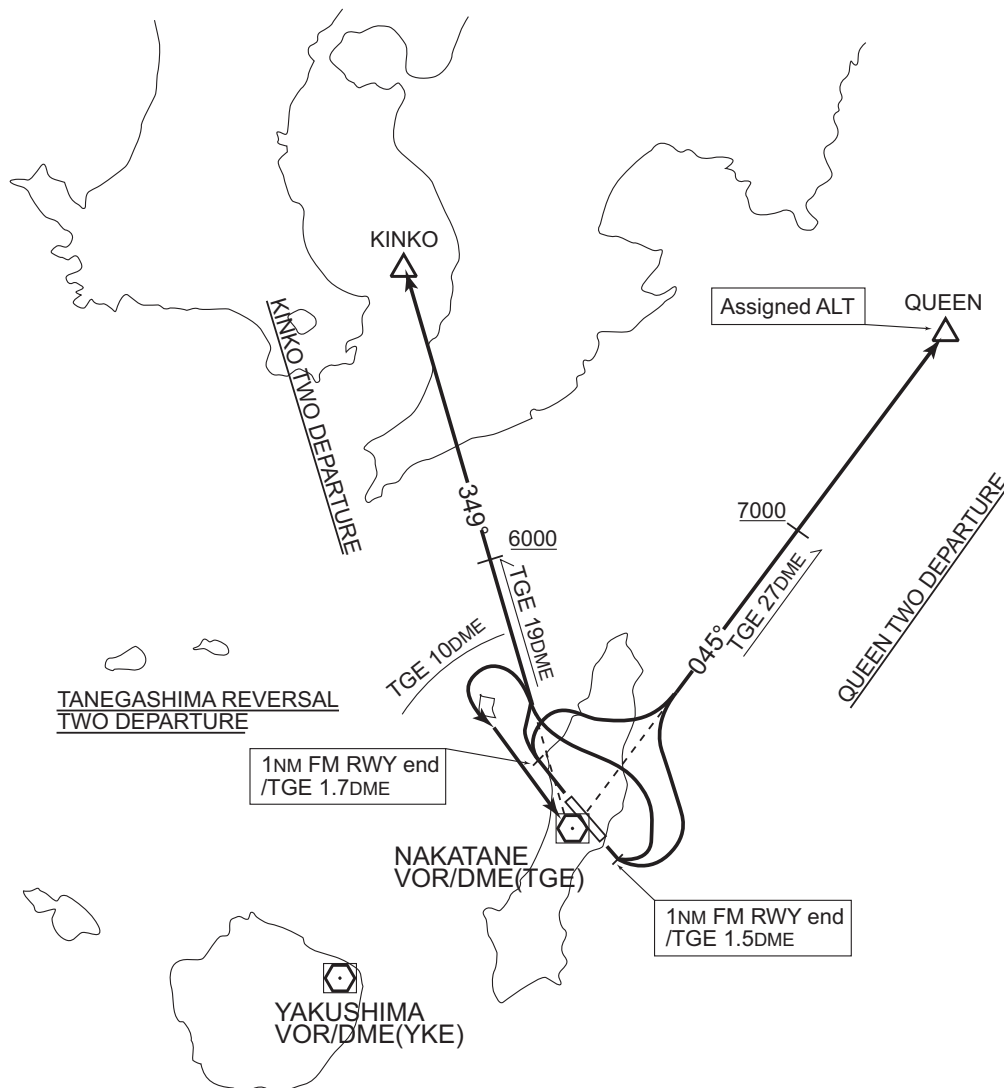

STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV SID

FREDY ONE RNAV DEPARTURE

Basic RNP1

Note GNSS required.

VAR 6°W (2011)



FREDY ONE RNAV DEPARTURE

RWY13 : Climb on HDG 129° at or above 1200FT, turn left direct to FREDY at or above 7000FT, to QUEEN.

RWY31 : Climb on HDG 309° at or above 1300FT, turn right direct to FREDY at or above 7000FT, to QUEEN.

STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV SID

FREDY ONE RNAV DEPARTURE

RWY13

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (KIAS)	Vertical Angle	Navigation Performance
VA	—	—	—	129° (122.9°)	—	+1200	—	—	Basic RNP1
DF	FREDY	—	—	—	L	+7000	—	—	Basic RNP1
TF	QUEEN	—	24.9	044° (038.0°)	—	—	—	—	Basic RNP1

RWY31

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (KIAS)	Vertical Angle	Navigation Performance
VA	—	—	—	309° (302.9°)	—	+1300	—	—	Basic RNP1
DF	FREDY	—	—	—	R	+7000	—	—	Basic RNP1
TF	QUEEN	—	24.9	044° (038.0°)	—	—	—	—	Basic RNP1


STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV TRANSITION

JACKY TRANSITION			RNAV 1
Note 1) DME/DME/IRU or GNSS required. 2) RADAR service required.	Critical DME	—	
	DME GAP	—	
	Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1	

VAR 6°W (2011)

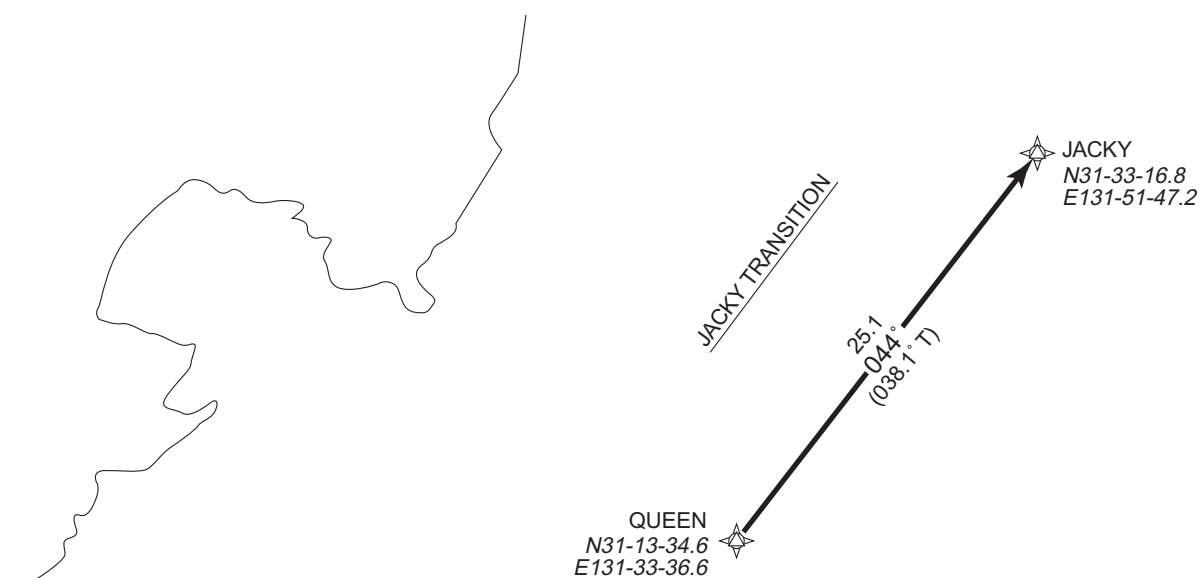

JACKY TRANSITION
From QUEEN to JACKY.

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (KIAS)	Vertical Angle	Navigation Performance
IF	QUEEN	—	—	—	—	—	—	—	RNAV1
TF	JACKY	—	25.1	044° (038.1°)	—	—	—	—	RNAV1

STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV SID



STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV SID

KAGYA ONE RNAV DEPARTURE

RWY13

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (KIAS)	Vertical Angle	Navigation Performance
VA	—	—	—	129° (122.9°)	—	+1200	—	—	Basic RNP1
DF	KAGYA	—	—	—	L	—	—	—	Basic RNP1
TF	FG801	—	8.3	348° (342.4°)	—	+6000	—	—	Basic RNP1
TF	KINKO	—	25.7	348° (342.3°)	—	—	—	—	Basic RNP1

RWY31

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (KIAS)	Vertical Angle	Navigation Performance
VA	—	—	—	309° (302.9°)	—	+1300	—	—	Basic RNP1
DF	KAGYA	—	—	—	R	—	—	—	Basic RNP1
TF	FG801	—	8.3	348° (342.4°)	—	+6000	—	—	Basic RNP1
TF	KINKO	—	25.7	348° (342.3°)	—	—	—	—	Basic RNP1

STANDARD ARRIVAL CHART - INSTRUMENT

RJFG / TANEGASHIMA

STAR

KAGYA ARRIVAL

From over TEPPPO, proceed via TGE 12DME counterclockwise ARC to KAGYA.
Cross KAGYA at or above 6,000ft.

CHANGE: Radial FM TGE. Bearing on HOLD Pattern.




INTENTIONALLY LEFT BLANK

INSTRUMENT APPROACH CHART

RJFG / TANEGASHIMA


VOR/DME/ILS RWY31

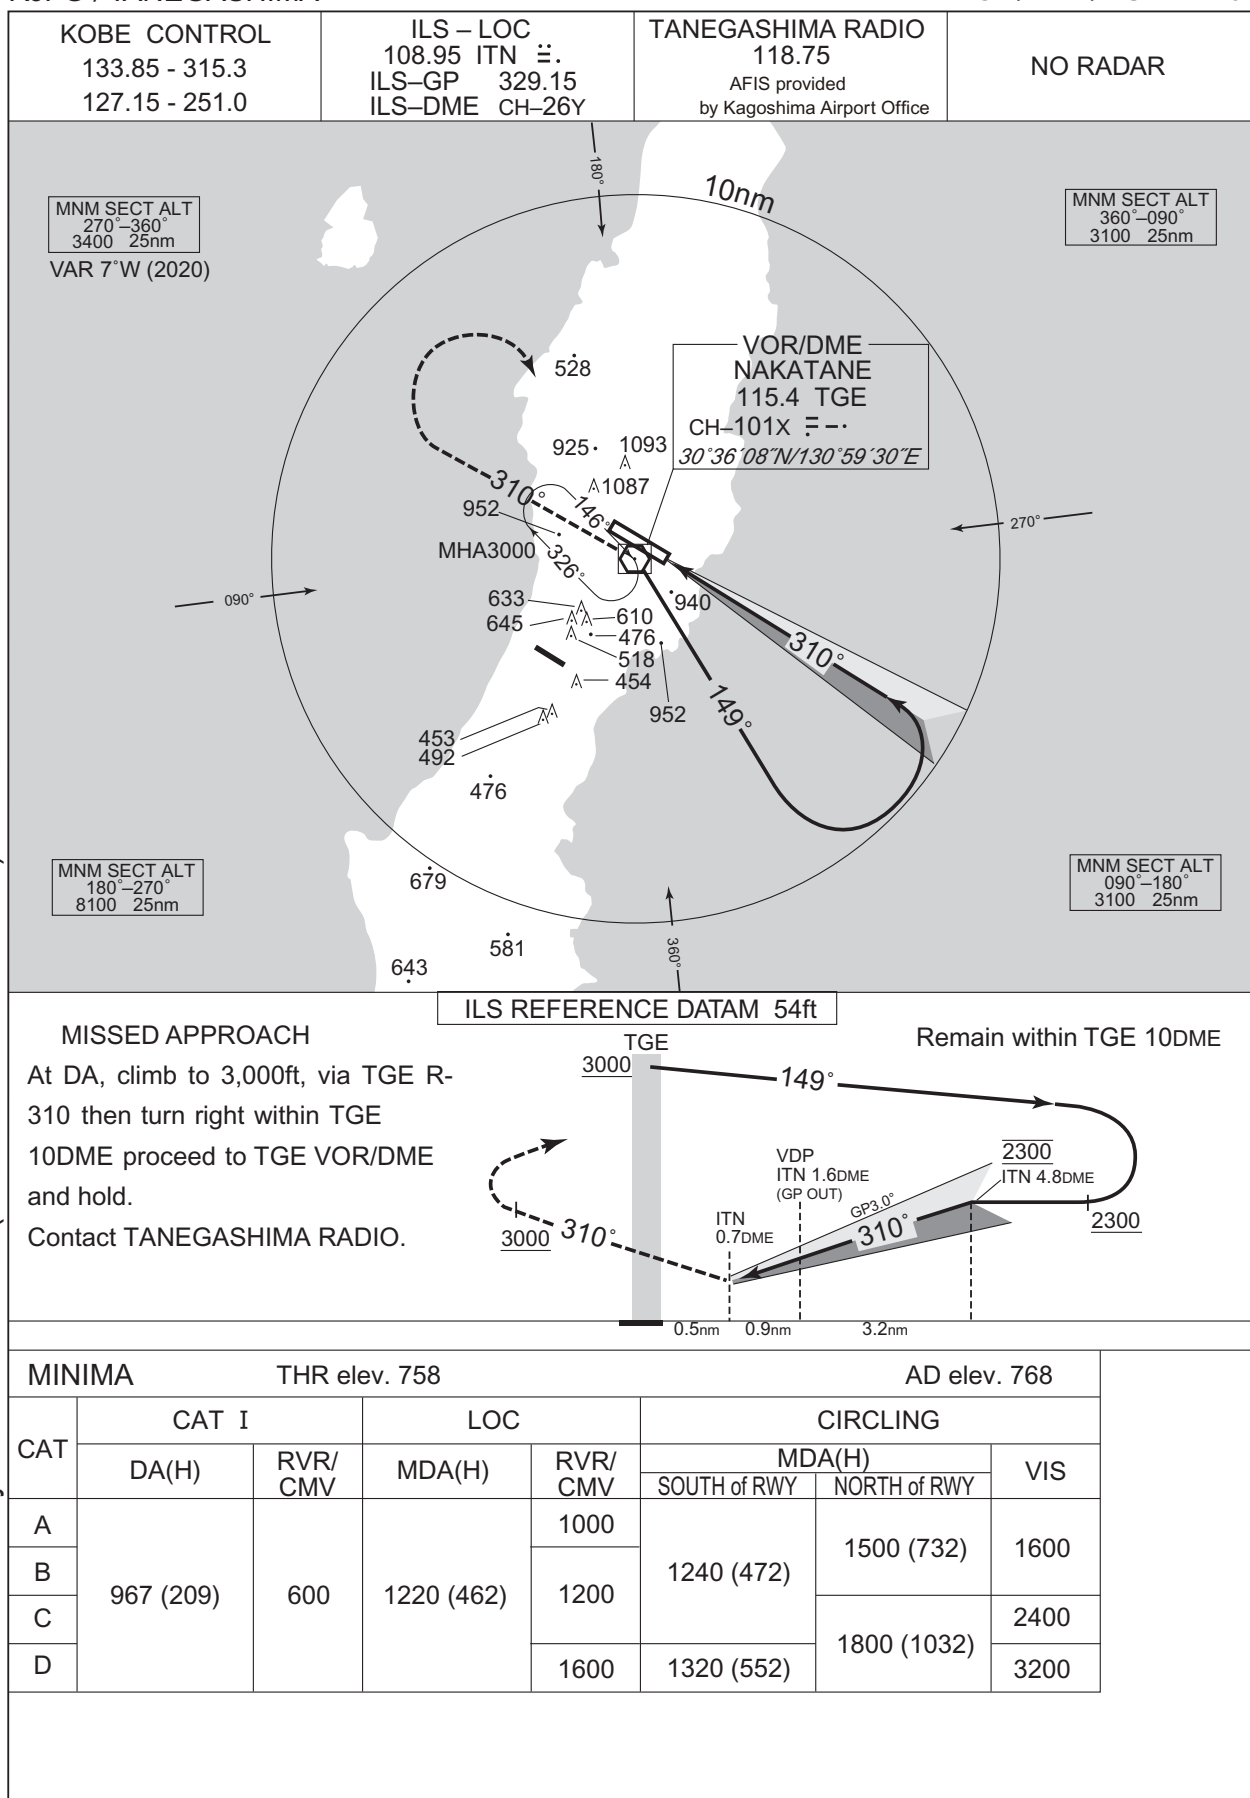

INSTRUMENT APPROACH CHART

RJFG / TANEGASHIMA

VOR/DME RWY31

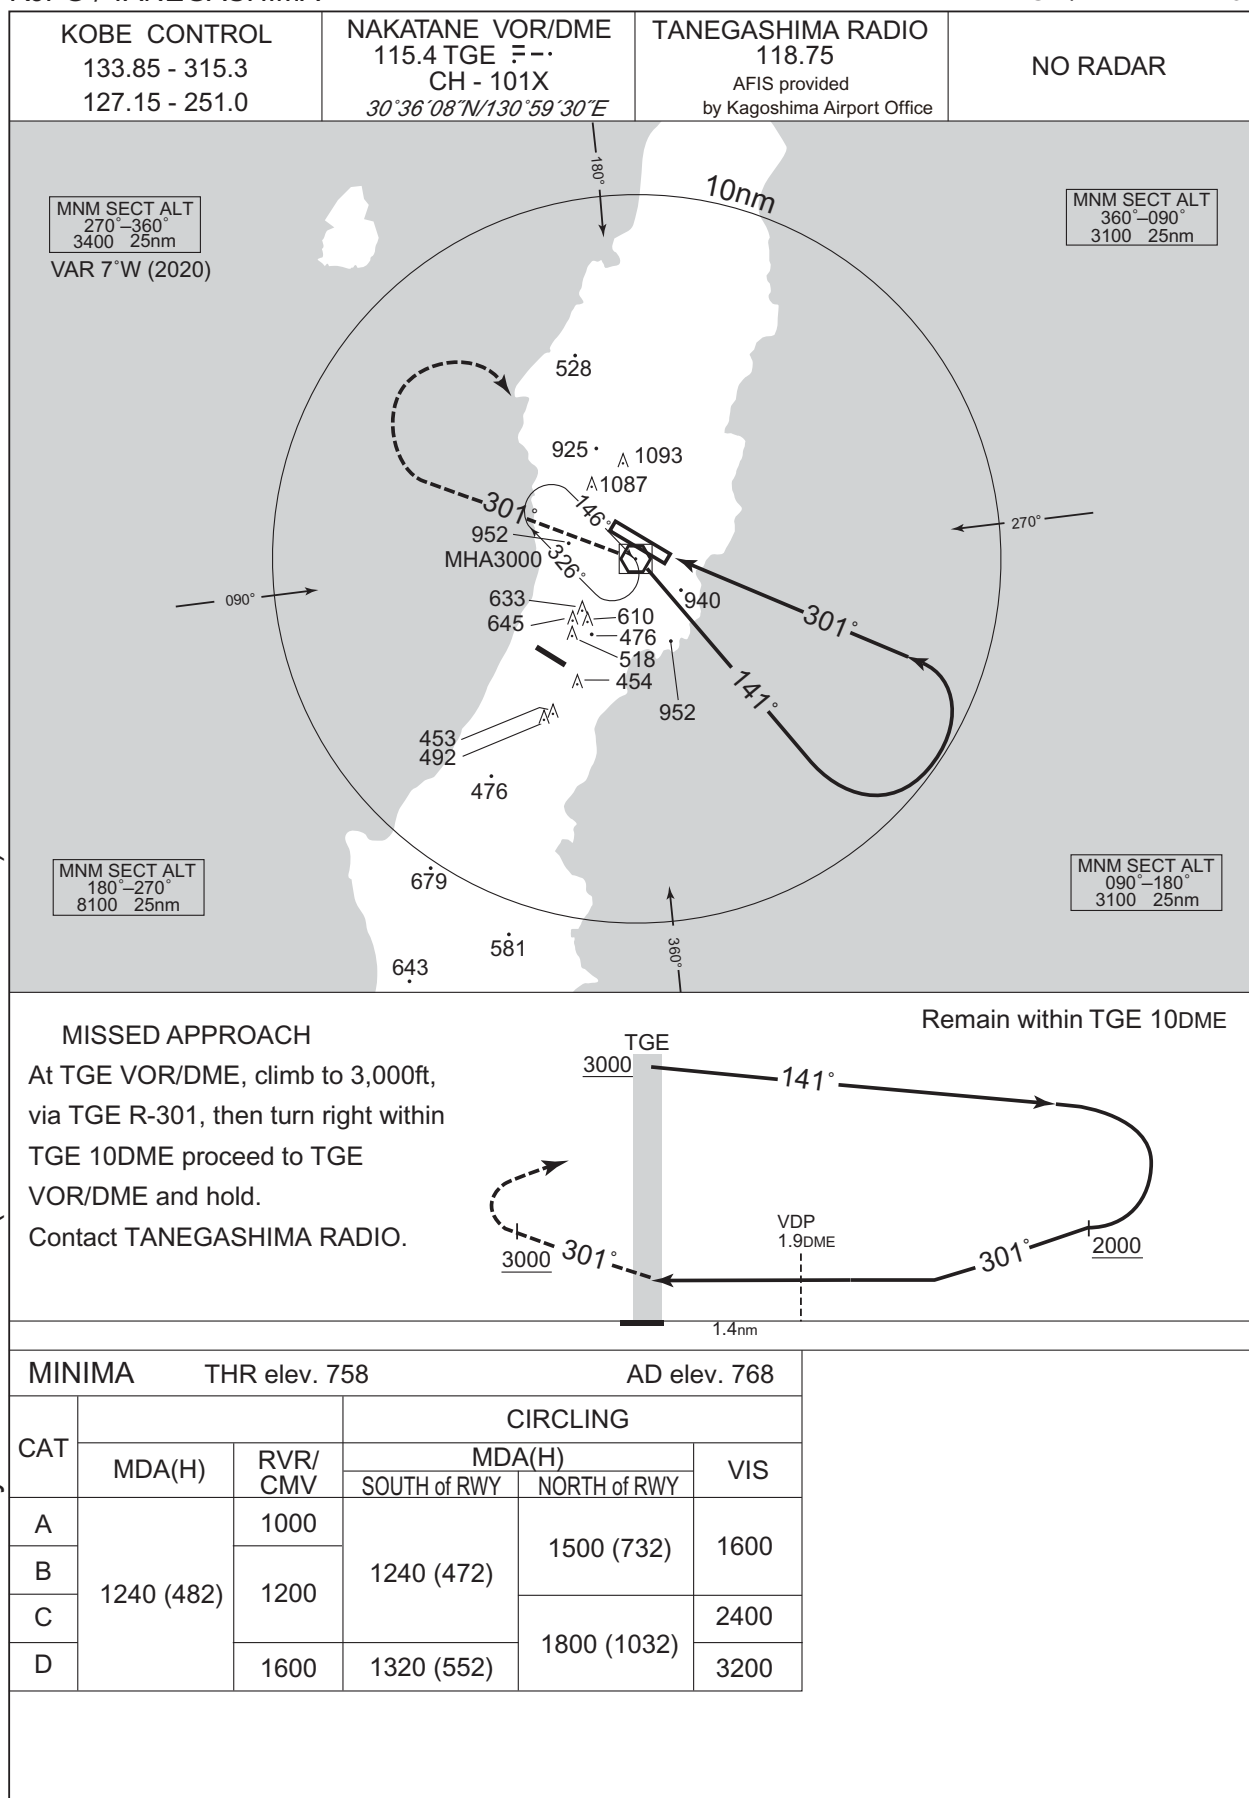


CHANGE : Secondary FREQ abolished(TANEGASHIMA RADIO).

INSTRUMENT APPROACH CHART

RJFG / TANEGASHIMA

VOR/DME RWY13

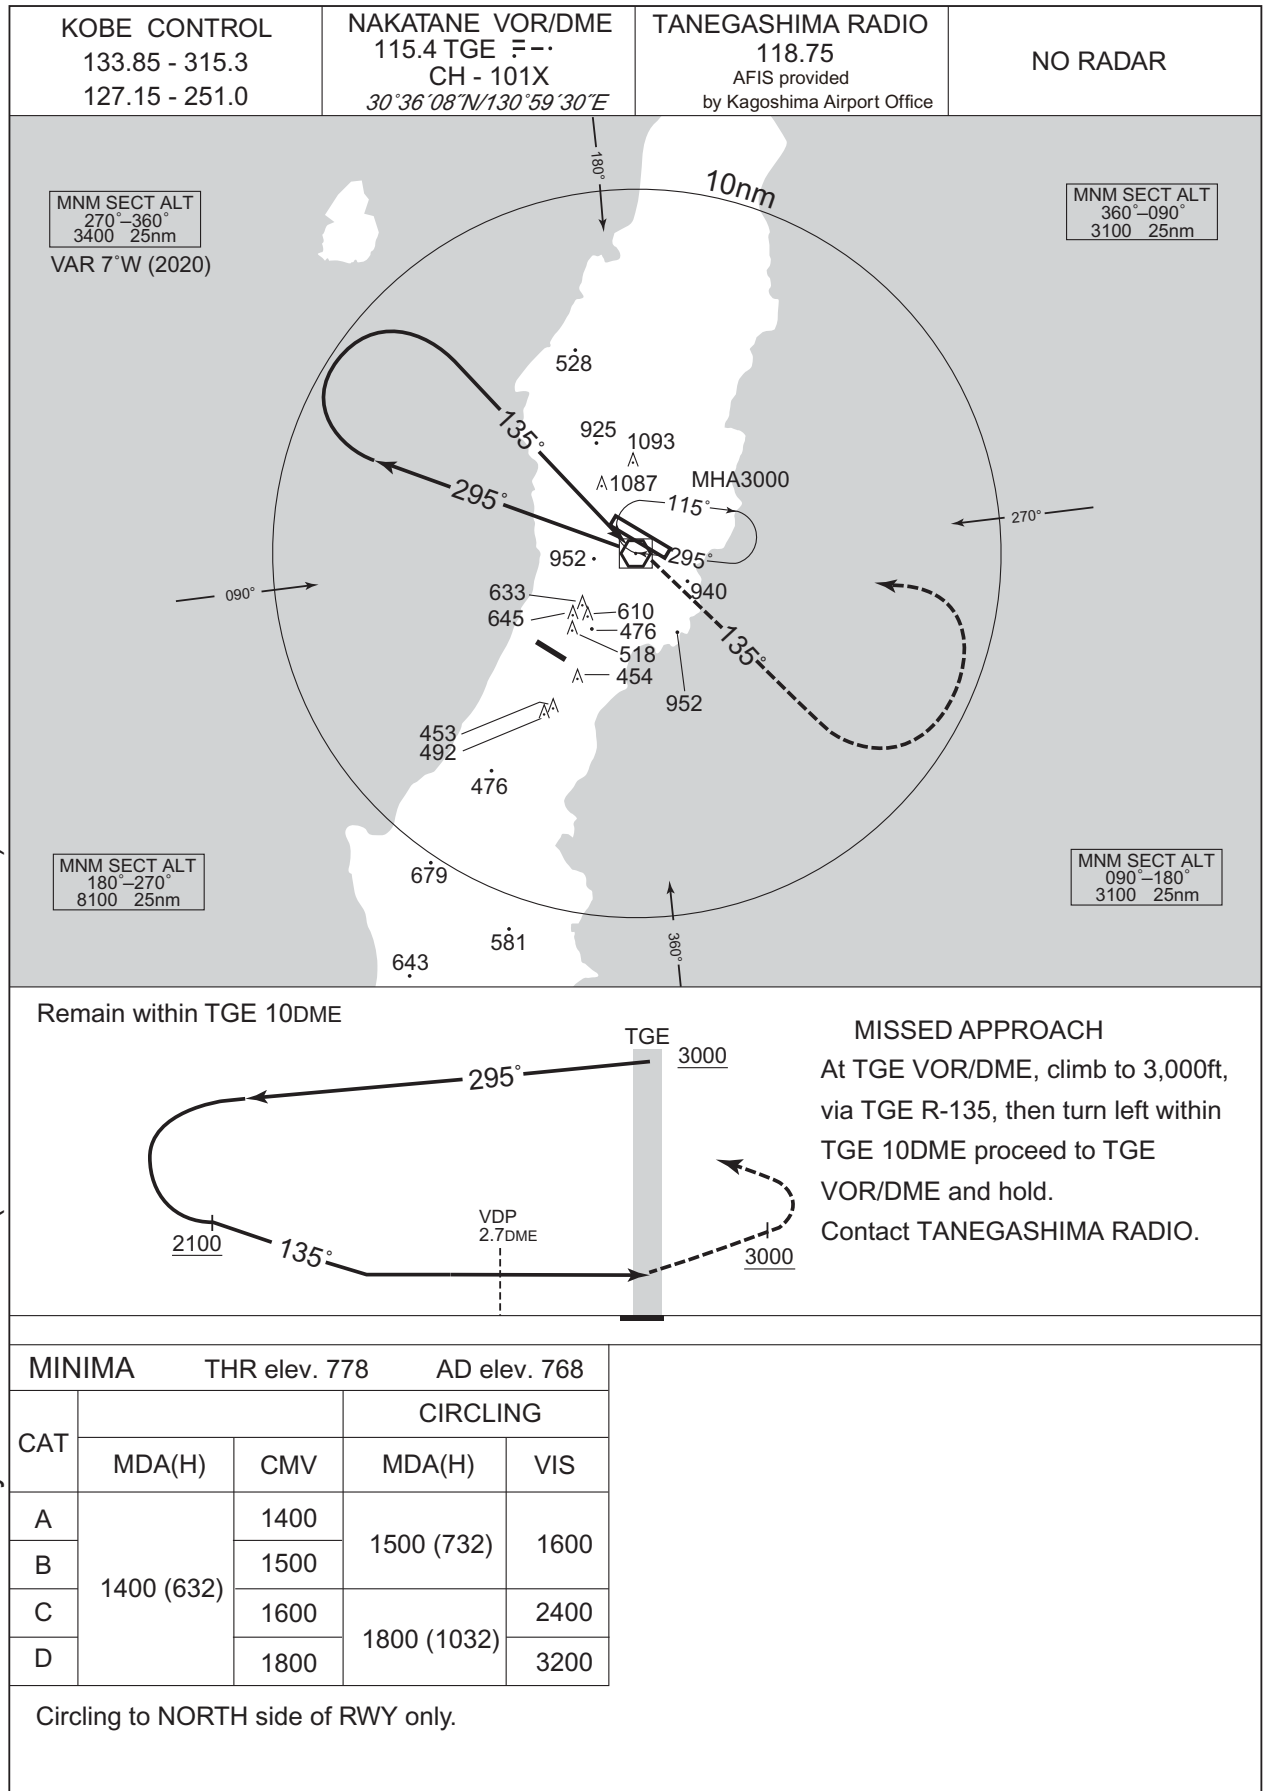


CHANGE : Secondary FREQ abolished(TANEGASHIMA RADIO).

INSTRUMENT APPROACH CHART

RJFG / TANEGASHIMA

RNAV(GNSS) RWY13

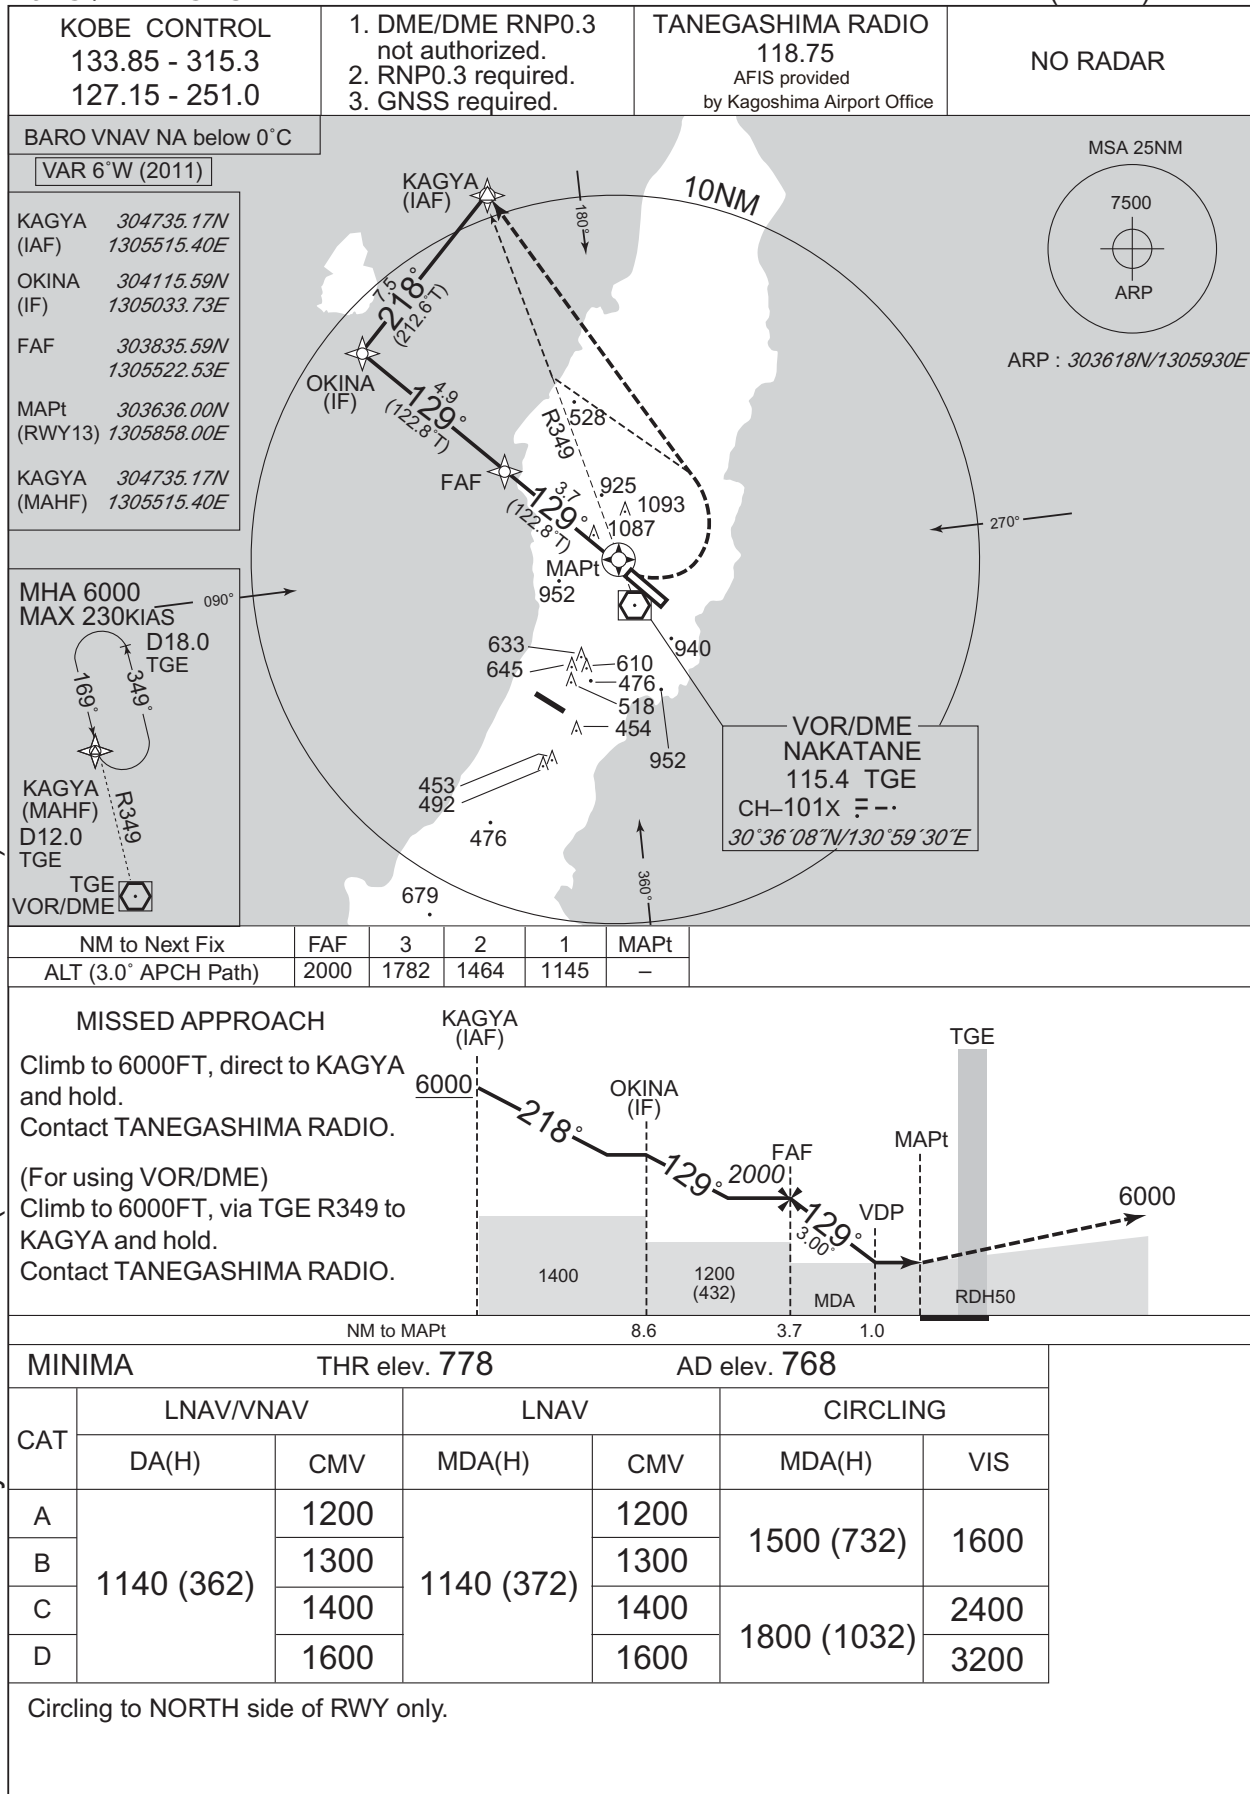

CHANGE : Secondary FREQ abolished(TANEGASHIMA RADIO).

RJFG / TANEGASHIMA

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).


CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
喜志鹿崎 Kishigazaki	014°T / 14.2NM	灯台 Lighthouse
西之表 Nishinoomote	359°T / 7.5NM	西之表港 Harbor
10NM W	270°T / 10.0NM	海上 Over the sea
島間 Shimama	219°T / 10.6NM	港 Harbor
竹崎 Takezaki	187°T / 13.2NM	灯台 Lighthouse

RJFG / TANEGASHIMA

Minimum Vectoring Altitude CHART

CHANGE : Minimum vectoring altitude(6000→5000).

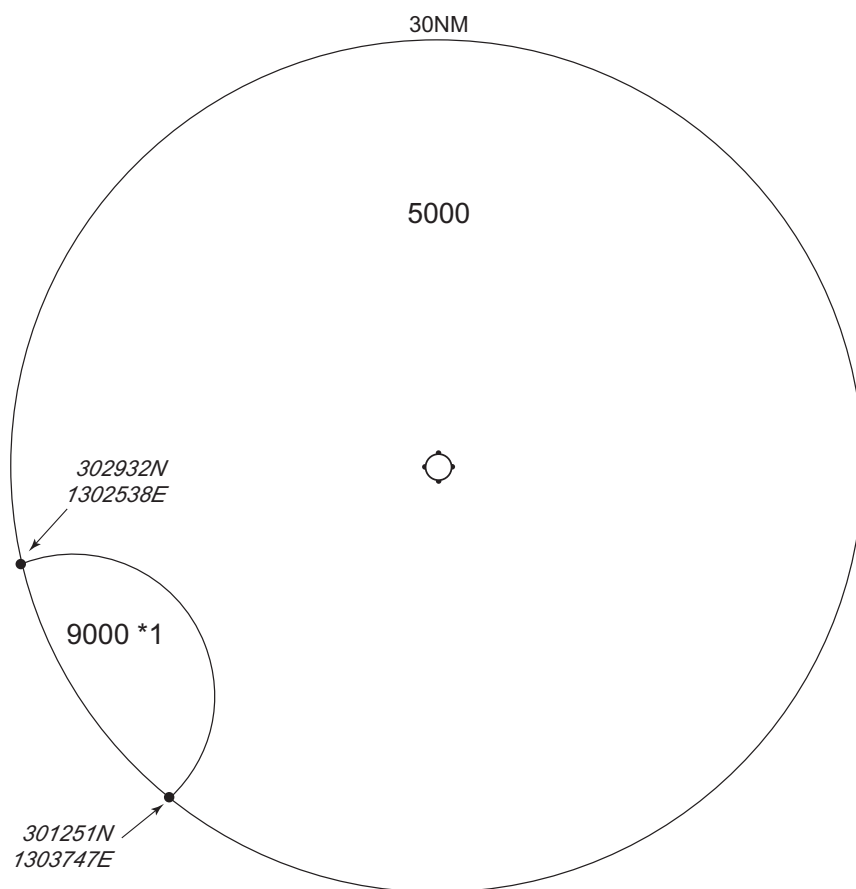

*1 : 302013N/1302957E RADIUS : 10NM

CENTER : 303618N/1305930E (ARP)