

CHANGE : Overrun area marking erased.



STANDARD DEPARTURE CHART -INSTRUMENT

RJKI / KIKAI

SID

KASARI TWO DEPARTURE

RWY07 : Turn left,...

RWY25 : Turn right,...

...direct to AME VOR/DME.

Cross AME VOR/DME at or above 3000FT.

Note RWY07 : 5.0% climb gradient required up to 700FT.


OBST ALT 558FT located at 2.4NM 088° FM end of RWY07.

CHANGE : NAKATANE FIVE DEPARTURE abolished.

KASARI TWO DEPARTURE



STANDARD DEPARTURE CHART -INSTRUMENT

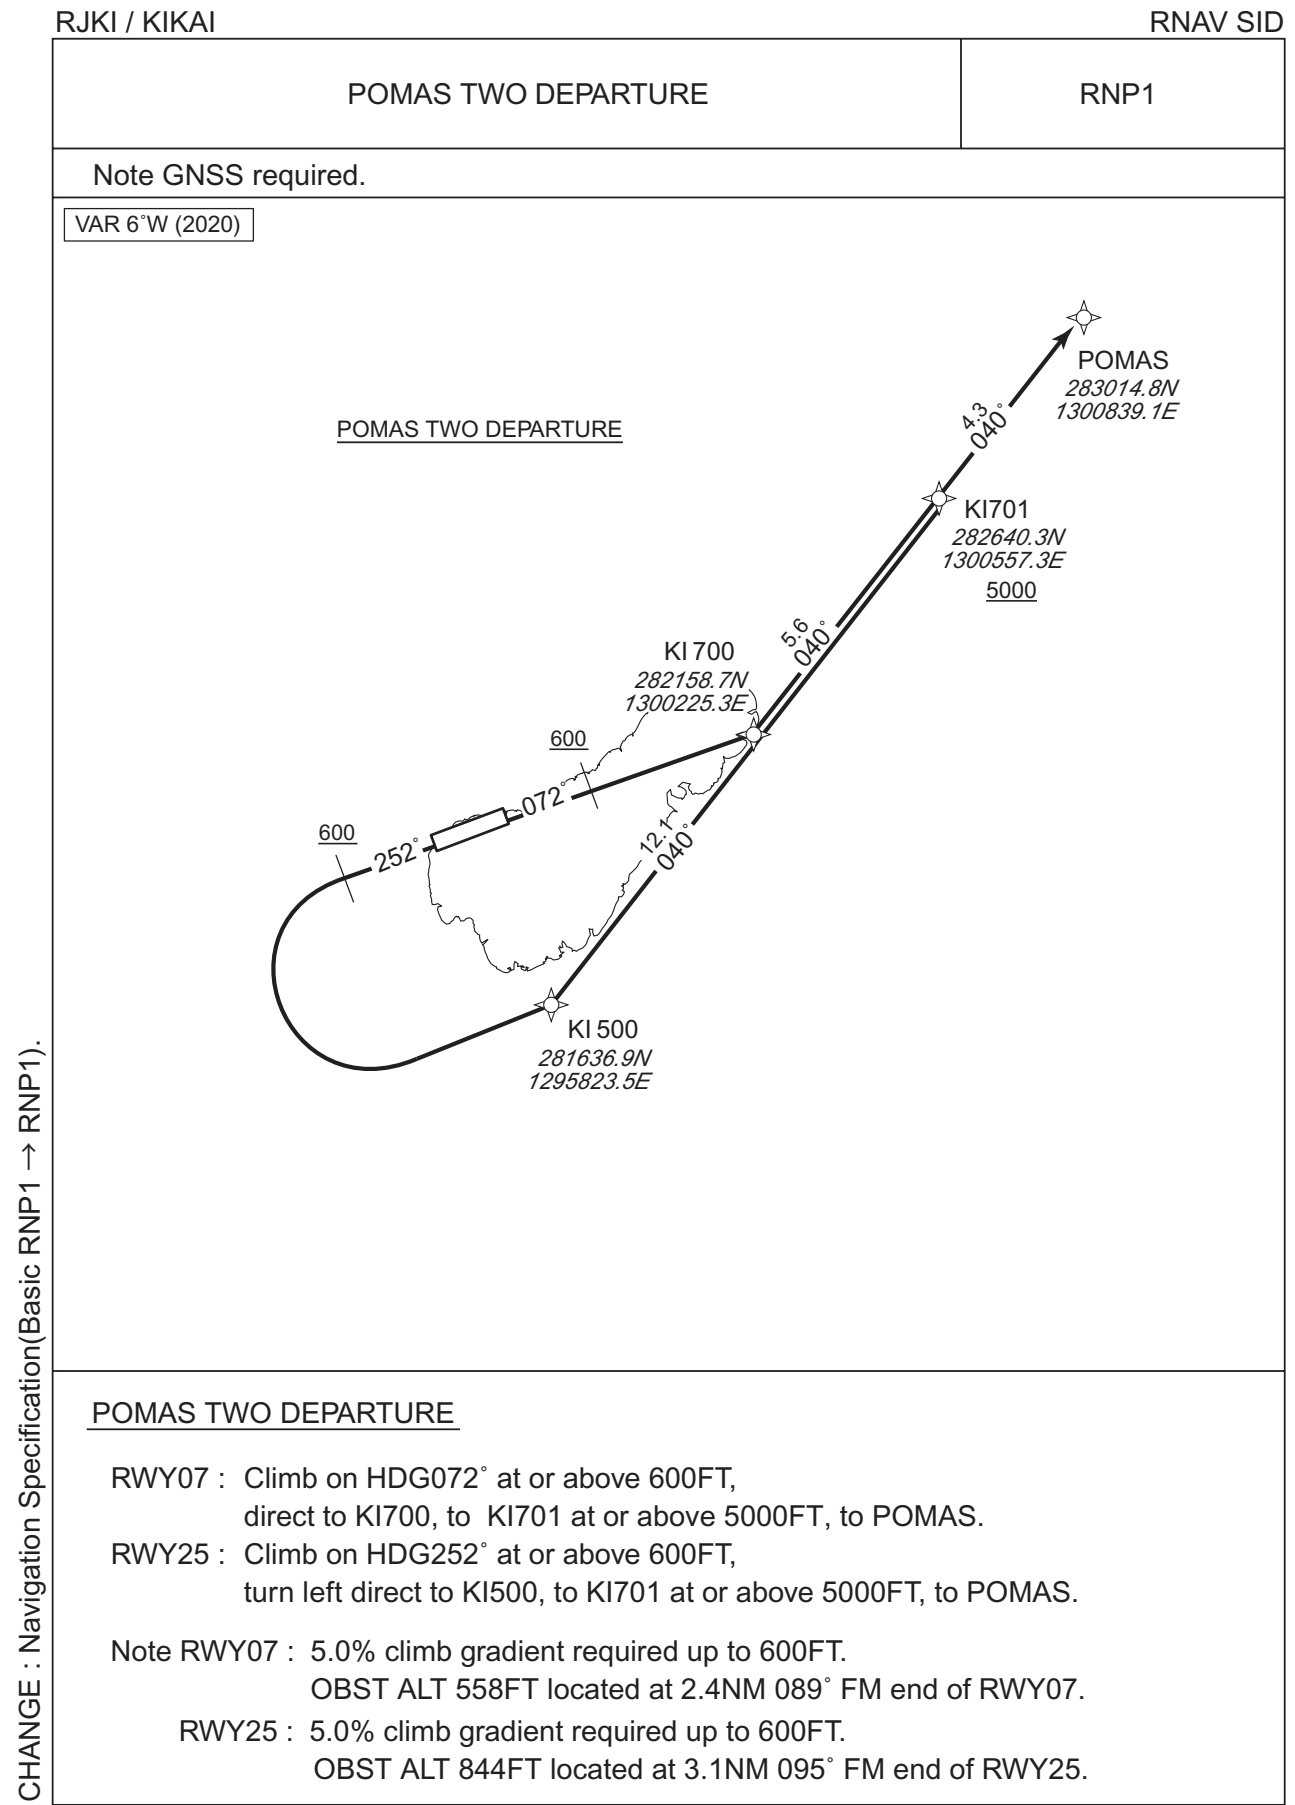

STANDARD DEPARTURE CHART -INSTRUMENT

RJKI / KIKAI

RNAV SID

POMAS TWO DEPARTURE

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	072 (065.7)	-6.1	-	-	+600	-	-	RNP1
002	DF	KI700	-	-	-6.1	-	-	-	-	-	RNP1
003	TF	KI701	-	040 (033.5)	-6.1	5.6	-	+5000	-	-	RNP1
004	TF	POMAS	-	040 (033.5)	-6.1	4.3	-	-	-	-	RNP1

RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	252 (245.7)	-6.1	-	-	+600	-	-	RNP1
002	DF	KI500	-	-	-6.1	-	L	-	-	-	RNP1
003	TF	KI701	-	040 (033.5)	-6.1	12.1	-	+5000	-	-	RNP1
004	TF	POMAS	-	040 (033.5)	-6.1	4.3	-	-	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).


RJKI / KIKAI

RNAV SID

RNP1

VAR 6°W (2020)

BOROS
283258.6N
1295353.1E
3000

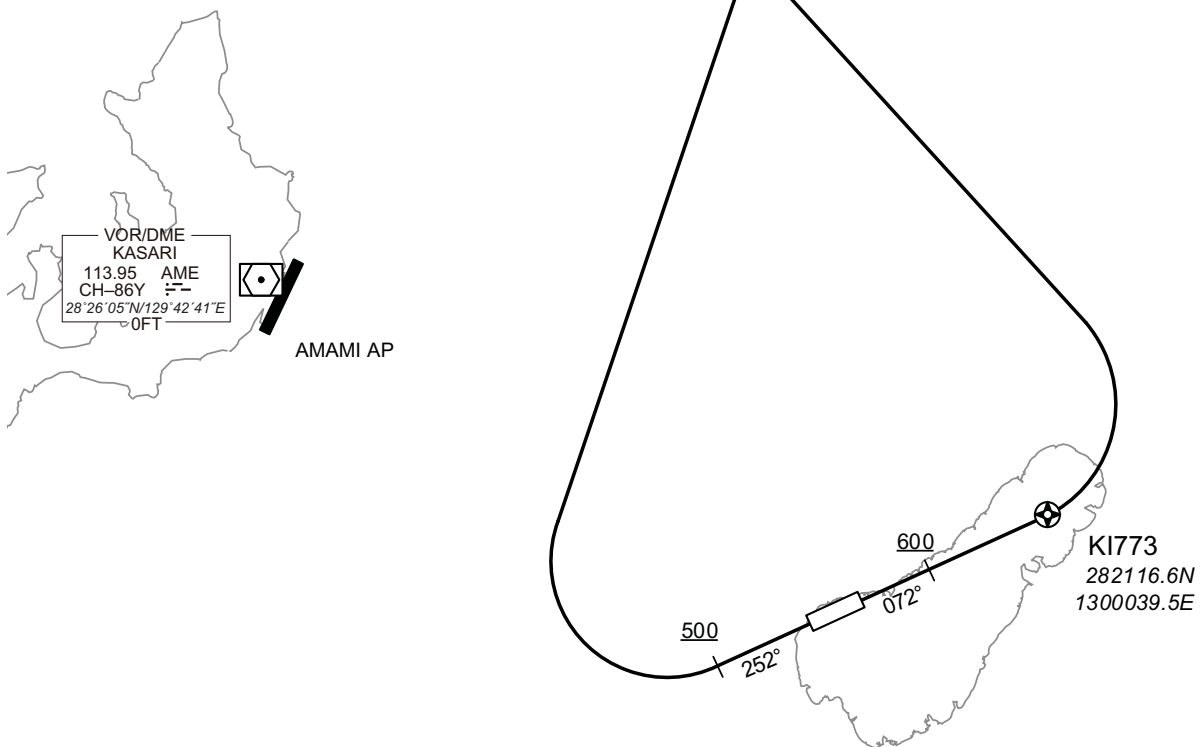

RWY07 : Climb on HDG072° at or above 600FT, direct to KI773, turn left direct to BOROS at or above 3000FT.

RWY25 : Climb on HDG252° at or above 500FT, turn right direct to BOROS at or above 3000FT.

NOTE RWY07 : 5.0% climb gradient required up to 600FT.
OBST ALT 558FT located at 2.4NM 089° FM end of RWY07.

CHANGE : Navigation Specification(Basic RNP1 \rightarrow RNP1).

STANDARD DEPARTURE CHART -INSTRUMENT


RJKI / KIKAI

RNAV SID

BOROS ONE DEPARTURE											
RWY07											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	072 (065.7)	-6.1	-	-	+600	-	-	RNP1
002	DF	KI773	Y	-	-6.1	-	-	-	-	-	RNP1
003	DF	BOROS	-	-	-6.1	-	L	+3000	-	-	RNP1
RWY25											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	252 (245.7)	-6.1	-	-	+500	-	-	RNP1
002	DF	BOROS	-	-	-6.1	-	R	+3000	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART -INSTRUMENT

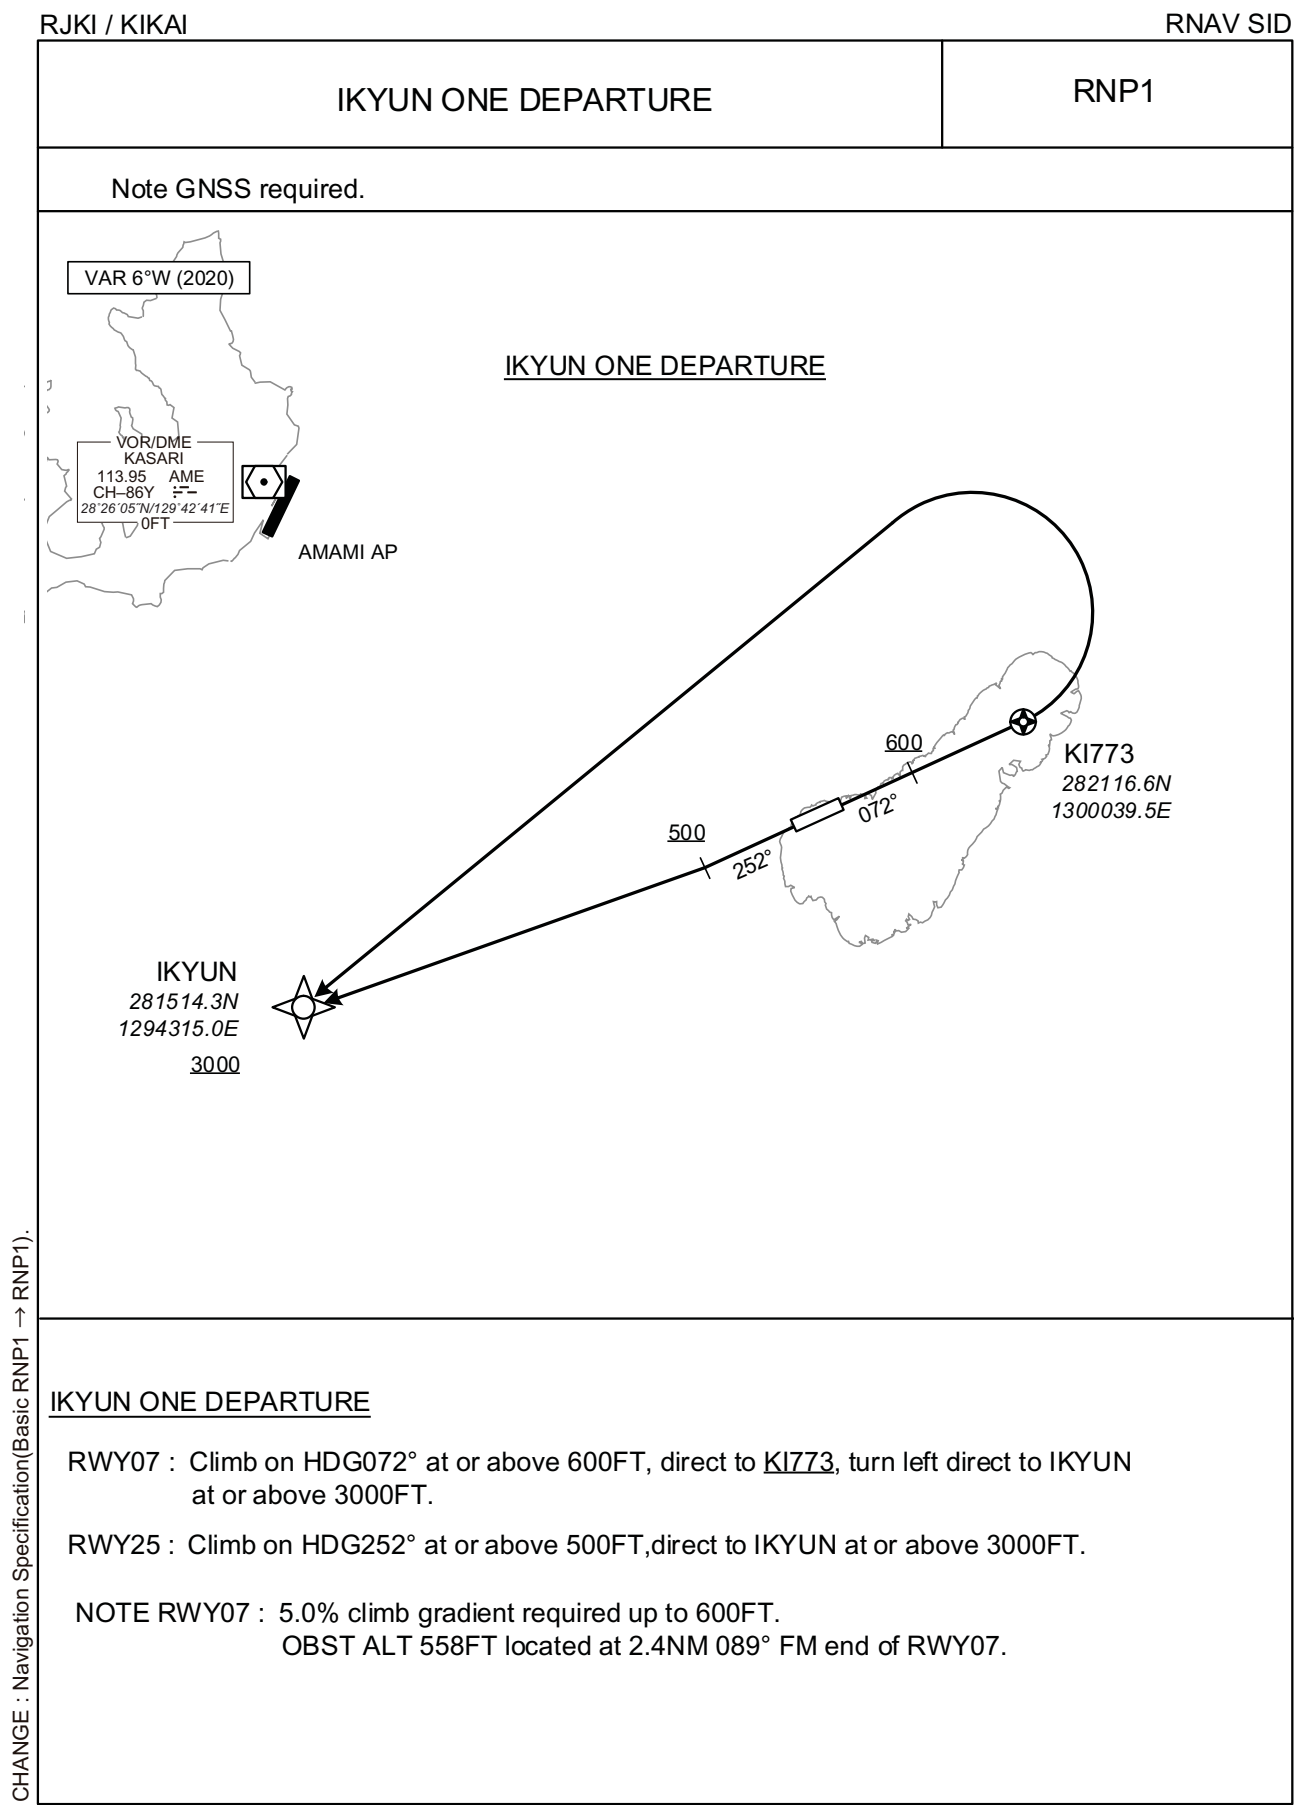

STANDARD DEPARTURE CHART -INSTRUMENT


RJKI / KIKAI

RNAV SID


IKYUN ONE DEPARTURE											
RWY07											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	072 (065.7)	-6.1	-	-	+600	-	-	RNP1
002	DF	KI773	Y	-	-6.1	-	-	-	-	-	RNP1
003	DF	IKYUN	-	-	-6.1	-	L	+3000	-	-	RNP1
RWY25											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	252 (245.7)	-6.1	-	-	+500	-	-	RNP1
002	DF	IKYUN	-	-	-6.1	-	-	+3000	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).


RJKI / KIKAI

NAHA APP 124.95 – 280.1	KASARI VOR/DME 113.95 AME CH - 86Y  28°26'05"N/129°42'41"E	KIKAI RADIO 118.0 AFIS provided by Kagoshima Airport Office	RADAR AVBL
----------------------------	--	--	------------

VAR 6°W (2016)

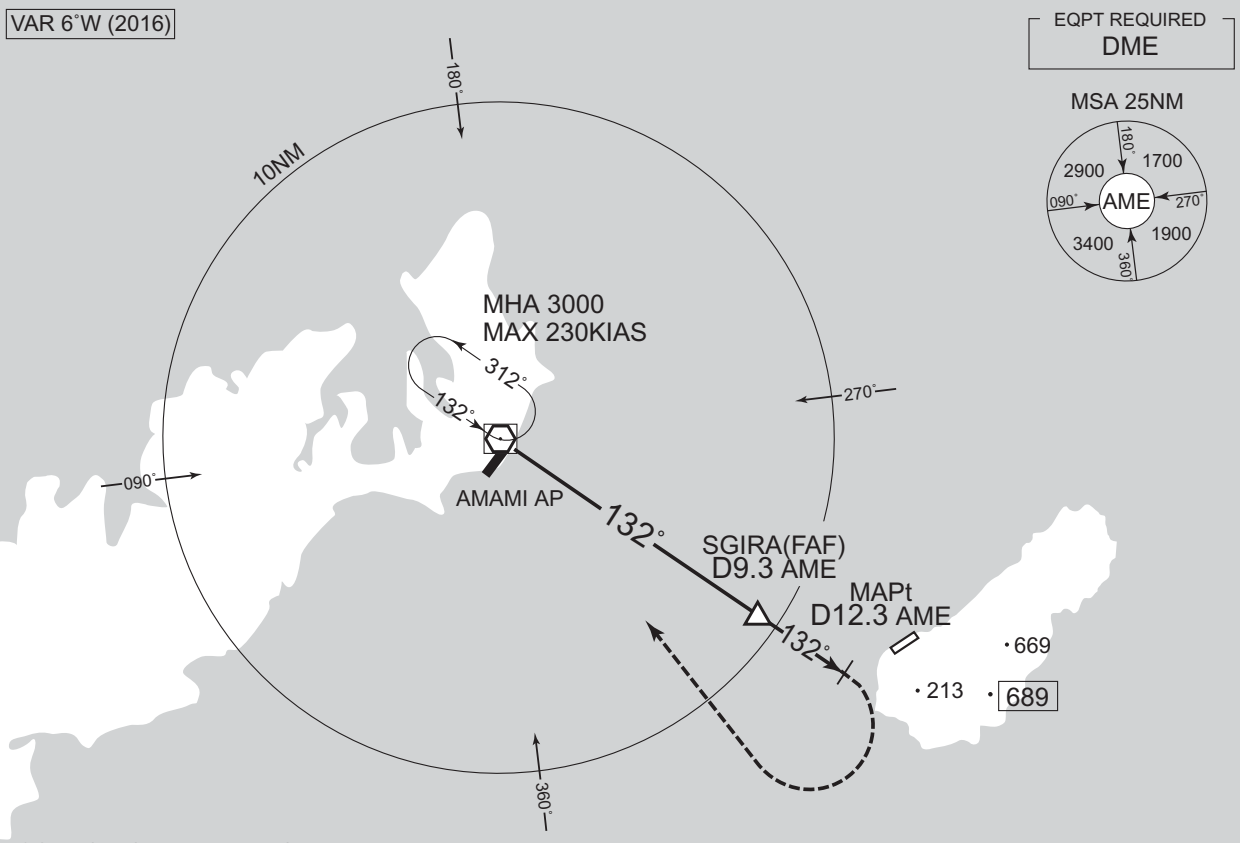

EQPT REQUIRED
 DME

MSA 25NM


SGIRA(FAF) : 282036.09N/1295111.50E

MINIMA		AD elev. 15
CAT	CIRCLING	
	MDA(H)	VIS
A	460 (445)	1600
B	500 (485)	
C	660 (645)	2400
D	—	—

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to **NORTH** side of RWY only.

RJKI / KIKAI

NAHA APP 124.95 – 280.1	RNP APCH	KIKAI RADIO 118.0 AFIS provided by Kagoshima Airport Office	RADAR AVBL
-----------------------------------	-----------------	---	-------------------

Baro – VNAV not authorized below 5°C.

VAR 6°W (2020)

AMAMI AP
VOR/DME KASARI
113.95 AME
CH-86Y
28°26'05"N/129°42'41"E

Using NAVAID

NOT TO SCALE
MHA 3000
MAX 210KIAS
D16.0 AME

RNAV HLDG


NOT TO SCALE

Using NAVAID

NOT TO SCALE
MHA 3000
MAX 210KIAS
D20.0 AME

KADON	281236.50N	3	2	1	MAPt
(IAF/MAHF)	1294922.95E				
IKEJI	281541.27N				
(IAF)	1294414.66E				
RYUZE	281933.41N				
(IAF)	1294550.55E				
KI770	281604.97N				
(IF)	1294736.81E				
ARATI	281726.58N				
(FAF)	1295101.33E				
KI772	281845.03N				
(MAPt)	1295418.21E				
KI773	282116.63N				
(MATF)	1300039.45E				

ARP : 281917N / 1295541E

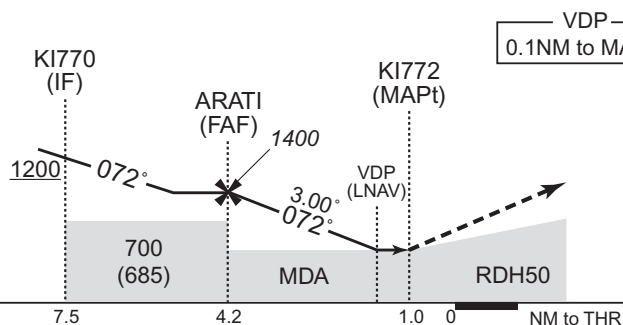


MISSED APPROACH
Direct to KI773, turn right
direct to KADON and hold
at 3000FT.
Contact NAHA APP.

Missed APCH climb gradient MNM 3.2%						
MINIMA		THR elev.21		AD elev.15		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	413 (392)	1500	400 (385)	1500	460(445)	1600
B					500(485)	
C		1800		1800	660(645)	
D	—	—	—	—	—	—

MINIMA with Missed APCH climb gradient of 2.5% are not established.
Circling to NORTH side of RWY only.


INSTRUMENT APPROACH CHART

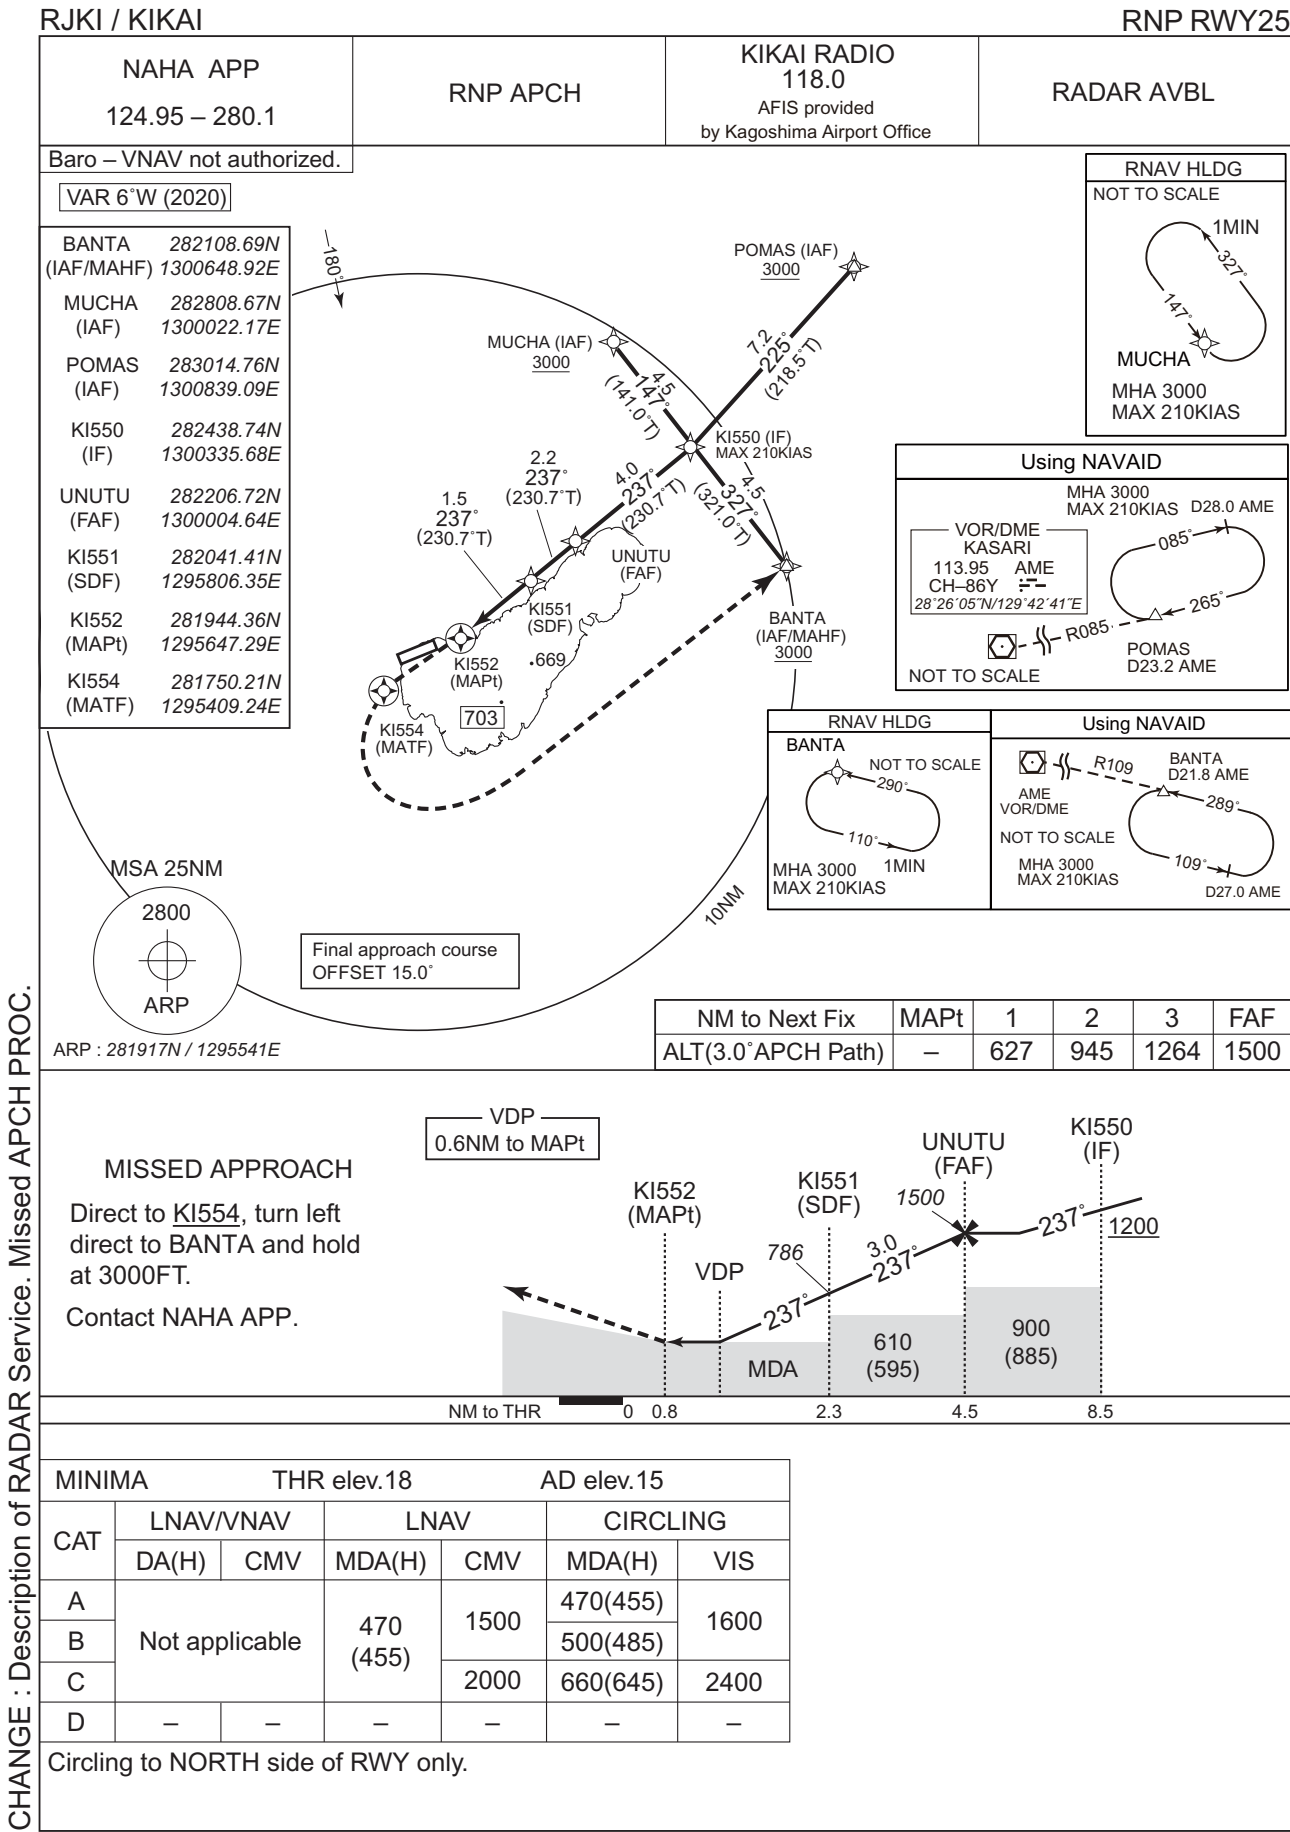

INTENTIONALLY LEFT BLANK

RJKI / KIKAI

Visual REP

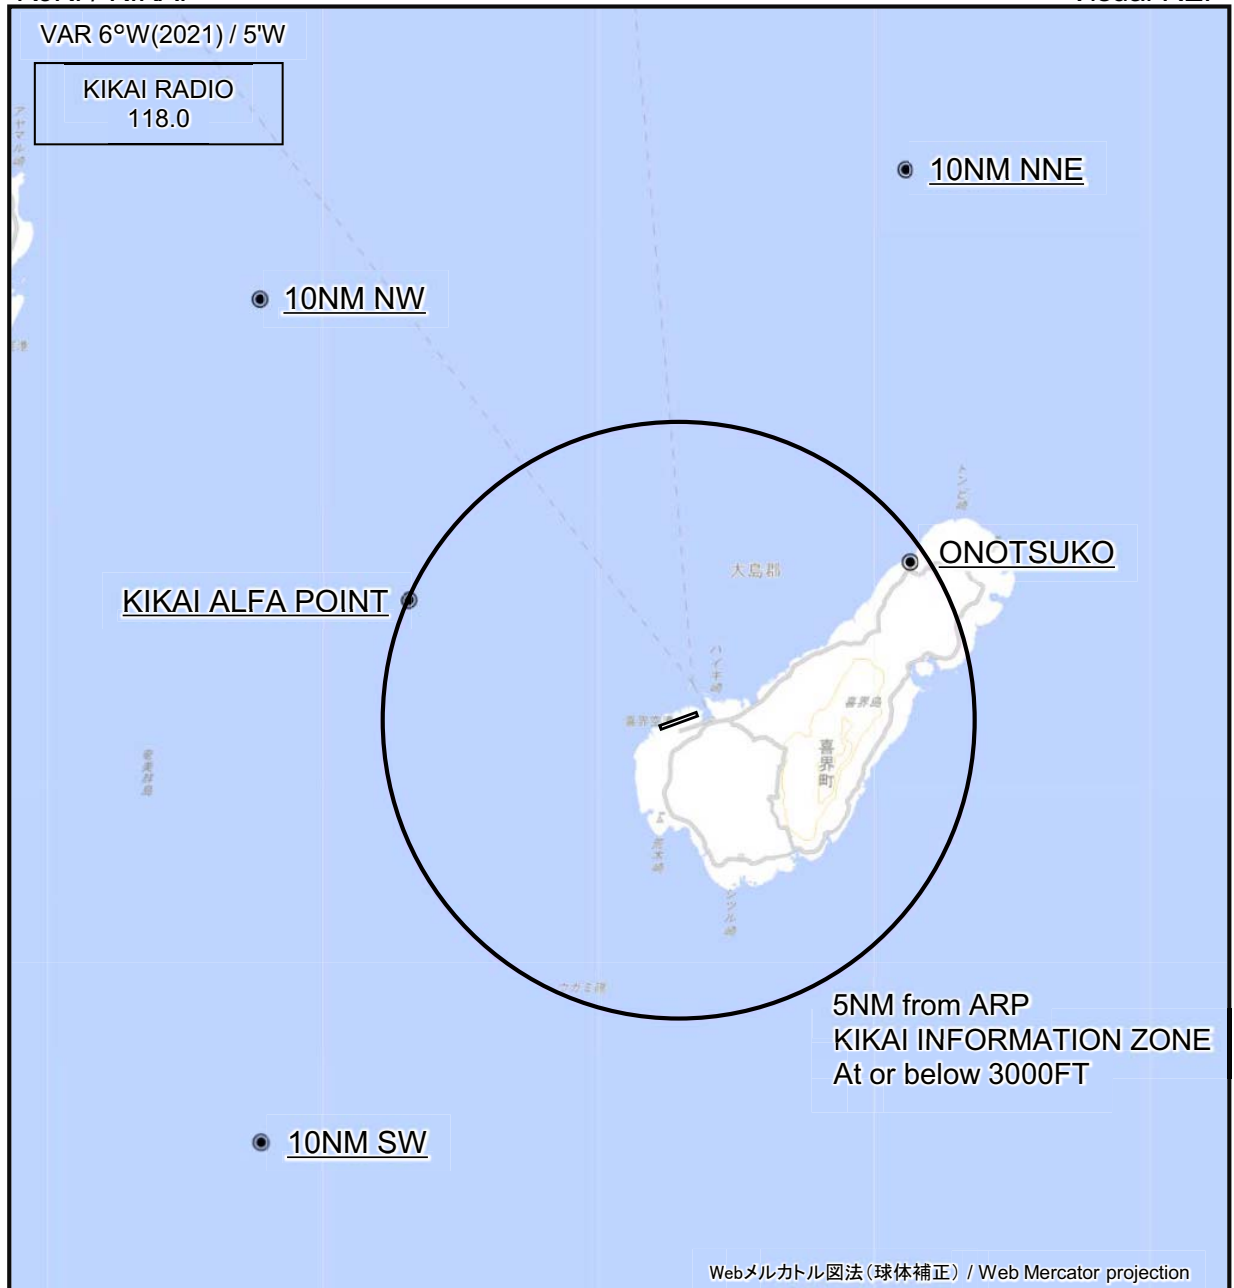

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
10NM NNE	022°T / 10.0NM	海上 Over the sea
10NM NW	315°T / 10.0NM	海上 Over the sea
小野津港 Onotsuko	056°T / 4.7NM	港 Harbor
喜界ALFA POINT Kikai Alfa Point	294°T / 5.0NM	喜界空港と奄美空港を結ぶ直線上 On the straight line connecting Kikai AP and Amami AP
10NM SW	225°T / 10.0NM	海上 Over the sea

RJKI / KIKAI

Minimum Vectoring Altitude CHART

