


RJFG / TANEGASHIMA

AD CHART

CHANGE : CEILO METER, WIND SPEED METER added.

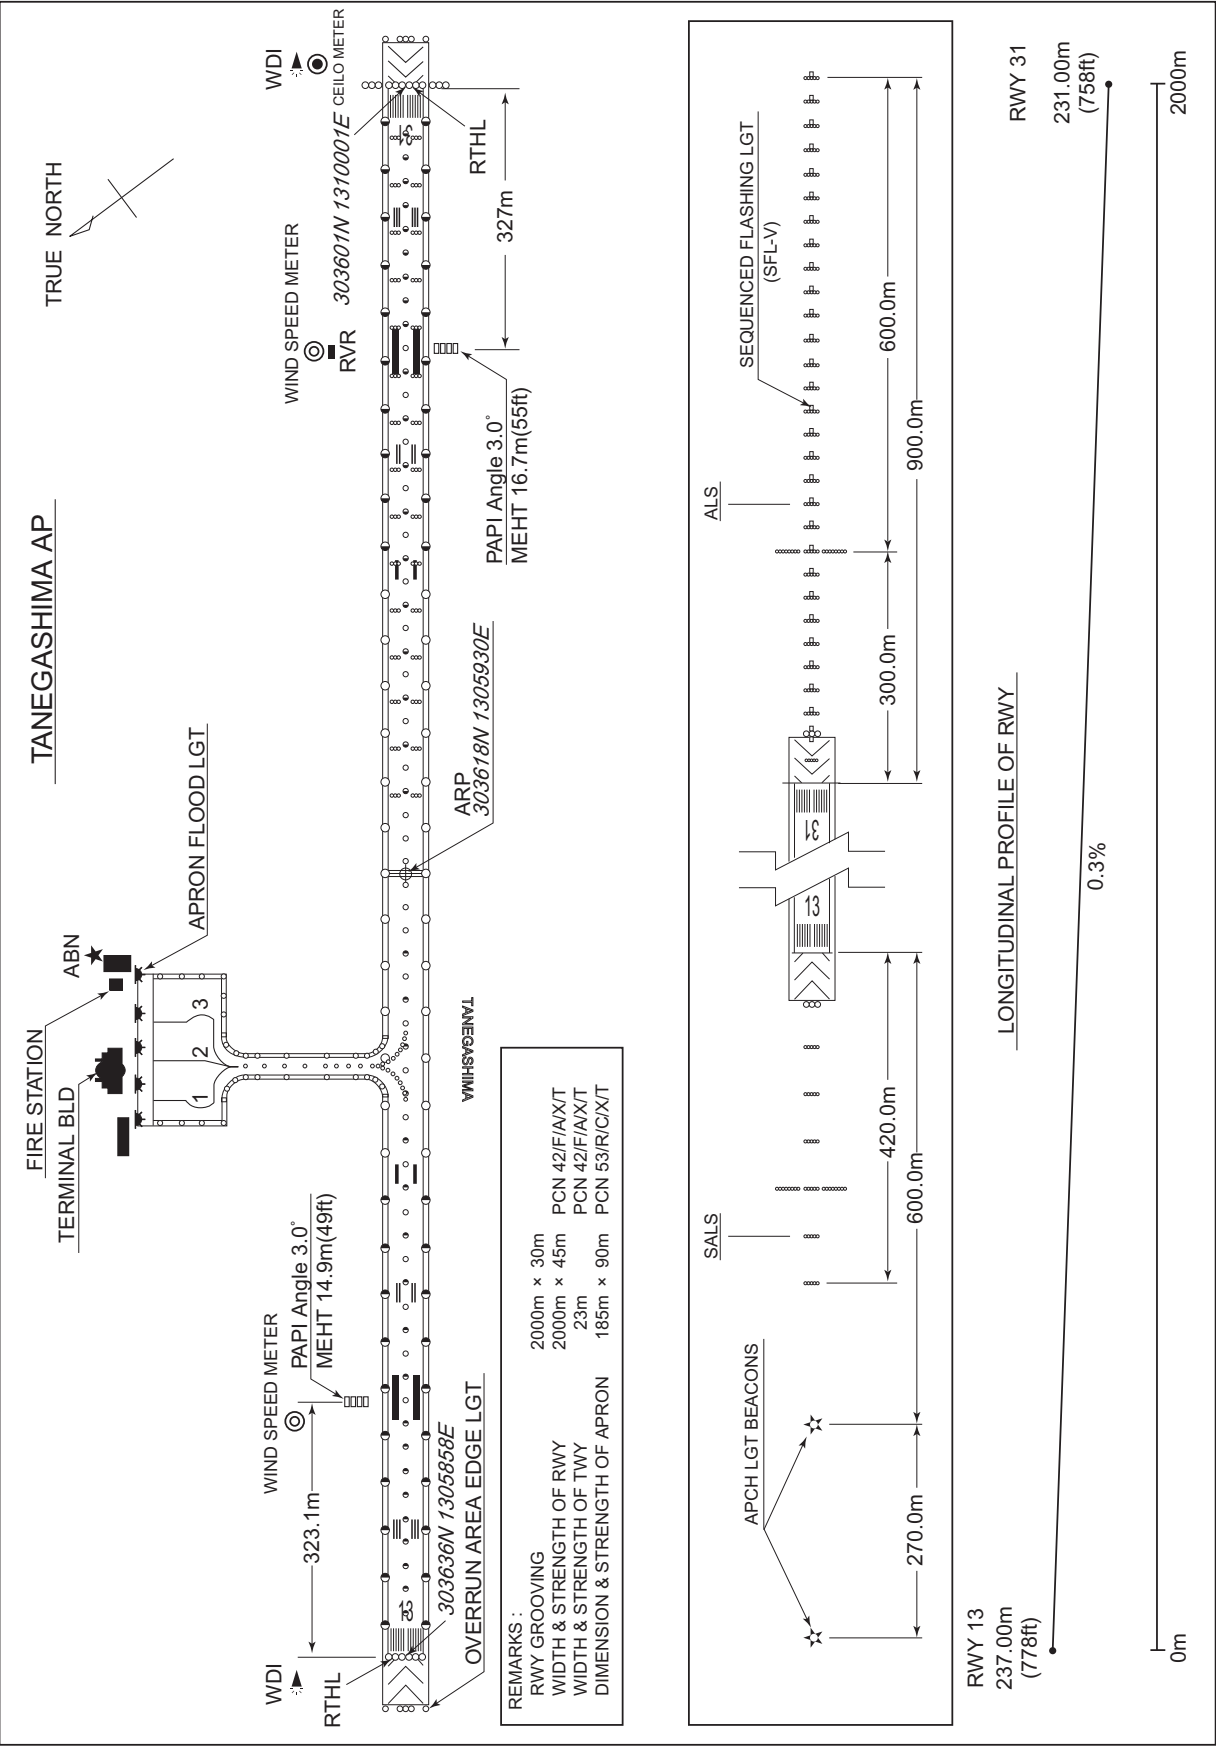

**INTENTIONALLY LEFT BLANK**

STANDARD DEPARTURE CHART - INSTRUMENT

RJFG / TANEGASHIMA

SID

QUEEN TWO DEPARTURE

RWY13: Climb RWY HDG until 1NM from RWY end/TGE 1.5DME, turn left,...

RWY31: Climb RWY HDG until 1NM from RWY end/TGE 1.7DME, turn right,...

...Climb via TGE R-045 to QUEEN.  
Cross TGE R-045/27DME at or above 7,000ft, cross QUEEN at assigned altitude.

KINKO TWO DEPARTURE

RWY13: Climb RWY HDG until 1NM from RWY end/TGE 1.5DME, turn left,...

RWY31: Climb RWY HDG until 1NM from RWY end/TGE 1.7DME, turn right,...

...Climb via TGE R-349 to KINKO.  
Cross TGE R-349/19DME at or above 6,000ft.


TANEGASHIMA REVERSAL TWO DEPARTURE

RWY13: Climb RWY HDG until 1NM from RWY end/TGE 1.5DME, turn left,...

RWY31: Climb RWY HDG until 1NM from RWY end/TGE 1.7DME, turn right,...

...Climb via TGE R-349, then turn left proceed to TGE VOR/DME within TGE 10DME.

CHANGE: PROC renamed. Radial FM TGE.

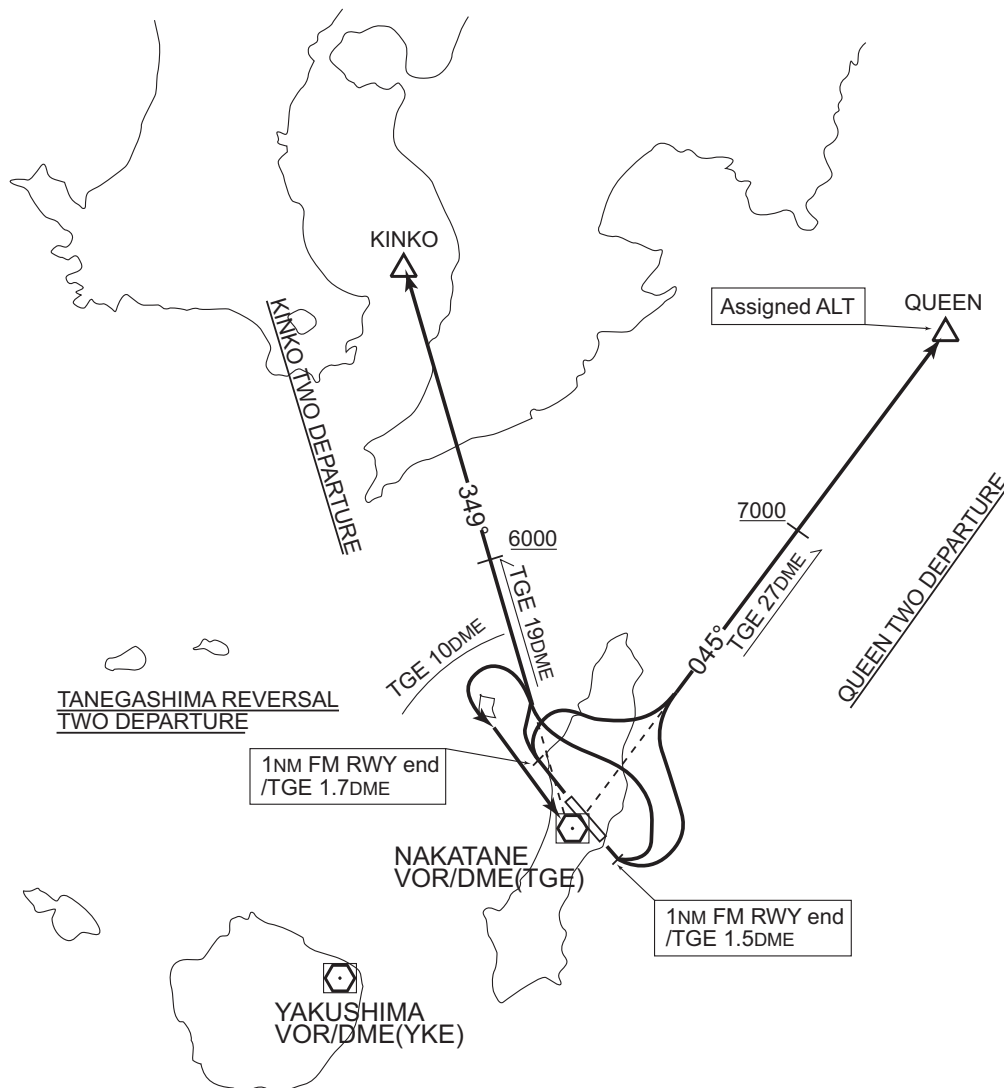

STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV SID

FREDY ONE RNAV DEPARTURE

Basic RNP1

Note GNSS required.

VAR 6°W (2011)



FREDY ONE RNAV DEPARTURE

RWY13 : Climb on HDG 129° at or above 1200FT, turn left direct to FREDY at or above 7000FT, to QUEEN.

RWY31 : Climb on HDG 309° at or above 1300FT, turn right direct to FREDY at or above 7000FT, to QUEEN.

## STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV SID

FREDY ONE RNAV DEPARTURE

## RWY13

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (KIAS)	Vertical Angle	Navigation Performance
VA	—	—	—	129° (122.9°)	—	+1200	—	—	Basic RNP1
DF	FREDY	—	—	—	L	+7000	—	—	Basic RNP1
TF	QUEEN	—	24.9	044° (038.0°)	—	—	—	—	Basic RNP1

## RWY31

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (KIAS)	Vertical Angle	Navigation Performance
VA	—	—	—	309° (302.9°)	—	+1300	—	—	Basic RNP1
DF	FREDY	—	—	—	R	+7000	—	—	Basic RNP1
TF	QUEEN	—	24.9	044° (038.0°)	—	—	—	—	Basic RNP1

## STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV TRANSITION



STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV SID



## STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV SID

KAGYA ONE RNAV DEPARTURE

## RWY13

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (KIAS)	Vertical Angle	Navigation Performance
VA	—	—	—	129° (122.9°)	—	+1200	—	—	Basic RNP1
DF	KAGYA	—	—	—	L	—	—	—	Basic RNP1
TF	FG801	—	8.3	348° (342.4°)	—	+6000	—	—	Basic RNP1
TF	KINKO	—	25.7	348° (342.3°)	—	—	—	—	Basic RNP1

## RWY31

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (KIAS)	Vertical Angle	Navigation Performance
VA	—	—	—	309° (302.9°)	—	+1300	—	—	Basic RNP1
DF	KAGYA	—	—	—	R	—	—	—	Basic RNP1
TF	FG801	—	8.3	348° (342.4°)	—	+6000	—	—	Basic RNP1
TF	KINKO	—	25.7	348° (342.3°)	—	—	—	—	Basic RNP1



STANDARD ARRIVAL CHART - INSTRUMENT

RJFG / TANEGASHIMA

STAR

KAGYA ARRIVAL

From over TEPPPO, proceed via TGE 12DME counterclockwise ARC to KAGYA.  
Cross KAGYA at or above 6,000ft.

CHANGE: Radial FM TGE. Bearing on HOLD Pattern.



**INTENTIONALLY LEFT BLANK**

INSTRUMENT APPROACH CHART

RJFG / TANEGASHIMA

VOR/DME/ILS RWY31




CHANGE : Secondary FREQ abolished(TANEGASHIMA RADIO).

INSTRUMENT APPROACH CHART

RJFG / TANEGASHIMA

VOR/DME RWY31

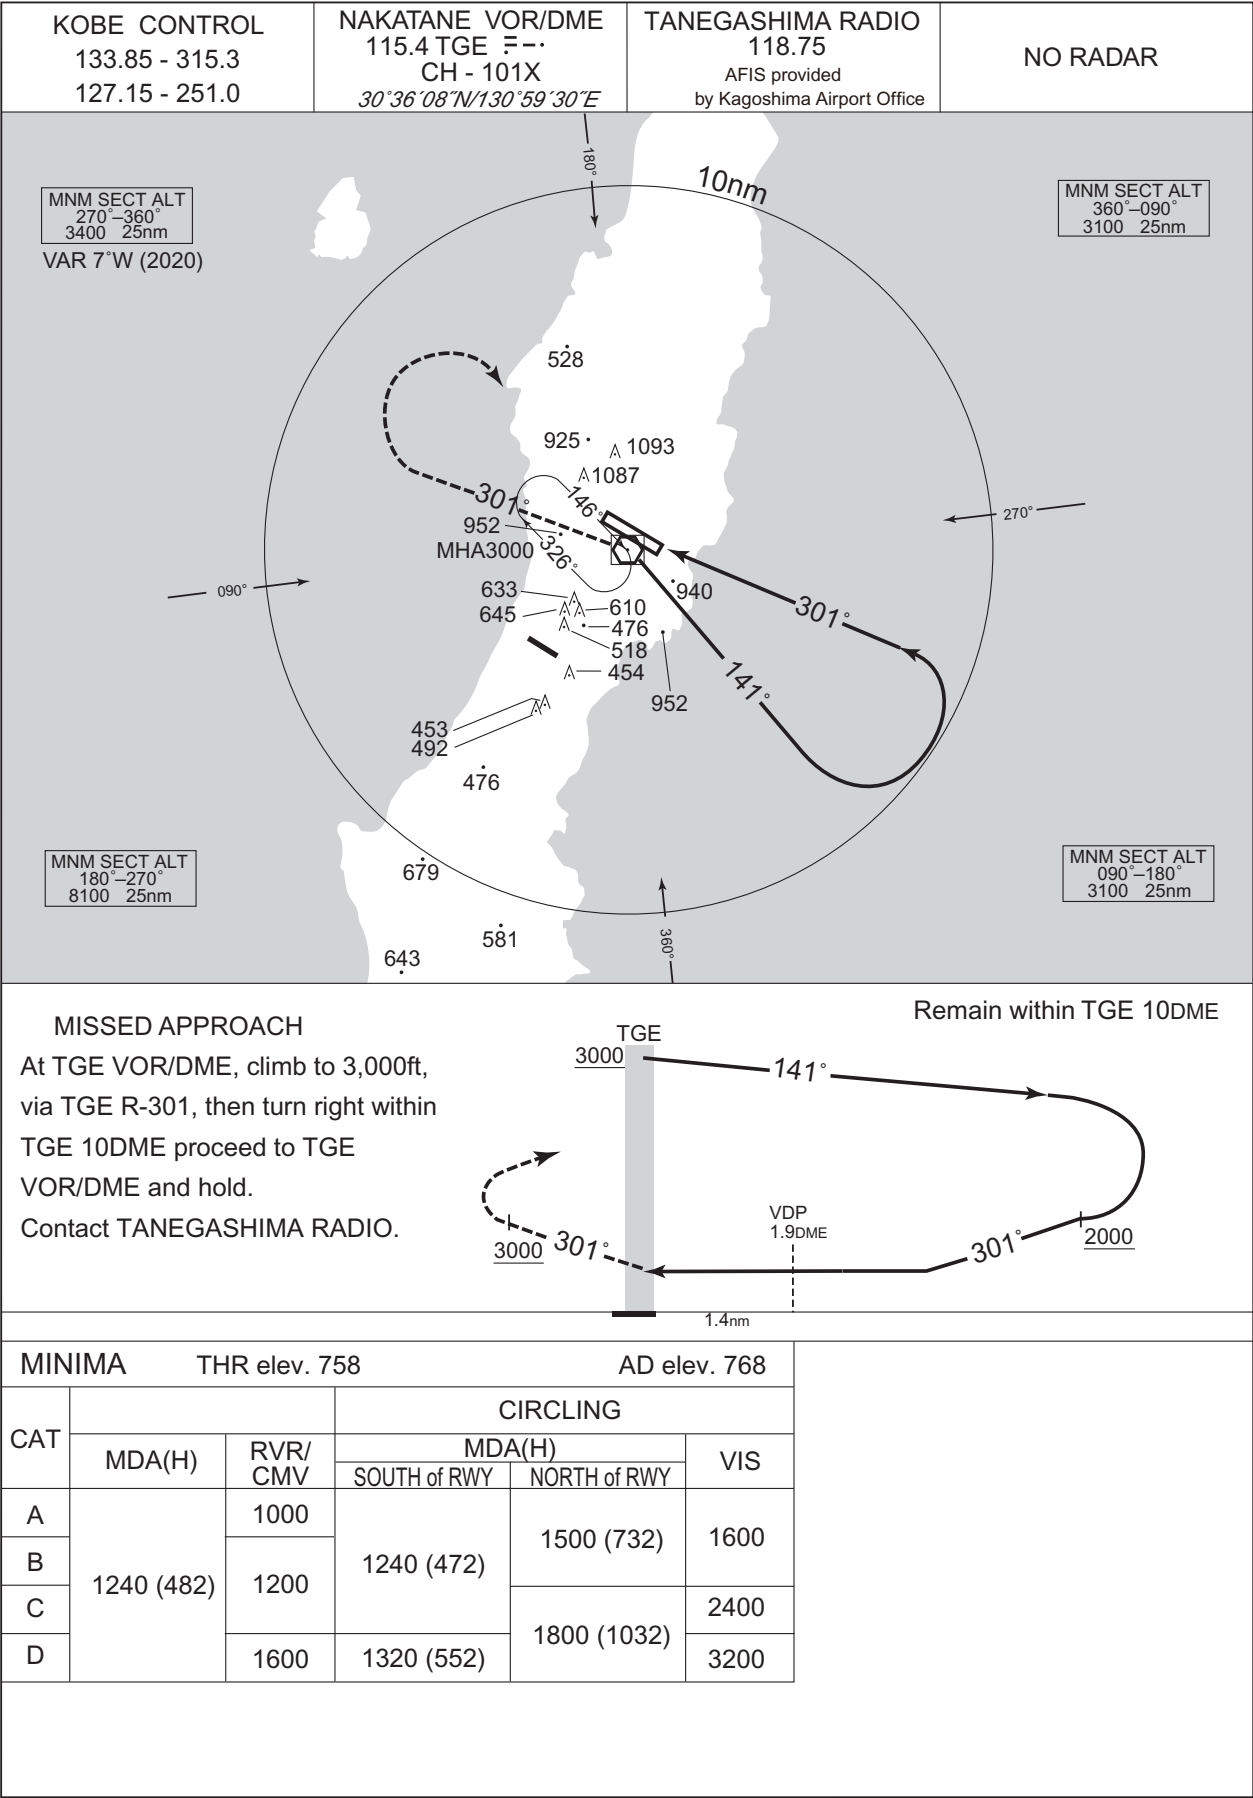


CHANGE : Secondary FREQ abolished(TANEGASHIMA RADIO).

INSTRUMENT APPROACH CHART

RJFG / TANEGASHIMA

VOR/DME RWY13

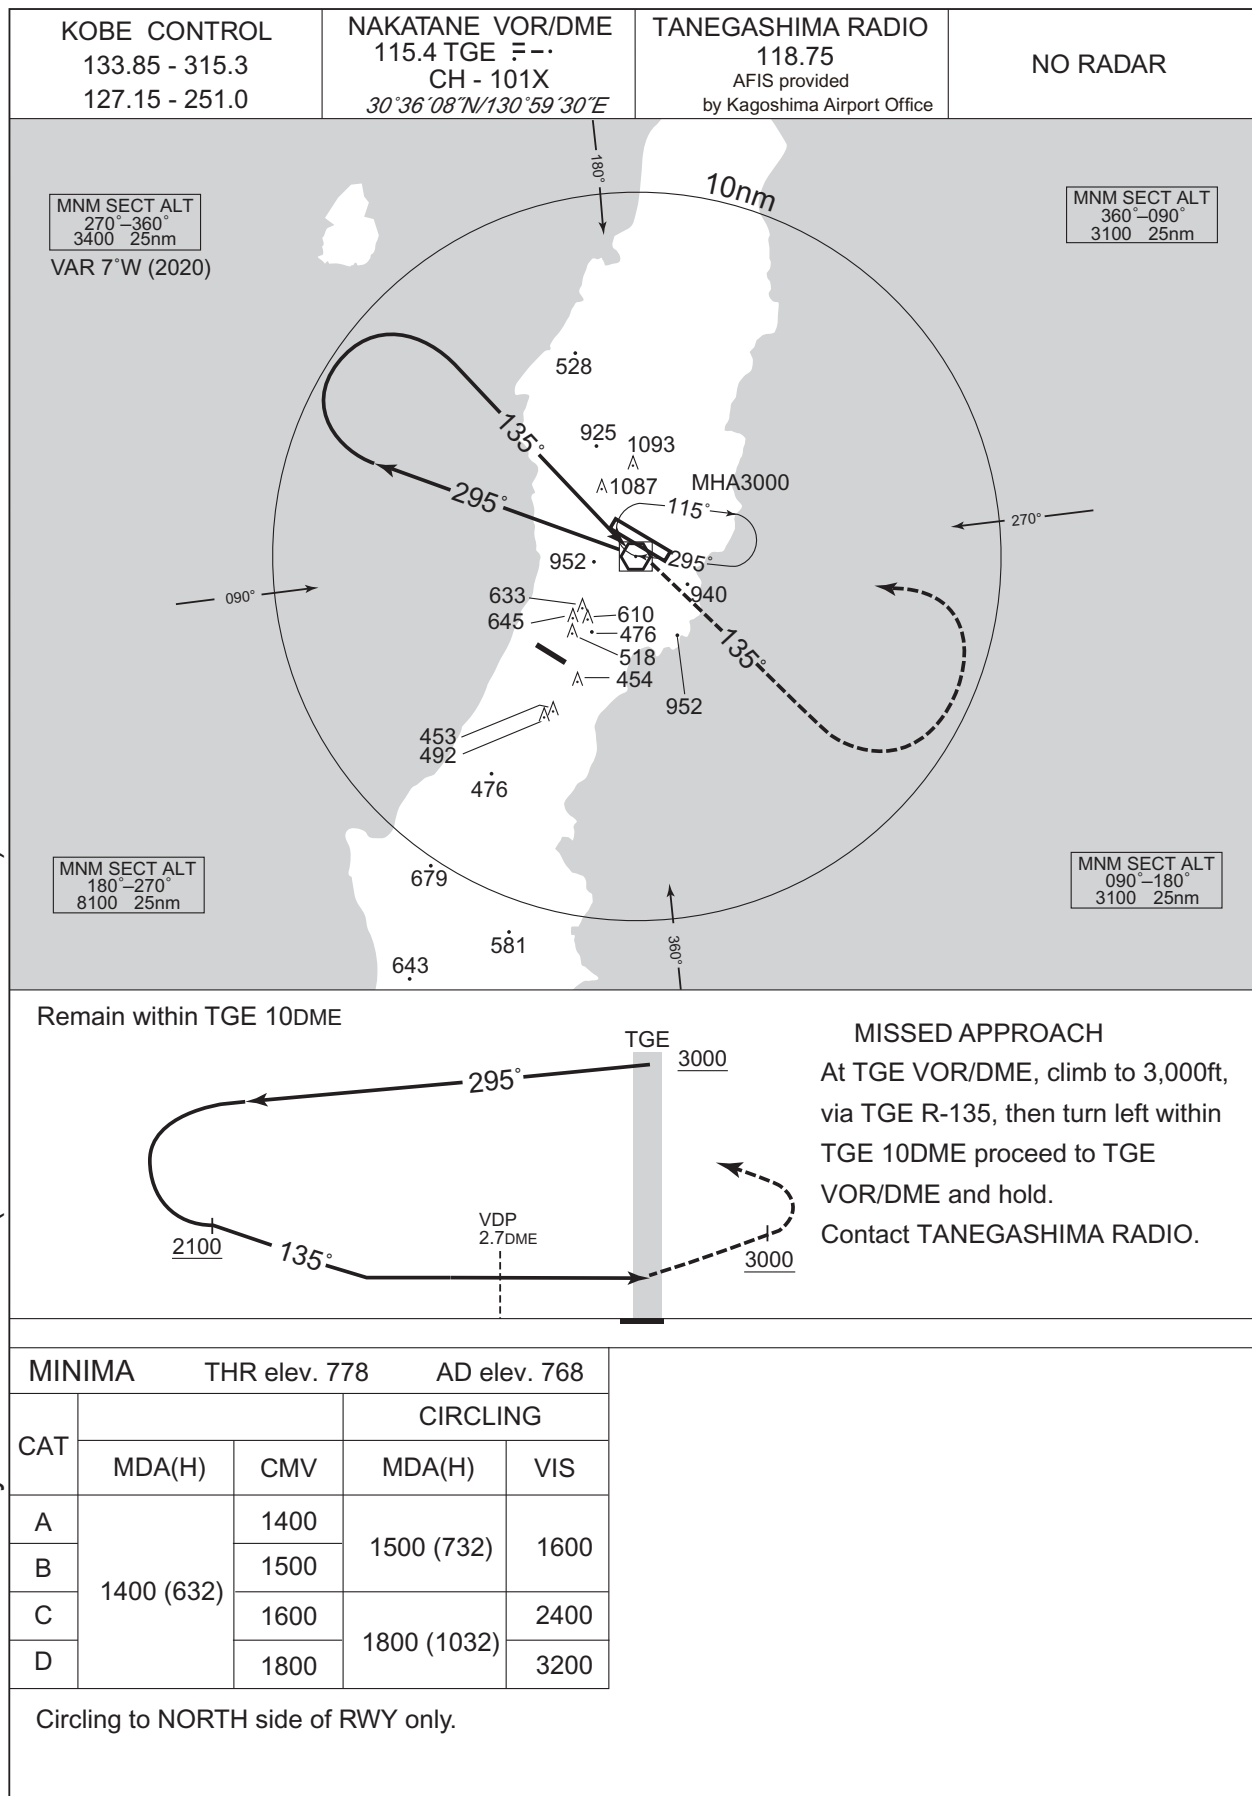

CHANGE : Secondary FREQ abolished(TANEGASHIMA RADIO).

## RJFG / TANEGASHIMA

<b>KOBE CONTROL</b> 133.85 - 315.3 127.15 - 251.0	1. DME/DME RNP0.3 not authorized. 2. RNP0.3 required. 3. GNSS required.	<b>TANEGASHIMA RADIO</b> 118.75 AFIS provided by Kagoshima Airport Office	<b>NO RADAR</b>
---	--	--	-----------------

**BARO VNAV NA below 0°C**

VAR 6°W (2011)

**MHA 6000 MAX 230KIAS**  
D18.0 TGE  
169°  
349°  
KAGYA (MAHF)  
D12.0 TGE  
TGE VOR/DME

**VOR/DME NAKATANE**  
 115.4 TGE  
 CH-101X F--  
 30°36'08"N / 130°59'30"E

NM to Next Fix	FAF	3	2	1	MAPt
ALT (3.0° APCH Path)	2000	1782	1464	1145	-

MINIMA		THR elev. 778		AD elev. 768		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	1140 (362)	1200	1140 (372)	1200	1500 (732)	1600
B		1300		1300		
C		1400		1400	1800 (1032)	2400
D		1600		1600		

CHANGE : Secondary FREQ abolished(TANEGASHIMA RADIO).

RJFG / TANEGASHIMA

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).


CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
喜志鹿崎 Kishigazaki	014°T / 14.2NM	灯台 Lighthouse
西之表 Nishinoomote	359°T / 7.5NM	西之表港 Harbor
10NM W	270°T / 10.0NM	海上 Over the sea
島間 Shimama	219°T / 10.6NM	港 Harbor
竹崎 Takezaki	187°T / 13.2NM	灯台 Lighthouse

RJFG / TANEGASHIMA

Minimum Vectoring Altitude CHART

CHANGE : Minimum vectoring altitude(6000→5000).

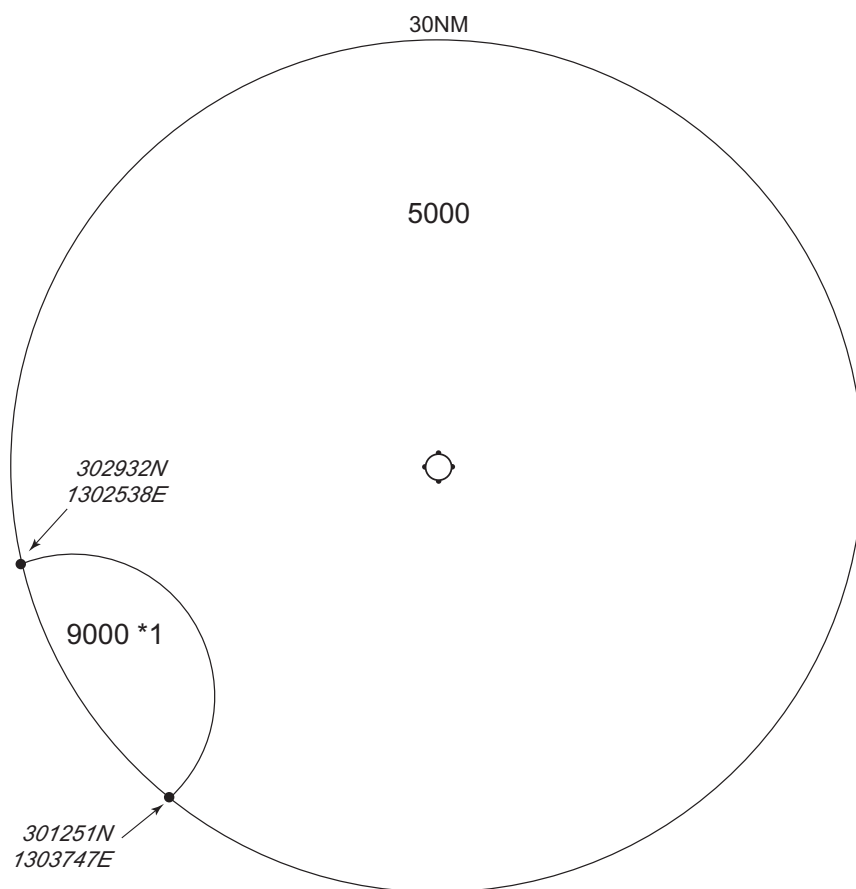

\*1 : 302013N/1302957E RADIUS : 10NM

CENTER : 303618N/1305930E (ARP)