

AD CHART



STANDARD DEPARTURE CHART -INSTRUMENT

RORK / KITADAITO

SID

SOUTH SIX DEPARTURE

RWY03 : Climb RWY HDG to 500FT, turn right, direct to MDE VOR/DME.

RWY21 : Climb to MDE VOR/DME.

Cross MDE VOR/DME at or above 2400FT.

SOUTH SIX DEPARTURE



VOR/DME
MINAMIDAITO
117.8 MDE
CH-125X
25°51'16"N/131°15'50"E
200FT



STANDARD DEPARTURE CHART -INSTRUMENT

RORK / KITADAITO

RNAV SID

CORCO NORTH ONE DEPARTURE


Basic RNP1

Note GNSS required.

VAR 5°W (2015)

CORCO NORTH ONE DEPARTURE

CORCO
255226.5N
1305915.1E
5000

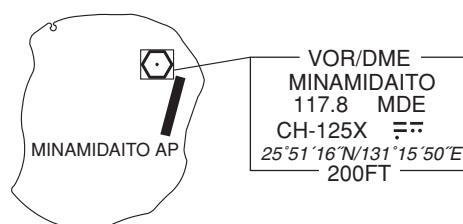

CORCO NORTH ONE DEPARTURE

RWY03 : Climb on HDG030° at or above 500FT, turn left direct to CORCO at or above 5000FT.

RWY21 : Climb on HDG210° at or above 500FT, turn right direct to CORCO at or above 5000FT.

NOTE RWY03 : 4.0% climb gradient required up to 500FT due to airspace restrictions only.

RWY03

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	030 (025.4)	-4.9	—	—	+500	—	—	Basic RNP1
002	DF	CORCO	—	—	-4.9	—	L	+5000	—	—	Basic RNP1

RWY21


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	210 (205.4)	-4.9	—	—	+500	—	—	Basic RNP1
002	DF	CORCO	—	—	-4.9	—	R	+5000	—	—	Basic RNP1

INSTRUMENT APPROACH CHART


RORK / KITADAITO

VOR Z RWY03

FUKUOKA CONTROL 124.5 - 279.5	MINAMIDAITO VOR/DME 117.8 MDE CH-125X 25°51'16"N/131°15'50"E	DAITO RADIO 118.55 AFIS provided by Naha Airport Office	NO RADAR
----------------------------------	---	--	----------

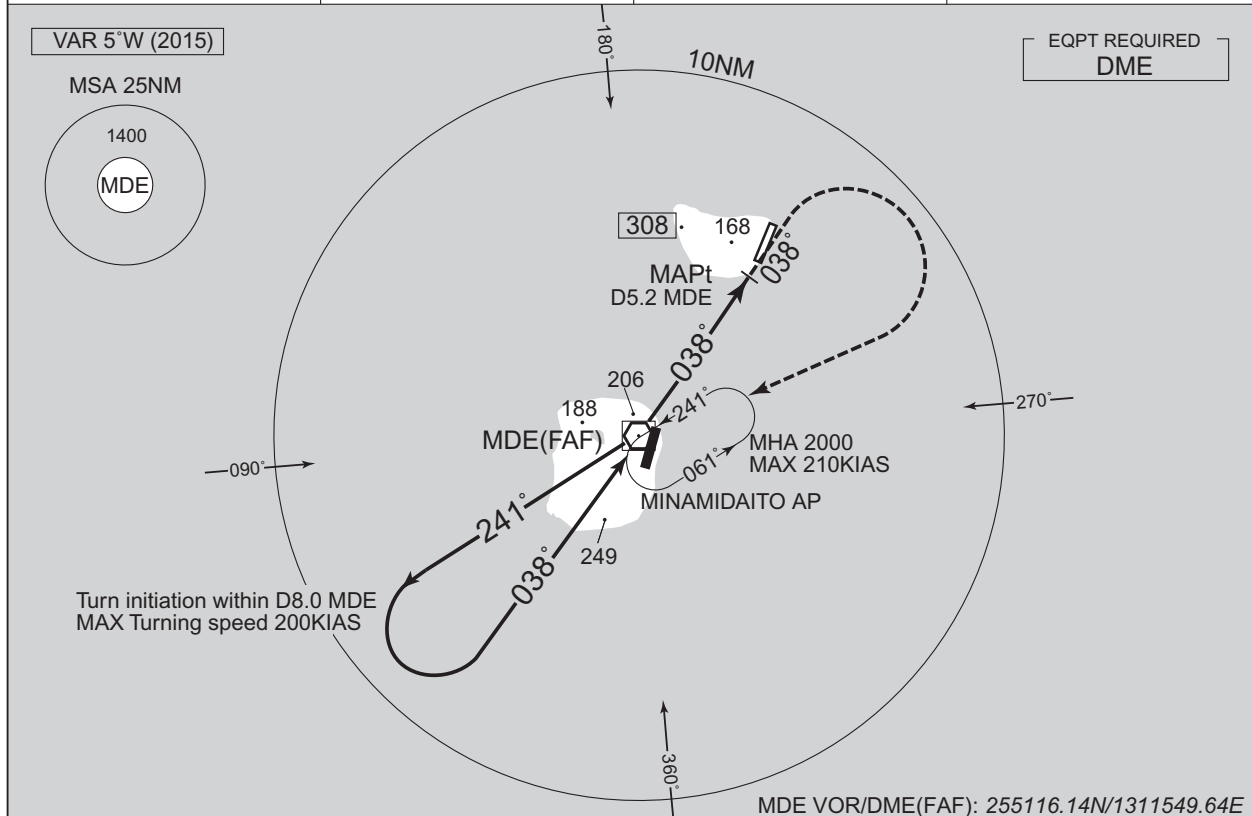

NM from MDE	FAF	1	2	3	4	MAPt
ALT (3.0° APCH Path)	2030	1711	1393	1075	756	—

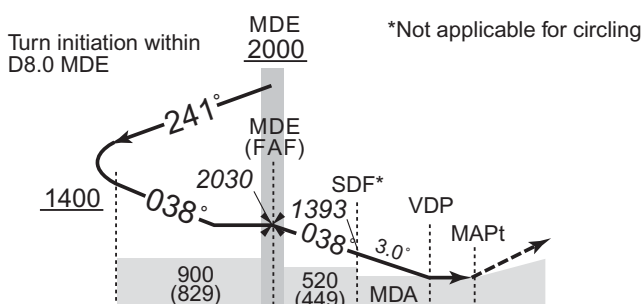

MISSED APPROACH

Climb to 500FT via MDE R038,
turn right, direct to MDE VOR/DME
and hold at 2000FT.
Contact DAITO RADIO.

Timing not authorized for defining the MAPt.

DME from MDE	0	2.0	4.8	5.2	6.0
NM to THR	6.0	4.0	1.2	0.8	0

MINIMA	THR elev. 74	AD elev. 71	CIRCLING	
CAT	MDA(H)	CMV	MDA(H)	VIS
A	480 (409)	1500	560 (489)	1600
B	480 (409)	1500	560 (489)	1600
C	490 (419)	1800	630 (559)	2400
D	—	—	—	—

CHANGE : ATC call sign.

INSTRUMENT APPROACH CHART

RORK / KITADAITO

VOR Y RWY03



CHANGE : ATC call sign.


RORK / KITADAITO

RNAV(GNSS) RWY03

Baro-VNAV not authorized below 5°C

VAR 5°W (2015)


MSA 25NM



ARP · 255641N / 13119.37E

DAITO RADIO
118.55
AFIS provided
by Naha Airport Office

NO RADAR



NM to Next Fix	FAF	3	2	1	MAPt
ALT (3.0° APCH Path)	1100	1079	760	442	–

MDE
VOR/DME

241°

061°

MHA 2000
MAX 210KIAS

(For using VOR/DME)
Turn left, direct to MDE VOR/DME and hold
at 2000FT.
Contact DAITO RADIO.

7.2 3.1 1.1 0 NM to THR

MINIMA		THR elev. 74		AD elev. 71		
CAT	LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	MDA(H)	CMV	MDA (H)	VIS
A	440 (366)	1500	440 (369)	1500	560 (489)	1600
B				1800	630 (559)	2400
C						
D	—	—	—	—	—	—

CHANGE : ATC call sign.

RORK / KITADAITO

Visual REP

VAR 5°W (2014) / 2.1°W

DAITO RADIO
118.55

10NM N

沖縄

KITADAITO INFORMATION ZONE
At or below 3000FT

10NM W

5NM from ARP

北大東島

北大

MINAMIDAITOJIMA

南大東島

南大東

MINAMIDAITO INFORMATION ZONE
At or below 3000FT

大東諸島

Webメルカトル図法(球体補正) / Web Mercator projection

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).


CHANGE : Map updated. BRG/DIST from ARP.

Call sign	BRG / DIST from ARP	Remarks
10NM N	360°T / 10.0NM	海上 Over the sea
10NM W	270°T / 10.0NM	海上 Over the sea
南大東島 Minamidaitojima	210°T / 6.8NM	南大東空港 Minamidaito Airport

RORK / KITADAITO

Minimum Vectoring Altitude CHART

CHANGE : Shape of segment. Minimum vectoring altitude.

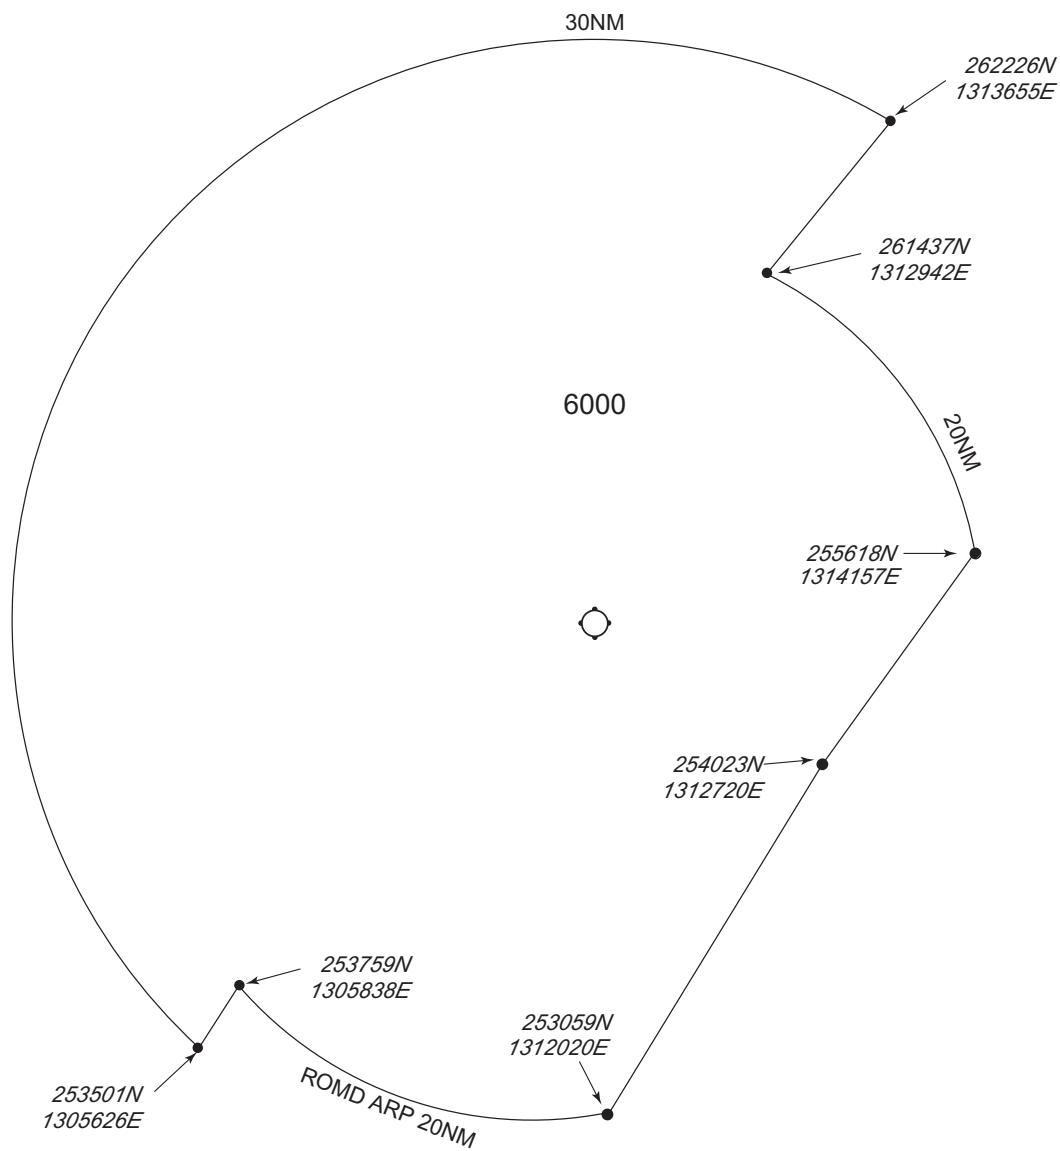

CENTER : 255641N/1311937E (RORK ARP)
REF : 255048N/1311549E (ROMD ARP)