

## AD CHART

**TANEGASHIMA AP**

TRUE NORTH

WIND SPEED METER

WDI

RVR 303601N 1310001E

CEILO METER

RTHL

327m

PAPI Angle 3.0°

MEHT 16.7m(55ft)

ARP 303618N 1305930E

APRON FLOOD LGT

ABN

TERMINAL BLD

1 2 3

WIND SPEED METER

WDI

323.1m

PAPI Angle 3.0°

MEHT 14.9m(49ft)

RTHL

303636N 1305858E

OVERRUN AREA EDGE LGT

TANEGASHIMA

REMARKS :

RWY GROOVING	2000m x 30m	PCN 42/F/A/X/T
WIDTH & STRENGTH OF RWY	2000m x 45m	PCN 42/F/A/X/T
WIDTH & STRENGTH OF TWY	23m	PCN 53/R/C/X/T
DIMENSION & STRENGTH OF APRON	185m x 90m	

**LONGITUDINAL PROFILE OF RWY**

RWY 13

237.00m (778ft)

RWY 31

231.00m (758ft)

0.3%

2000m

0m

APCH LGT BEACONS

SALS

600.0m

420.0m

270.0m

ALS

300.0m

600.0m

900.0m

SEQUENCED FLASHING LGT (SFL-V)

**INTENTIONALLY LEFT BLANK**

STANDARD DEPARTURE CHART - INSTRUMENT

RJFG / TANEGASHIMA

SID

QUEEN TWO DEPARTURE

RWY13: Climb RWY HDG until 1NM from RWY end/TGE 1.5DME, turn left,...

RWY31: Climb RWY HDG until 1NM from RWY end/TGE 1.7DME, turn right,...

...Climb via TGE R-045 to QUEEN.  
Cross TGE R-045/27DME at or above 7,000ft, cross QUEEN at assigned altitude.

KINKO TWO DEPARTURE

RWY13: Climb RWY HDG until 1NM from RWY end/TGE 1.5DME, turn left,...

RWY31: Climb RWY HDG until 1NM from RWY end/TGE 1.7DME, turn right,...

...Climb via TGE R-349 to KINKO.  
Cross TGE R-349/19DME at or above 6,000ft.


TANEGASHIMA REVERSAL TWO DEPARTURE

RWY13: Climb RWY HDG until 1NM from RWY end/TGE 1.5DME, turn left,...

RWY31: Climb RWY HDG until 1NM from RWY end/TGE 1.7DME, turn right,...

...Climb via TGE R-349, then turn left proceed to TGE VOR/DME within TGE 10DME.

CHANGE: PROC renamed. Radial FM TGE.

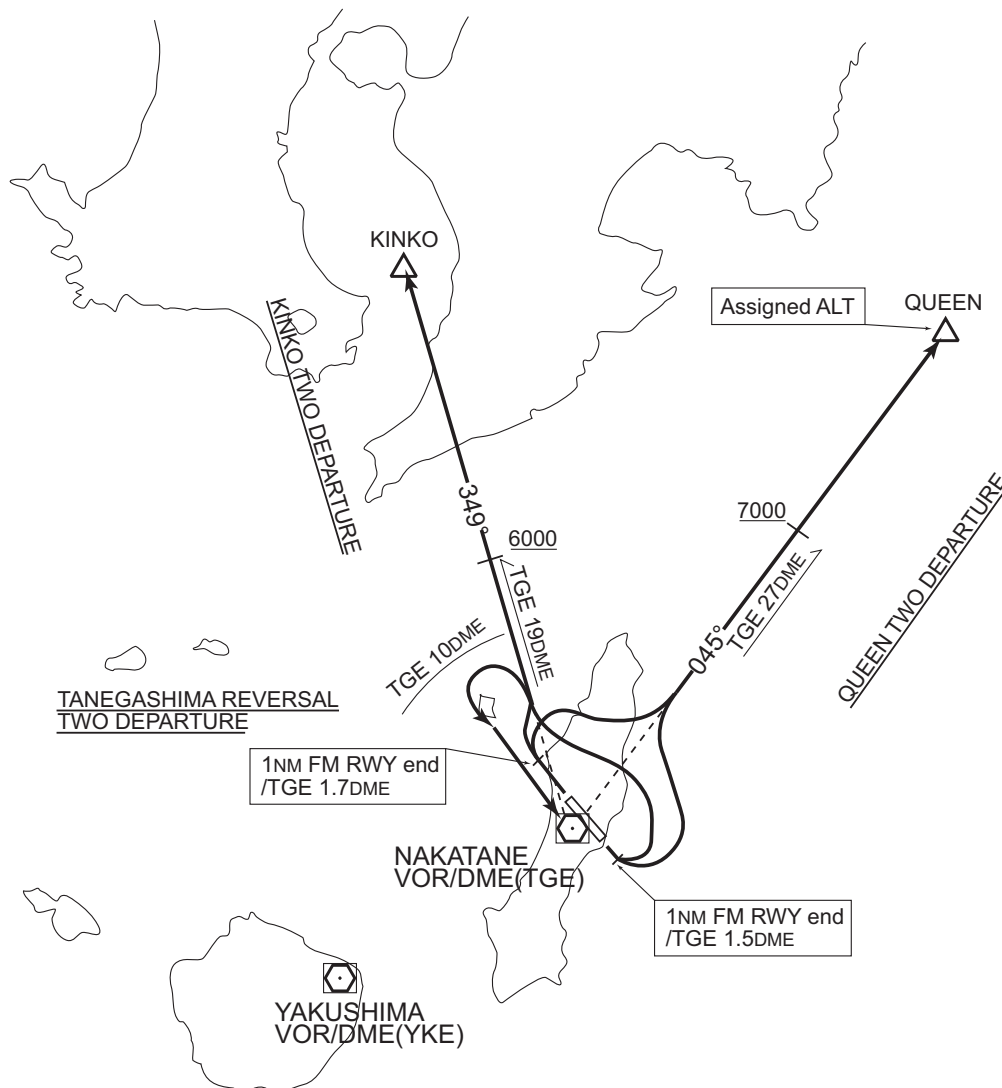

STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV SID

FREDY ONE RNAV DEPARTURE

Basic RNP1

Note GNSS required.

VAR 6°W (2011)



FREDY ONE RNAV DEPARTURE

RWY13 : Climb on HDG 129° at or above 1200FT, turn left direct to FREDY at or above 7000FT, to QUEEN.

RWY31 : Climb on HDG 309° at or above 1300FT, turn right direct to FREDY at or above 7000FT, to QUEEN.

## STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV SID

FREDY ONE RNAV DEPARTURE

## RWY13

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (KIAS)	Vertical Angle	Navigation Performance
VA	—	—	—	129° (122.9°)	—	+1200	—	—	Basic RNP1
DF	FREDY	—	—	—	L	+7000	—	—	Basic RNP1
TF	QUEEN	—	24.9	044° (038.0°)	—	—	—	—	Basic RNP1

## RWY31

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (KIAS)	Vertical Angle	Navigation Performance
VA	—	—	—	309° (302.9°)	—	+1300	—	—	Basic RNP1
DF	FREDY	—	—	—	R	+7000	—	—	Basic RNP1
TF	QUEEN	—	24.9	044° (038.0°)	—	—	—	—	Basic RNP1

## STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV TRANSITION



STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV SID



## STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV SID

KAGYA ONE RNAV DEPARTURE

## RWY13

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (KIAS)	Vertical Angle	Navigation Performance
VA	—	—	—	129° (122.9°)	—	+1200	—	—	Basic RNP1
DF	KAGYA	—	—	—	L	—	—	—	Basic RNP1
TF	FG801	—	8.3	348° (342.4°)	—	+6000	—	—	Basic RNP1
TF	KINKO	—	25.7	348° (342.3°)	—	—	—	—	Basic RNP1

## RWY31

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (KIAS)	Vertical Angle	Navigation Performance
VA	—	—	—	309° (302.9°)	—	+1300	—	—	Basic RNP1
DF	KAGYA	—	—	—	R	—	—	—	Basic RNP1
TF	FG801	—	8.3	348° (342.4°)	—	+6000	—	—	Basic RNP1
TF	KINKO	—	25.7	348° (342.3°)	—	—	—	—	Basic RNP1



STANDARD ARRIVAL CHART - INSTRUMENT


RJFG / TANEGASHIMA

STAR

KAGYA ARRIVAL

From over TEPPPO, proceed via TGE 12DME counterclockwise ARC to KAGYA.  
Cross KAGYA at or above 6,000ft.

CHANGE: Radial FM TGE. Bearing on HOLD Pattern.

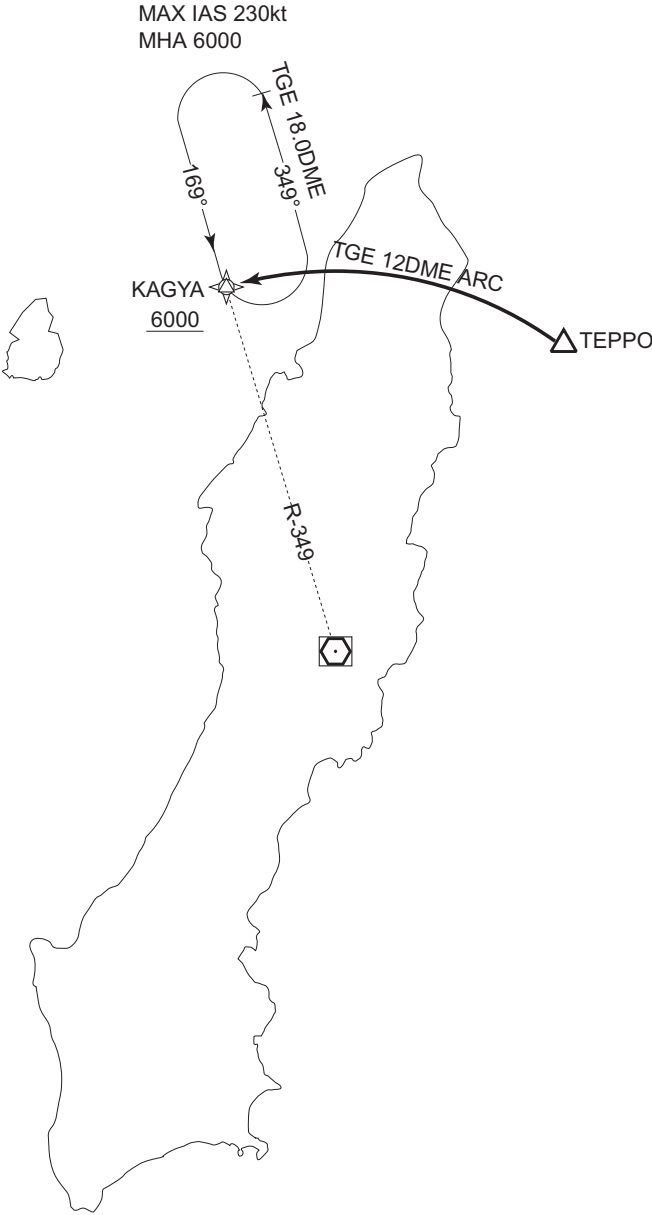

**INTENTIONALLY LEFT BLANK**

INSTRUMENT APPROACH CHART

RJFG / TANEGASHIMA

VOR/DME/ILS RWY31




CHANGE : Secondary FREQ abolished(TANEGASHIMA RADIO).

## INSTRUMENT APPROACH CHART

RJFG / TANEGASHIMA

VOR/DME RWY31

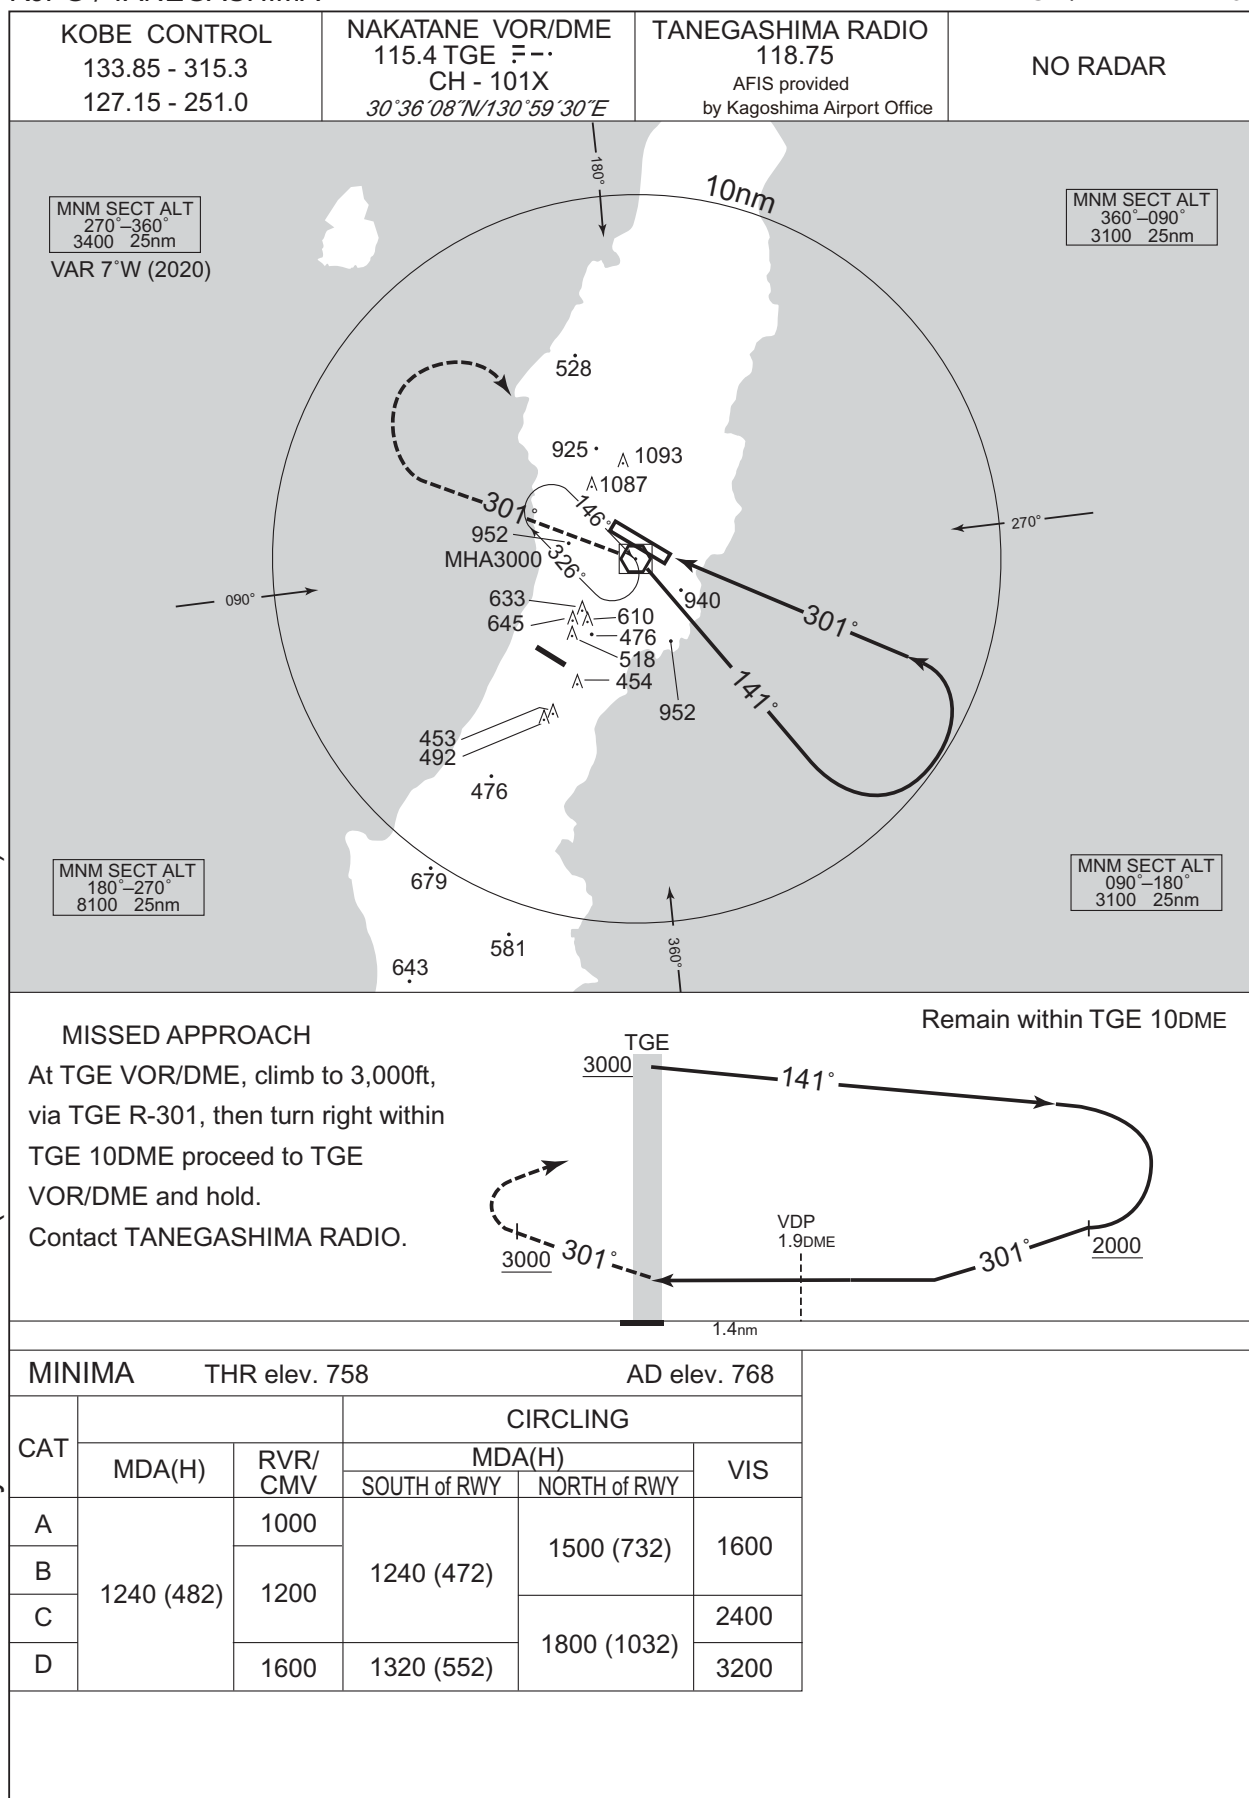


CHANGE : Secondary FREQ abolished(TANEGASHIMA RADIO).

INSTRUMENT APPROACH CHART


RJFG / TANEGASHIMA

VOR/DME RWY13

KOBE CONTROL 133.85 - 315.3 127.15 - 251.0	NAKATANE VOR/DME 115.4 TGE F-- CH - 101X 30°36'08"N/130°59'30"E	TANEGASHIMA RADIO 118.75 AFIS provided by Kagoshima Airport Office	NO RADAR
--	--	---	----------

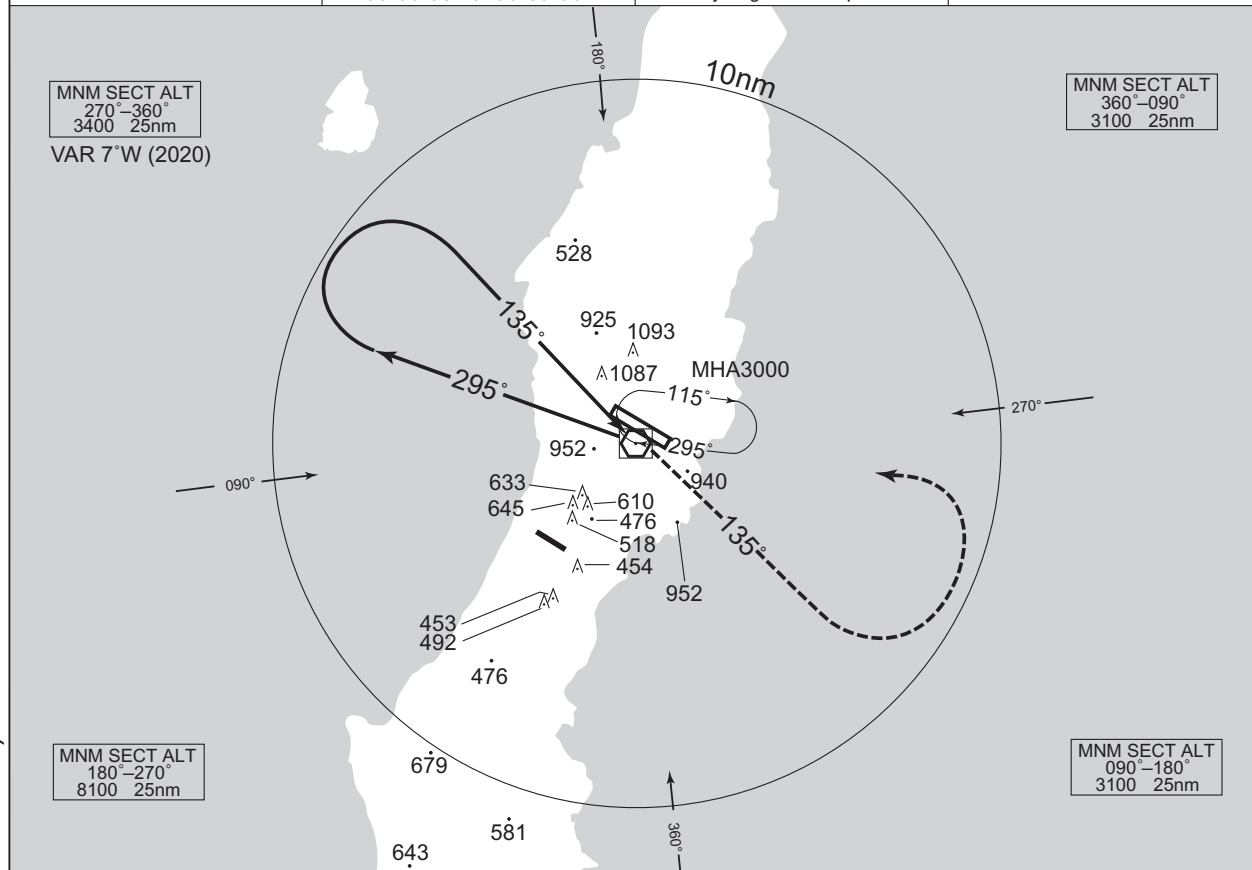

Remain within TGE 10DME

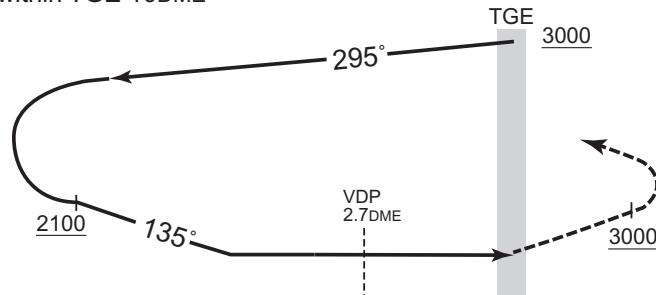

**MISSED APPROACH**  
At TGE VOR/DME, climb to 3,000ft,  
via TGE R-135, then turn left within  
TGE 10DME proceed to TGE  
VOR/DME and hold.  
Contact TANEGASHIMA RADIO.

MINIMA		THR elev. 778	AD elev. 768	
CAT			CIRCLING	
	MDA(H)	CMV	MDA(H)	VIS
A	1400 (632)	1400	1500 (732)	1600
B		1500		
C		1600	1800 (1032)	2400
D		1800		


Circling to NORTH side of RWY only.

CHANGE : Secondary FREQ abolished(TANEGASHIMA RADIO).

## INSTRUMENT APPROACH CHART

RJFG / TANEGASHIMA

RNP RWY13

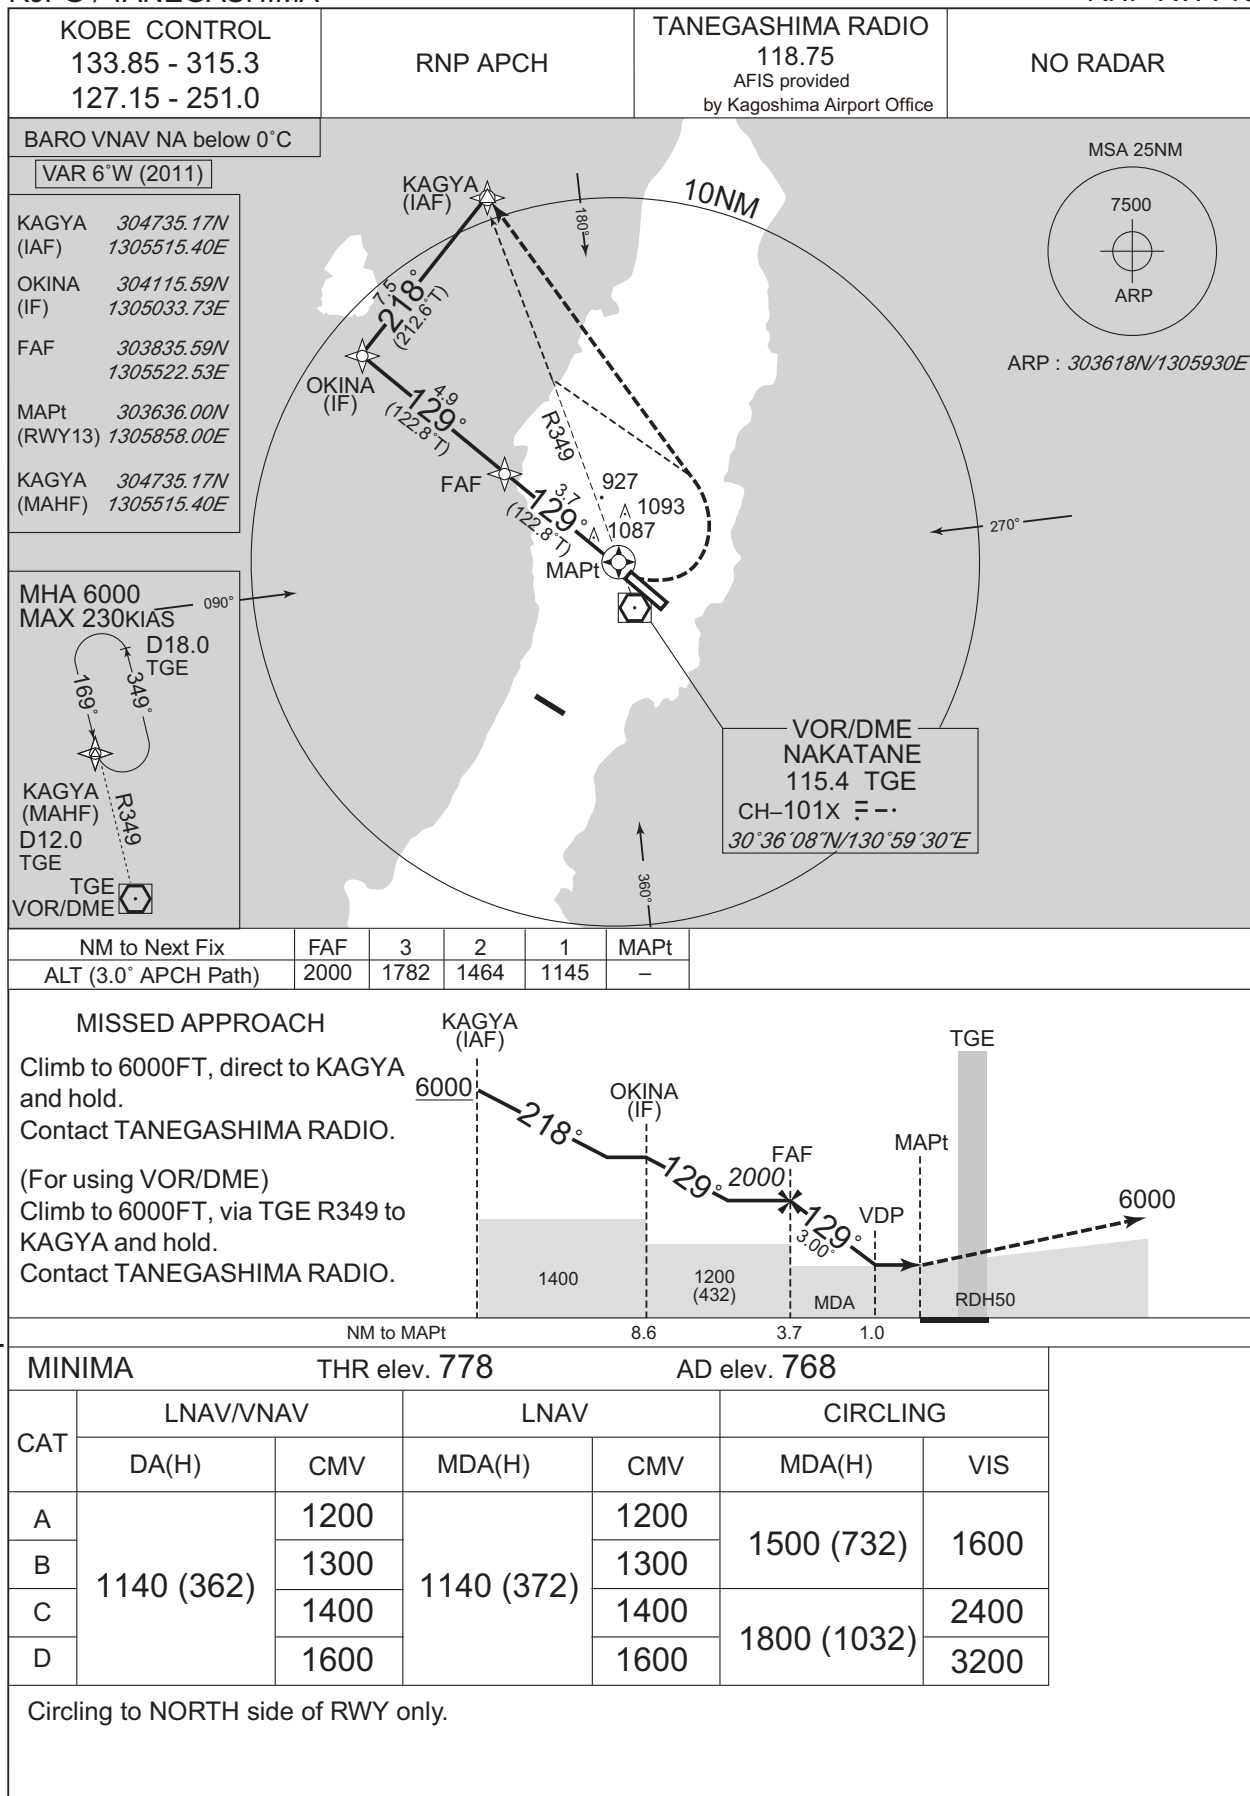

CHANGE:PROC renamed. Requirement for RNP.

RJFG / TANEGASHIMA

Visual REP



※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).


CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
喜志鹿崎 Kishigazaki	014°T / 14.2NM	灯台 Lighthouse
西之表 Nishinoomote	359°T / 7.5NM	西之表港 Harbor
10NM W	270°T / 10.0NM	海上 Over the sea
島間 Shimama	219°T / 10.6NM	港 Harbor
竹崎 Takezaki	187°T / 13.2NM	灯台 Lighthouse

RJFG / TANEGASHIMA

Minimum Vectoring Altitude CHART

CHANGE : Minimum vectoring altitude(6000→5000).

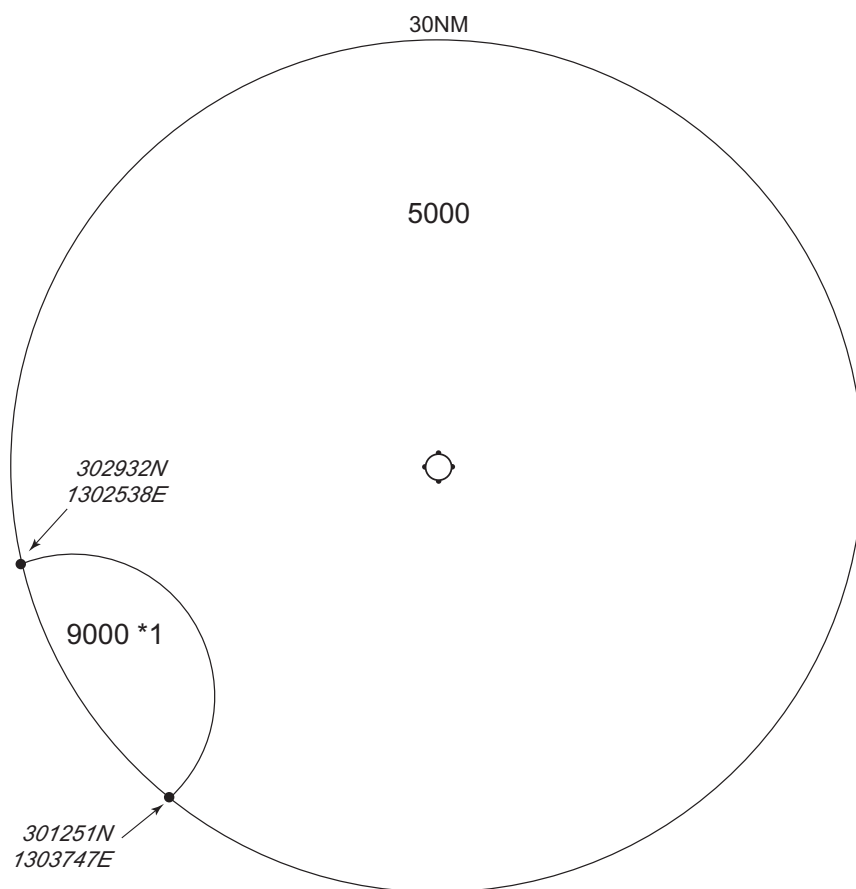

\*1 : 302013N/1302957E RADIUS : 10NM

CENTER : 303618N/1305930E (ARP)