

AD 2 AERODROMES

RJTY AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RJTY - YOKOTA

RJTY AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	354455N1392055E
2	Direction and distance from (city)	3.5nm WNW TACHIKAWA
3	Elevation/ Reference temperature	462ft / -
4	Geoid undulation at AD ELEV PSN	Nil
5	MAG VAR/ Annual change	7.0°W(2003)/0.0°
6	AD Administration, address, telephone, telefax, telex, AFS, e-mail and/or Web-site addresses	USAF Yokota Airfield Management Tel:042-552-2510 ext.5-7006/5-9127 Fax: 042-552-9975 374 OSS/OSA Unit 5222 APO, AP 96328-5222
7	Types of traffic permitted(IFR/ VFR)	IFR/VFR
8	Remarks	

RJTY AD 2.3 OPERATIONAL HOURS

1	AD Administration	2100 - 1300 Daily
2	Customs and immigration	Nil
3	Health and sanitation	Nil
4	AIS Briefing Office	H24
5	ATS Reporting Office(ARO)	Nil
6	MET Briefing Office	Nil
7	ATS	Control Tower : 2100-1300 daily Radar Approach control : H24
8	Fuelling	Nil
9	Handling	Nil
10	Security	Nil
11	De-icing	Nil
12	Remarks	Nil

RJTY AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Nil
2	Fuel/ oil types	Nil
3	Fuelling facilities/ capacity	Nil
4	De-icing facilities	Nil
5	Hangar space for visiting aircraft	Nil
6	Repair facilities for visiting aircraft	Nil
7	Remarks	Nil

RJTY AD 2.5 PASSENGER FACILITIES

1	Hotels	Nil
2	Restaurants	Nil
3	Transportation	Nil
4	Medical facilities	Nil
5	Bank and Post Office	Nil
6	Tourist Office	Nil
7	Remarks	Nil

RJTY AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	Nil
2	Rescue equipment	Nil
3	Capability for removal of disabled aircraft	Nil
4	Remarks	Nil

RJTY AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	Types of clearing equipment	Nil
2	Clearance priorities	Nil
3	Remarks	Nil

RJTY AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	Apron surface and strength	To be issued later
2	Taxiway width, surface and strength	To be issued later
3	ACL and elevation	Not available
4	VOR checkpoints	Not available
5	INS checkpoints	Not available
6	Remarks	

RJTY AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and Visual docking/ parking guidance system of aircraft stands	Nil
2	RWY and TWY markings and LGT	RWY : 18/36 (Marking) RWY centerline, RWY threshold, Fixed distance, TDZ, RWY side stripes, arresting gear, assault zone. (LGT) high intensity RWY, high intensity centerline, assault zone lighting. TWY: (Marking) TWY centerline, RWY hold, TWY side stripes, enhanced centerline markings, TWY designation, ILS hold signs (LGT) TWY edge LGT, RWY hold sign, ILS hold signs
3	Stop bars	Nil
4	Remarks	(LGT) Apron flood LGT

RJTY AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas					
RWY/Area affected	Obstacle type	Coordinates	Elevation	Markings/ LGT	Remarks
Nil					

In circling area and at AD				
Obstacle type	Coordinates	Elevation	Markings/ LGT	Remarks
Nil				

RJTY AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	YOKOTA
2	Hours of service MET Office outside hours	Nil
3	Office responsible for TAF preparation Periods of validity	Nil
4	Trend forecast Interval of issuance	Nil
5	Briefing/ consultation provided	Nil
6	Flight documentation Language(s) used	Nil
7	Charts and other information available for briefing or consultation	Nil
8	Supplementary equipment available for providing information	Nil
9	ATS units provided with information	Nil
10	Additional information(limitation of service, etc.)	Nil

RJTY AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY(M)	Strength(PCN) and surface of RWY	THR coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
18	To be issued later	3353x61	PCN 126/R/B/W/T Concrete	354547.54N 1392043.44E	THR ELEV: 462ft TDZ ELEV: 462ft
36		3353x61	PCN 126/R/B/W/T Concrete	354401.67N 1392105.64E	THR ELEV: 416ft TDZ ELEV: 430ft
Slope of RWY		Strip Dimensions(M)		Remarks	
7		10		12	
Nil		Nil			

RJTY AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (m)	TODA (m)	ASDA (m)	LDA (m)	Remarks
1	2	3	4	5	6
18	3353	3353	3353	3353	
36	3353	3353	3353	3353	

RJTY AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type LEN INTST	RTHL Color WBAR	PAPI (VASIS) Angle DIST FM THR MEHT	RTZL LEN	RCLL LEN Spacing Color INTST	REDL LEN Spacing Color INTST	RENL Color WBAR	STWL LEN Color
1	2	3	4	5	6	7	8	9
18			PAPI (*1)					
36			PAPI					
Remarks								
10								
High intensity approach light and sequence flashers(SFLs) available for RWY 18/36. SFLs and PAPIs are step capable (the lights have varying intensity levels depending on weather conditions). (*1)GP not coincidental with RWY18 ILS								

RJTY AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	ABN: 354447.9N/1392037.4E, White/Green EV10sec, HN&HO
2	LDI location and LGT Anemometer location and LGT	Nil
3	TWY edge and center line lighting	Nil
4	Secondary power supply/ switch-over time	Nil
5	Remarks	WDI LGT, OBST LGT


RJTY AD 2.16 HELICOPTER LANDING AREA

To be issued later


RJTY AD 2.17 ATS AIRSPACE

Designation and lateral limits		Vertical limits (ft)	Airspace classifica- tion	ATS unit call sign Language	Remarks
1		2	3	4	6
YOKOTA CTR	Area within a radius of 5nm of ARP (35°45'N/ 139°21'E), excluding Tachikawa and Iruma CTR.	Up to but not including 3000 AGL	D	YOKOTA TOWER English	
YOKOTA ACA	SEE below Figure		E	YOKOTA APP YOKOTA DEP YOKOTA ARR English	*ACA: APPROACH CONTROL AREA
YOKOTA CLASS C AIRSPACE	SEE below Figure		C	YOKOTA APP English	Operational Hour 0600UTC- 1000UTC

横田進入管制空域
Yokota Approach Control Area

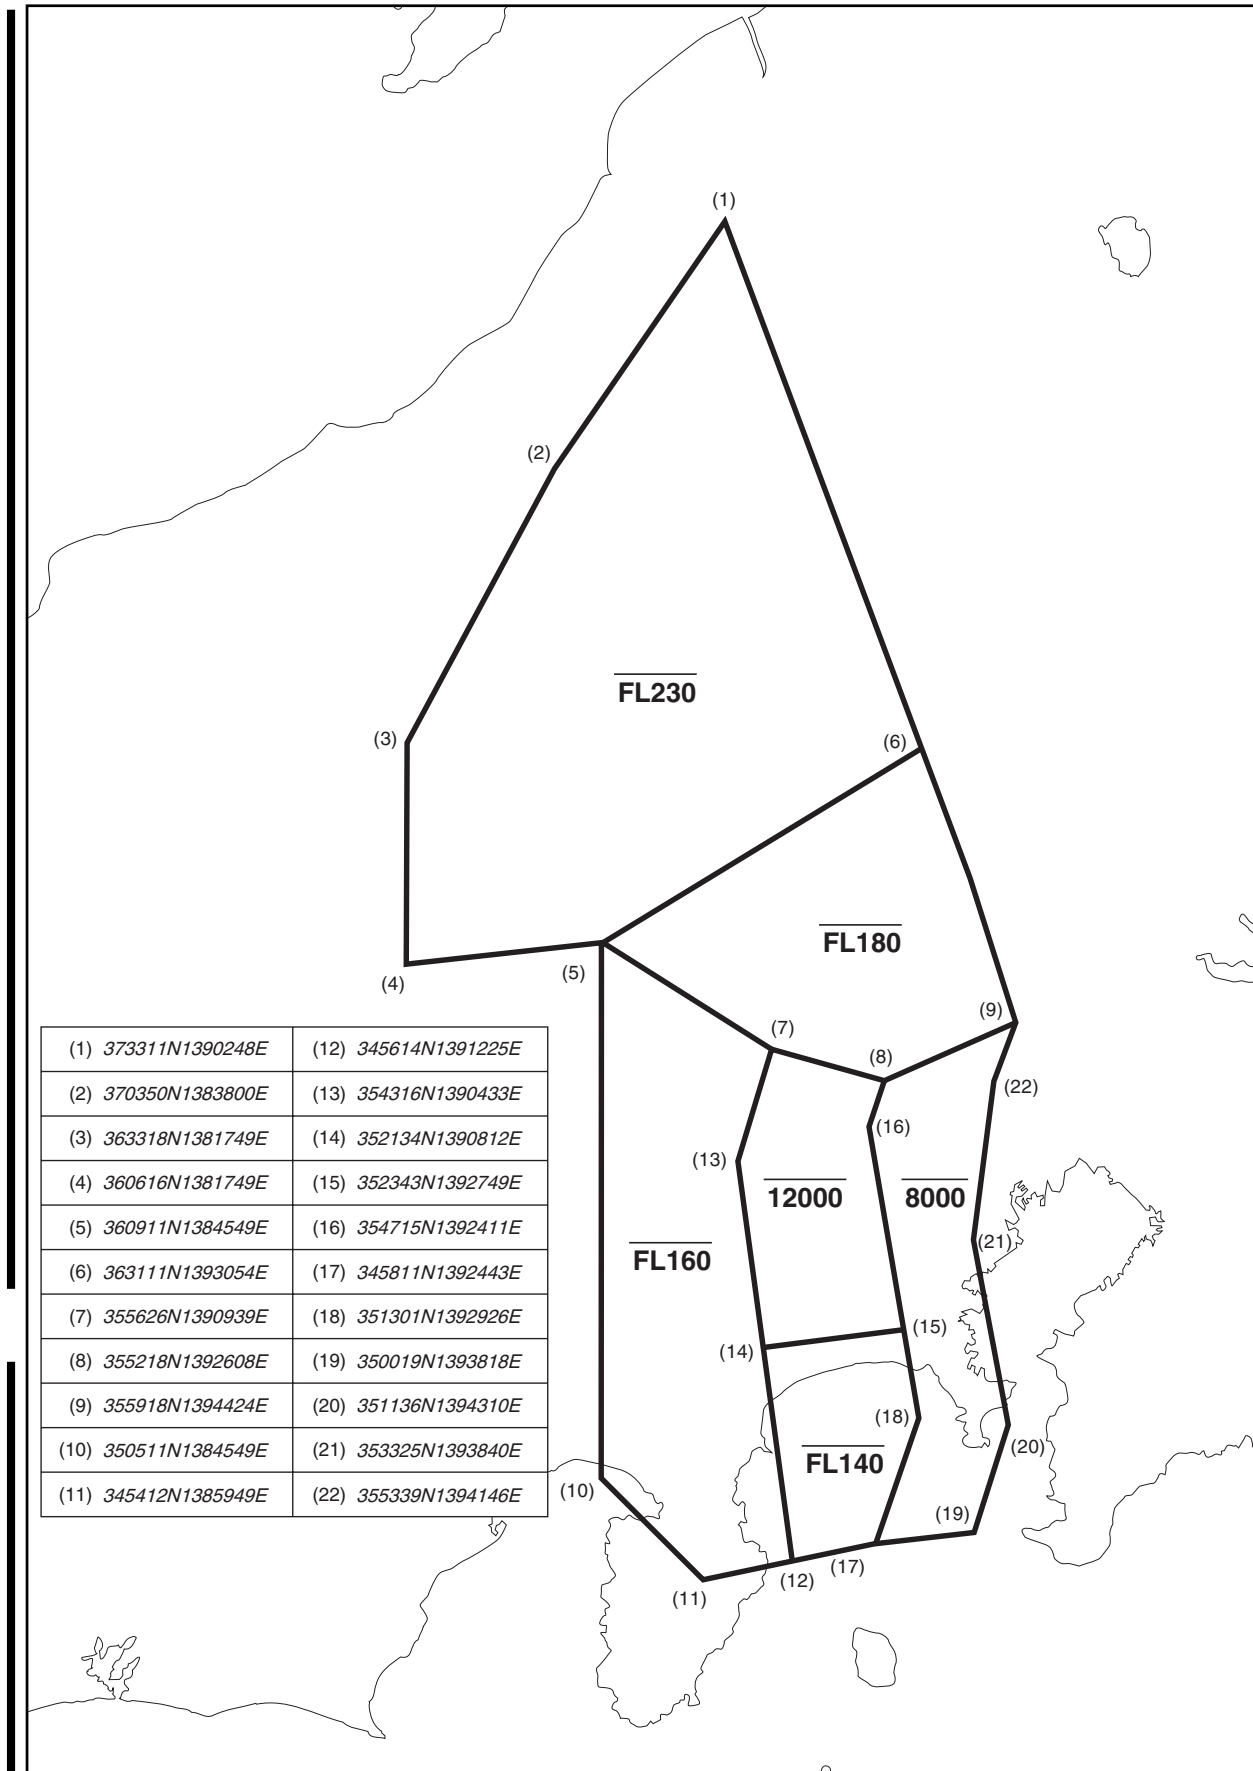

YOKOTA CLASS C AIRSPACE
(Operation hour : 0600UTC - 1000 UTC)

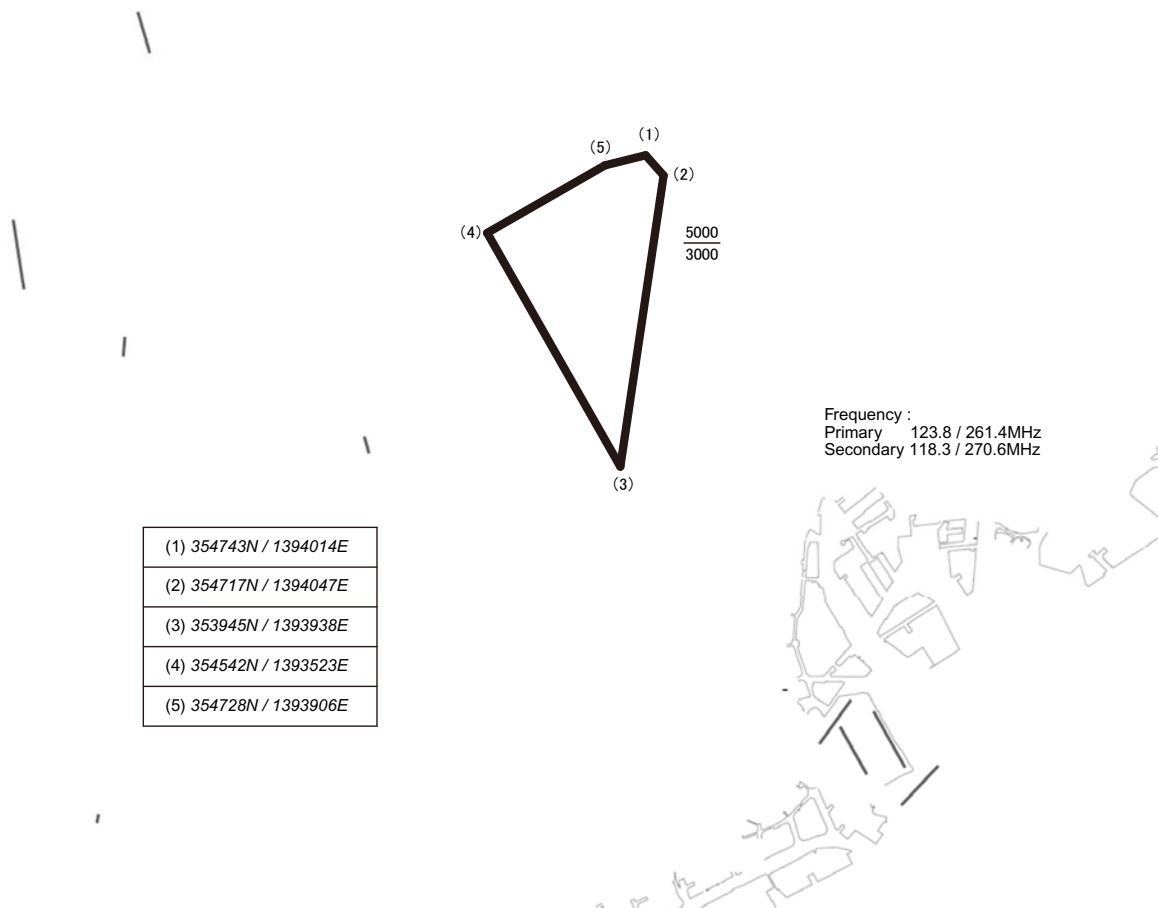

1. 空域の運用について

当該空域においては、計器飛行方式により飛行すること。
ただし、管制機関から許可された場合を除く。

2. 許可の取得方法

1. ただし書きの許可を得る場合は、当該空域に入域する前に、横田アプローチと通信を設定した上で許可を得ること。

1. Operation of airspace

ACFT should fly by IFR in this airspace except when approved by controlling facilities.

2. Procedures for obtaining the approval

When obtaining the approval as depicted 1. ,ACFT should obtain the approval upon contact with Yokota Approach Control prior to enter this airspace.

RJTY AD 2.18 ATS COMMUNICATION FACILITIES

Service designation	Call sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
APP	Yokota Approach Control	118.3MHz(1)(3) 123.8MHz(2) 261.4MHz(2)(3) 270.6MHz(1)(3) 120.7MHz(3) 317.8MHz(3) 243.0MHz(E) 121.5MHz(E)	H24	APP ser provided for Yokota Tachikawa, Iruma ABs and Atsugi NAS RADAR monitored. (1)ABV 5000ft to upper limits of airspace. (2)SFC TO 5000ft (3)VFR advisory ser.
DEP	Yokota Departure Control	122.1MHz 363.8MHz	H24	
TWR	Yokota Tower	134.3MHz 315.8MHz 121.5MHz(E) 243.0MHz(E)	2100 - 1300	
GND	Yokota Ground Control	133.2MHz 308.6MHz	2100 - 1300	
Clearance delivery	Yokota Clearance	131.4MHz 279.9MHz	2100 - 1300	
ATIS	Yokota Airbase	128.4MHz 281.0MHz	2100 - 1300	Maintenance Period : 2245-2315 THU
MET	Yokota Metro	344.6MHz	H24	PMSV Unusable beyond 40NM BLW FL140 210°- 330°.
A/G	Yokota Radio	4747KHz(1) 6738KHz(1) 8967KHz(1) 11236KHz(1) 292.1MHz(2)	H24	(1)SSB (2)UHF

RJTY AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
TACAN (7.00°W)	YOK	1172MHz (CH-85X)	H24	354456.35N 1392100.94E	438FT	Maintenance Period: 1500 - 2100 MON-SUN Unusable: 005°-061° beyond 30NM BLW 10000FT 062°-108° beyond 30NM all ALT 271°-342° beyond 35NM BLW 15000FT
ILS-LOC36	I-YOK	109.7MHz	H24	354601.03N 1392040.62E		for RWY36 BRG 357°(MAG) Maintenance Period 1900-2100 MON-THU LOC Restricted beyond 20° left of course for terrain.
ILS-GP36		109.7MHz	H24	354410.78N 1392057.60E		Maintenance Period: 1900 - 2100 TUE-FRI
ILS-LOC18	I-YAS	108.7MHz	H24	354348.72N 1392108.38E		BRG 177°(MAG) Maintenance Period 1900-2100 MON-THU
ILS-GP18		108.7MHz	H24	354537.17N 1392051.67E		Maintenance Period 1900-2100 TUE-FRI

RJTY AD 2.20 LOCAL TRAFFIC REGULATIONS

1. Airport regulations

Prior Permission Required
Non TACAN equipped ACFT, radar required for departure procedure.
Advise ATC when making AUTOLAND/COUPLED ILS approach
Terrain rises rapidly W of final approach course. If on vectors to final, DO NOT CROSS W of YOK R-185 or R-355.

2. Taxiing to and from stands

All aircraft contact ground control prior to engine start.

3. Parking area for small aircraft(General aviation)

Nil

4. Parking area for helicopters

Nil

5. Apron - taxiing during winter conditions

Nil

6. Taxiing - limitations

Copter avoid overflight of grass area between RWY end and ramp S of Delta TWY ACFT will maintain TWY CL during taxi
OPR(300ft minimum BTN ACFT in trail)

7. School and training flights - technical test flights - use of runways

Nil

8. Helicopter traffic - limitation

Nil

9. Removal of disabled aircraft from runways

Nil

RJTY AD 2.21 NOISE ABATEMENT PROCEDURES

Nationally established quiet hour in effect at YOKOTA 1300-2100 daily, program strictly enforced.

RJTY AD 2.22 FLIGHT PROCEDURES

I. 横田 VFR レーダー・アドバイザリー・サービス

1. VFR レーダー・アドバイザリー・サービス（パイロットに対する飛行の安全と航空機の動向に関する情報の提供）は付図に示す横田ターミナル・エリアにおいて終日利用可能である。横田ターミナル・エリアは大変混雑した空域である。レーダー・アドバイザリー・サービスの提供を受けている場合でも、他の航空機との安全な間隔の維持に関するパイロットの責任は軽減されない。また交通が輻輳する場合、VFR 機について異常な接近の可能性をすべて把握できない場合がある。パイロットは常時注意して航行すべきである。特に別図中の "High Traffic Area" においては高い警戒をすべきである。

注：横田 VFR レーダー・アドバイザリー・サービスを受けない航空機は High Traffic Area を 1,500 ft 以下で通過することを推奨する。

2. VFR レーダー・アドバイザリー・サービスは下記の点を考慮し、可能な限り実施される。

- a) 管制官の業務量に余裕があること
- b) 通信設定ができること
- c) トランスポンダーを装備していること
- d) レーダー監視ができること（低高度を航行中の小型機は監視困難な場合がある。）

3. VFR 機は付図空域内の全域で横田アプローチ・コントロールと交信することが可能である。ただし、High Traffic Area の航行を予定する場合は、入域前に横田アプローチ・コントロールと通信設定し、下記の事項を伝えること。

- a) 航空機無線呼出符号
- b) レーダー・アドバイザリー・サービスを要求すること

(例)

YOKOTA APPROACH CONTROL, JA1234 REQUEST RADAR TRAFFIC ADVISORIES.

注：横田アプローチ・コントロールがレーダー・トラフィック・アドバイザリーを提供できない場合は次の用語で伝えられる。交通の輻輳によりレーダー・トラフィック・アドバイザリーを提供できない場合には、パイロットは注意して航行し、可能な限り、High Traffic Area の航行は避けること。

(例)

JA1234, YOKOTA APPROACH CONTROL, UNABLE RADAR TRAFFIC ADVISORIES.

4. 横田アプローチ・コントロールから要求があった場合、次の事項を伝えること。ただし、必要でない事項もあるので、横田アプローチ・コントロールからの要求が無い事項は伝えないこと。

- a) 航空機の型式
- b) 巡航高度及び離脱高度
- c) 飛行の方向または目的地（ただし、「目的地」については、付図空域内の空港等が目的地の場合に限る）
- d) 航空保安無線施設または空港等からの位置

I. Yokota VFR Radar Advisory Service

1. VFR Radar Advisory Service is available 24-hours a day in the Yokota Terminal Area as depicted in the attached chart. Yokota is an extremely congested airspace. Receiving VFR Radar Advisories does not relieve the pilot of any responsibility to "see and avoid" other traffic. Yokota controllers may be too busy to see all possible conflicts for VFR traffic. Pilots should maintain high vigilance at all times, especially in the "High Traffic Area" depicted.

Note: It is recommended aircraft that choose not to call Yokota for VFR Radar Advisory Service maintain an altitude at or below 1,500ft (MSL) when transitioning the High Traffic Area.

2. VFR Radar Advisory Service (advice and information from the radar facility to assist pilots with information on radar observed traffic) will be provided to the maximum extent possible consistent with:

- a) ATC workload
- b) Two-way radio communication
- c) Aircraft Transponder equipment
- d) Radar reception (small aircraft at low altitudes may be difficult to see)

3. VFR aircraft may call Yokota anywhere in the attached area, but aircraft planning to fly through the High Traffic Area should contact Yokota Approach prior to entering that area. Provide only the following information on initial call-up:

- a) Call sign.
- b) A request for Radar Traffic Advisories.

(Example)

YOKOTA APPROACH CONTROL, JULIET ALFA
1-2-3-4 REQUEST RADAR TRAFFIC ADVISORIES.

Note: If Yokota is unable to provide Radar Traffic Advisories, they shall inform the aircraft. If Yokota is too busy to provide Radar Traffic Advisories, aircraft should maintain high vigilance and, if possible, avoid the High Traffic Area.

(Example)

JULIET ALFA 1-2-3-4, YOKOTA APPROACH CONTROL,
UNABLE RADAR TRAFFIC ADVISORIES.

4. When requested by Yokota, provide the following information. Yokota may not need all of this information immediately. Do not provide unless requested by the controller.

- a) Aircraft type
- b) Altitude leaving and Altitude to maintain.
- c) Direction of flight or destination airport (if within the Yokota VFR Advisory Service Area)
- d) Position reference a NAVAID or airport.

(例)

Yokota: JA1234, YOKOTA ARRIVAL, SQUAWK 5-4-2-2.

JA1234: JA1234 SQUAWK 5-4-2-2.

Yokota: JA1234, RADAR CONTACT 5 MILES NORTH OF EDA
RADIO BEACON. SAY TYPE AIRCRAFT,
ALTITUDE LEAVING AND ALTITUDE TO MAINTAIN.JA1234: JA1234, CESSNA ONE SEVEN TWO, LEAVING TWO
THOUSAND FIVE HUNDRED, CLIMBING TO FOUR
THOUSAND FIVE HUNDRED.

Yokota: JA1234 SAY DESTINATION OR ROUTE OF FLIGHT.

JA1234: JA1234 INBOUND CHOFU.

または

JA1234: JA1234 SOUTH BOUND

5. レーダー・アドバイザリー・サービスを受けて付図に
示す管制圏を飛行しようとする場合、その意思を当該管
制圏に入域する前に横田アプローチ・コントロールに通
報しなければならない。横田アプローチ・コントロール
は当該要求を承認するか、適切な飛行場管制所との通信
設定を指示するか、又は、交通の状況により要求を承認
しないことがある。

(Example)

Yokota: JULIET ALFA 1-2-3-4, YOKOTA ARRIVAL,
SQUAWK 5-4-2-2.

JA 1234: JULIET ALFA 1-2-3-4 SQUAWK 5-4-2-2.

Yokota: JULIET ALFA 1-2-3-4, RADAR CONTACT
5 MILES NORTH OF EDA RADIO BEACON.
SAY TYPE AIRCRAFT, ALTITUDE LEAVING
AND ALTITUDE TO MAINTAIN.JA 1234: JULIET ALFA 1-2-3-4, CESSNA ONE SEVEN
TWO, LEAVING TWO THOUSAND FIVE
HUNDRED, CLIMBING TO FOUR THOUSAND
FIVE HUNDRED.Yokota: JULIET ALFA 1-2-3-4 SAY DESTINATION OR
ROUTE OF FLIGHT.

JA 1234: JULIET ALFA 1-2-3-4 INBOUND CHOFU.

Or


JA 1234: JULIET ALFA 1-2-3-4 SOUTH BOUND

5. Aircraft receiving VFR Radar Advisory Service who wish
to fly through one of the control zones depicted in the
attachment shall inform Yokota Approach of this intention
prior to entering the control zone. Yokota may approve the
request, or give a frequency change to the appropriate
tower, or disapprove the request (as determined by traffic).

YOKOTA VFR RADAR ADVISORY SERVICE AREA

CALL YOKOTA APPROACH CONTROL ON:

- (1) SFC to 5500: 120.7MHz
- (2) 6000 to FL175: 118.3MHz

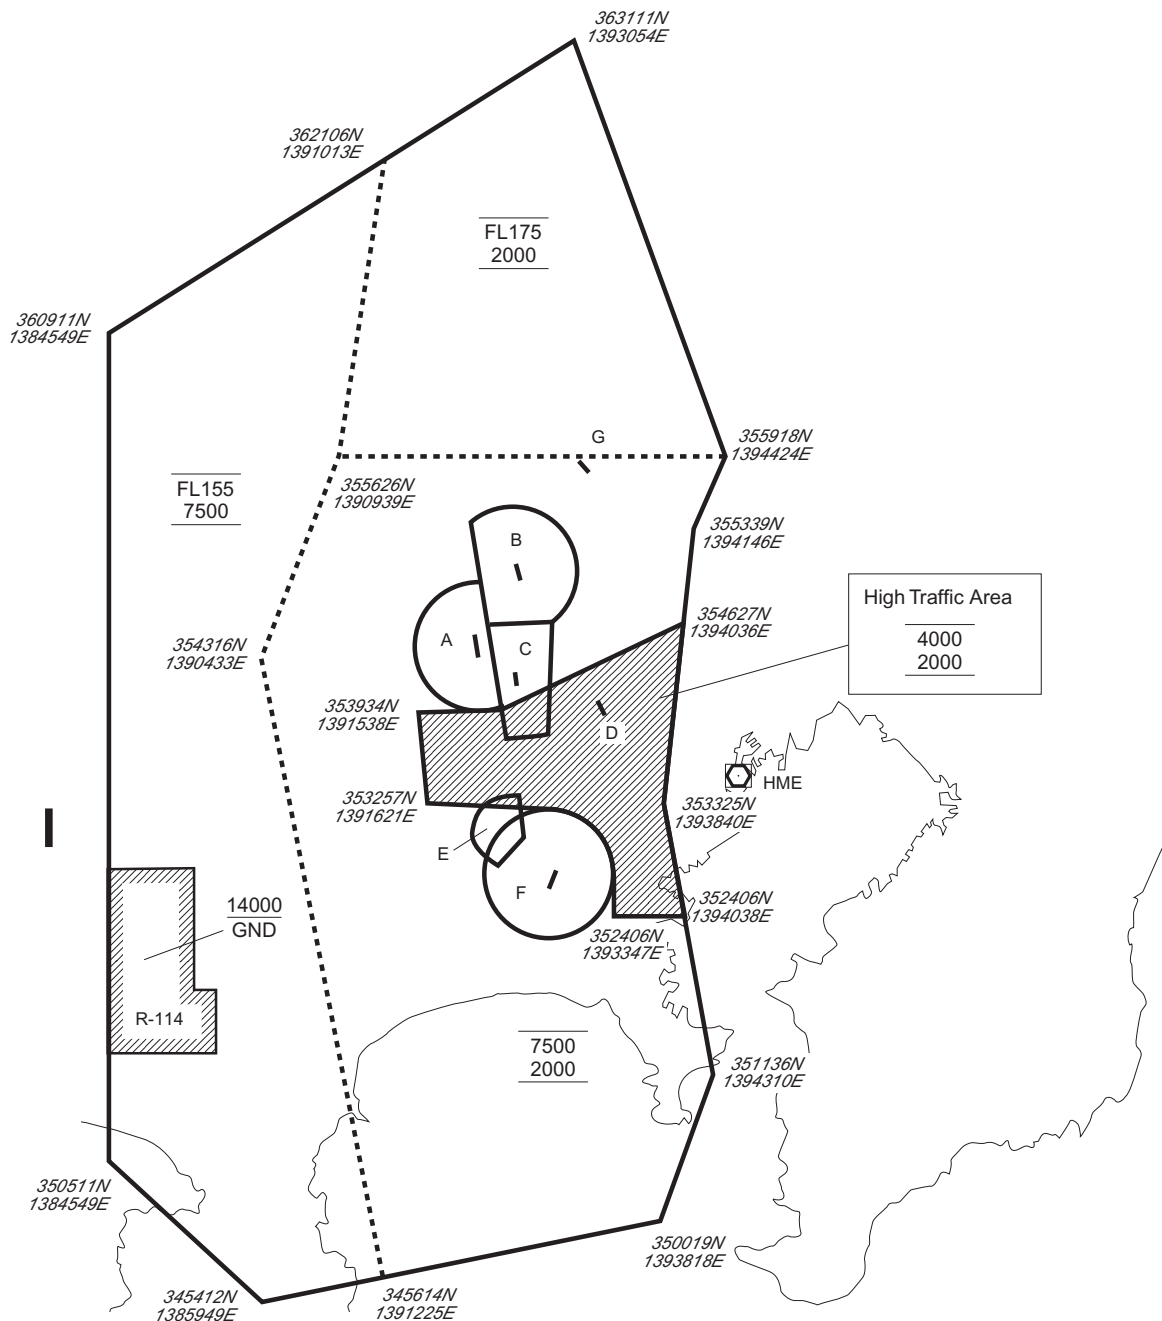

Control Zone	COM(MHz)
A. RJTY	SFC-3000 134.3
B. RJTJ	SFC-6000 122.05
C. RJTC	SFC-3000 118.85
D. RJTF	none 130.8
E. RJTR	SFC-1700 122.5
F. RJTA	SFC-6000 126.2
G. Honda	none 130.75

RJTY AD 2.23 ADDITIONAL INFORMATION


RWY CLSD every 3rd FRI monthly 0530-0900.
Do not mistake IRUMA AD 7NM NNE or TACHIKAWA AD 4NM ESE for YOKOTA.
Hawks frequently circle over the field, crows fly across RWY, advise ATC of hazardous bird act. Peak bird act APR-OCT
Change Control Zone A. RJTY. SFC 2999
Numerous OBST on/off-base at both end of RWY are not lit.

RJTY AD 2.24 CHARTS RELATED TO AN AERODROME

Aerodrome/Heliport Chart
Standard Departure Chart- Instrument (BREEE)
Standard Departure Chart- Instrument (TIMAP)
Standard Departure Chart- Instrument (BUSYU)
Standard Departure Chart- Instrument (KANTO - RNAV)
Standard Departure Chart- Instrument (FUSSA - RNAV)
Instrument Approach Chart (HI-ILS Y or LOC Y RWY18)
Instrument Approach Chart (ILS Z or LOC Z RWY18)
Instrument Approach Chart (HI-ILS Y or LOC Y RWY36)
Instrument Approach Chart (ILS Z or LOC Z RWY36)
Instrument Approach Chart (RNAV(GPS) RWY18)
Instrument Approach Chart (RNAV(GPS) RWY36)

RJTY / YOKOTA

AD CHART

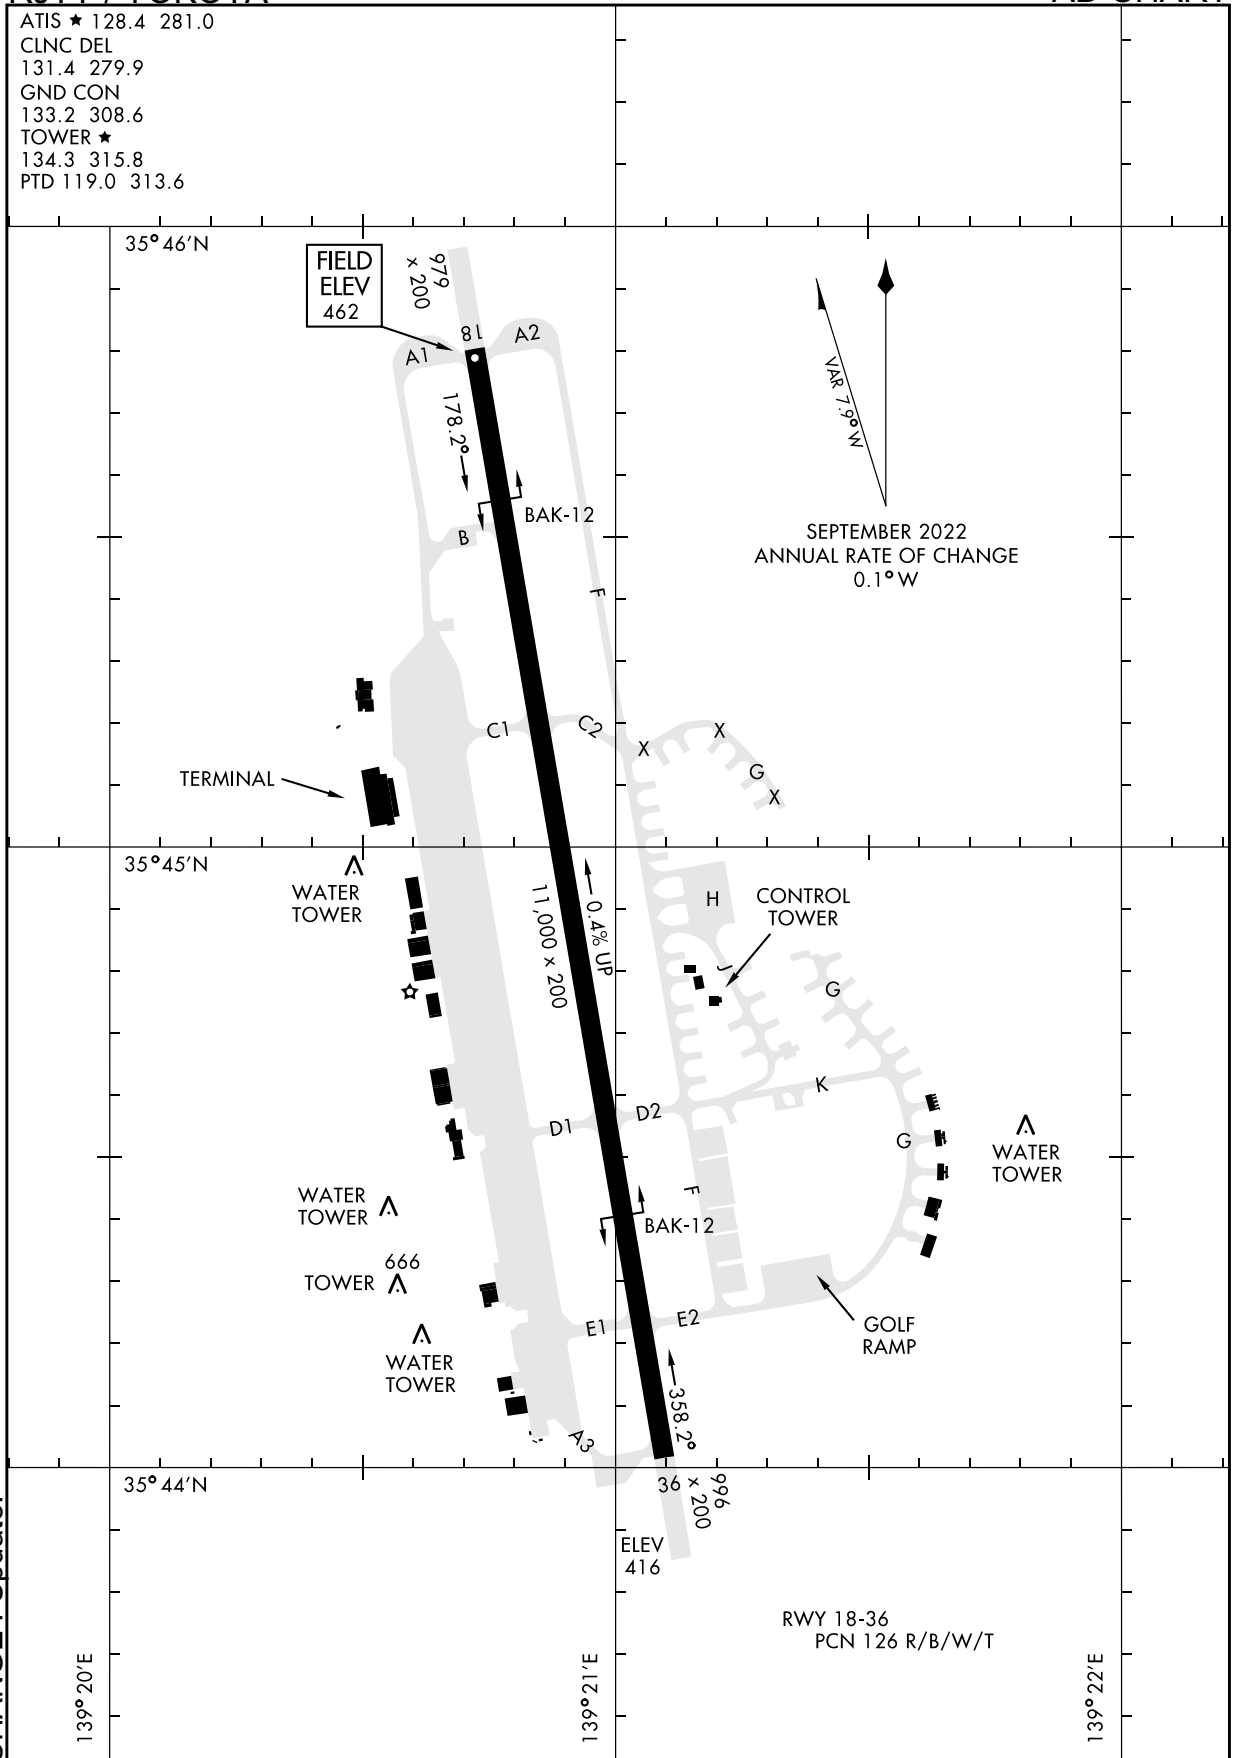

NOTE: REPRINTING DOD FLIP

RJTY/YOKOTA

BREEE SIX DEPARTURE(OBSTACLE)

YOKOTA
Chan 85 YOK

178°

178

BREEE
11,000

R-178

TA 14,000

TAKEOFF RWY 18: Climb on YOK TACAN R-178 to BREEE, cross BREEE at or below 11,000. Continue as assigned by ATC.

CHANGE : Update.


NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

TIMAP FIVE DEPARTURE(OBSTACLE)

ATIS★128.4 281.0
 CLNC DEL
 131.4 279.9
 GND CON
 133.2 308.6
 TOWER★
 134.3 315.8
 DEP CON
 122.1 363.8

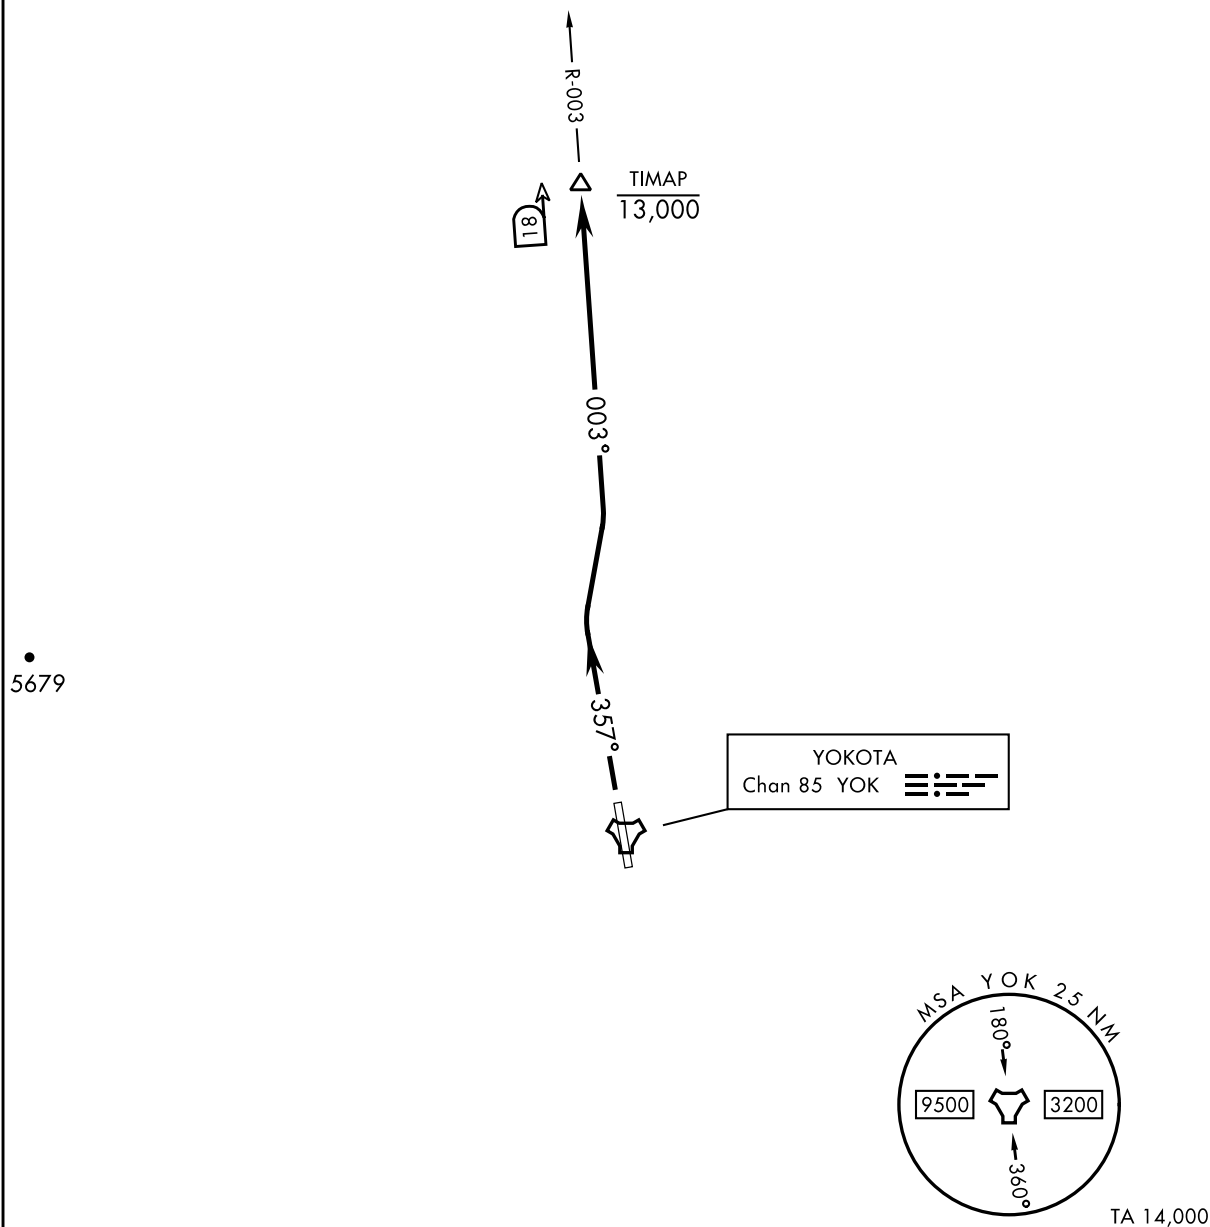

CHANGE : Update.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 36: Climb to 4000, turn right to intercept YOK TACAN R-003 to TIMAP.
 Cross TIMAP at or below 13,000. Continue as assigned by ATC.


NOTE: REPRINTING DOD FLIP

RJTY / YOKOTA

BUSYU TWO DEPARTURE

Rwy	Knots	60	120	180	240	300	360
* 18 (a)	V/V(fpm)	360	720	1080	1440	1800	2160
† 18 (b)	V/V(fpm)	465	930	1395	1860	2325	2790
* 36 (c)	V/V(fpm)	383	766	1149	1532	1915	2298
† 36 (b)	V/V(fpm)	476	952	1428	1904	2380	2856

(a) to 8000
 (b) to 13,400
 (c) to 7900

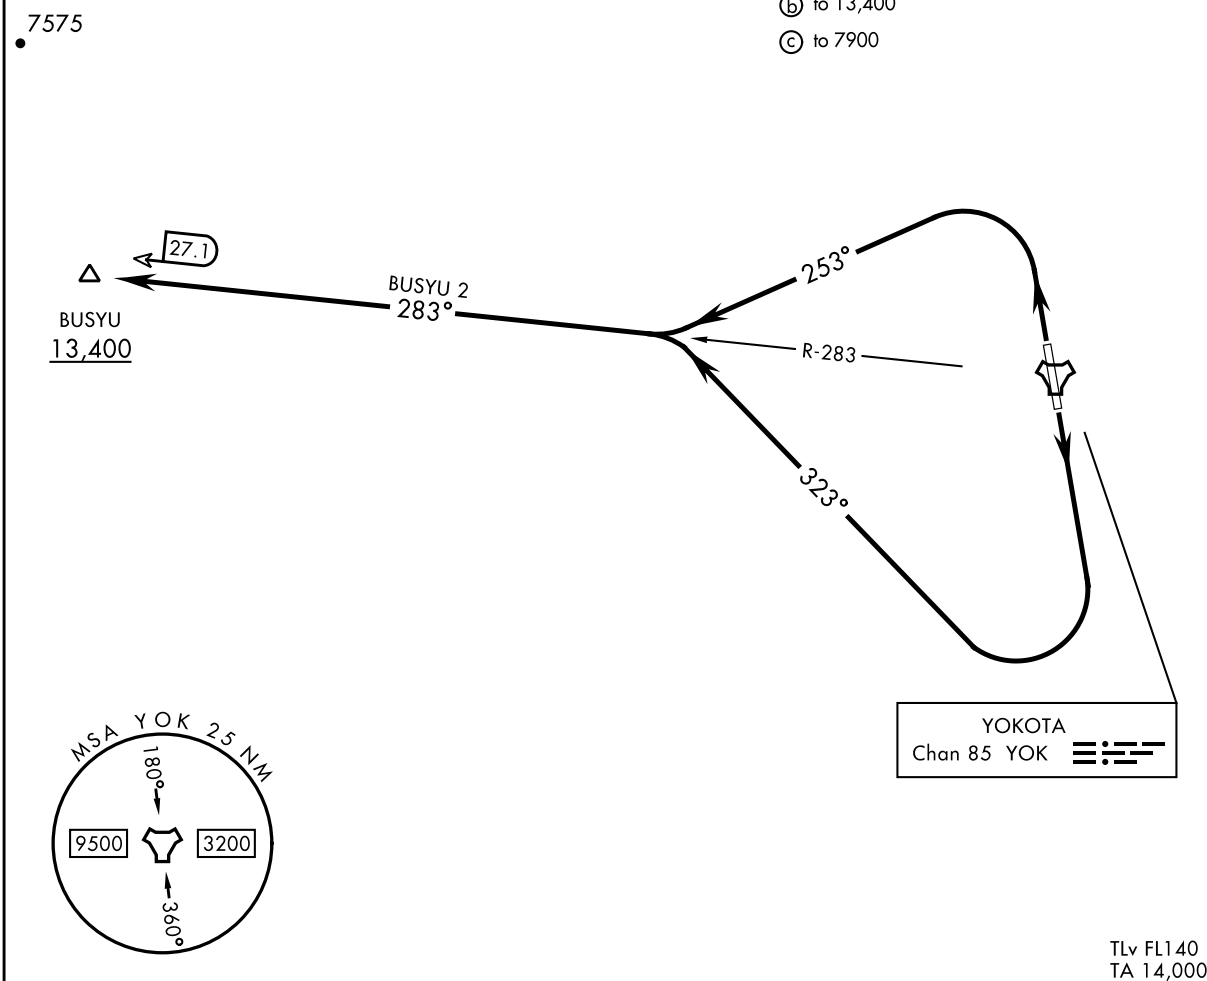

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 18: Climbing right turn to intercept YOK TACAN R-283 to BUSYU. Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

TAKEOFF RWY 36: Climbing left turn to intercept YOK TACAN R-283 to BUSYU. Cross BUSYU at or above 13,400. Maintain ATC assigned altitude.

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA


KANTO ONE DEPARTURE(RNAV)

DEP CON
122.1 363.8

RNAV1-GPS

RADAR required (non-GPS equipped
acft)TIMAP
13,000

3478

TLv FL140
TA 14,000

DEPARTURE ROUTE DESCRIPTION


TAKEOFF RWY 36: Climb direct TIMAP, cross at or below 13,000 or as assigned by ATC.

NOTE: REPRINTING DOD FLIP

STANDARD DEPARTURE CHART - INSTRUMENT

RJTY / YOKOTA

FUSSA TWO DEPARTURE(RNAV)

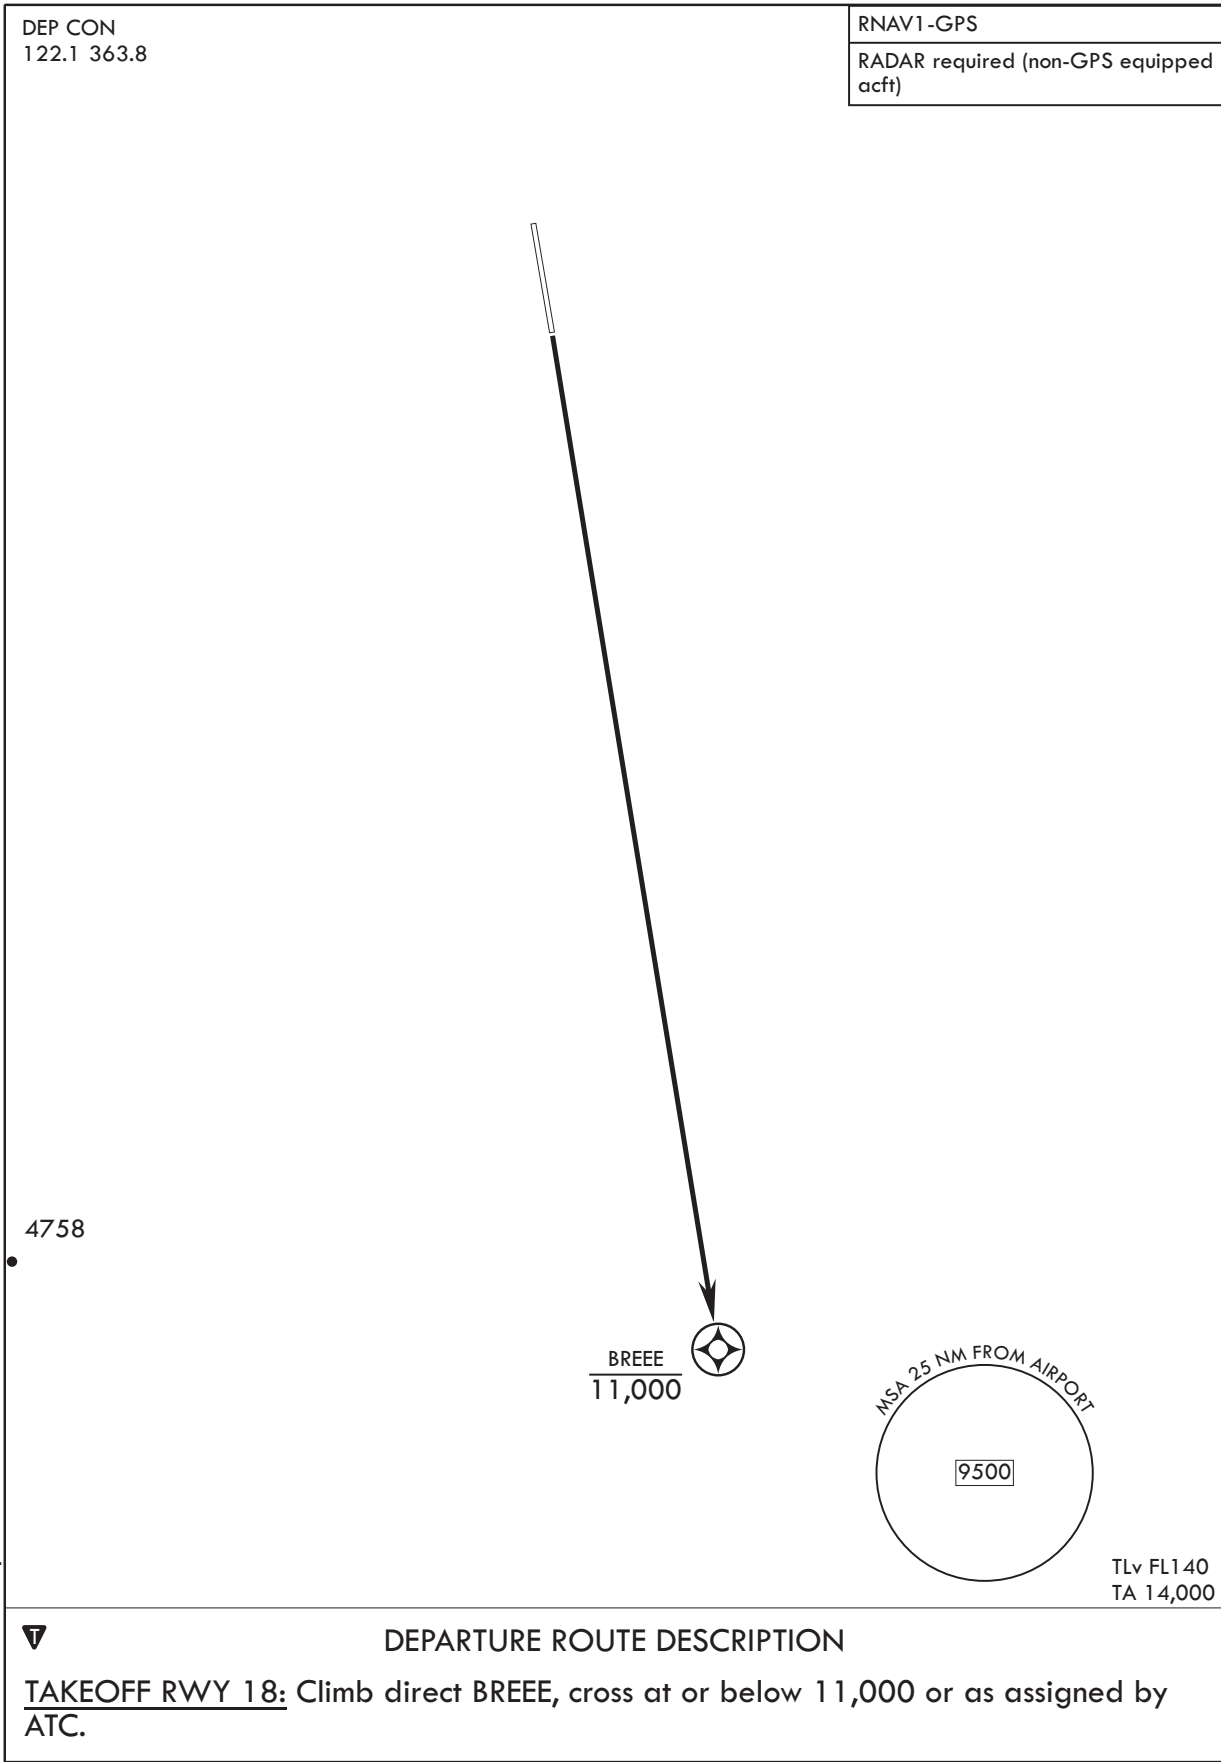

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

INTENTIONALLY LEFT BLANK

RJTY / YOKOTA

HI-ILS Y or LOC Y RWY18

DME or RADAR required

1 * When ALS inop, increase CAT CDE RVR to 40, vis to $\frac{3}{4}$ mile.
 ** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile;
 CAT CDE vis to $1\frac{7}{8}$ miles.
 *** Circling not authorized E of Rwy 18-36.

ALSF-1

MISSED APPROACH: Climb to 4000 on YOK TACAN R-178 to BREE and hold.
Missed approach requires RADAR or RNAV for Non-TACAN equipped aircraft.

Diagram of HIRL Rwy 18-36 showing elevation, TDZE, and various navigational markers.

- ELEV 462** (at the top left)
- TDZE 462** (at the top right)
- 177°** (heading indicator at the top)
- 573** (elevation marker near the top)
- A₁** (obstacle marker near the top)
- 81** (distance marker near the top)
- P** (obstacle marker near the top)
- 565** (elevation marker near the top)
- 11,000 x 200** (runway dimensions)
- 0.4% DOWN** (runway slope)
- x x x** (obstacle markers near the center)
- 667** (elevation marker near the center)
- A** (obstacle marker near the center)
- ☆** (obstacle marker near the center)
- TWR** (tower location near the center)
- P** (obstacle marker near the bottom)
- 36** (distance marker near the bottom)
- A₁** (obstacle marker near the bottom)

			← 4.4 NM →		0.6	
CATEGORY	A	B	C	D	E	
S-ILS 18*	662/24		200	(200-½)		
S-LOC 18**	1120/24 658 (700-½)		1120-1¾ 658		(700-1¾)	
*** CIRCLING	1120-1 658 (700-1)		1280-2½ 818 (900-2½)	1360-3 898 (900-3)	1580-3 1118 (1200-3)	


CHANGE : Update.

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJTY/YOKOTA


LOC I-YAS 108.7	APCH CRS 177°	Rwy ldg 11,000 TDZE 462 Arpt Elev 462	ILS Z or LOC Z RWY18	
RADAR or DME required			ALSIF-1 	† MISSED APPROACH: Climb to 4000 on YOK TACAN R-178 to BREEE and hold.
ATIS ★ 128.4 281.0	APP CON 118.3 270.6 (Abv 5000) 123.8 261.4 (Blw 5000)	TOWER ★ 134.3 315.8	GND CON 133.2 308.6	CLNC DEL 131.4 279.9

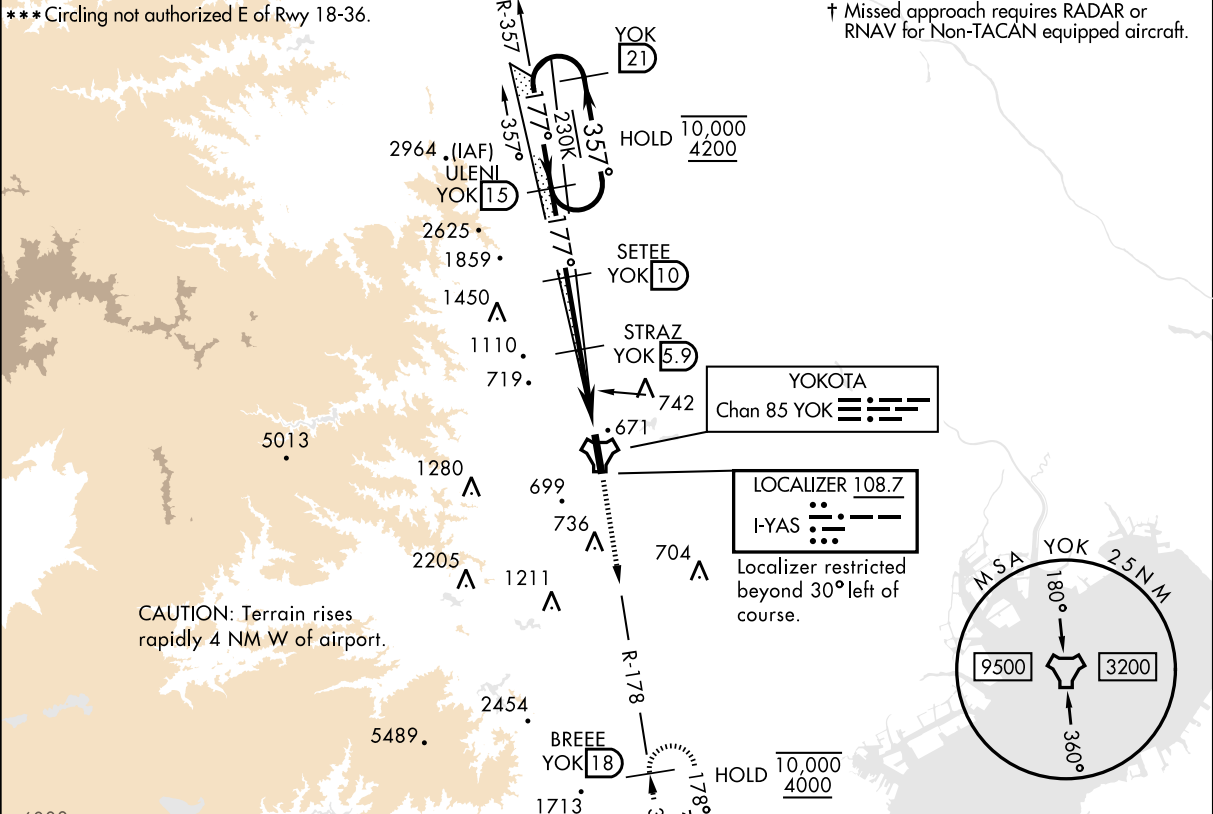

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJTY / YOKOTA

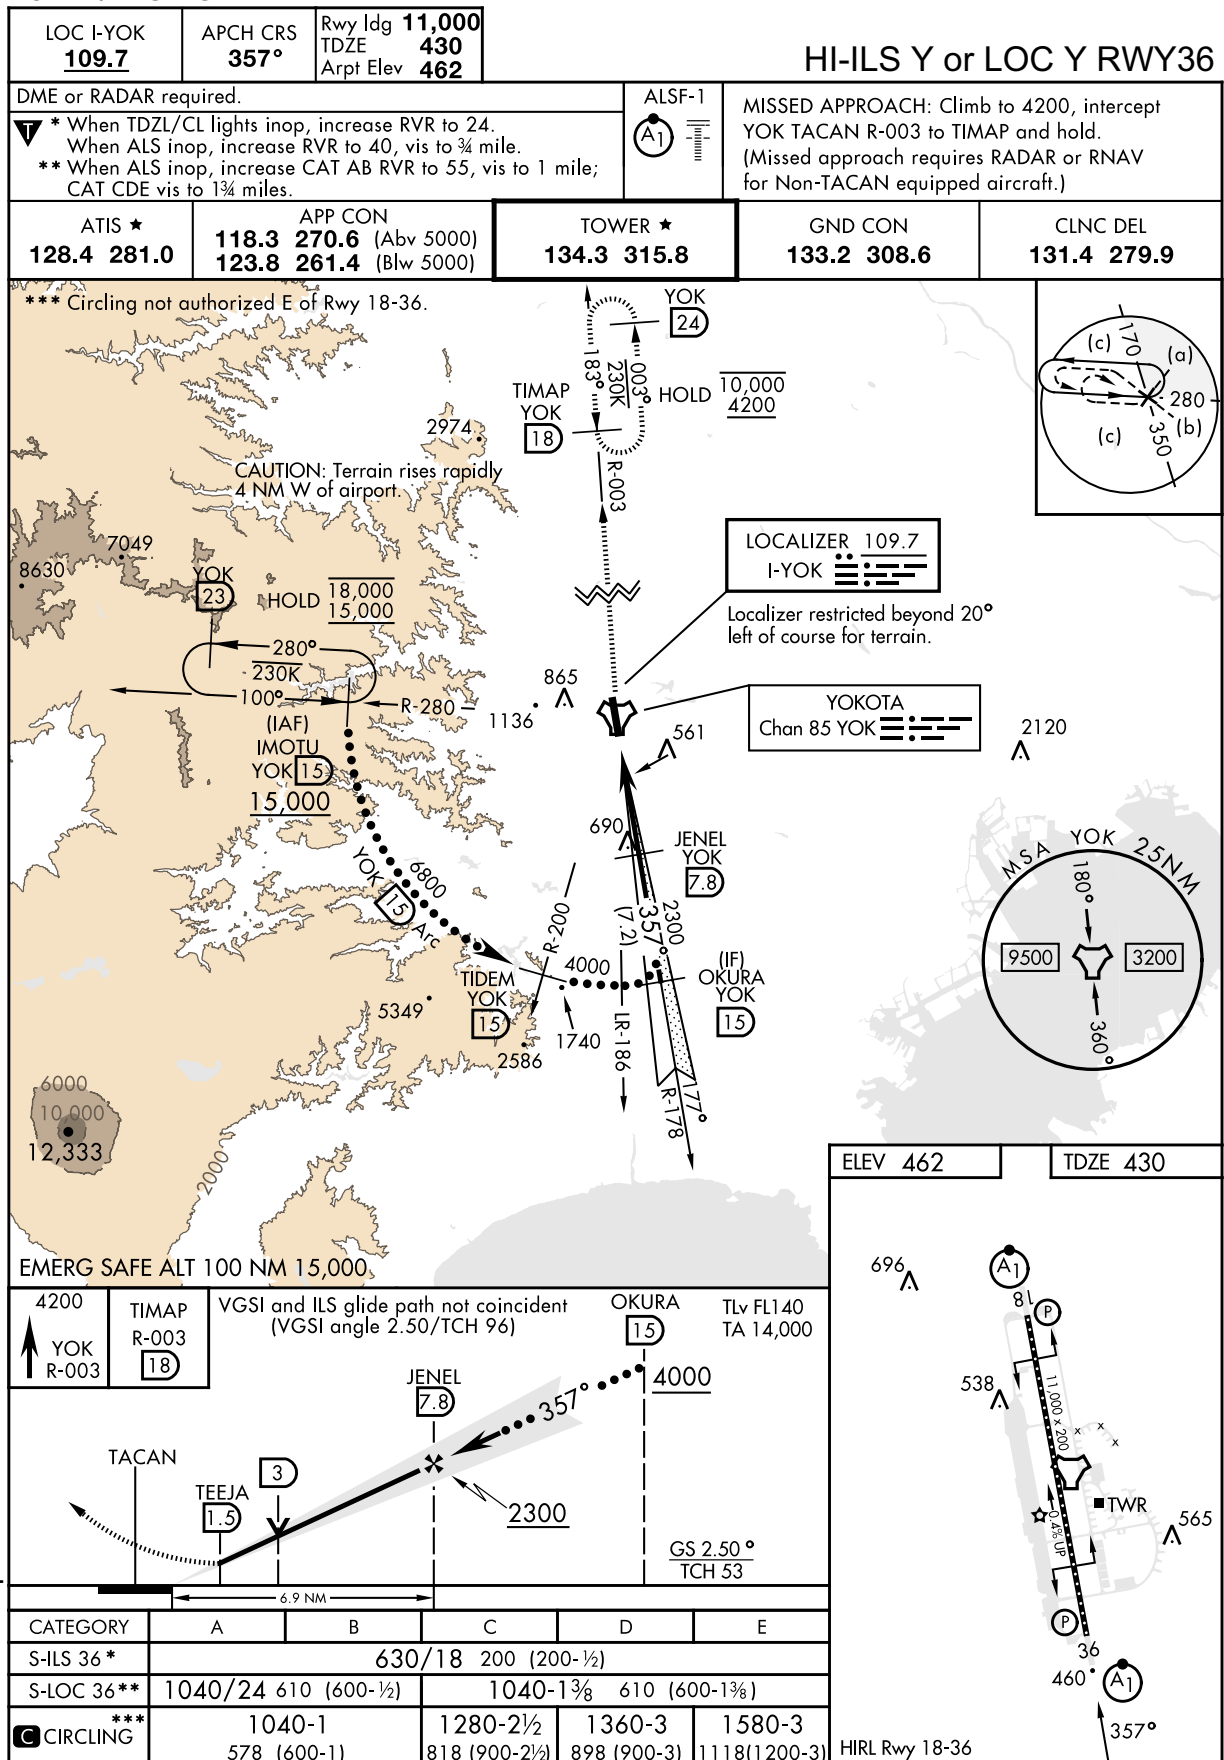

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART

RJTY / YOKOTA

LOC I-YOK 109.7	APCH CRS 357°	Rwy ldg 11,000 TDZE 430 Arpt Elev 462
---------------------------	-------------------------	--

ILS Z or LOC Z RWY36

RADAR or DME required. DME required for LOC only.

▼ * When ALS inop, increase RVR to 40, vis to ¾ mile.
When TDZL/CL lights inop increase RVR to 24.
** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE vis to 1¼ miles.




† MISSED APPROACH: Climb to 4200, intercept YOK TACAN R-003 to TIMAP and hold.

ATIS ★ 128.4 281.0	APP CON 118.3 270.6 (Abv 5000) 123.8 261.4 (Blw 5000)	TOWER ★ 134.3 315.8	GND CON 133.2 308.6	CLNC DEL 131.4 279.9
------------------------------	---	-------------------------------	-------------------------------	--------------------------------


*** Circling not authorized E of Rwy 18-36.

† Missed approach requires RADAR or RNAV for non-TACAN equipped aircraft.

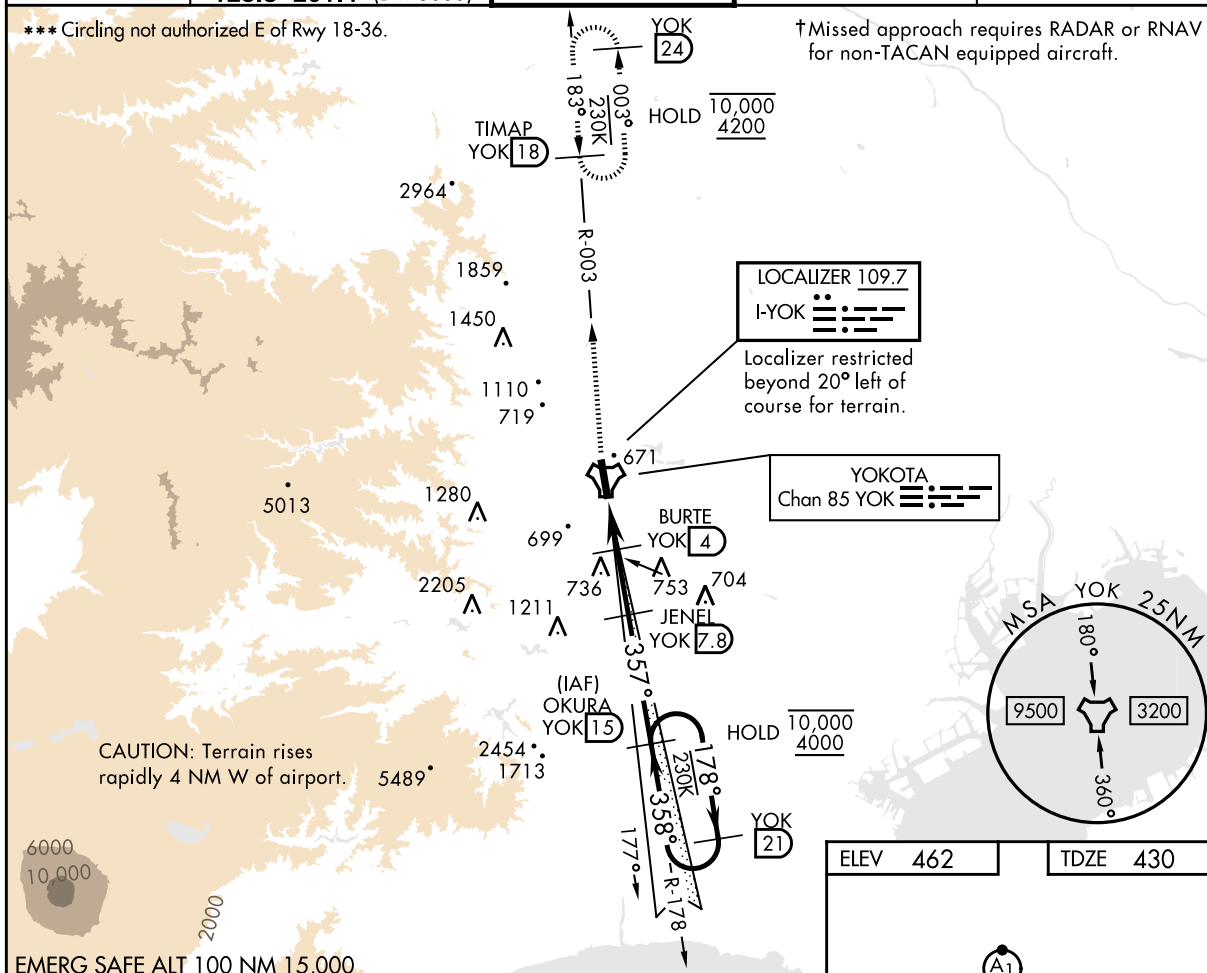


EMERG SAFE ALT 100 NM 15,000.

4200
↑ YOK R-003
TIMAP R-003
TLv FL140
TA 14,000
VGSI and ILS glidepath not coincident
(VGSI angle 2.50/TCH 96)

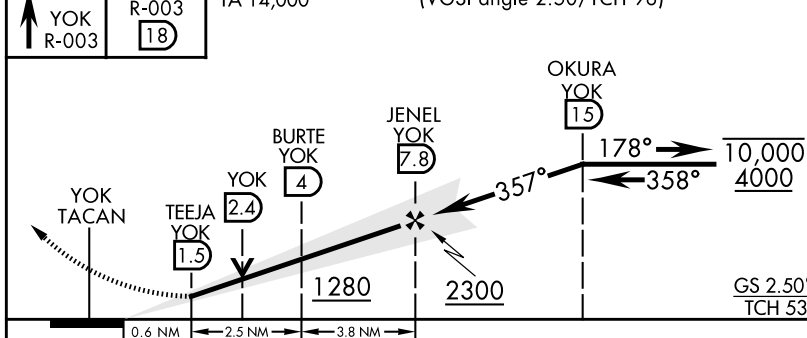


CATEGORY	A	B	C	D	E
S-ILS 36 *	630/18		200	(200-½)	
S-LOC 36 **	860/24	430 (400-½)	860/40	430	(400-¾)
*** CIRCLING	1020-1 558 (600-1)	1200-1 738 (800-1)	1280-2½ 818 (900-2½)	1360-3 898 (900-3)	1580-3 1118 (1200-3)

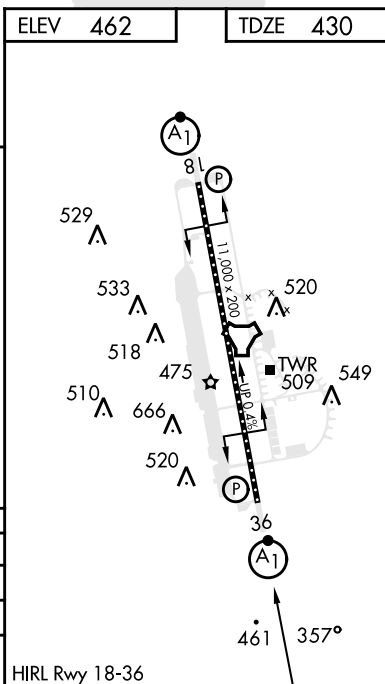

CHANGE : Update.

NOTE: REPRINTING DOD FLIP

RJTY / YOKOTA

APCH CRS 177° Rwy ldg 11,000 TDZE 462 Arpt Elev 462		RNAV(GPS)RWY18			
DME/DME RNP - 0.3 NA		ALSF-1 		MISSED APPROACH: Climb to 4000 direct MESTR WPT and hold.	
*When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CD vis to 1 1/2 miles. **Circling not authorized E of Rwy 18-36.					
ATIS ★ 128.4 281.0		APP CON 118.3 270.6 (Abv 5000) 123.8 261.4 (Blw 5000)		TOWER ★ 134.3 315.8	
		GND CON 133.2 308.6		CLNC DEL 131.4 279.9	

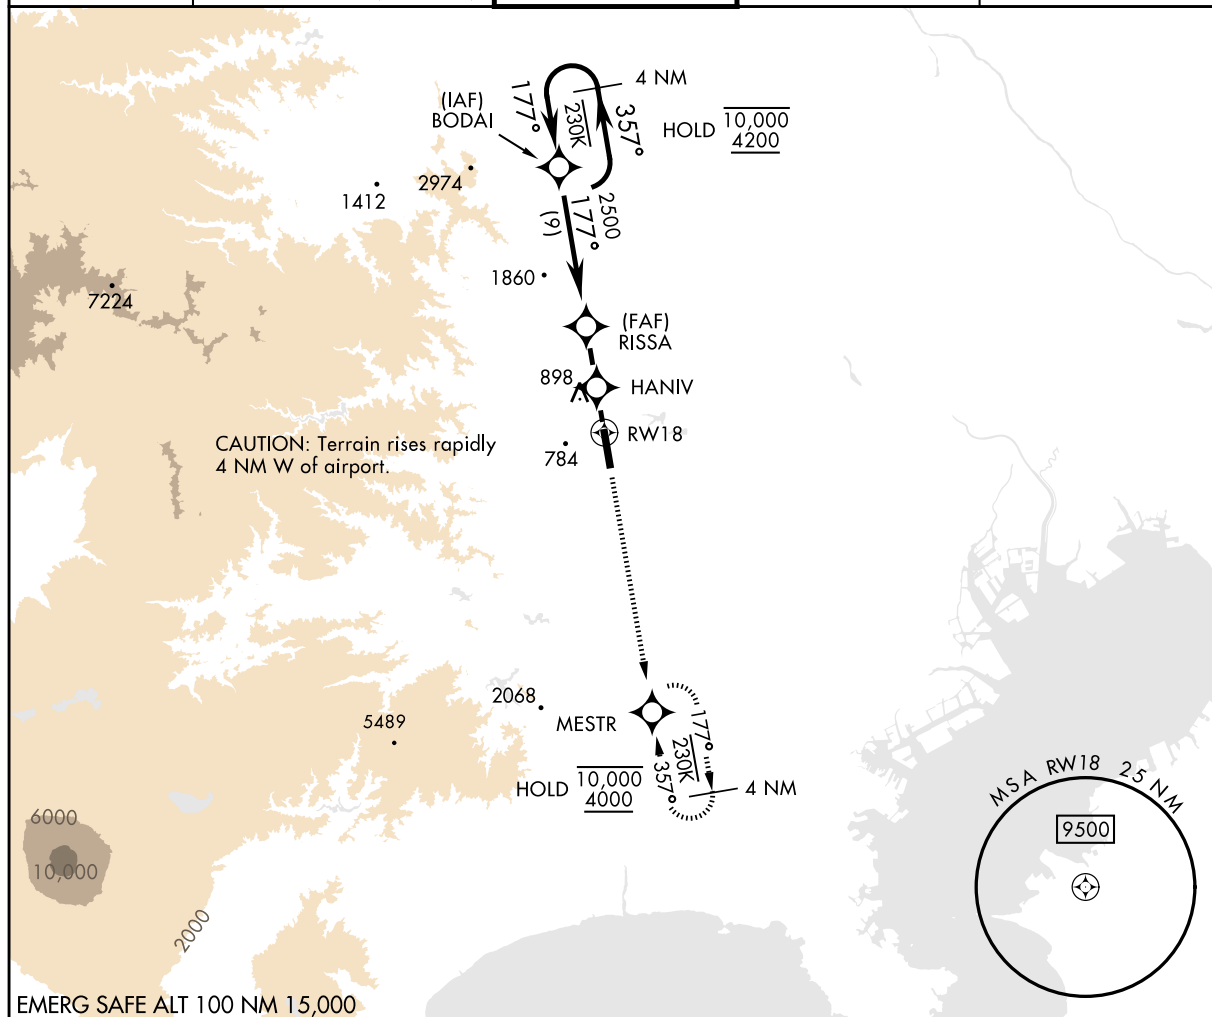


Figure 1: Instrument approach chart for RWY 18 at BODAI.

Chart Data:

- Category:** A, B, C, D
- LNAB MDA *:** 980/24, 518 (600-½), 980/55, 518 (600-1)
- CIRCLING **:** 1020-1, 1200-1, 1280-2½, 1360-3
- MDA Values:** 558 (600-1), 738 (800-1), 818 (900-2½), 898 (900-3)

Chart Details:

- Approach Path:** 3.13° TCH 68, 4200' width.
- Key Points:** BODAI, RISSA, HANIV, RW18.
- Distances:** 1.4 NM to RW18, 3.5 NM, 2.5 NM.
- Chart Symbols:** MESTR, 4000, TA 14,000, ELEV 462, TDZE 462.

NOTE: REPRINTING DOD FLIP

INSTRUMENT APPROACH CHART


RJTY / YOKOTA

APCH CRS 357°	Rwy Idg 11,000
	TDZE 430
	Arpt Elev 462

RNAV(GPS)RWY36

<p>▼ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 3/8 miles. ** Circling not authorized East of Rwy 18-36.</p>	<p>ALSF-1 (A1)</p>	<p>MISSED APPROACH: Climb to 4200 direct BODAI and hold.</p>
--	------------------------	--

<p>ATIS★ 128.4 281.0</p>	<p>APP CON 118.3 270.6 (ABV 5000MSL) 123.8 261.4 (BLW 5000MSL)</p>	<p>TOWER★ 134.3 315.8</p>	<p>GND CON 133.2 308.6</p>	<p>CLNC DEL 131.4 279.9</p>
------------------------------	--	-------------------------------	--------------------------------	---------------------------------

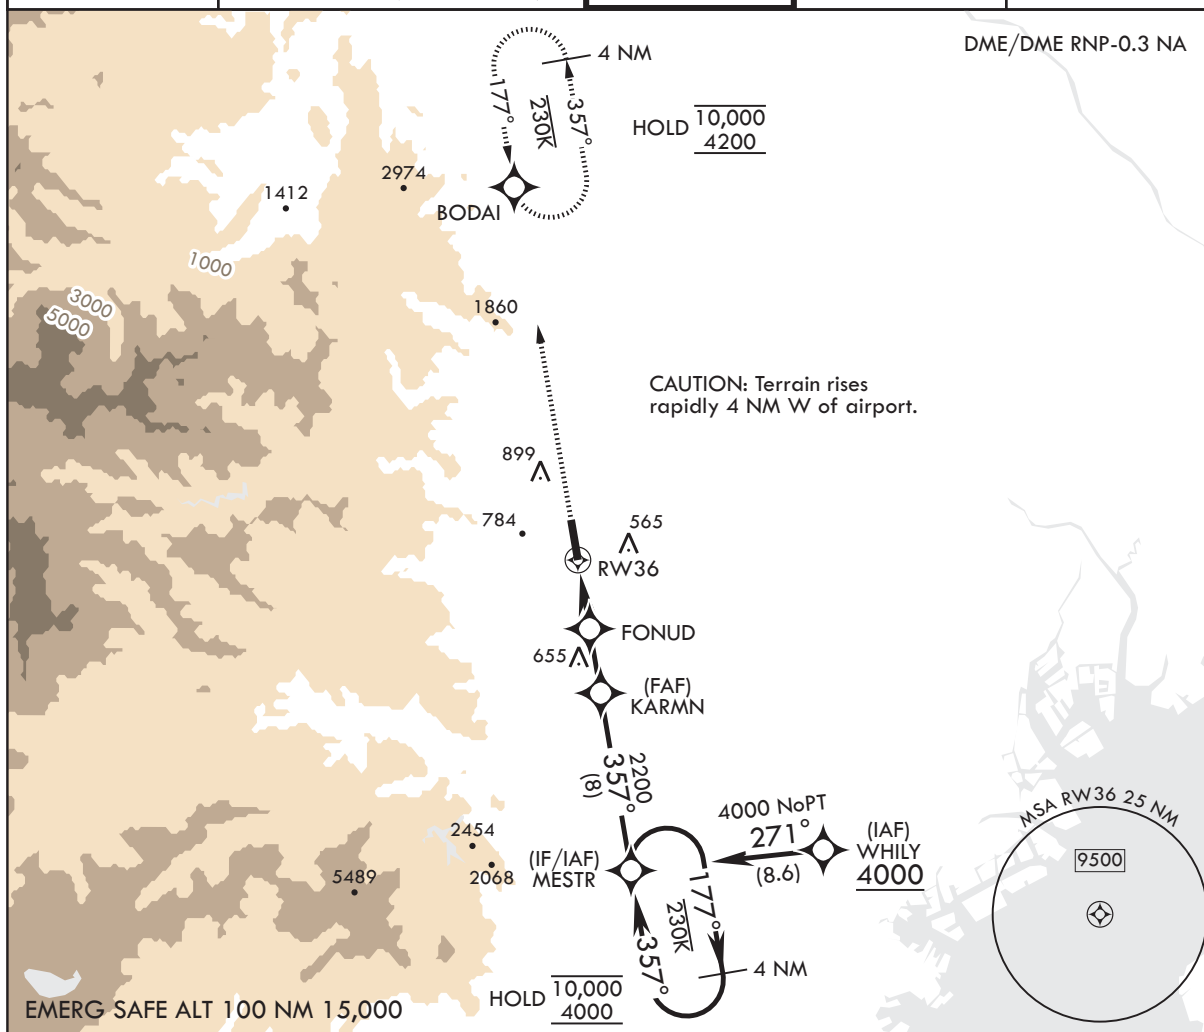

<p>4200 BODAI</p> <p>TLv FL140 TA 14,000</p> <p>1.5 NM to RWY36</p> <p>3.1 NM</p> <p>2.9 NM</p> <p>1360</p> <p>2200</p> <p>177°</p> <p>357°</p> <p>10,000</p> <p>4000</p> <p>≤ 2.68° TCH 75</p>	<p>VGSI and descent angles not not coincident (VGSI Angle 2.50/TCH 96).</p> <p>MESTR Holding Pattern</p> <p>4 NM</p> <p>10,000</p> <p>4000</p> <p>357°</p> <p>177°</p> <p>4000 NoPT 271° (8.6)</p> <p>(IAF) WHILY 4000</p> <p>MSA RW36 25 NM 9500</p>	<p>ELEV 462</p> <p>TDZE 430</p> <p>81</p> <p>529</p> <p>533</p> <p>518</p> <p>510</p> <p>475</p> <p>666</p> <p>666</p> <p>520</p> <p>36</p> <p>357°</p> <p>HIRL all rwys</p>
---	---	--

CHANGE : Update.

NOTE: REPRINTING DOD FLIP