



AD CHART

TARAMA AIRPORT

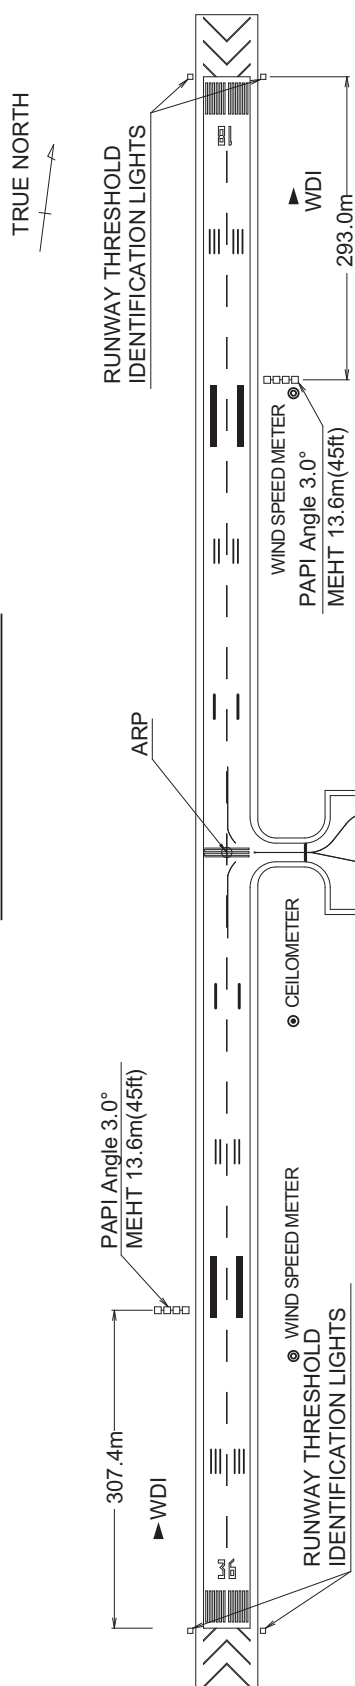

REMARKS : WIDTH OF RWY	1500m x 45m
WIDTH OF TWY	77.5m x 18m
WIDTH OF APRON	110m x 70m
RWY GROOVING	1500m x 30m
STRENGTH OF RWY	PCN 16/F/B/Y/T
STRENGTH OF TWY	PCN 16/F/B/Y/T
STRENGTH OF APRON	PCN 16/F/B/Y/T

LONGITUDINAL PROFILE OF RUNWAY

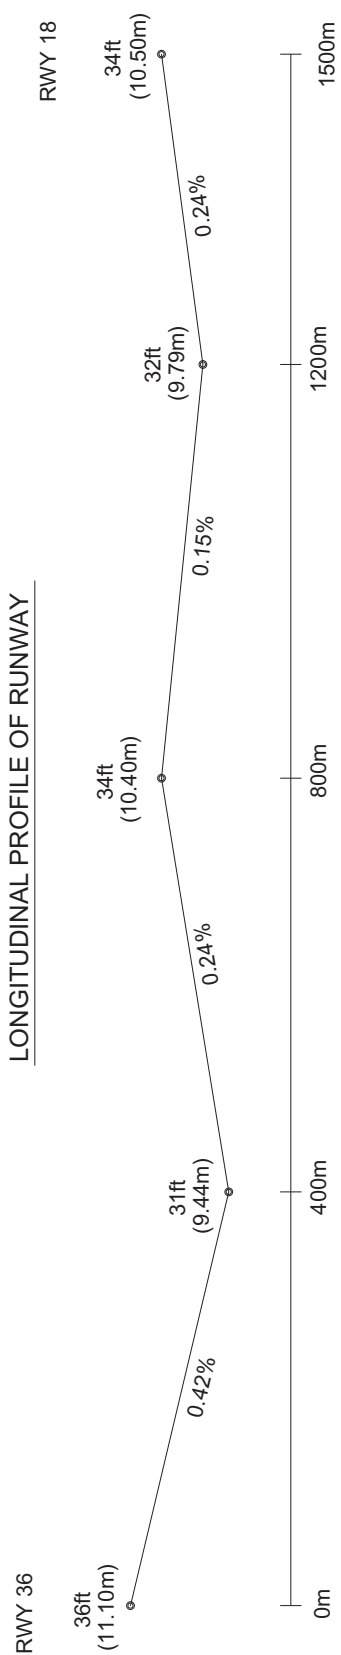

INTENTIONALLY LEFT BLANK

RORT / TARAMA


RNAV SID and TRANSITION

Basic RNP1

VAR 5°W (2020)



VOR/DME
SHIMOJISHIMA
117.1 SJE
CH-118X ::--
24°49'19"N/125°08'38"E
100FT

VORTAC
MIYAKOJIMA
113.45 MJC
CH-81Y 
24°46'39"N/125°17'36"E
200FT

3000
GAHRA
244243.1N
1250550.4E

MIYAKOJIMA(MJC)
244638.6N
1251736.3E

MIYAKO TRANSITION



RWY18 : Climb on HDG178° at or above 500FT, turn left direct to GAHRA at or above 3000FT.
RWY36 : Climb on HDG358° at or above 500FT, turn right direct to GAHRA at or above 3000FT.

From GAHRA at or above 3000FT, to MJC.

25/2/21

STANDARD DEPARTURE CHART -INSTRUMENT

RORT / TARAMA

RNAV SID and TRANSITION

GAHRA THREE DEPARTURE

RWY18

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	178 (172.8)	-4.9	—	—	+500	—	—	Basic RNP1
002	DF	GAHRA	—	—	-4.9	—	L	+3000	—	—	Basic RNP1

RWY36

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	358 (352.8)	-4.9	—	—	+500	—	—	Basic RNP1
002	DF	GAHRA	—	—	-4.9	—	R	+3000	—	—	Basic RNP1

MIYAKO TRANSITION


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GAHRA	—	—	-4.9	—	—	+3000	—	—	Basic RNP1
002	TF	MJC	—	075 (069.8)	-4.9	11.4	—	—	—	—	Basic RNP1

CHANGE : VAR. SID course. SID renamed. MIYAKO TRANSITION established.

INSTRUMENT APPROACH CHART

RORT / TARAMA


RNAV(GNSS) RWY18

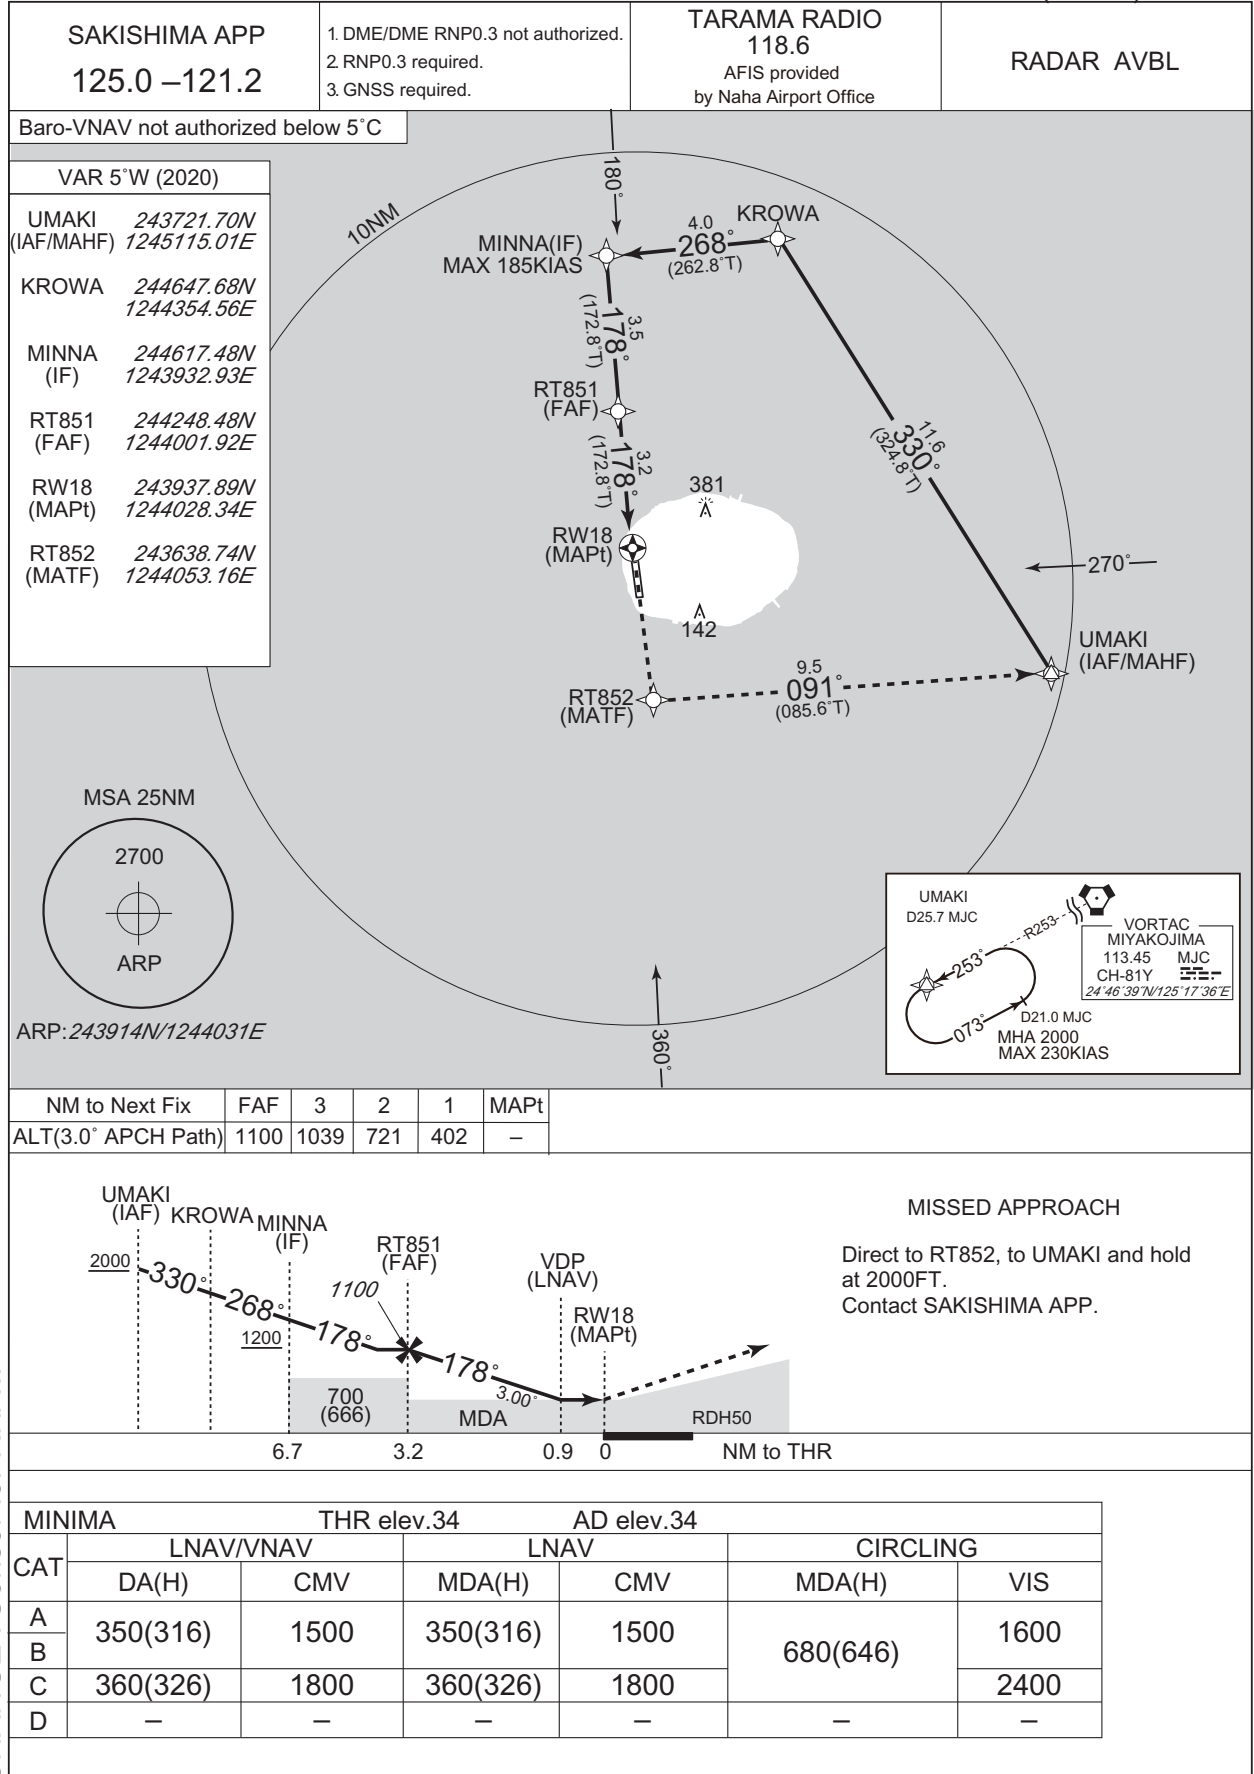

INSTRUMENT APPROACH CHART

RORT / TARAMA

RNAV(GNSS) RWY36

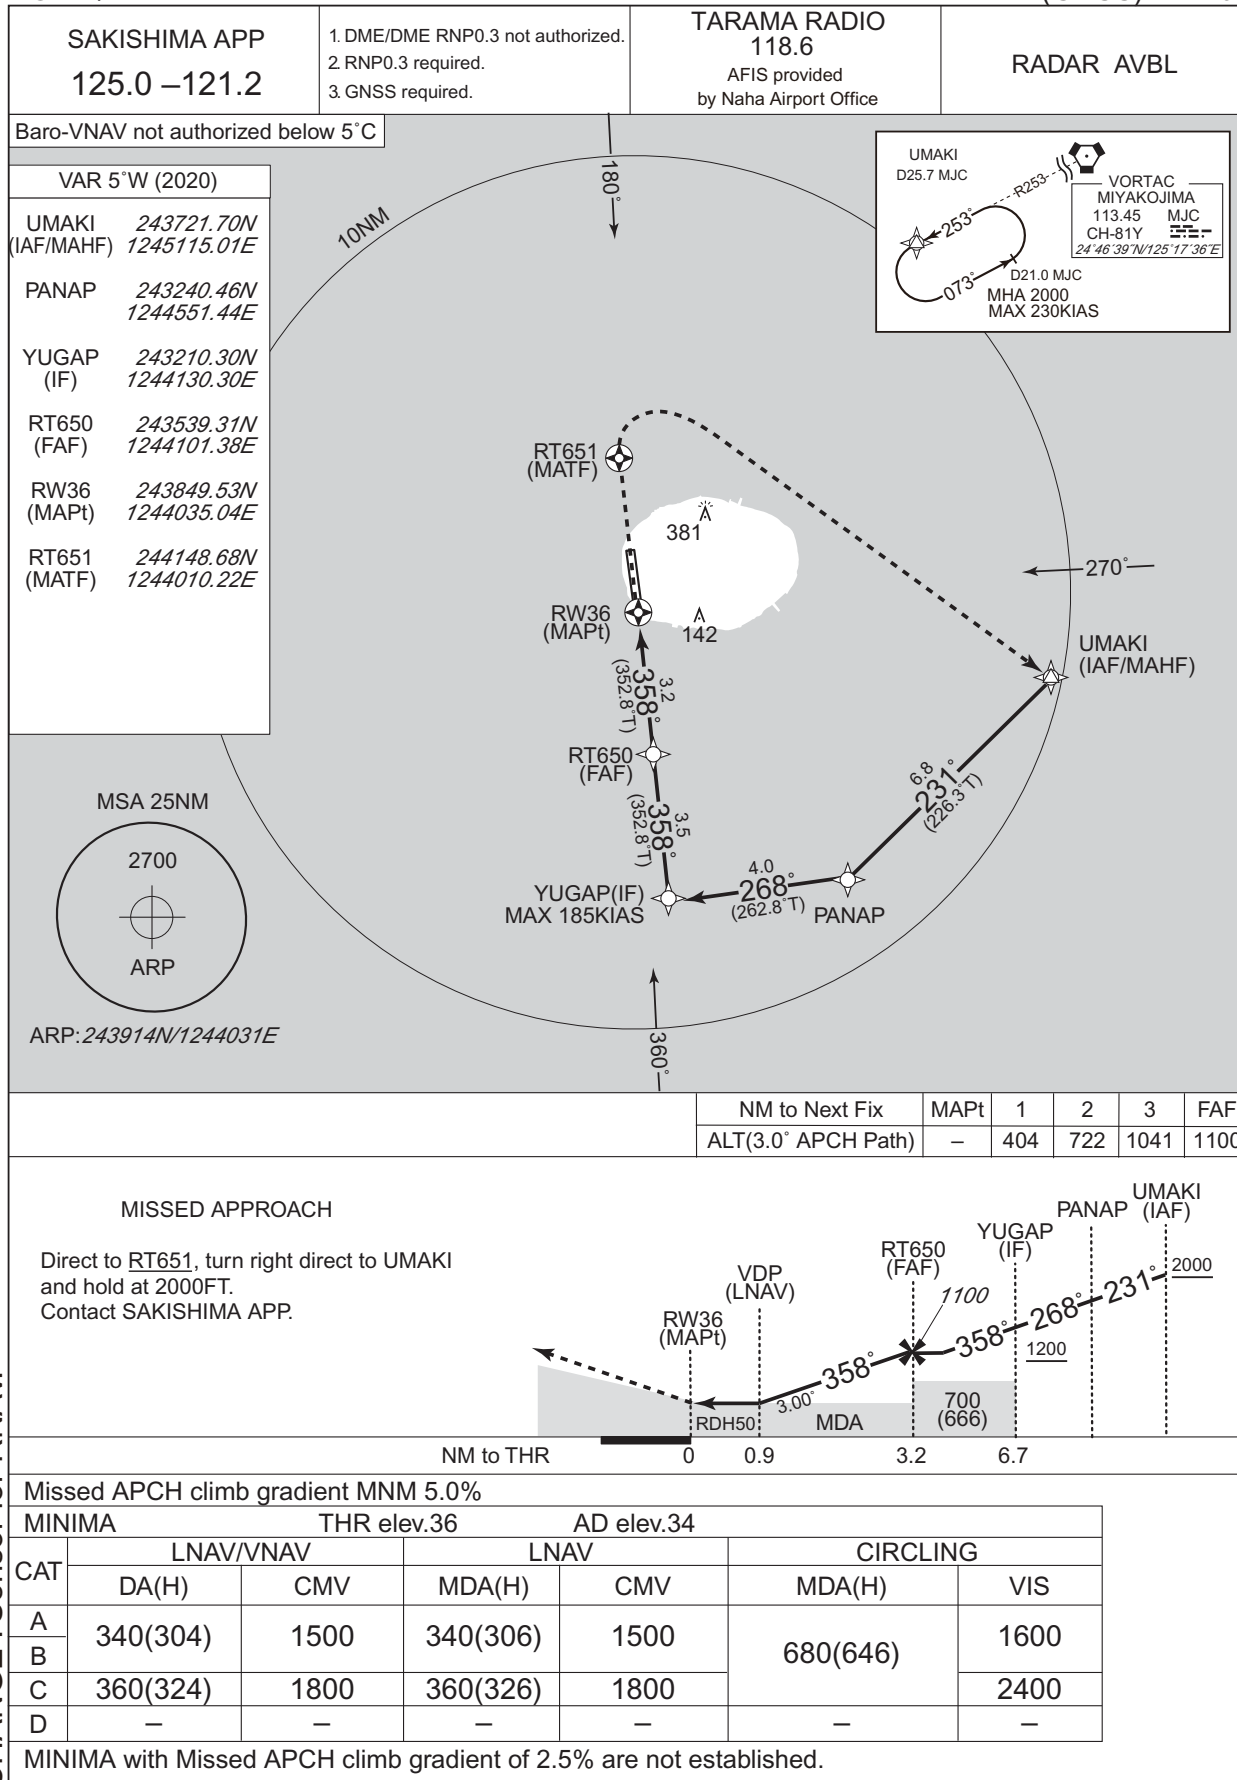

CHANGE : Sensor for RNAV.

RORT / TARAMA

Visual REP




Call sign	BRG / DIST from ARP	Remarks
ハナレ崎 HANAREZAKI	021° / 5.7NM	岬 Cape
10NM E	090°/10.0NM	海上 Over the sea
10NM SW	225°/10.0NM	海上 Over the sea



RORT / TARAMA

Minimum Vectoring Altitude CHART

VAR 4°W (2013)

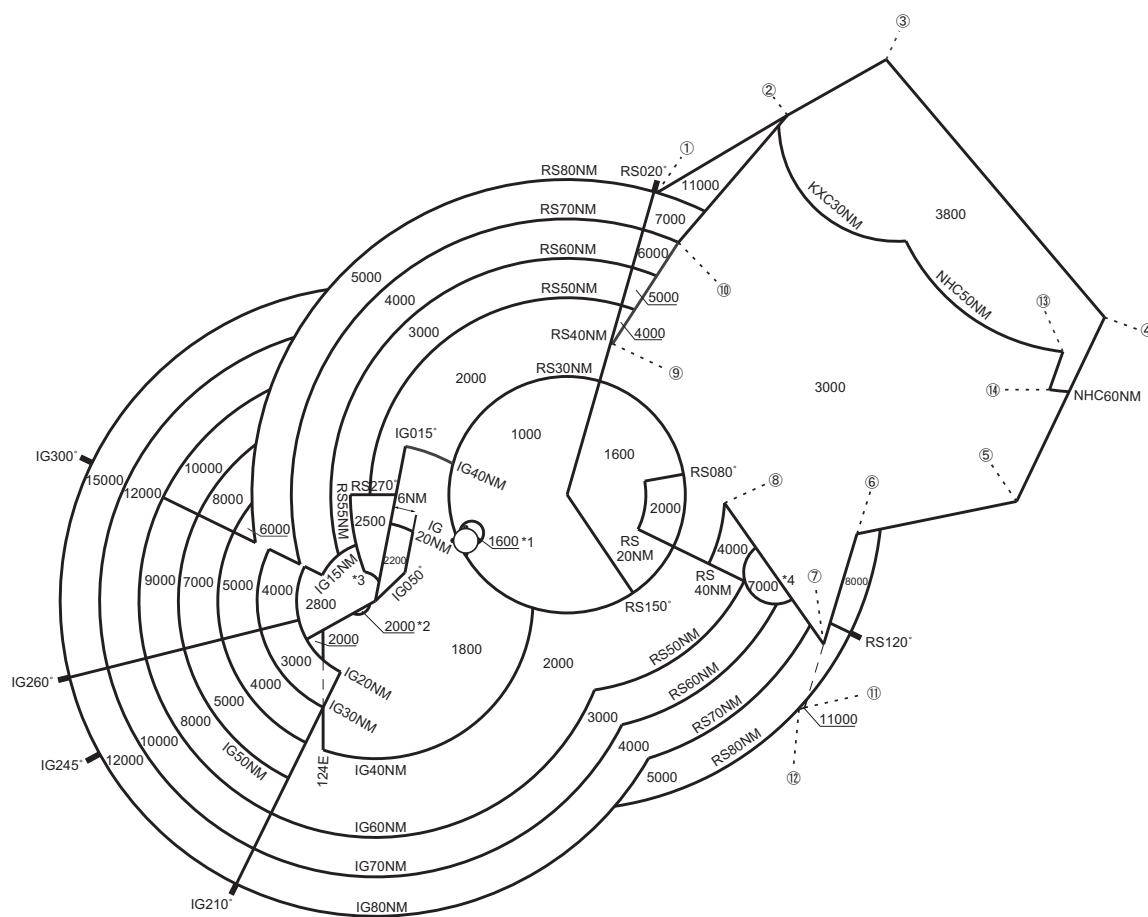

- ① 260606N/1253511E
- ② 262504N/1261226E
- ③ 263831N/1264046E
- ④ 253118N/1273951E
- ⑤ 244518N/1271337E
- ⑥ 243809N/1262857E
- ⑦ 241018N/1261859E
- ⑧ 244643N/1255220E
- ⑨ 252751N/1252151E
- ⑩ 255321N/1254054E
- ⑪ 235438N/1261324E
- ⑫ 235414N/1261156E
- ⑬ 252316N/1272802E
- ⑭ 251400N/1272404E

CENTER : 244938N/1250827E (RORS RADAR SITE)
CENTER : 242310N/1241441E (ROIG RADAR SITE)

- *1 : 244015N/1244143E RADIUS : 3NM
- *2 : 242248N/1240952E RADIUS : 3NM
- *3 : 242538N/1241100E RADIUS : 5NM
- *4 : 242850N/1260600E RADIUS : 8NM

CHANGE : Update(BTN RS020° and RS150°).

INTENTIONALLY LEFT BLANK