


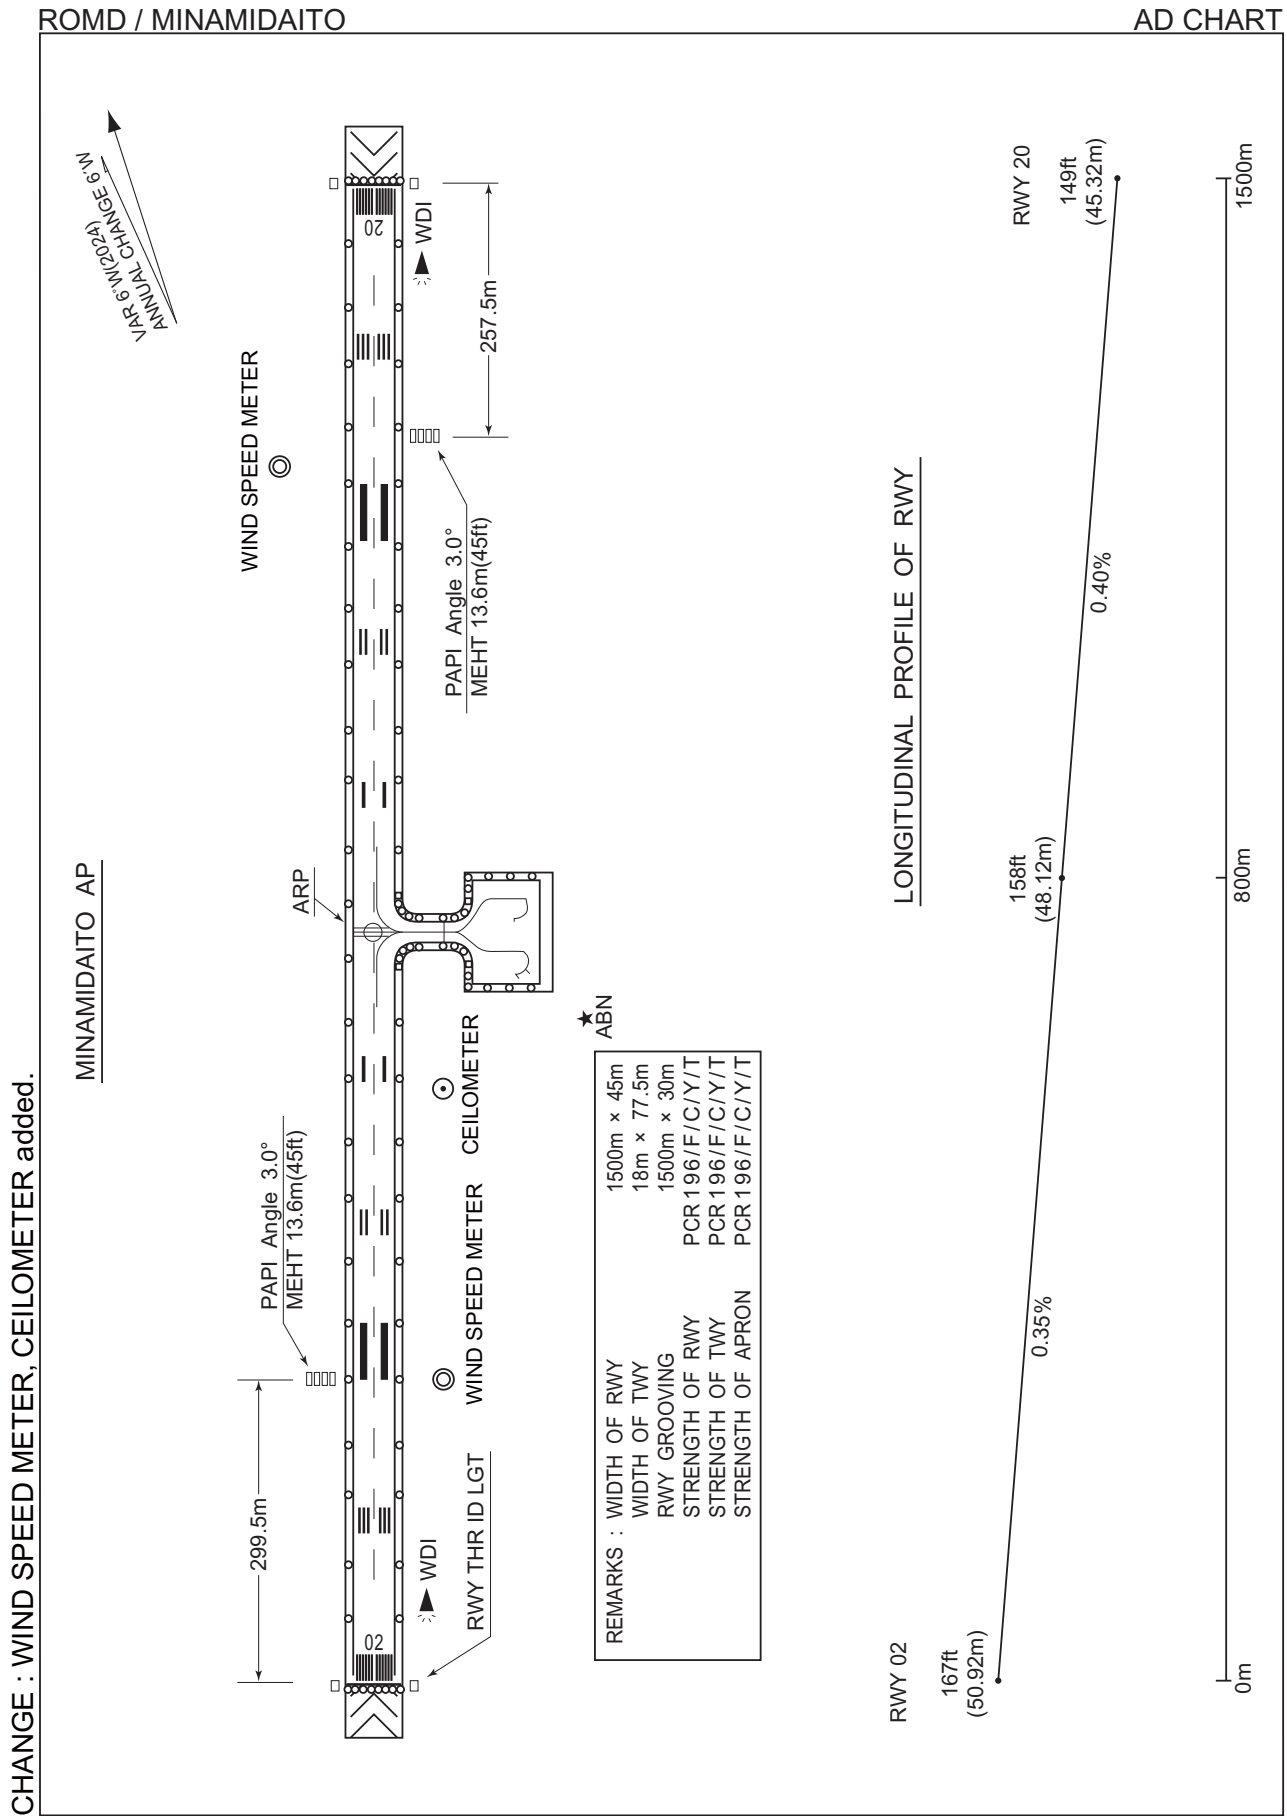


STANDARD DEPARTURE CHART -INSTRUMENT

ROMD / MINAMIDAITO

SID

TOPAT THREE DEPARTURE

RWY02 : Climb RWY HDG to 600FT, turn left HDG234° ...
RWY20 : Climb RWY HDG to 600FT, turn right HDG324° ...
... to intercept and proceed via MDE R279 to TOPAT.
Cross TOPAT at or above 8000FT.

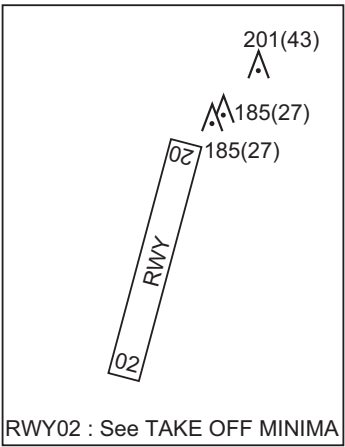

CHANGE : Description of PROC name.

8000
△ TOPAT
R279/D97.8 MDE
R103/D98.8 NHC

HDG234°

HDG324°

R279

VOR/DME
MINAMIDAITO
117.8 MDE
CH-125X
25°51'16"N/131°15'50"E
200FT

STANDARD DEPARTURE CHART -INSTRUMENT

ROMD / MINAMIDAITO

SID



MINAMIDAITO REVERSAL FOUR DEPARTURE

RWY 02 : Climb RWY HDG to 1000FT, turn right...

RWY 20 : Climb RWY HDG to 1000FT, turn left...

... direct to MDE VOR/DME.

Cross MDE VOR/DME at or above 2000FT.

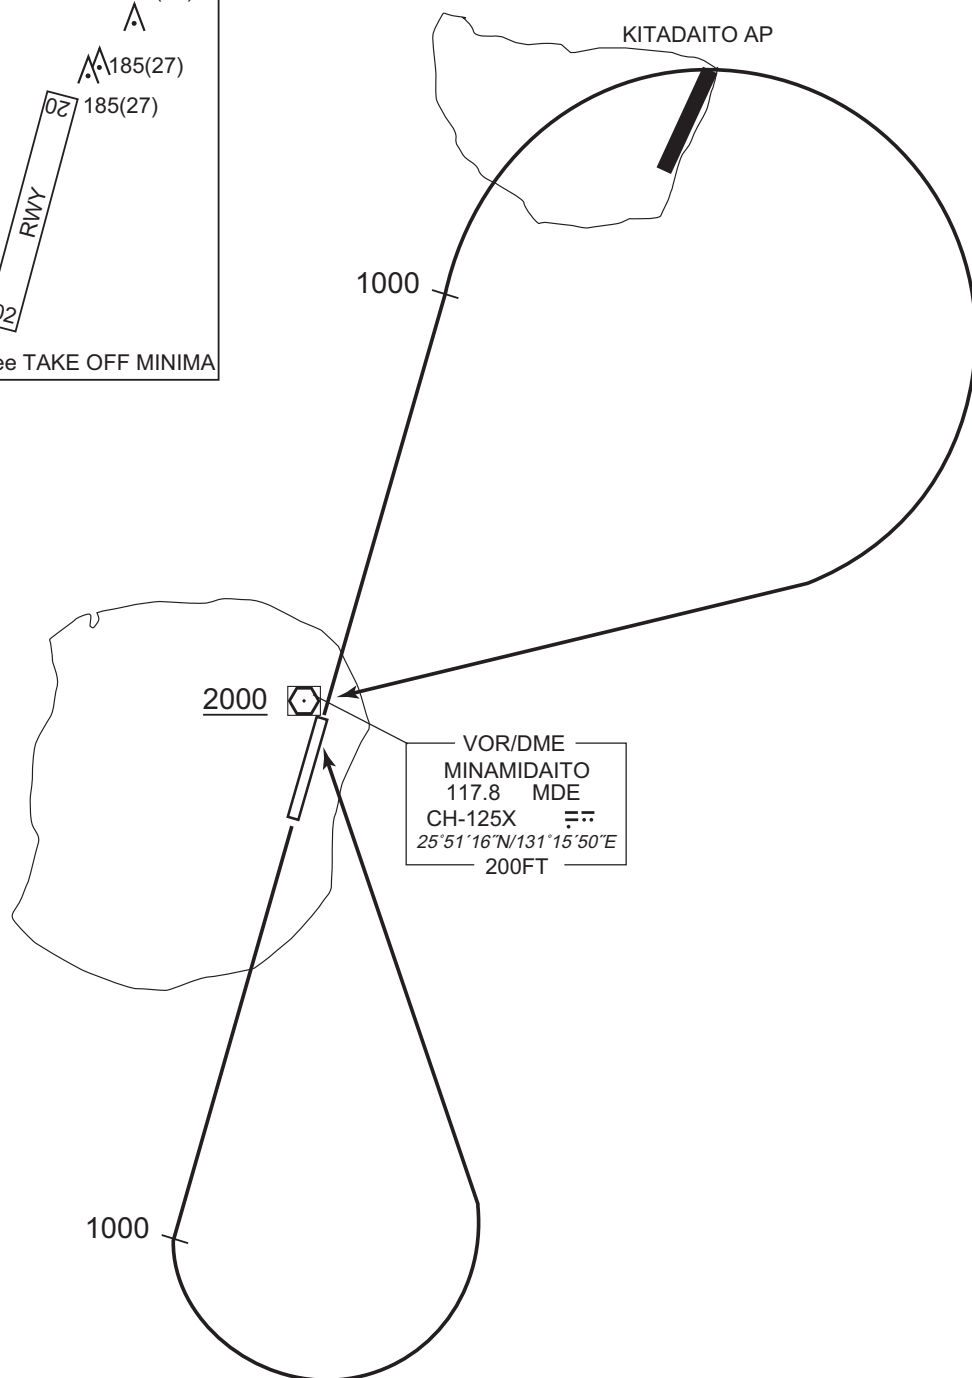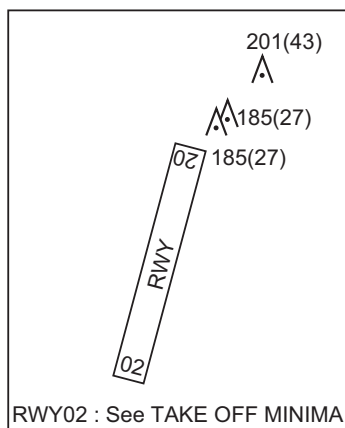

CHANGE : Description of PROC name.

STANDARD DEPARTURE CHART - INSTRUMENT

ROMD / MINAMIDAITO

RNAV SID

CORCO SOUTH ONE DEPARTURE

RNP1

Note GNSS required.

VAR 6°W

CORCO 5000

KITADAITO AP

600

021°

201°

600

201(43)

185(27)

185(27)

02

RWY

RWY02 : See TAKE OFF MINIMA

RWY02 : Climb on HDG021° at or above 600FT, turn left direct to CORCO at or above 5000FT.
RWY20 : Climb on HDG201° at or above 600FT, turn right direct to CORCO at or above 5000FT.

RWY02

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	021 (015.6)	-5.7	—	—	+600	—	—	RNP1
002	DF	CORCO	—	—	-5.7	—	L	+5000	—	—	RNP1

RWY20

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	201 (195.6)	-5.7	—	—	+600	—	—	RNP1
002	DF	CORCO	—	—	-5.7	—	R	+5000	—	—	RNP1

Waypoint Coordinates


Waypoint Identifier	Coordinates
CORCO	255226.5N / 1305915.1E

CHANGE : VAR. Waypoint Coordinates added.

INSTRUMENT APPROACH CHART


ROMD / MINAMIDAITO

VOR RWY02

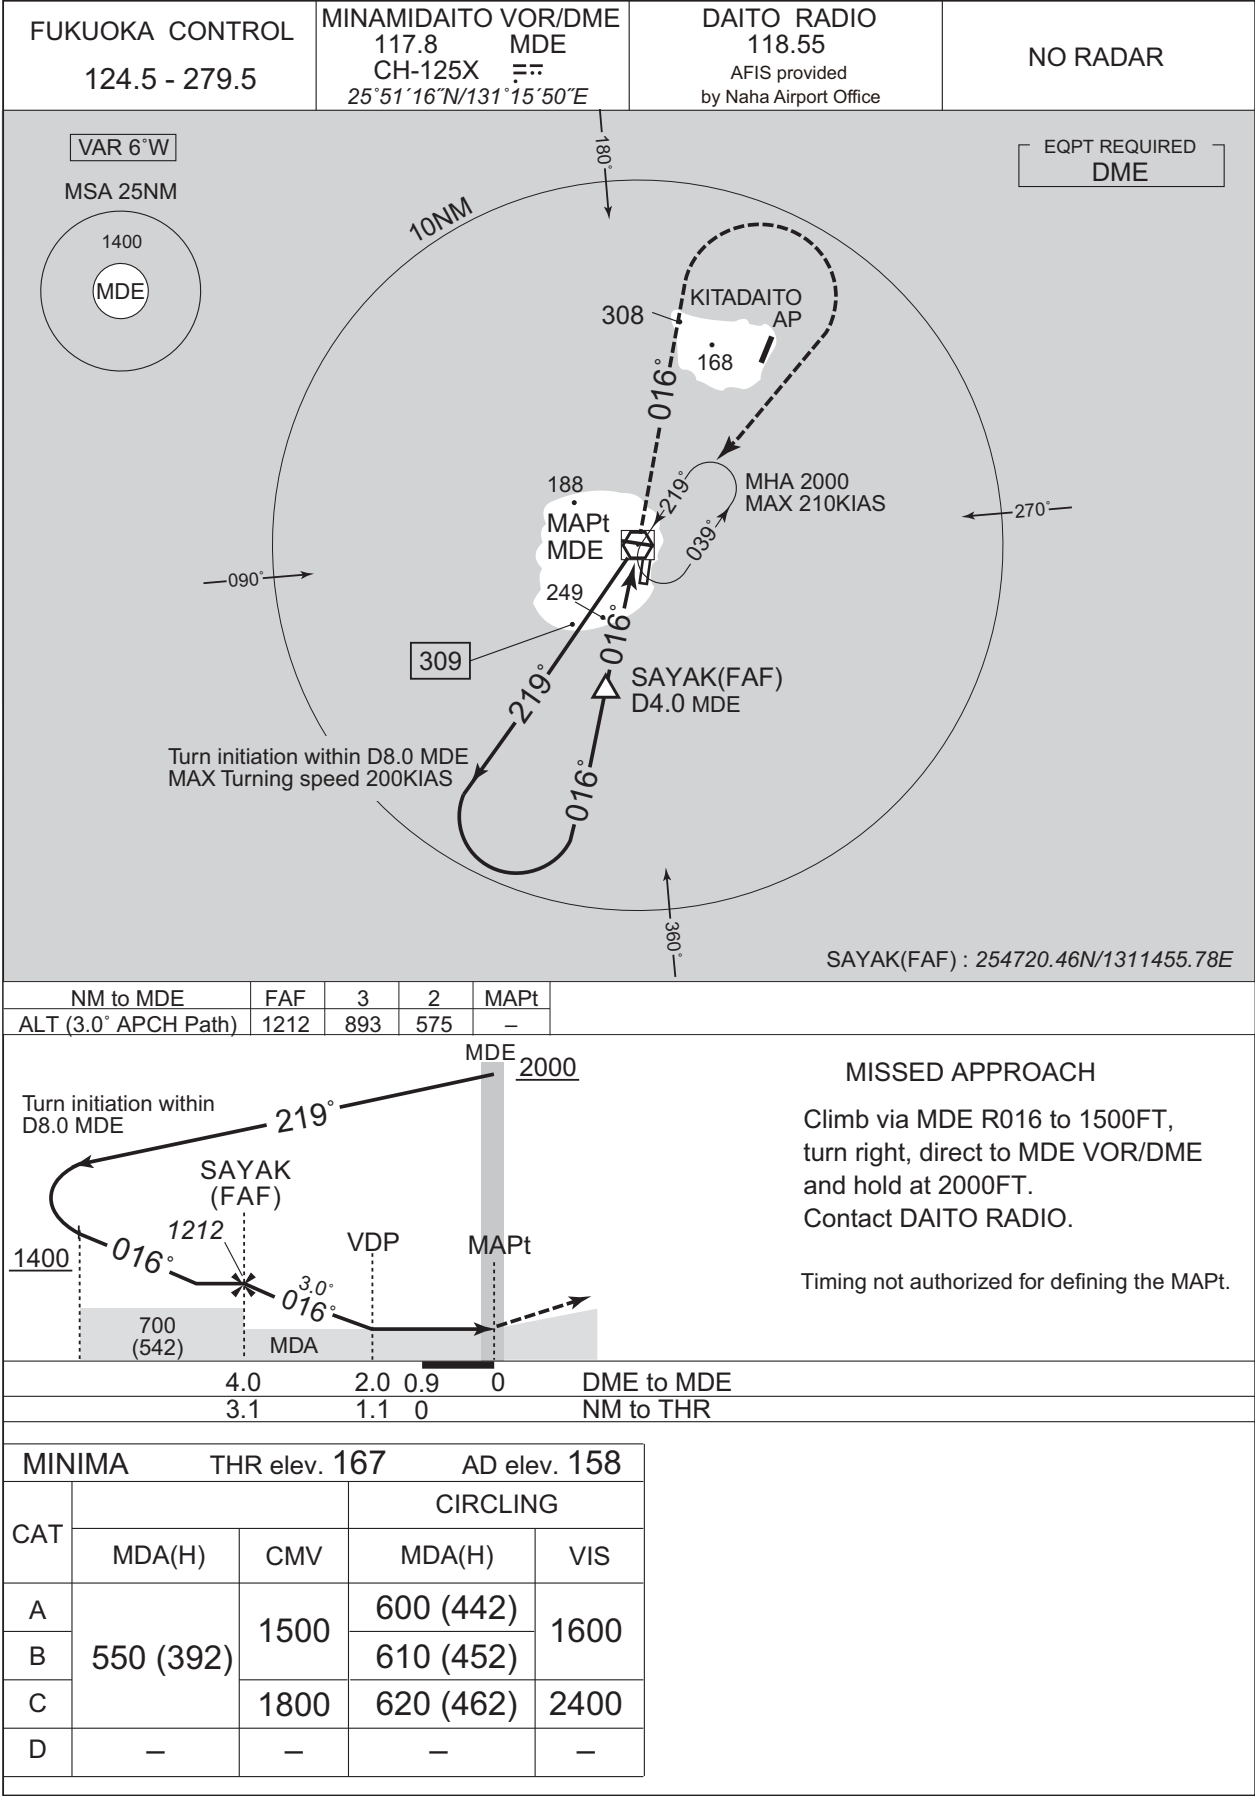



CHANGE : VAR OBST.

INSTRUMENT APPROACH CHART

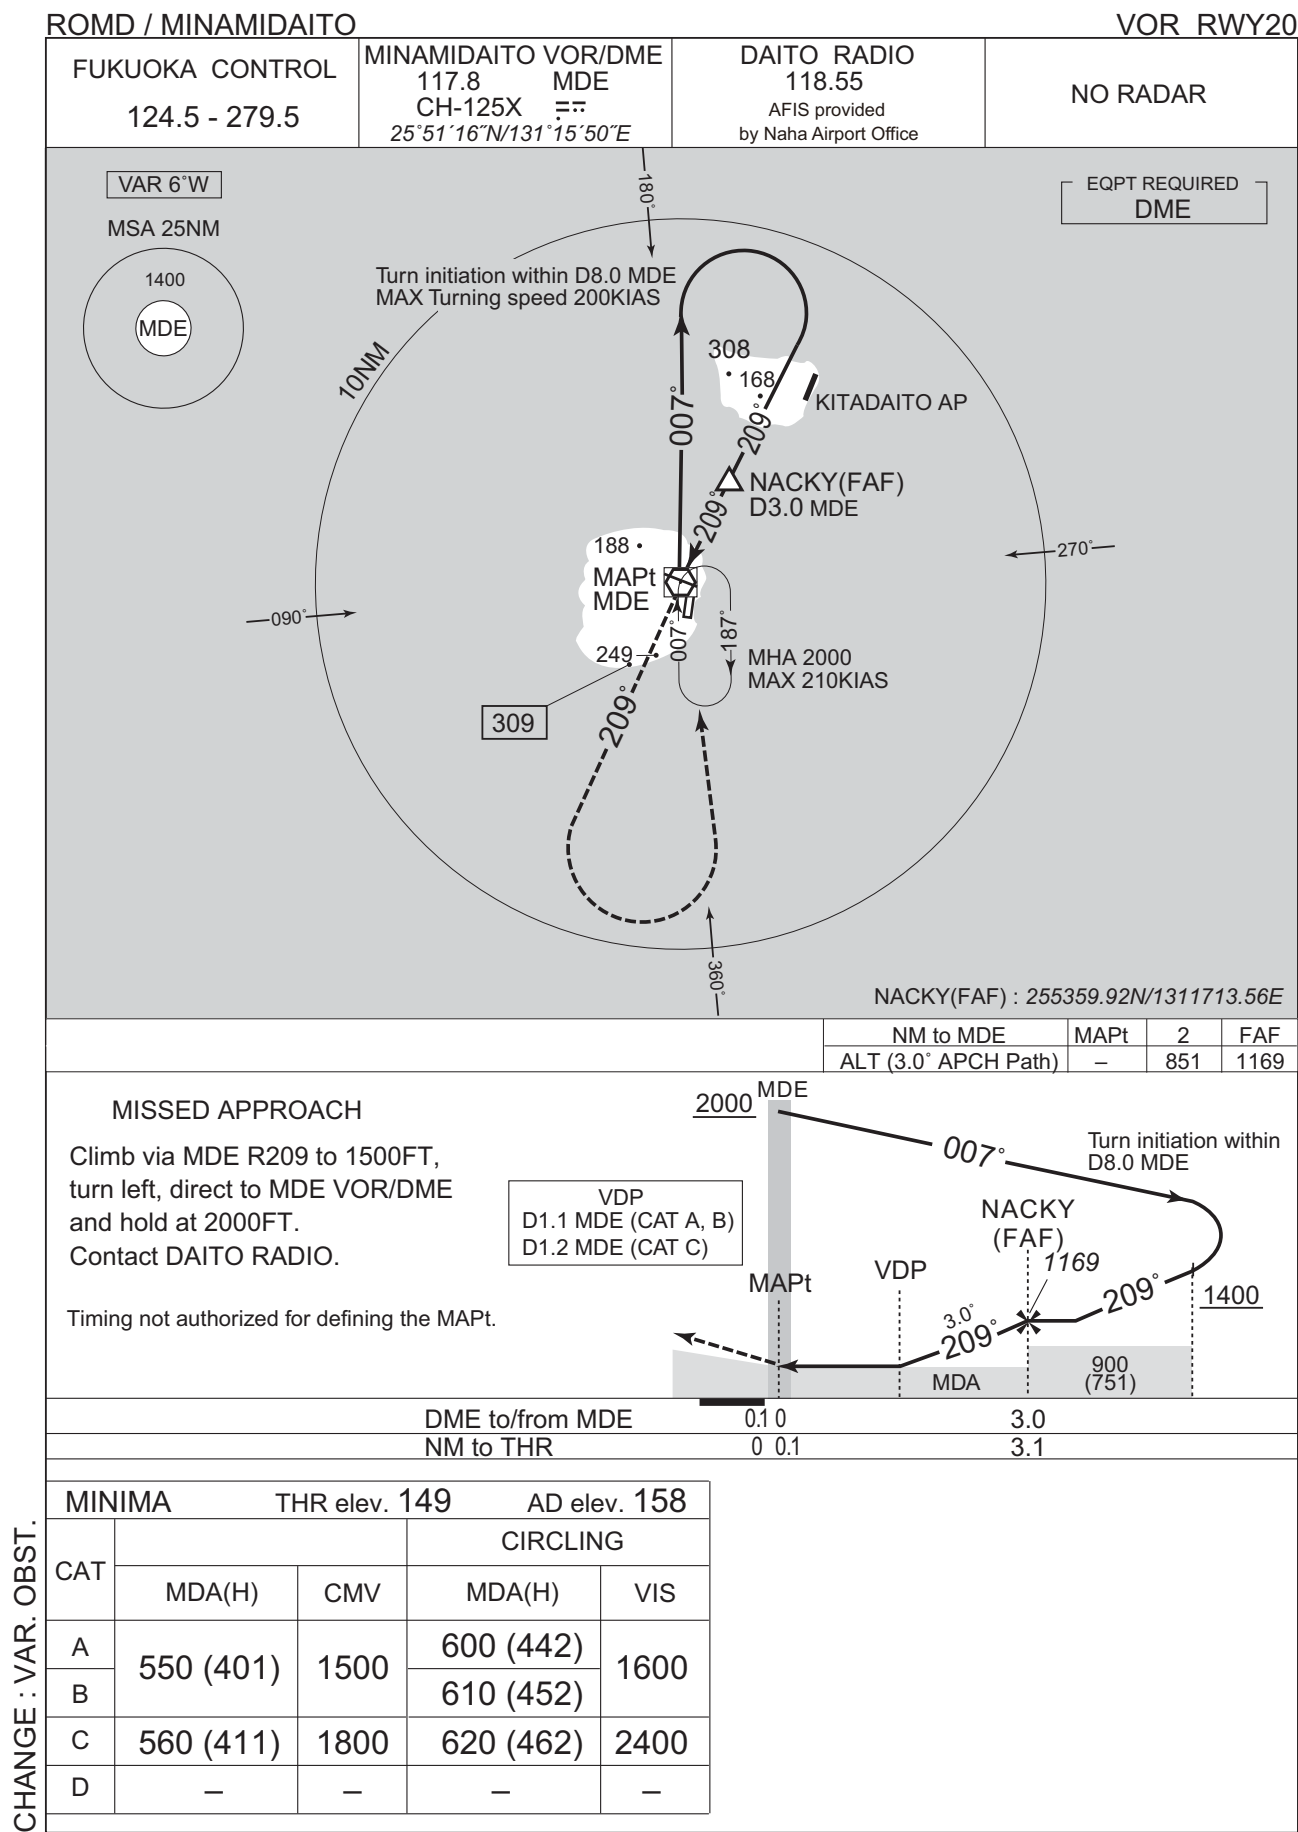

INSTRUMENT APPROACH CHART

ROMD / MINAMIDAITO RNP Z RWY02(AR)

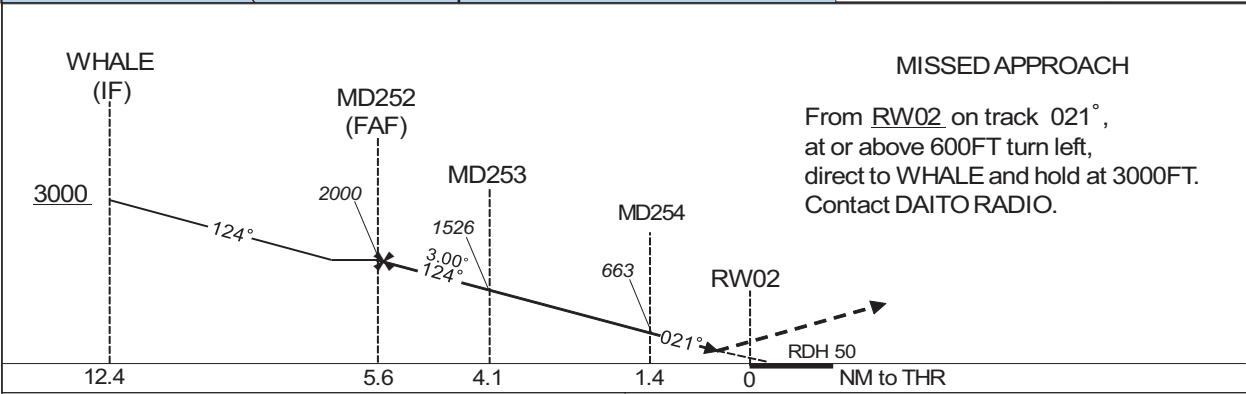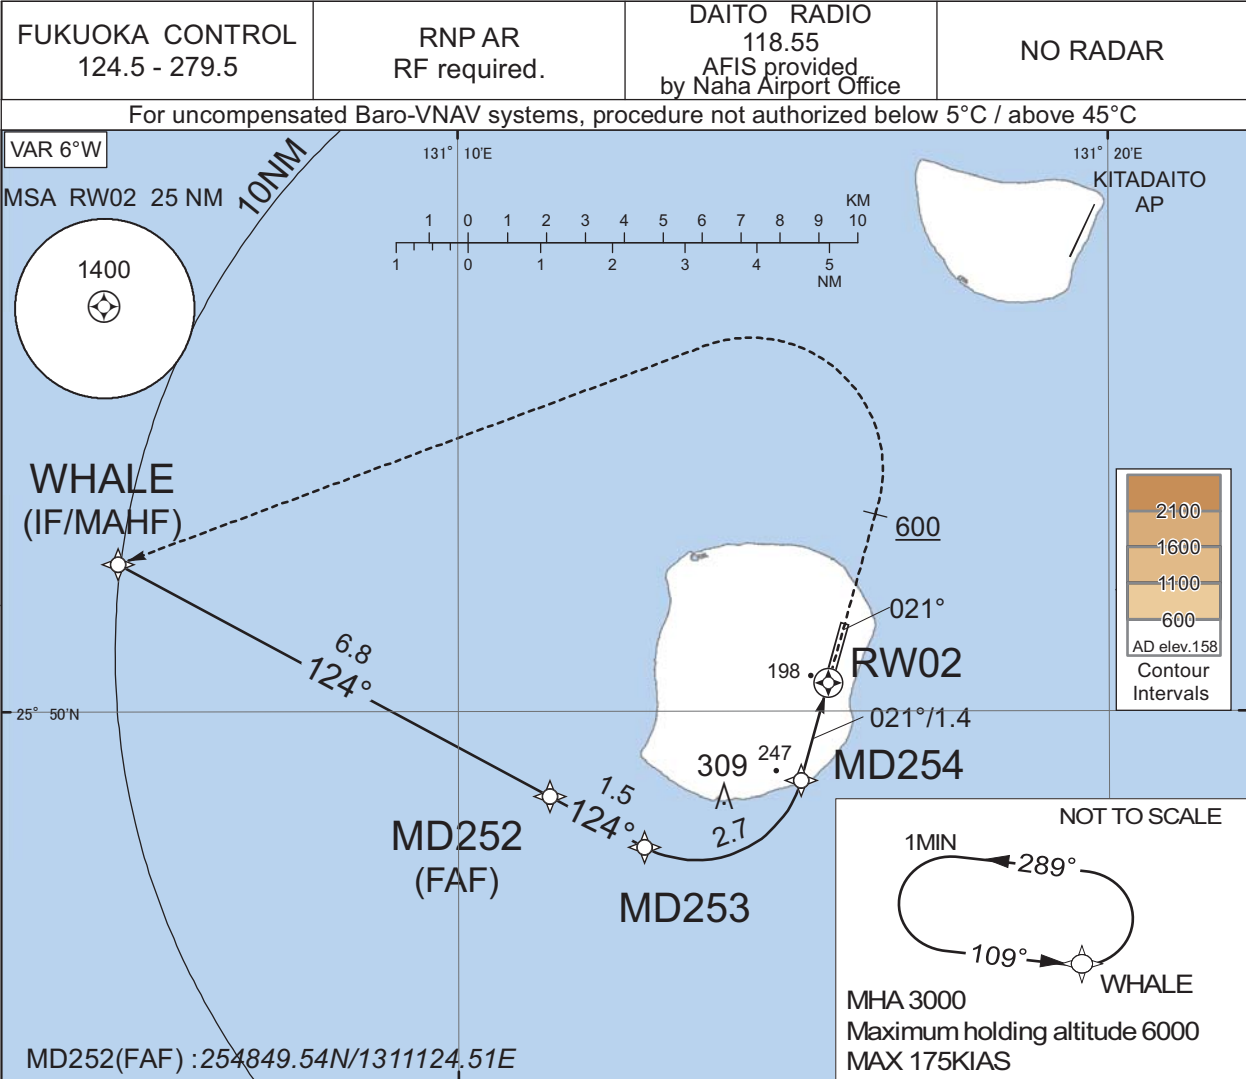

CHANGE : New PROC.

MINIMA	THR elev. 167	AD elev. 158
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B	-	-
C	447 (280)	1600
D	-	-

Authorization Required

INSTRUMENT APPROACH CHART

ROMD / MINAMIDAITO

RNP Z RWY02(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	WHALE	-	-	-5.7	-	-	+3000	-	-	-
002	TF	MD252	-	124 (118.4)	-5.7	6.8	-	2000	-	-	1.0
003	TF	MD253	-	124 (118.4)	-5.7	1.5	-	1526	-	-3.00	0.3
004	RF Center: MDRF1 r=1.51NM	MD254	-	-	-5.7	2.7	L	663	-	-3.00	0.3
005	TF	RW02	Y	021 (015.6)	-5.7	1.4	-	217	-	-3.00/50	0.3
006	FA	-	-	021 (015.6)	-5.7	-	-	+600	-	-	1.0
007	DF	WHALE	-	-	-5.7	-	L	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	WHALE	109 (103.0)	-5.7	1.0 (-6000)	L	3000	6000	-175 (-6000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
WHALE	255203.25N / 1310446.65E	MDRF1	254927.15N / 1311339.29E
MD252	254849.54N / 1311124.51E		
MD253	254807.07N / 1311251.61E		
MD254	254902.61N / 1311516.07E		
RW02	255023.94N / 1311541.26E		

CHANGE : New PROC.

ROMD / MINAMIDAITO

KOMOD / MINAMIDAITO

FUKUOKA CONTROL 124.5 - 279.5	RNP APCH	DAITO RADIO 118.55 AFIS provided by Naha Airport Office	NO RADAR
---	-----------------	---	-----------------

Baro-VNAV not authorized below 5°C

VAR 6°W

MSA 25NM
1400
ARP

ARP : 255048N / 1311549E

Fix	Elev.	Type
WHALE (IAF)	255203.25N / 1310446.65E	IAF
SHIGE	254409.02N / 1310909.30E	Fix
KOHJO (IF)	254304.20N / 1311325.19E	IF
JYUGO (FAF)	254724.92N / 1311445.83E	FAF
RW02 (MAPt)	255023.94N / 1311541.26E	MAPt
MD251 (MATF)	255420.02N / 1311654.45E	MATF
MINAMIDAITO (MDE) (MAHF)	255116.14N / 1311549.64E	MDE / MAHF

NM to Next Fix	FAF	3	2	MAPt
ALT (3.0' APCH Path)	1200	1172	853	-

MHA 2000 MAX 210KIAS
1MIN
NOT TO SCALE

MHA 3000 Maximum holding altitude 6000 MAX 175KIAS
1MIN
NOT TO SCALE

MISSED APPROACH
Climb direct to MD251, turn left direct to MDE and hold at 2000FT.
Contact DAITO RADIO.


CAT	LNAV/VNAV	LNAV	CIRCLING	
	DA(H)	CMV	MDA(H)	VIS
A	550 (383)	1500	600 (442)	1600
B			610 (452)	
C			620 (462)	
D	-	-	-	-

PROC renamed. Maximum HLDG ALT at WHALE established.
CHANGE: Missed APCH for using VOR/DME abolished. OBST.

INSTRUMENT APPROACH CHART

ROMD / MINAMIDAITO

RNP Z RWY20(AR)

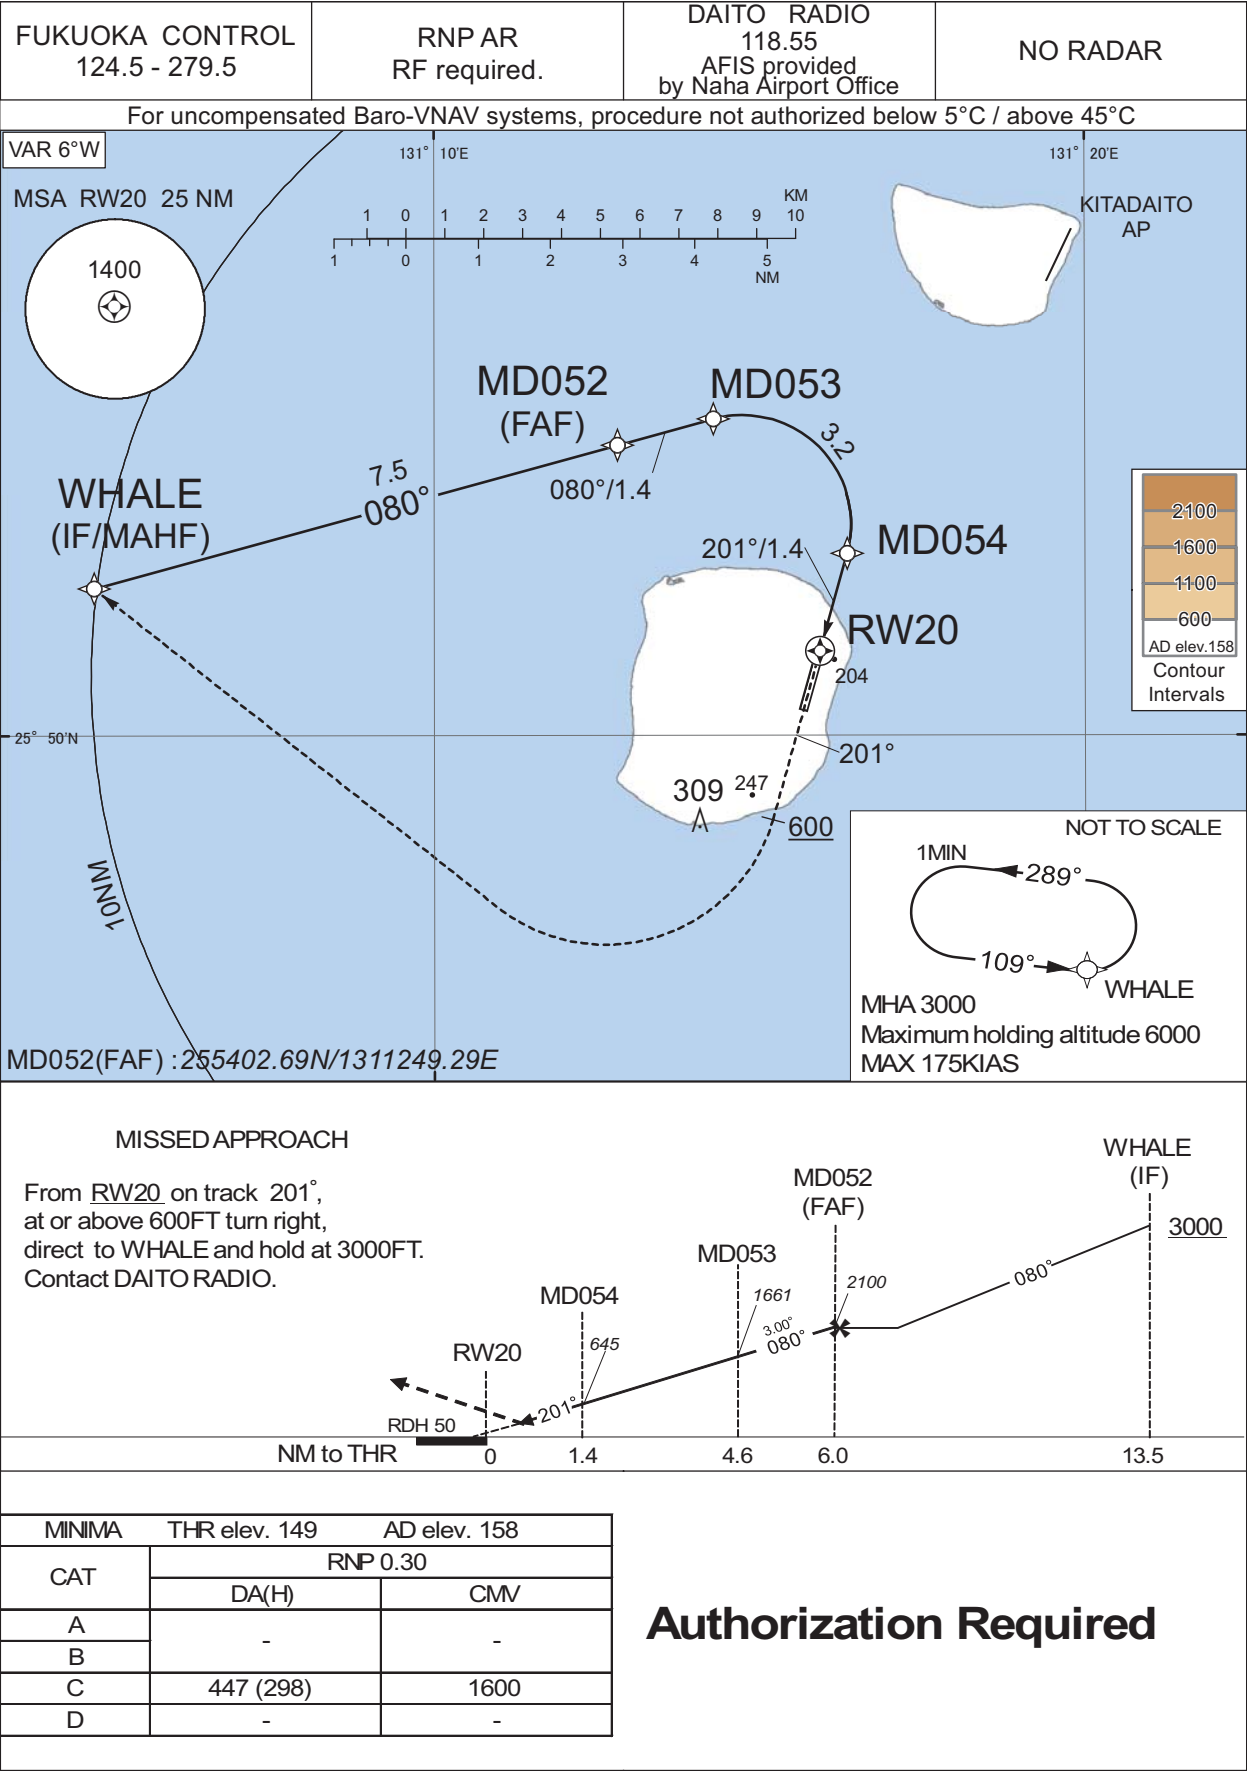

INSTRUMENT APPROACH CHART

ROMD / MINAMIDAITO

RNP Z RWY20(AR)


Coding Table											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	WHALE	-	-	-5.7	-	-	+3000	-	-	-
002	TF	MD052	-	080 (074.6)	-5.7	7.5	-	2100	-	-	1.0
003	TF	MD053	-	080 (074.7)	-5.7	1.4	-	1661	-	-3.00	0.3
004	RF Center: MDRF2 r=1.51NM	MD054	-	-	-5.7	3.2	R	645	-	-3.00	0.3
005	TF	RW20	Y	201 (195.6)	-5.7	1.4	-	199	-	-3.00/50	0.3
006	FA	-	-	201 (195.6)	-5.7	-	-	+600	-	-	1.0
007	DF	WHALE	-	-	-5.7	-	R	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	WHALE	109 (103.0)	-5.7	1.0 (-6000)	L	3000	6000	-175 (-6000)	1.0

Waypoint Coordinates			
Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
WHALE	255203.25N / 1310446.65E	MDRF2	255256.75N / 1311444.18E
MD052	255402.69N / 1311249.29E		
MD053	255424.51N / 1311417.72E		
MD054	255232.20N / 1311621.01E		
RW20	255110.87N / 1311555.80E		

CHANGE : New PROC.


INSTRUMENT APPROACH CHART

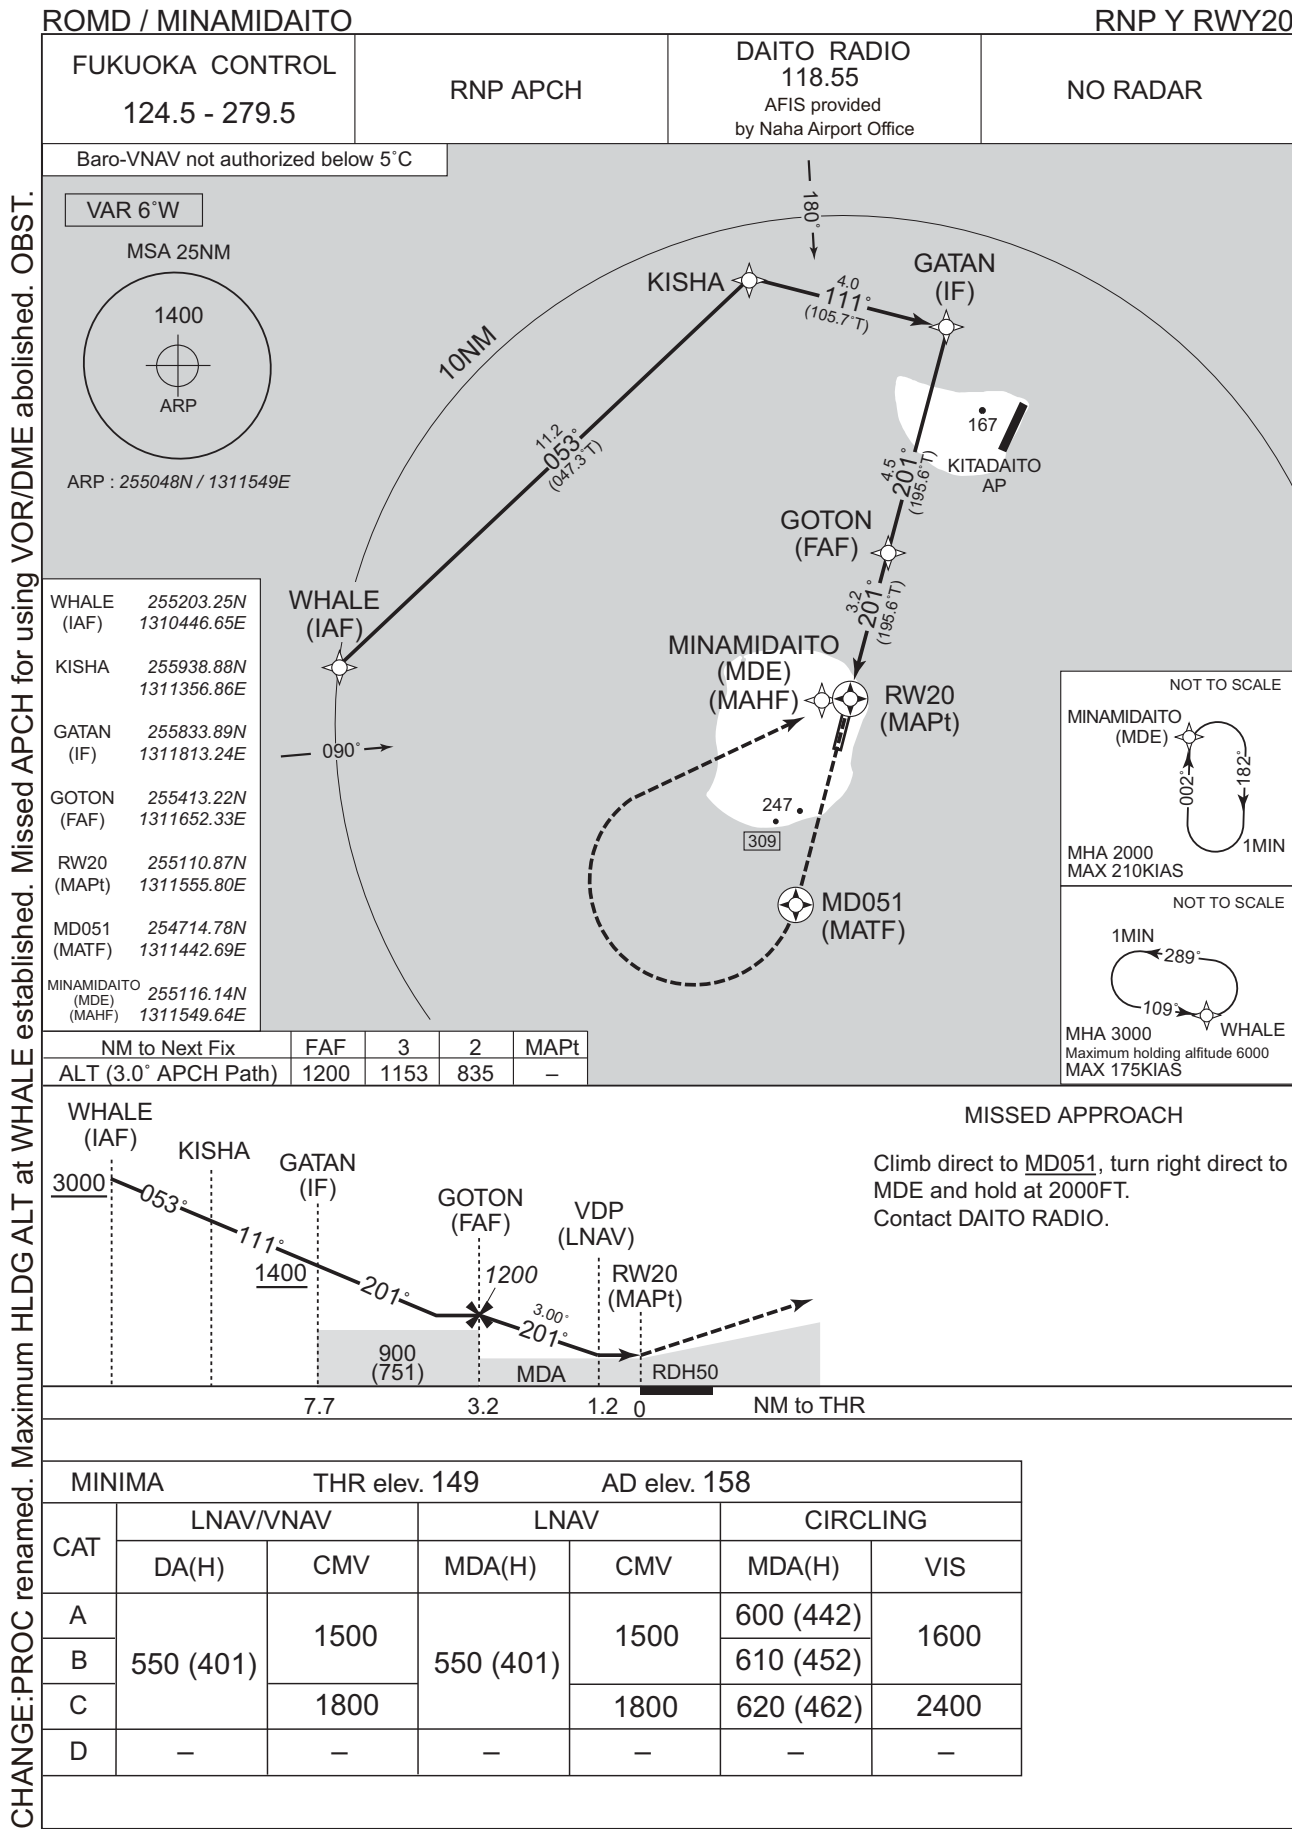

CHANGE:PROC renamed. Maximum HLDG ALT at WHALE established. Missed APCH for using VOR/DME abolished. OBST.

ROMD / MINAMI DAITO

Visual REP

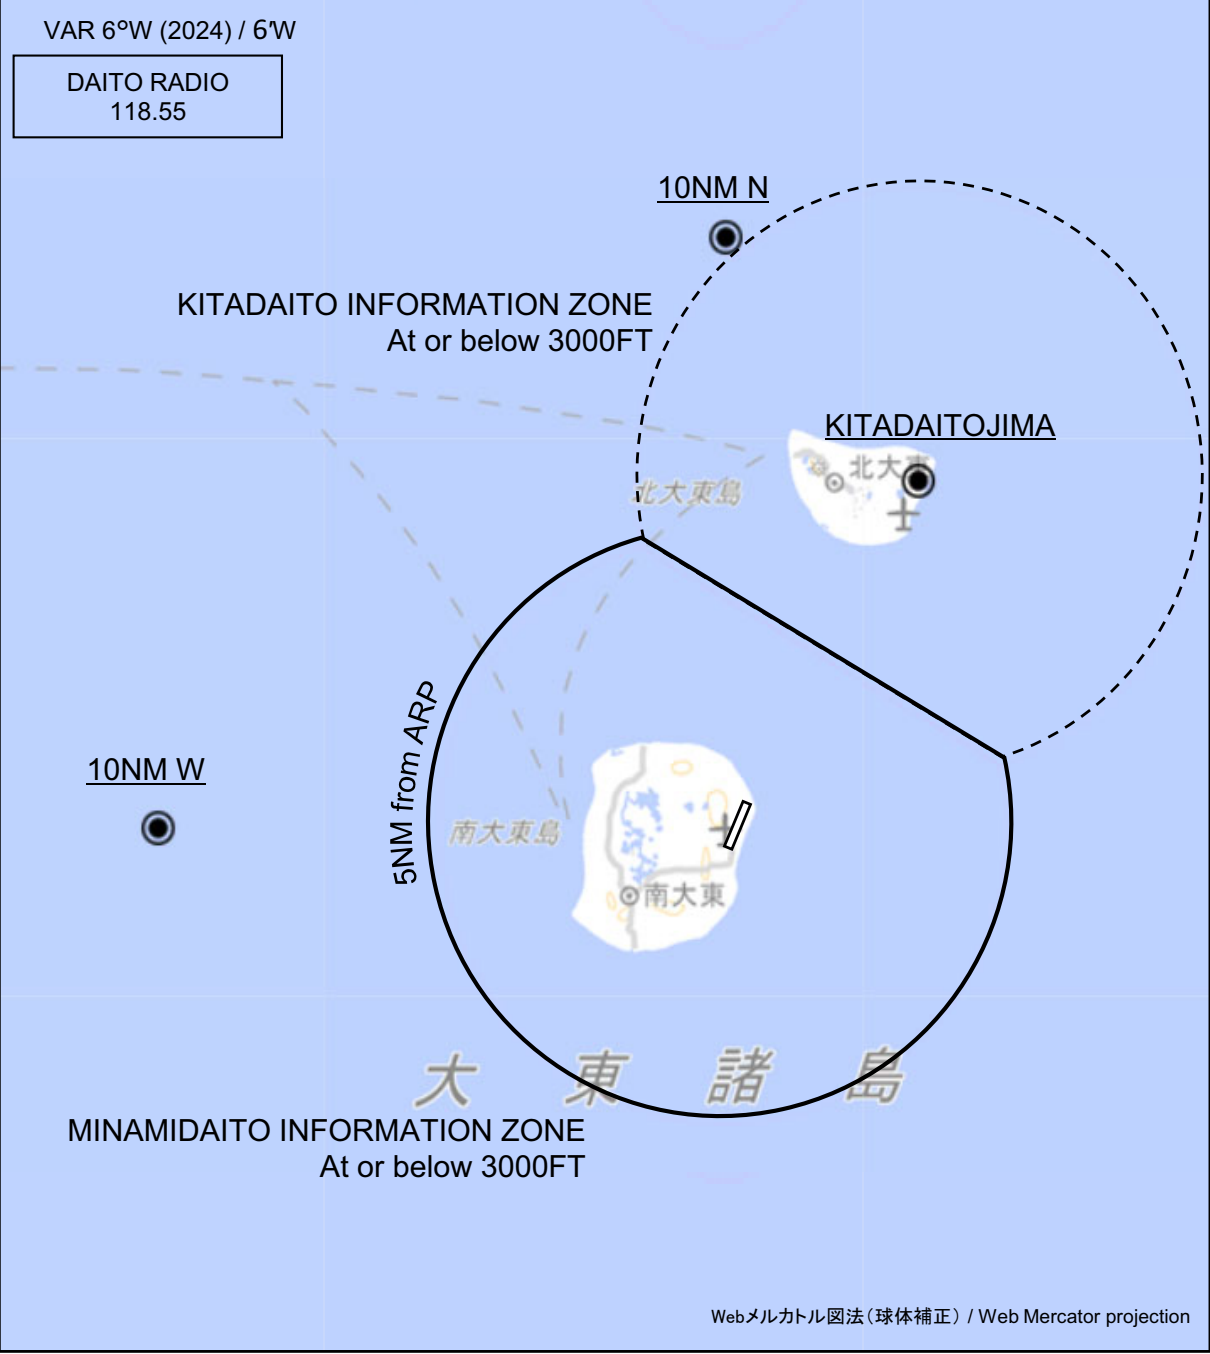

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).

CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
10NM N	360°T / 10.0NM	海上 Over the sea
北大東島 Kitadaitojima	030°T / 6.8NM	北大東空港 Kitadaito Airport
10NM W	270°T / 10.0NM	海上 Over the sea

Minimum Vectoring Altitude CHART

