


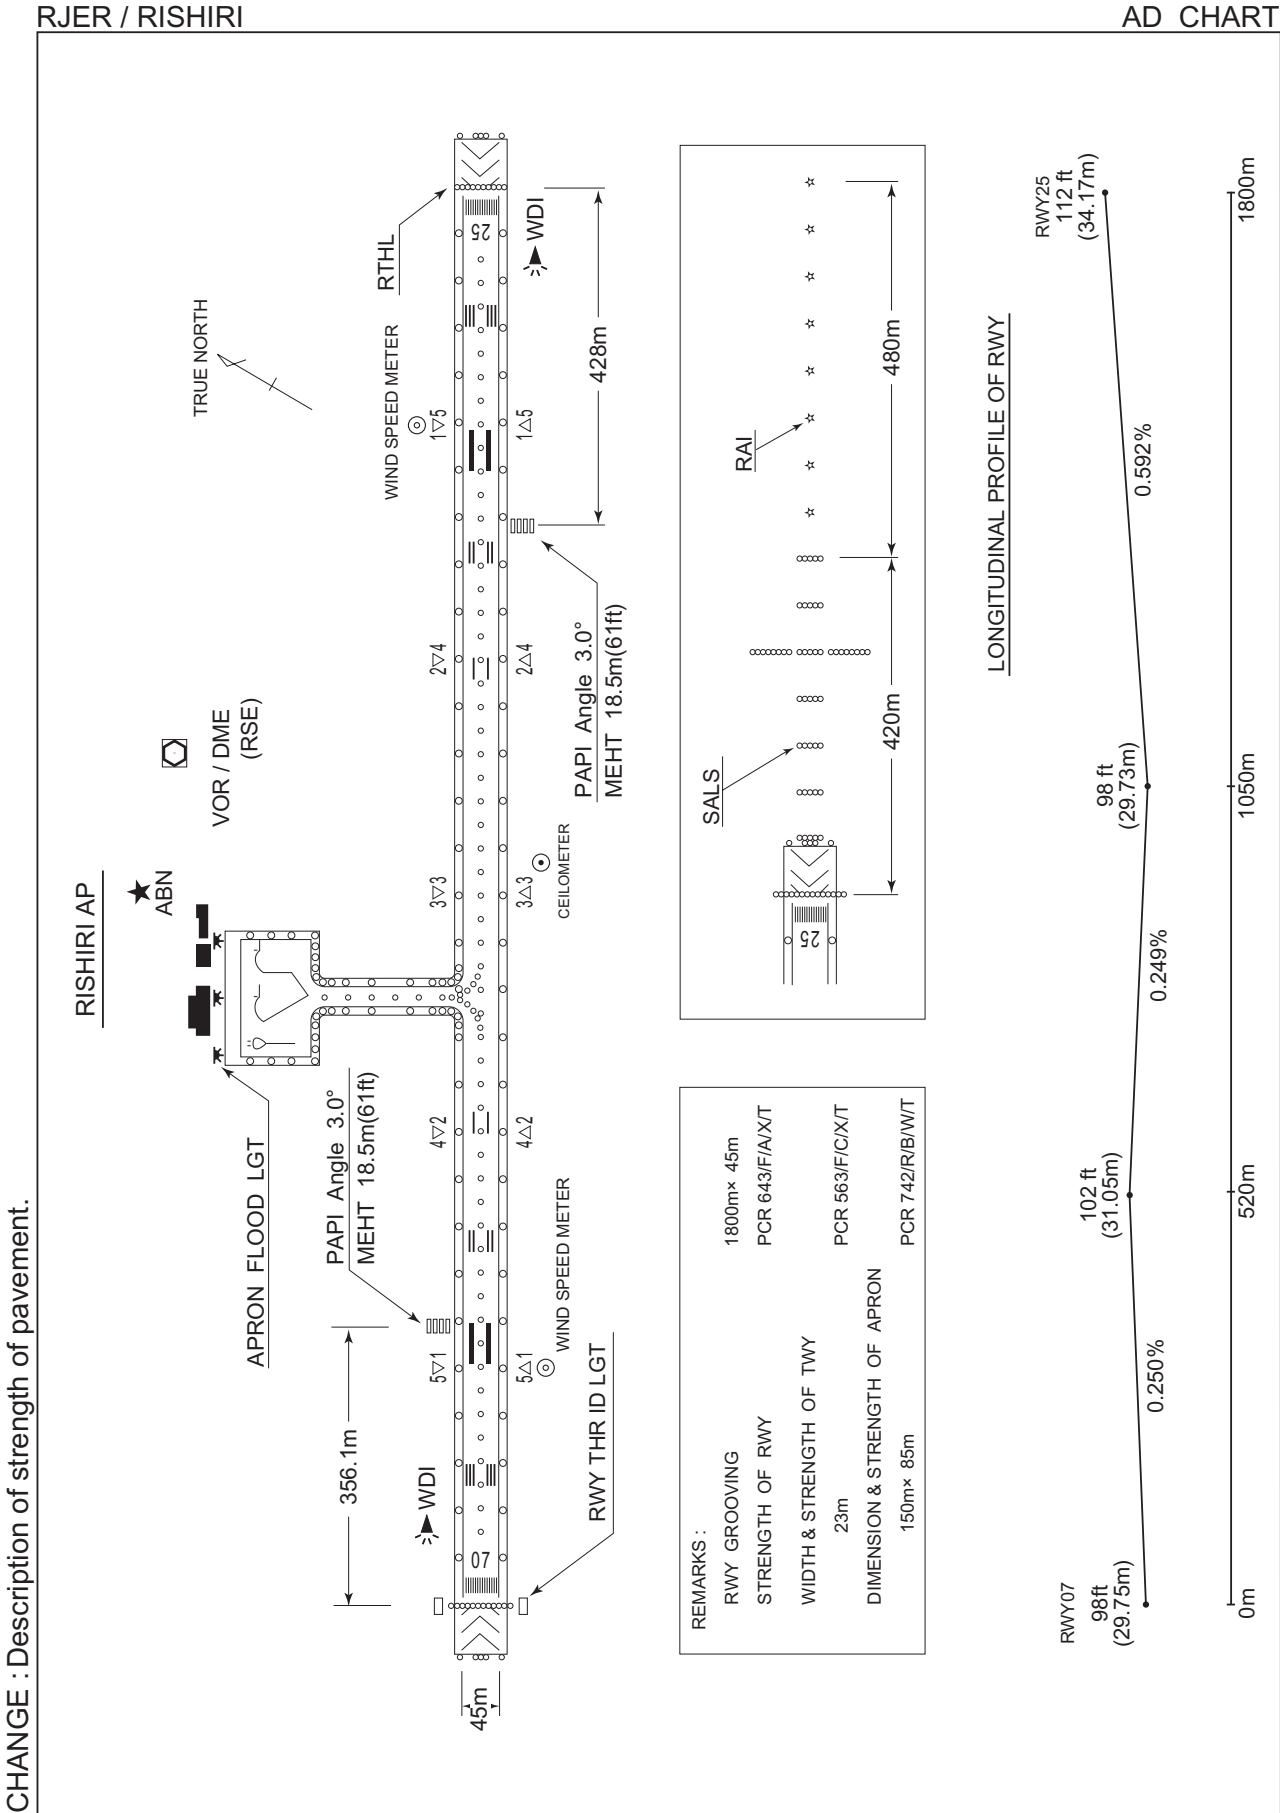

INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART-INSTRUMENT

RJER / RISHIRI

SID

RISHIRI REVERSAL THREE DEPARTURE

RWY07 : Climb RWY HDG to 600FT, turn left...

RWY25 : Climb RWY HDG to 600FT, turn right HDG 080°...

... to intercept and proceed via RSE R035 to 4000FT,
turn left, direct to RSE VOR/DME.

Cross RSE VOR/DME at or above 8000FT.

Note RWY07 : 4.0% climb gradient required up to 600FT.


OBST ALT 152FT located at 0.2NM 104° FM end of RWY07.

RWY25 : 5.2% climb gradient required up to 1000FT.

OBST ALT 262FT located at 0.6NM 225° FM end of RWY25.

OBST ALT 722FT located at 1.3NM 158° FM end of RWY25.

CHANGE : PROC renamed. Note for RWY07 added. Description of direction of OBST for RWY25.

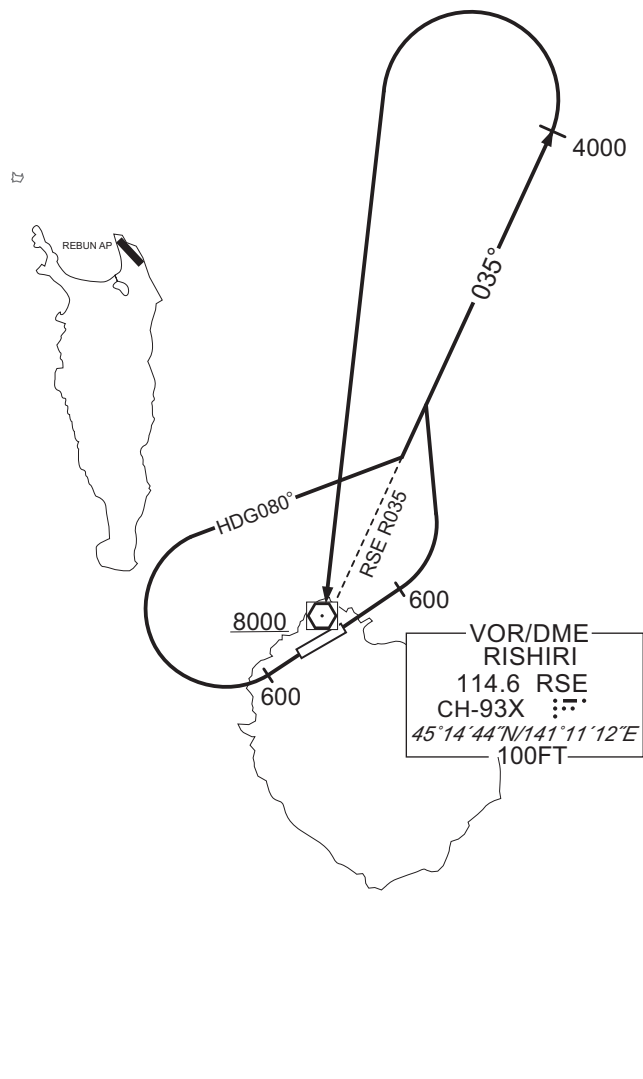

RJR / RISHIRI

RNAV SID



RWY25 : 5.2% climb gradient required up to 600FT.
OBST ALT 262FT located at 0.6NM 225°FM end of RWY25.

STANDARD DEPARTURE CHART-INSTRUMENT

RJER / RISHIRI


RNAV SID

LEDAX TWO DEPARTURE											
RWY07											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	068 (056.9)	-10.6	-	-	+600	-	-	RNP1
002	DF	ER700	-	-	-10.6	-	-	-	-	-	RNP1
003	TF	ER701	-	158 (147.3)	-10.6	8.0	-	-	-	-	RNP1
004	TF	LEDAX	-	172 (161.1)	-10.6	8.4	-	+8000	-	-	RNP1
RWY25											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	248 (236.9)	-10.6	-	-	+600	-	-	RNP1
002	DF	ER500	-	-	-10.6	-	R	-	-	-	RNP1
003	TF	ER701	-	126 (115.9)	-10.6	15.0	-	-	-	-	RNP1
004	TF	LEDAX	-	172 (161.1)	-10.6	8.4	-	+8000	-	-	RNP1
Waypoint Coordinates											
Waypoint Identifier		Coordinates									
ER500		452013.4N / 1411105.6E									
ER700		452023.2N / 1412406.4E									
ER701		451339.6N / 1413014.7E									
LEDAX		450542.8N / 1413406.1E									

CHANGE : PROC renamed. VAR. PROC course. Waypoint Coordinates added.

RJR / RISHIRI

LOC RWY25

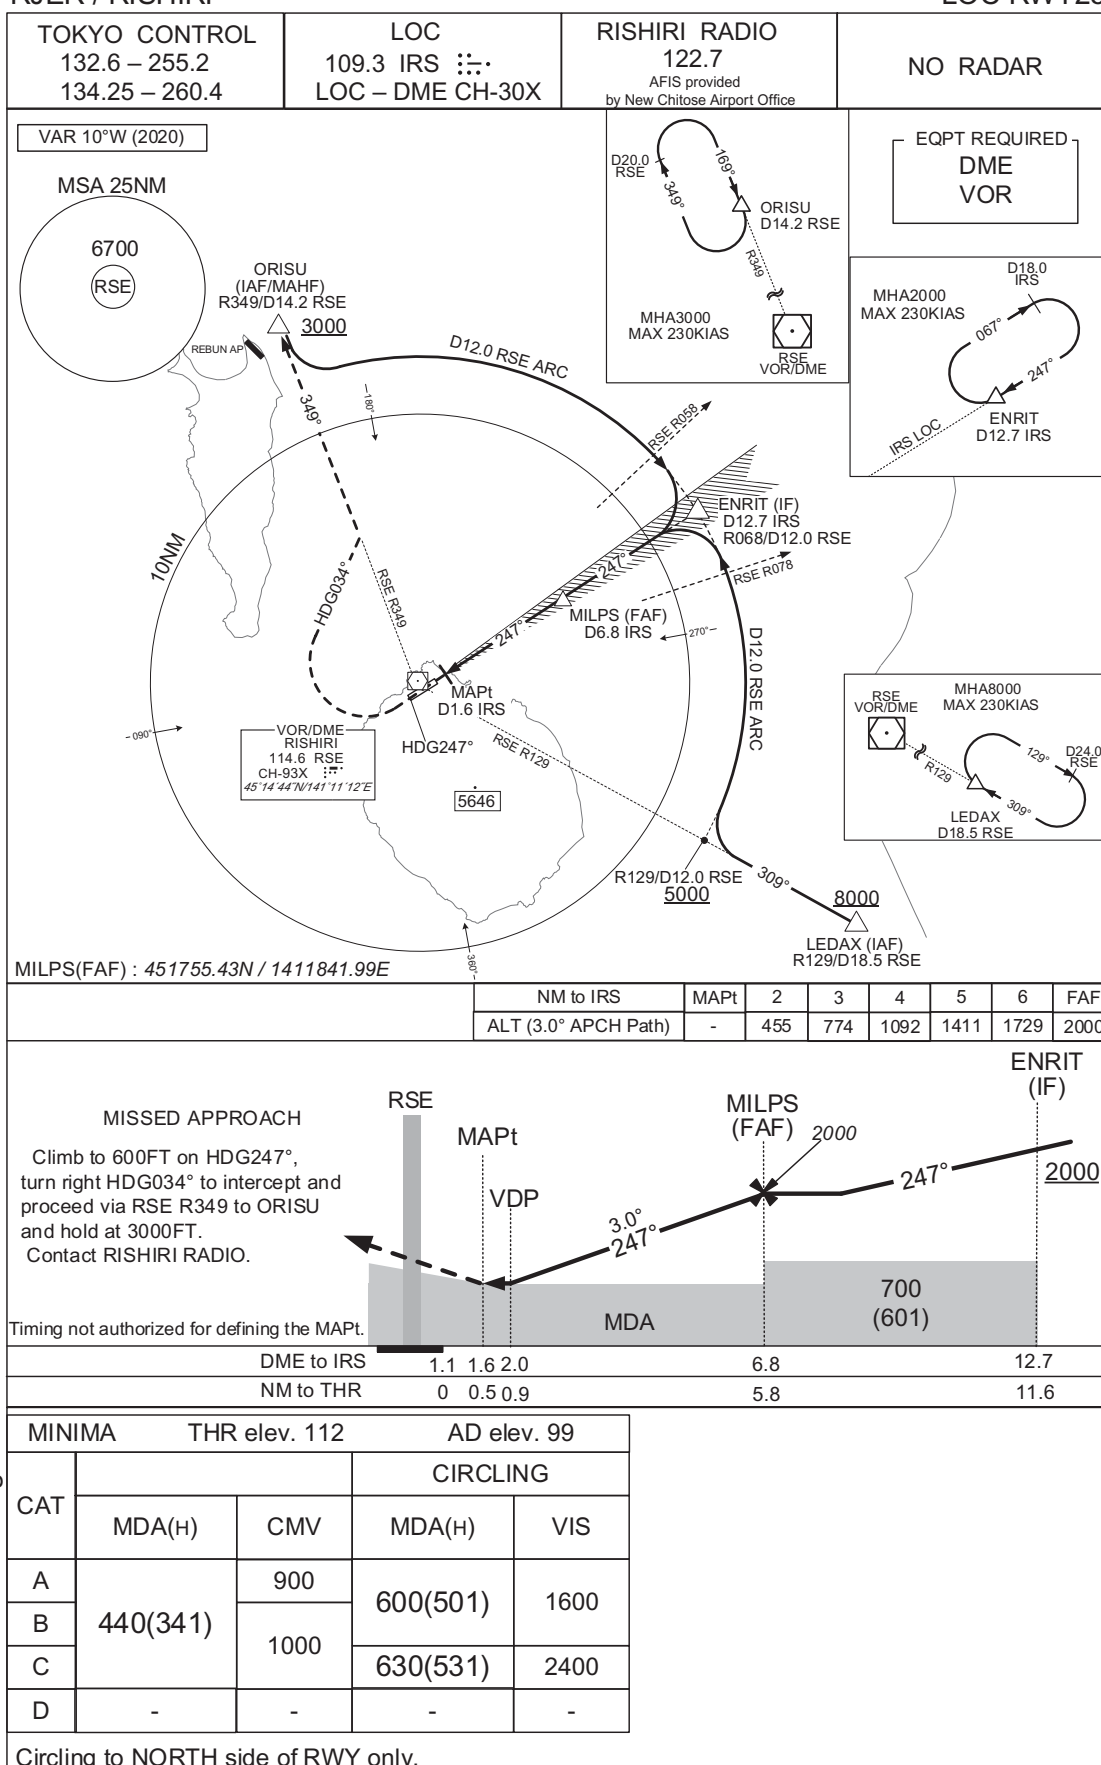

RJER / RISHIRI

TOKYO CONTROL
132.6 – 255.2
134.25 – 260.4

RISHIRI VOR/DME
114.6 RSE
CH-93X
45°14'44"N/141°11'12"E

RISHIRI RADIO
122.7
AFIS provided
by New Chitose Airport Office

NO RADAR

VAR 10°W (2020)

MSA 25NM

RIPPU(FAF) : 451239.21N / 1410144.85E

EQPT REQUIRED – DME

MISSED APPROACH

Turn left to intercept and proceed via RSE R349 to ORISU and hold at 3000FT.
Contact RISHIRI RADIO.

Timing not authorized for defining the MAPt.


MINIMA		AD elev. 99
CAT	CIRCLING	
	MDA(H)	VIS
A	610(511)	1600
B		
C	630(531)	2400
D	-	-

Circling to NORTH side of RWY only.

INSTRUMENT APPROACH CHART

RJER / RISHIRI


RNP RWY25

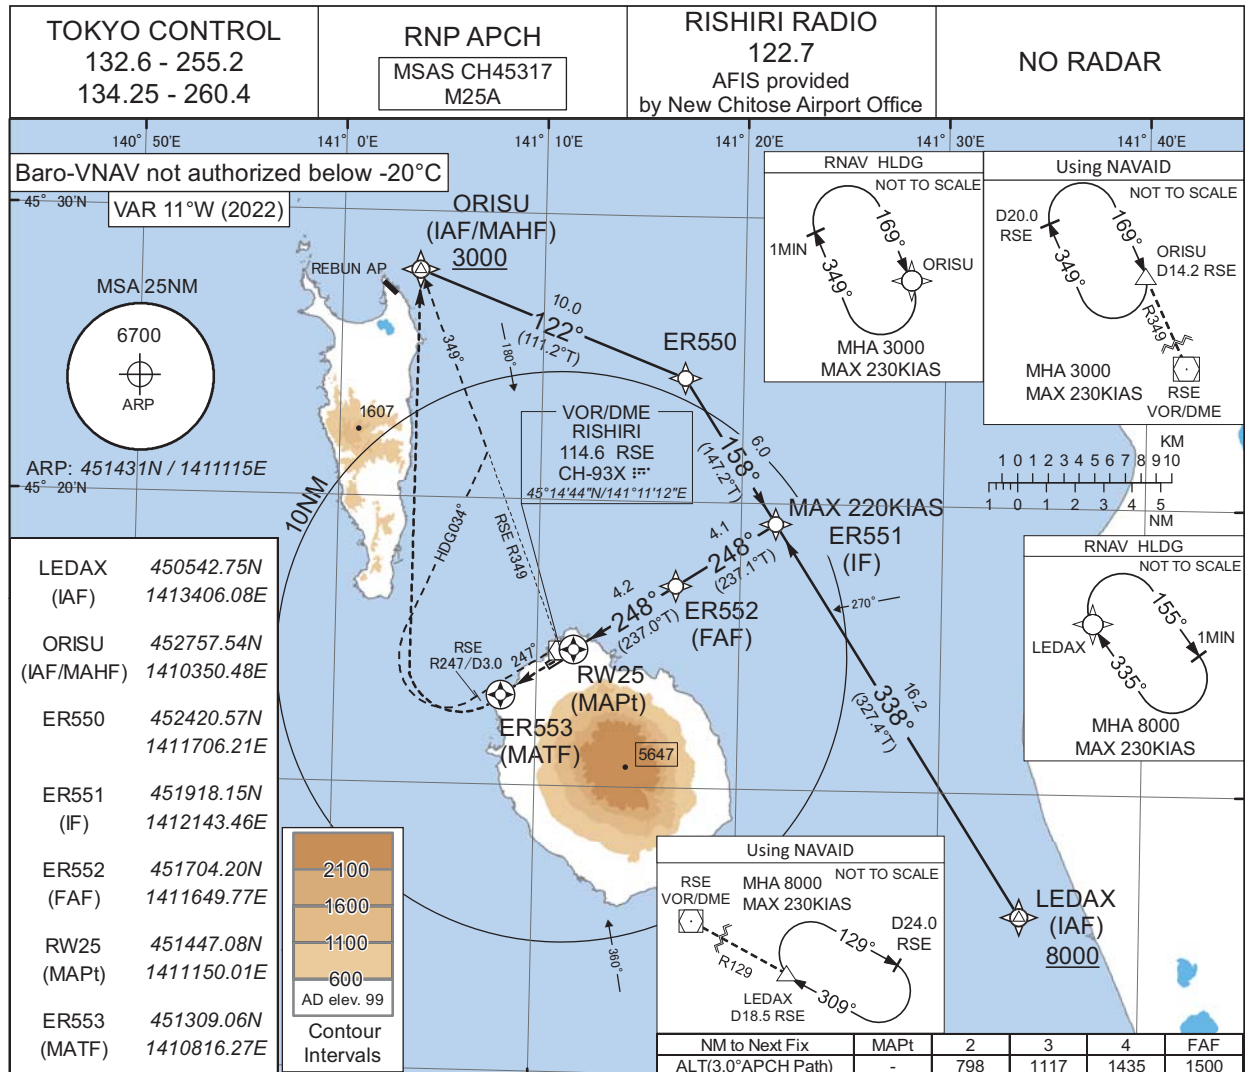

MISSED APPROACH

Direct to ER553, turn right direct to ORISU and hold at 3000FT.
Contact RISHIRI RADIO.

(For using VOR/DME)
Climb via RSE R247 to 3.0DME, turn right HDG034° to intercept and proceed via RSE R349 to ORISU and hold at 3000FT.
Contact RISHIRI RADIO.

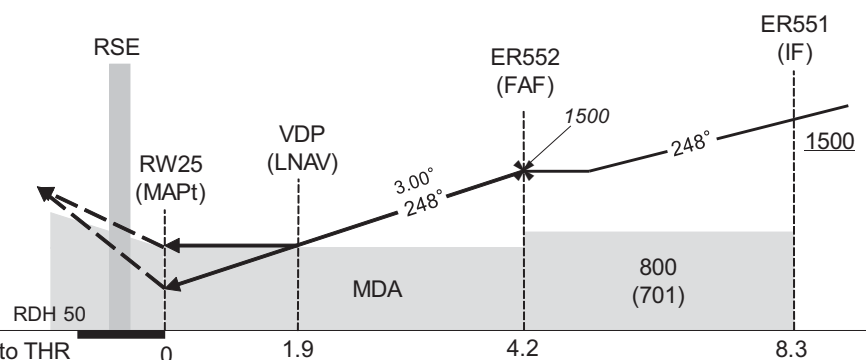

MINIMA		THR elev. 112				AD elev. 99		
CAT	LPV		LNAV/VNAV		LNAV		CIRCLING	
	DA(H)	CMV	DA(H)	CMV	MDA(H)	CMV	MDA(H)	VIS
A	397(285)	800	730(618)	1000	730(631)	1000	730(631)	1600
B	407(295)			1200		1200		2400
C	417(305)	1000	-	-	-	-	-	-
D	-	-	-	-	-	-	-	-

Circling to NORTH side of RWY only.

INSTRUMENT APPROACH CHART

RJER / RISHIRI

RNP RWY25

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00632
SBAS service provider identifier	2	FPAP latitude	451415.3275N
Airport identifier	RJER	FPAP longitude	1411040.7490E
Runway	25	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M25A	∠ length offset	0000
LTP/FTP latitude	451447.0530N	HAL	40.0
LTP/FTP longitude	1411149.9960E	VAL	50.0
CRC remainder	9A7FDBC0		

Required additional data


LTP/FTP orthometric height	34.5
----------------------------	------

CHANGE : Description of FAS DATA BLOCK ITEM(CRC remainder).

INSTRUMENT APPROACH CHART

RJER / RISHIRI

RNP RWY07

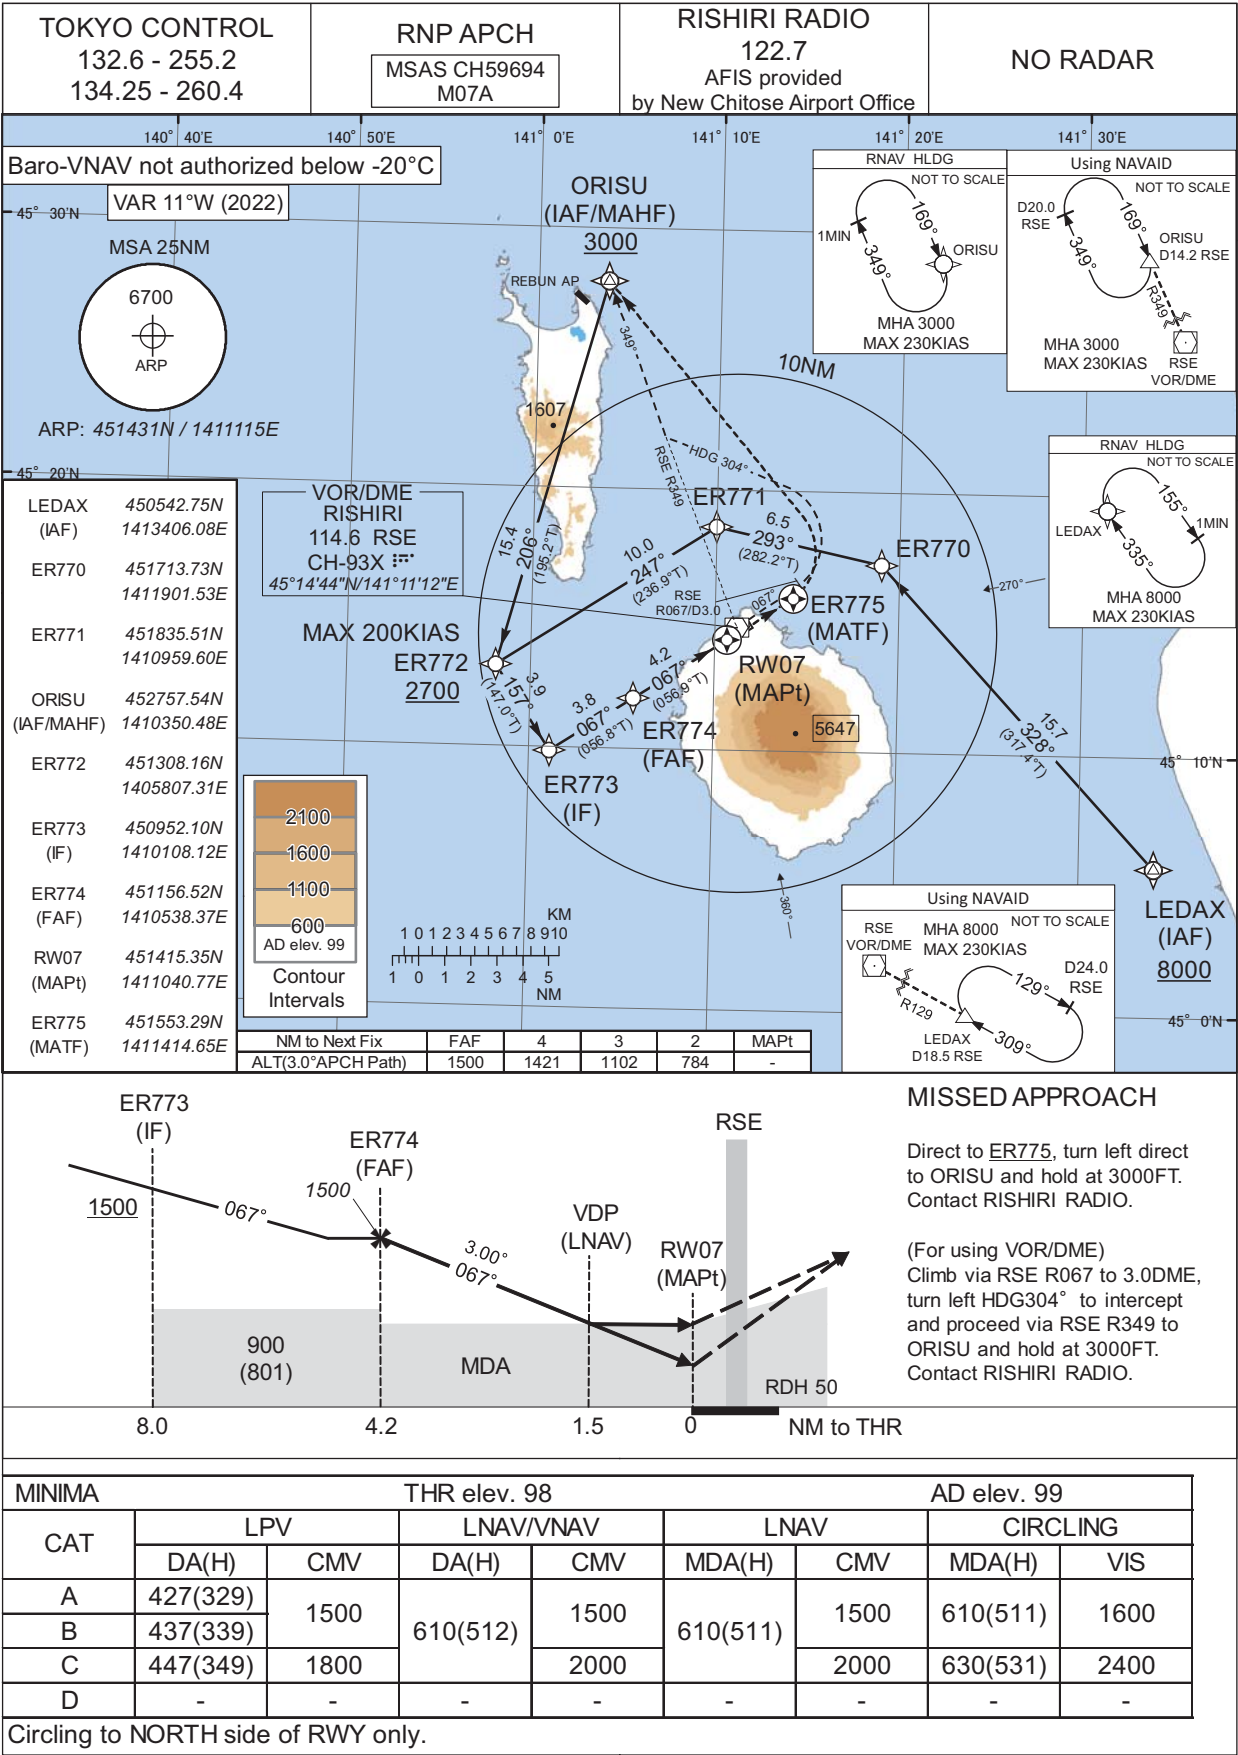

INSTRUMENT APPROACH CHART

RJER / RISHIRI

RNP RWY07

FAS DATA BLOCK

Operation type	0	LTP/FTP ellipsoidal height	+00590
SBAS service provider identifier	2	FPAP latitude	451447.0530N
Airport identifier	RJER	FPAP longitude	1411149.9960E
Runway	07	Threshold crossing height	00015.0
Approach performance designator	0	TCH units selector	1
Route indicator		Glide path angle	03.00
Reference path data selector	0	Course width at threshold	105.00
Reference path ID	M07A	∠ length offset	0000
LTP/FTP latitude	451415.3275N	HAL	40.0
LTP/FTP longitude	1411040.7490E	VAL	50.0
CRC remainder	138B8808		


Required additional data

LTP/FTP orthometric height	30.2
----------------------------	------

CHANGE : Description of FAS DATA BLOCK ITEM(CRC remainder).

RJR / RISHIRI

Visual REP




Call sign	BRG / DIST from ARP	Remarks
姫沼 Himenuma	110°T / 2.7NM	姫沼 Pond
沓形 Kutsugata	217°T / 4.2NM	沓形岬 Cape

Note : In the SE through SW of the airport, A/G COM from Rishiri Radio is blinded by Mt. Rishiri(1,721m/5,646ft).

RJER / RISHIRI

Minimum Vectoring Altitude CHART

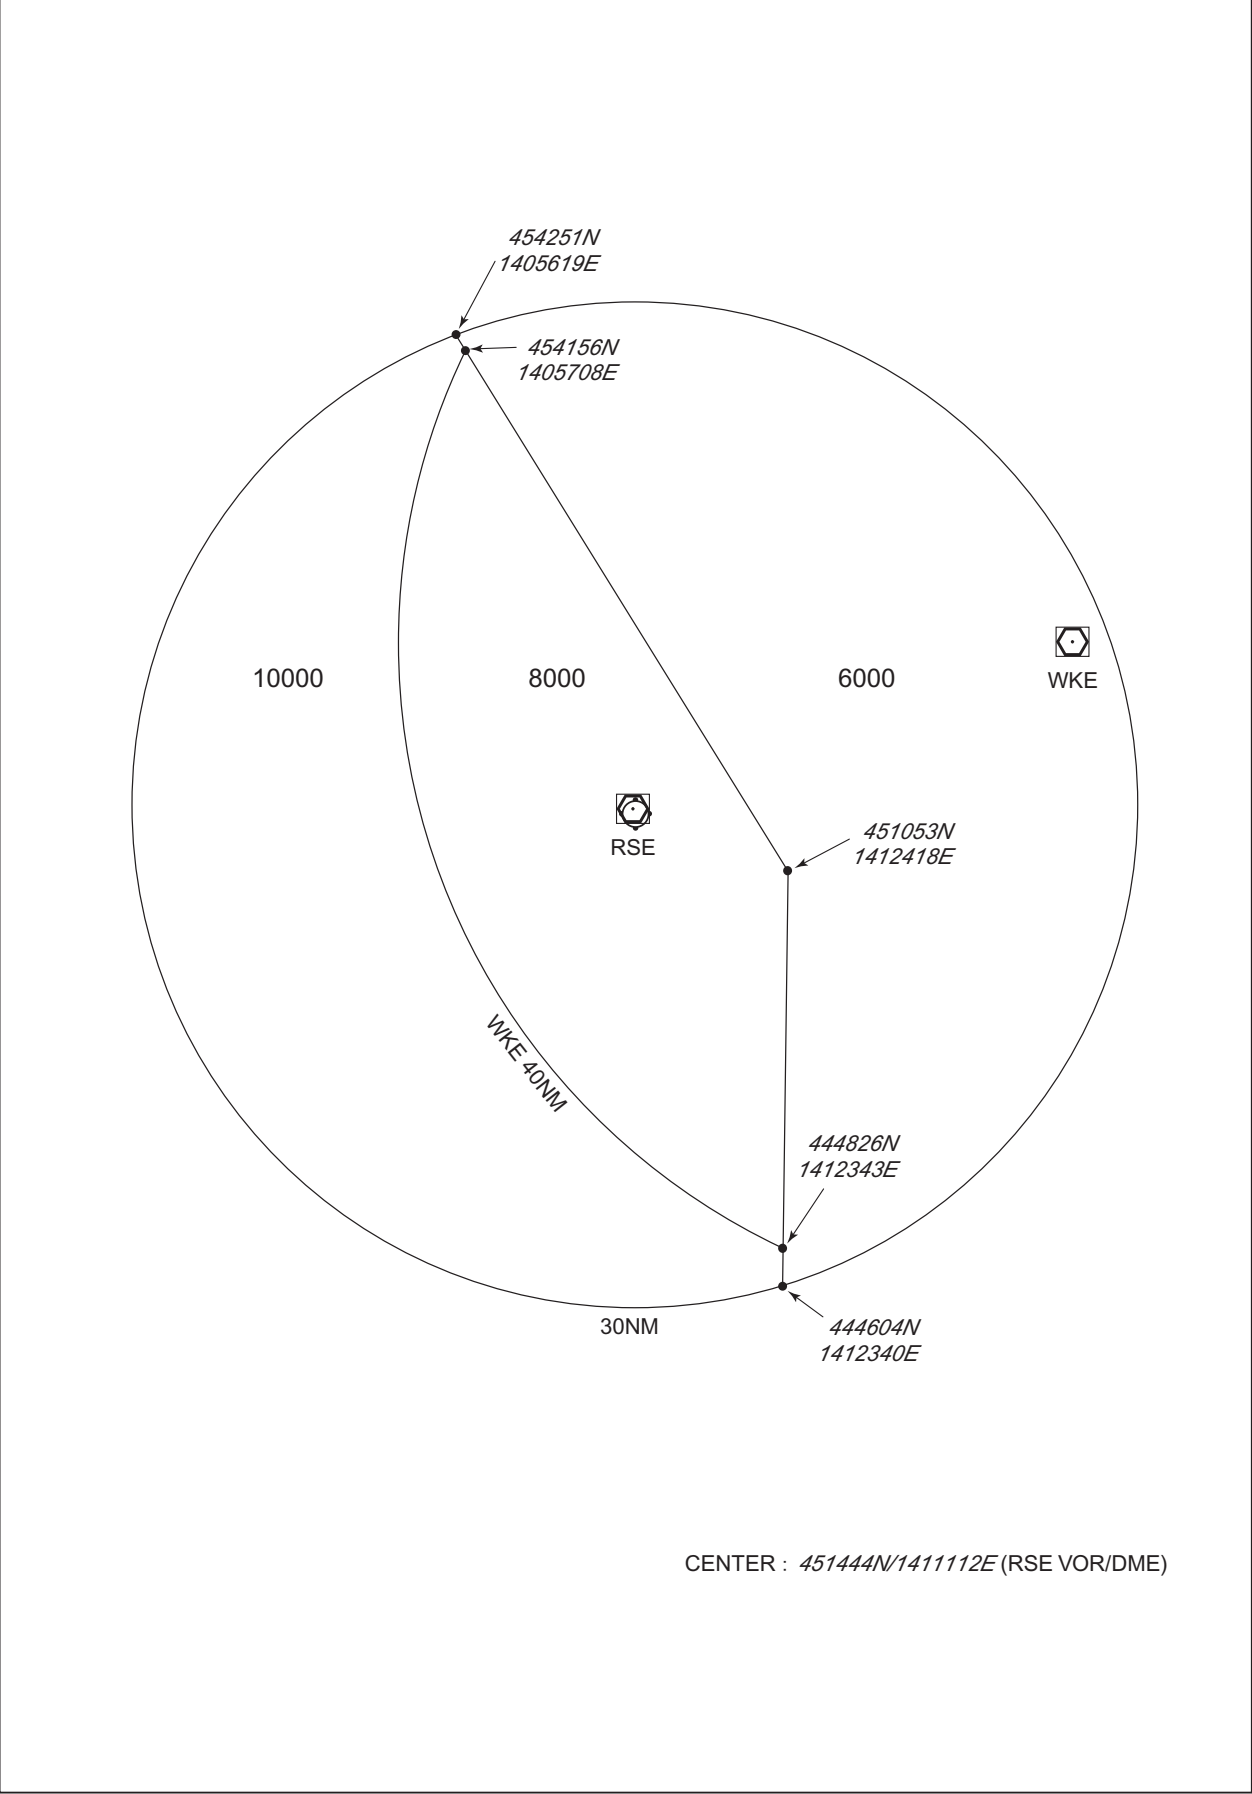

CHANGE : Description of VAR.