


ROKJ / KUMEJIMA

AD CHART



INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE CHART -INSTRUMENT

ROKJ / KUMEJIMA

SID

SOUTH FIVE DEPARTURE


RWY03 : Climb RWY HDG to 500FT, turn left HDG145° to intercept and proceed via KXC R190 to DORIS.

Maintain 4000FT or below until intercepting KXC R190, cross DORIS at or above 3000FT.

RWY21 : Climb RWY HDG to 500FT, turn left to intercept and proceed via KXC R190 to DORIS.


Cross DORIS at or above 3000FT.

Note RWY03 : 5.0% climb gradient required up to 500FT.

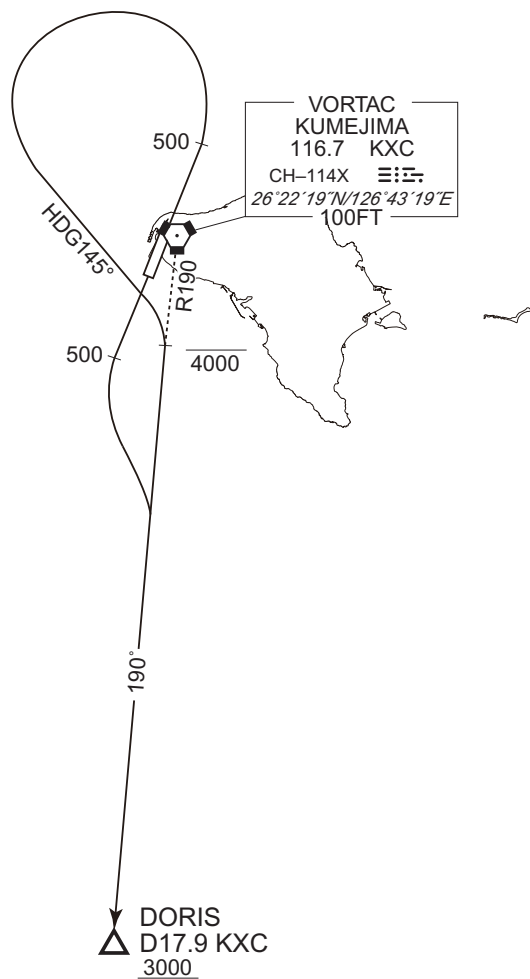

CHANGE : PROC renamed. PROC course.

STANDARD DEPARTURE CHART -INSTRUMENT

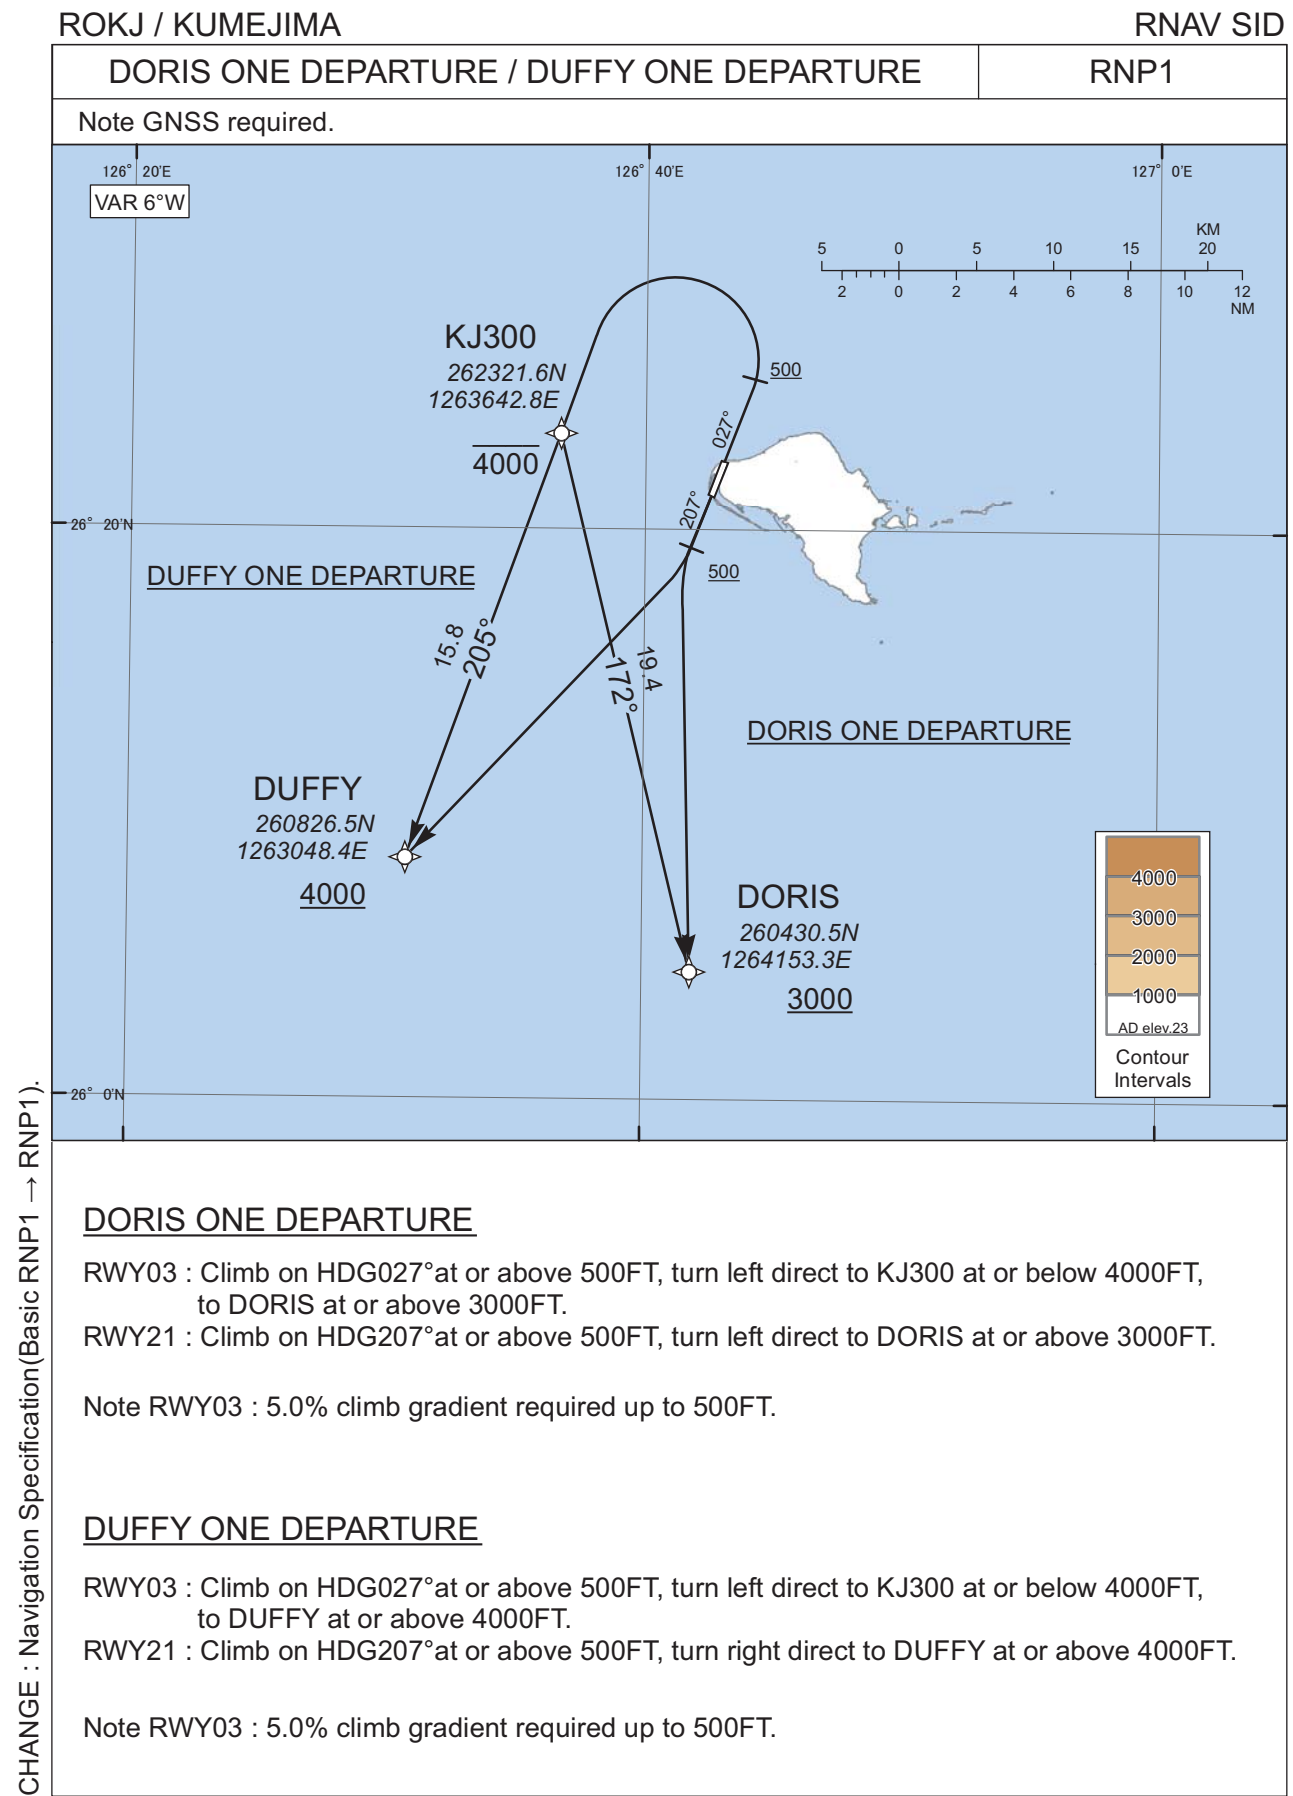

STANDARD DEPARTURE CHART -INSTRUMENT

ROKJ / KUMEJIMA

RNAV SID

DORIS ONE DEPARTURE

RWY03

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	027 (021.1)	-5.7	-	-	+500	-	-	RNP1
002	DF	KJ300	-	-	-5.7	-	L	-4000	-	-	RNP1
003	TF	DORIS	-	172 (166.1)	-5.7	19.4	-	+3000	-	-	RNP1

RWY21

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	207 (201.1)	-5.7	-	-	+500	-	-	RNP1
002	DF	DORIS	-	-	-5.7	-	L	+3000	-	-	RNP1

DUFFY ONE DEPARTURE

RWY03

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	027 (021.1)	-5.7	-	-	+500	-	-	RNP1
002	DF	KJ300	-	-	-5.7	-	L	-4000	-	-	RNP1
003	TF	DUFFY	-	205 (199.6)	-5.7	15.8	-	+4000	-	-	RNP1

RWY21


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	207 (201.1)	-5.7	-	-	+500	-	-	RNP1
002	DF	DUFFY	-	-	-5.7	-	R	+4000	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).


INSTRUMENT APPROACH CHART

ROKJ / KUMEJIMA

LOC RWY 03

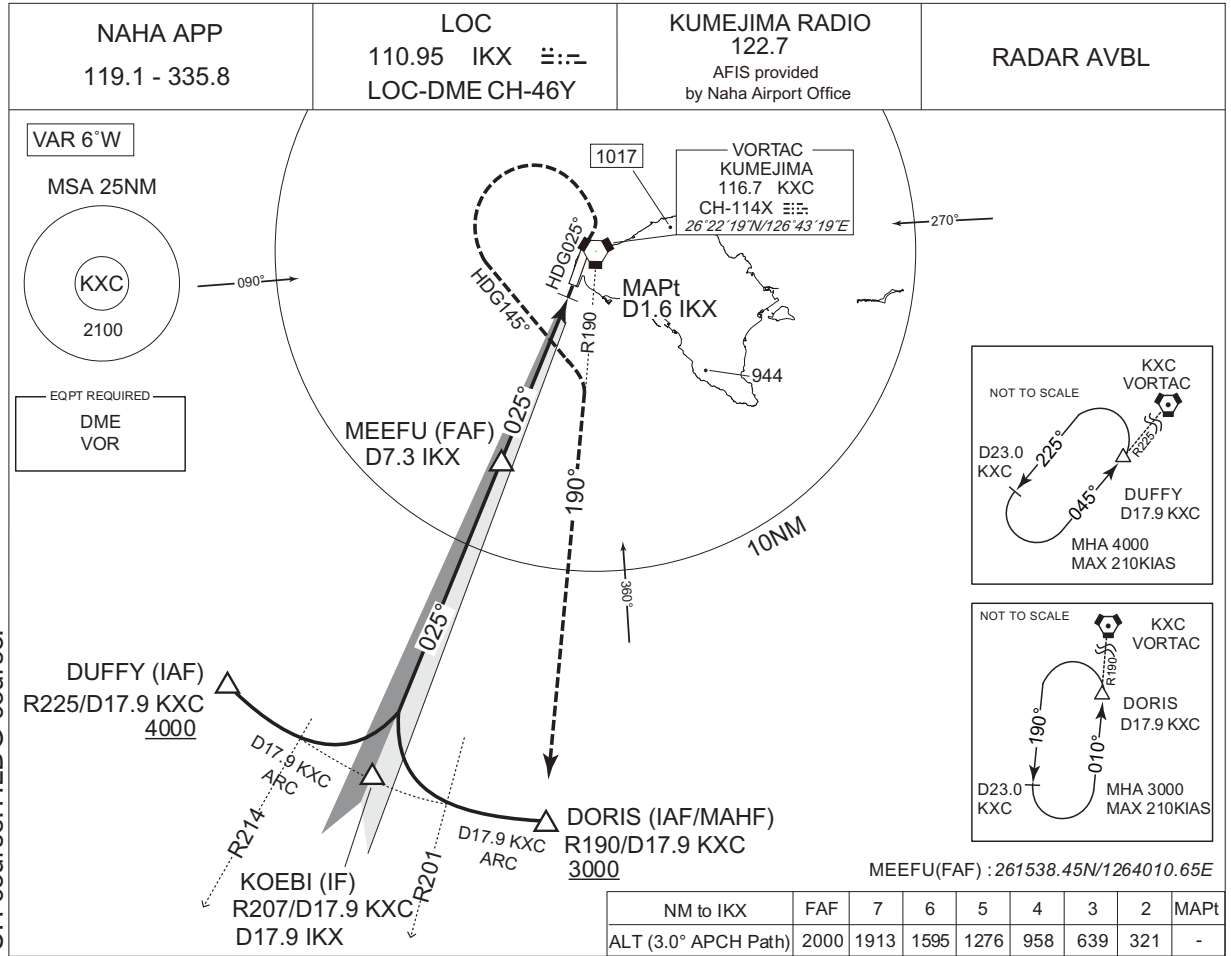

CHANGE : BRG FM KXC for DUFFY, KOEBI, DORIS. Missed APCH course. HLDG course.

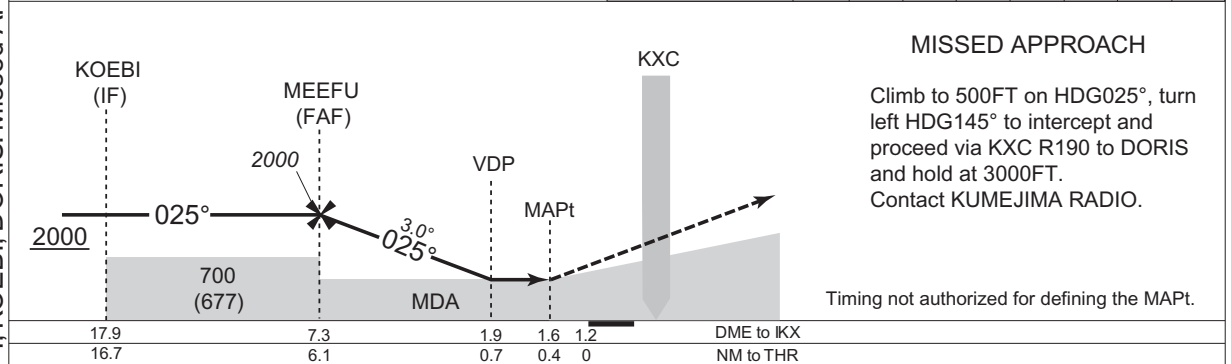

Missed APCH climb gradient MNM 5.0%

MINIMA		THR elev. 22	AD elev. 23
CAT	CIRCLING		VIS
	MDA(H)	CMV	
A	280 (257)	1500	380 (357)
B		1600	1600
C			2400
D		1800	580 (557)


MINIMA with Missed APCH climb gradient of 2.5% are not established.

Circling to WEST side of RWY only.

INSTRUMENT APPROACH CHART

ROKJ / KUMEJIMA

RNP RWY03

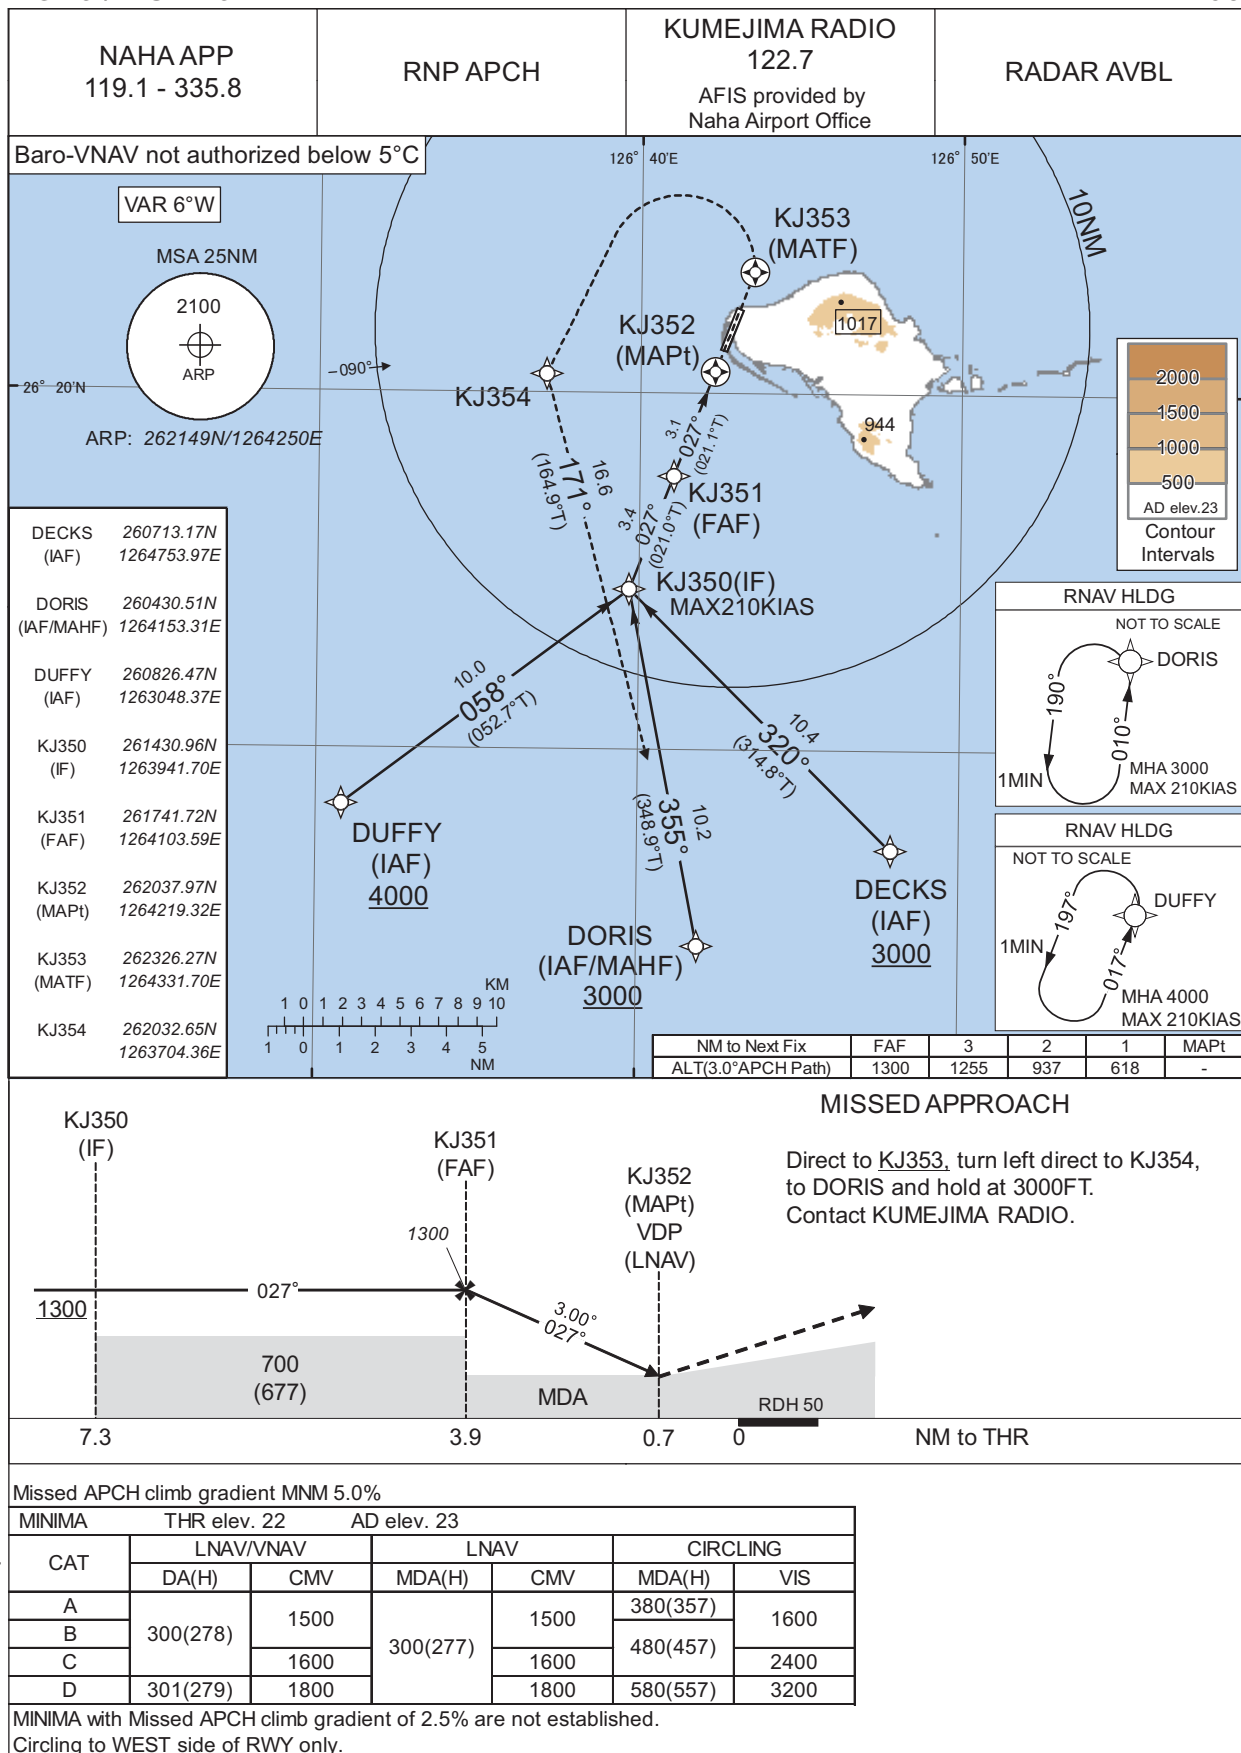


CHANGE : Description of VAR.

INSTRUMENT APPROACH CHART

ROKJ / KUMEJIMA

RNP RWY21(AR)

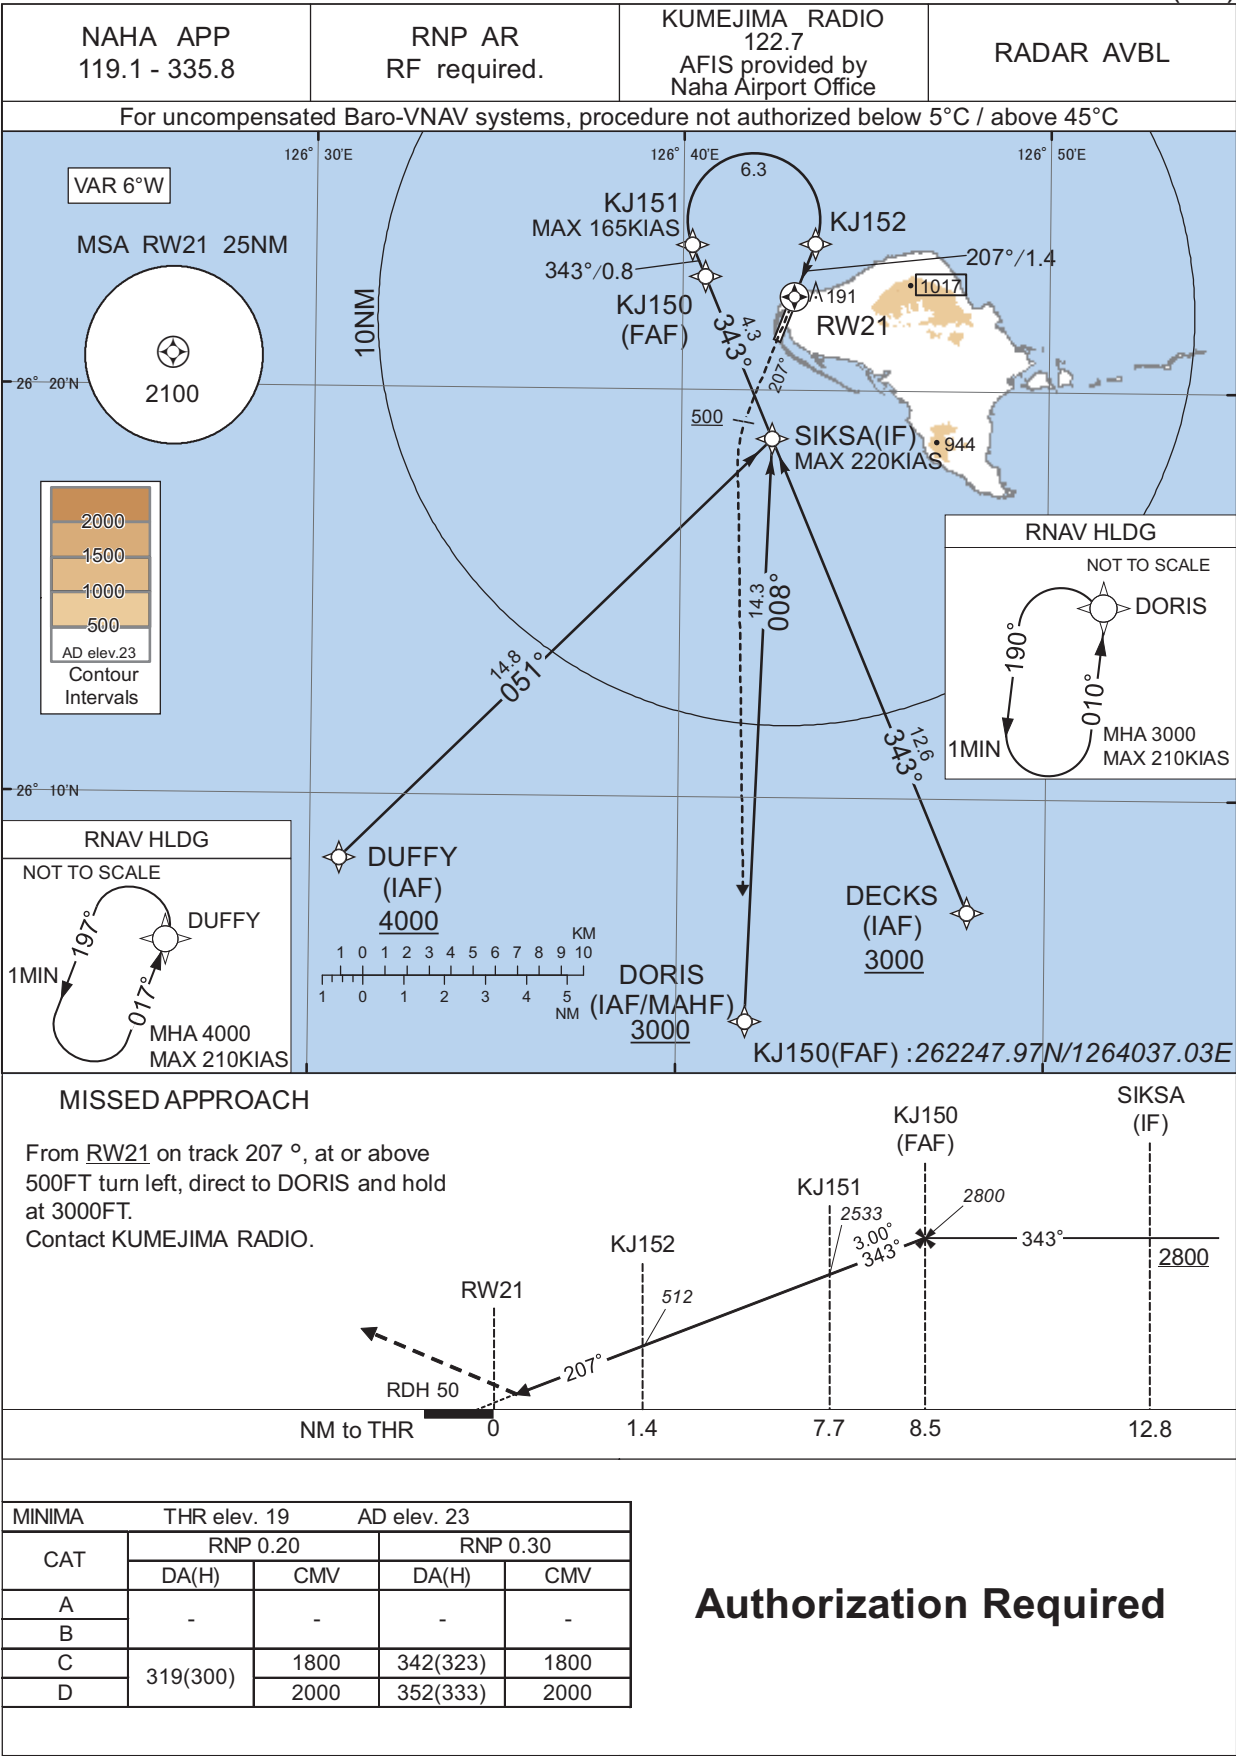

INSTRUMENT APPROACH CHART

ROKJ / KUMEJIMA

RNP RWY21(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/ RDH (°/FT)	RNP Value
001	IF	DECKS	-	-	-5.7	-	-	+3000	-	-	-
002	TF	SIKSA	-	343 (337.3)	-5.7	12.6	-	+2800	-220	-	0.3
001	IF	DORIS	-	-	-5.7	-	-	+3000	-	-	-
002	TF	SIKSA	-	008 (002.1)	-5.7	14.3	-	+2800	-220	-	1.0
001	IF	DUFFY	-	-	-5.7	-	-	+4000	-	-	-
002	TF	SIKSA	-	051 (045.2)	-5.7	14.8	-	+2800	-220	-	1.0
001	IF	SIKSA	-	-	-5.7	-	-	+2800	-220	-	-
002	TF	KJ150	-	343 (337.2)	-5.7	4.3	-	2800	-	-	0.3
003	TF	KJ151	-	343 (337.2)	-5.7	0.8	-	2533	-165	-3.00	0.20 0.30
004	RF Center: KJRF1 r=1.62NM	KJ152	-	-	-5.7	6.3	R	512	-	-3.00	0.20 0.30
005	TF	RW21	Y	207 (201.1)	-5.7	1.4	-	69	-	-3.00/50	0.20 0.30
006	FA	-	-	207 (201.1)	-5.7	-	-	+500	-	-	1.0
007	DF	DORIS	-	-	-5.7	-	L	3000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	DORIS	010 (004.1)	-5.7	1.0 (-14000)	L	3000	FL140	-210 (-14000)	1.0
Hold	DUFFY	017 (010.9)	-5.7	1.0 (-14000)	L	4000	FL140	-210 (-14000)	1.0


Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
DECKS	260713.17N / 1264753.97E	KJRF1	262412.35N / 1264155.20E
DORIS	260430.51N / 1264153.31E		
DUFFY	260826.47N / 1263048.37E		
SIKSA	261849.62N / 1264228.65E		
KJ150	262247.97N / 1264037.03E		
KJ151	262334.37N / 1264015.28E		
KJ152	262337.07N / 1264336.35E		
RW21	262218.92N / 1264302.73E		

CHANGE : New PROC.

ROKJ / KUME JIMA

Visual REP

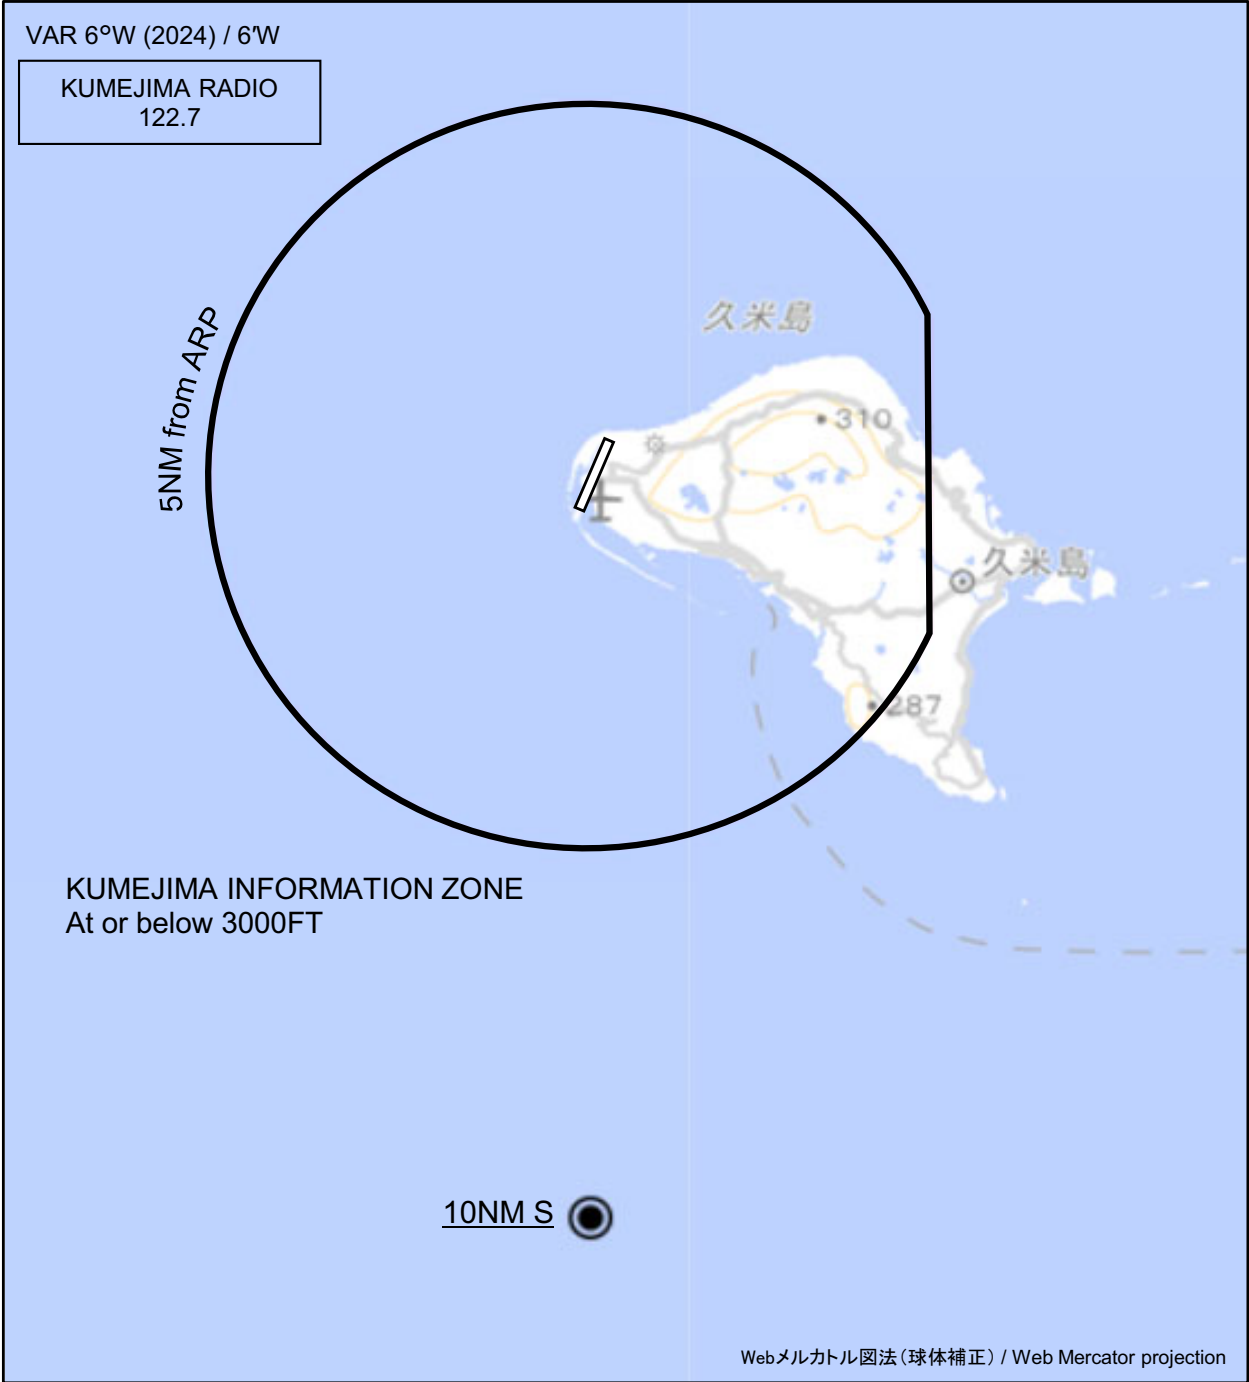

※図中に標高を示す数字がある場合、単位はメートル(m)である。The unit of measurement used to express elevation is meter(m).


CHANGE : VAR.

Call sign	BRG / DIST from ARP	Remarks
10NM S	180°T / 10.0NM	海上 Over the sea

ROKJ / KUMEJIMA

Minimum Vectoring Altitude CHART

VAR 6°W (2024)

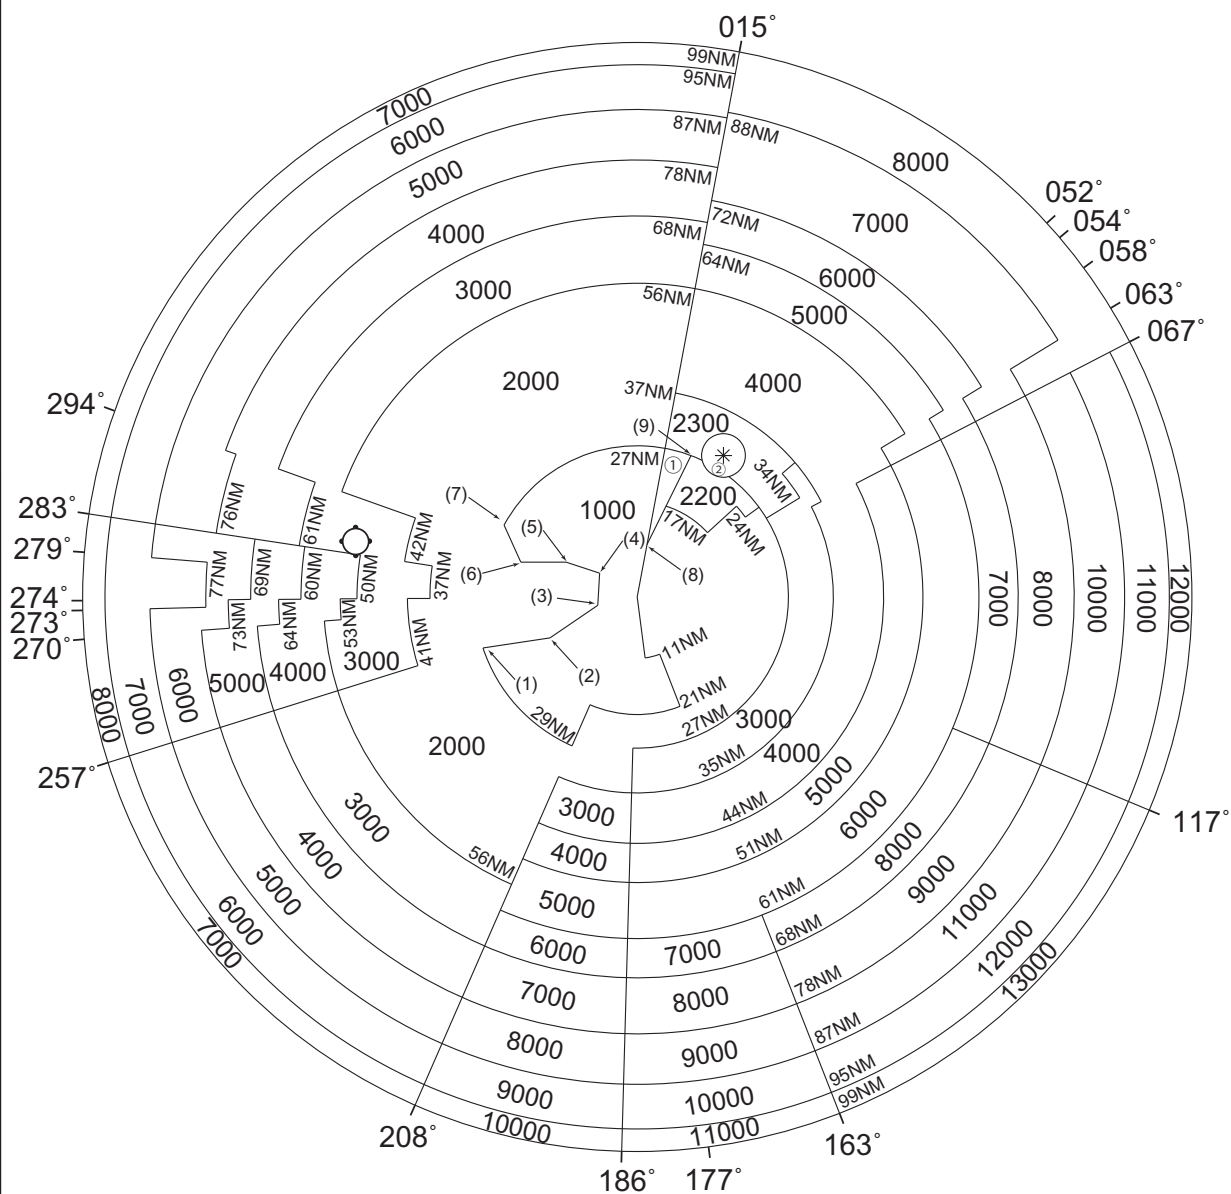

- | | | | |
|--------|----------------------|----------------------|--------------------------------|
| ① 1500 | (1) 260301N/1270807E | (6) 261829N/1271524E | CENTER: 261231N/1273834E (NHC) |
| ② 2600 | (2) 260459N/1272121E | (7) 262505N/1271157E | * : 263759N/1275528E |
| | (3) 261057N/1273045E | (8) 262154N/1274025E | RADIUS 3.9NM |
| | (4) 261640N/1273102E | (9) 263755N/1274900E | |
| | (5) 261835N/1272422E | | |

CHANGE : VAR.