



Dio



OWNER'S MANUAL

This manual should be considered a permanent part of the vehicle and kept accessible to ensure its correct and safe use.

This publication includes the latest production information available before publishing. Honda Motor Co., Ltd. reserves the right to make changes at any time without notice and without incurring any obligation.

No part of this publication may be reproduced without written permission.

The vehicle pictured in this owner's manual may not match your actual vehicle.

For any query or assistance, please call Customer care number:
1800 103 3434 (Toll free)

Welcome

Congratulations on your purchase of a new Honda vehicle. Your selection of a Honda makes you part of a worldwide family of satisfied customers who appreciate Honda's reputation for building quality into every product.

To ensure your safety and riding pleasure:

- Read this owner's manual carefully.
- Follow all recommendations and procedures contained in this manual.
- Pay close attention to safety messages contained in this manual and on the vehicle.

- The following codes in this manual indicate the destination.
- The illustrations here in are based on the SCV110FB VIII ID type.

Destination Codes

Code	Destination
------	-------------

SCV110F

VII ID, VIII ID	India
-----------------	-------

SCV110FB

VII ID, VIII ID	India
-----------------	-------

A Few Words About Safety

Your safety, and the safety of others, is very important. Operating this vehicle safely is an important responsibility.

To help you make informed decisions about safety, we have provided operating procedures and other information on safety labels and in this manual. This information alerts you to potential hazards that could hurt you or others.

Of course, it is not practical or possible to warn you about all hazards associated with operating or maintaining a vehicle. You must use your own good judgement.

You will find important safety information in a variety of forms, including:

- Safety labels on the vehicle
- Safety Messages preceded by a safety alert symbol  and one of three signal words: DANGER, WARNING, or CAUTION.

These signal words mean:

DANGER

You **WILL** be KILLED or SERIOUSLY HURT if you don't follow instructions.

WARNING

You **CAN** be KILLED or SERIOUSLY HURT if you don't follow instructions.

CAUTION

You **CAN** be HURT if you don't follow instructions.

Other important information is provided under the following titles:

NOTICE Information to help you avoid damage to your vehicle, other property, or the environment.

Contents

Vehicle Safety P. 2

Operation Guide P. 14

Maintenance P. 79

Troubleshooting P. 114

Information P. 129

Specifications P. 141

Warranty Policy P. 144

Index P. 152

Vehicle Safety

This section contains important information for safe riding of your vehicle.
Please read this section carefully.

Safety Guidelines	P. 3
Image Labels	P. 6
Safety Precautions	P. 8
Riding Precautions	P. 9
Accessories & Modifications	P. 12
Loading	P. 13

Safety Guidelines

Follow these guidelines to enhance your safety:

- Perform all routine and regular inspections specified in this manual.
- Stop the engine and keep sparks and flames away before filling the fuel tank.
- Do not run the engine in enclosed or partly enclosed areas. Carbon monoxide in exhaust gases is toxic and can kill you.

Always Wear a Helmet

It's a proven fact: helmets and protective apparel significantly reduce the number and severity of head and other injuries. So always wear an approved helmet and protective apparel. 📖P. 8

Before Riding

Make sure that you are physically fit, mentally focused, and free of alcohol and drugs. Check

that you and your passenger are both wearing an approved helmet and protective apparel. Instruct your passenger on holding onto the grab rails or your waist, leaning with you in turns, and keeping their feet on the footpegs, even when the vehicle is stopped.

Take Time to Learn & Practice

Even if you have ridden other vehicles, practice riding in a safe area to become familiar with how this vehicle works and handles, and to become accustomed to the vehicle's size and weight.

Ride Defensively

Always pay attention to other vehicles around you, and do not assume that other drivers see you. Be prepared to stop quickly or perform an evasive maneuver.

Safety Guidelines

Make Yourself Easy to See

Make yourself more visible, especially at night, by wearing bright reflective clothing, positioning yourself so other drivers can see you, signaling before turning or changing lanes, and using your horn when necessary.

Ride within Your Limits

Never ride beyond your personal abilities or faster than conditions warrant. Fatigue and inattention can impair your ability to use good judgement and ride safely.

Don't Drink or Use Drugs and Ride

Alcohol or drugs and riding don't mix. Even one alcoholic drink can reduce your ability to respond to changing conditions, and your reaction time gets worse with every additional drink. The same is true for drug use. Don't drink or use drugs and ride, and don't let your friends do it either.

Keep Your Honda in Safe Condition

It's important to keep your vehicle properly maintained and in safe riding condition. Inspect your vehicle before every ride and perform all recommended maintenance. Never exceed load limits (➤P. 13), and do not modify your vehicle or install accessories that would make your vehicle unsafe (➤P. 12).

If You are Involved in a Crash

Personal safety is your first priority. If you or anyone else has been injured, take time to assess the severity of the injuries and whether it is safe to continue riding. Call for emergency assistance if needed. Also follow applicable laws and regulations if another person or vehicle is involved in the crash.

If you decide to continue riding, first turn the ignition switch to the OFF position, and evaluate the condition of your vehicle.

Inspect for fluid leaks, check the tightness of critical nuts and bolts, and check the handlebar, control levers, brakes, and wheels. Ride slowly and cautiously.

Your vehicle may have suffered damage that is not immediately apparent. Have your vehicle thoroughly checked at a qualified service facility as soon as possible.

Carbon Monoxide Hazard

Exhaust contains poisonous carbon monoxide, a colourless, odorless gas. Breathing carbon monoxide can cause loss of consciousness and may lead to death.

If you run the engine in a confined or even partly enclosed area, the air you breathe could contain a dangerous amount of carbon monoxide.

Never run your vehicle inside a garage or other enclosure.

WARNING

Running the engine of your vehicle while in an enclosed or even partially enclosed area can cause a rapid build-up of toxic carbon monoxide gas.

Breathing this colourless, odorless gas can quickly cause unconsciousness and lead to death.

Only run your vehicle's engine when it is located in a well ventilated area outdoors.

Image Labels

Image Labels

The following pages describe the label meanings. Some labels warn you of potential hazards that could cause serious injury. Others provide important safety information. Read this information carefully and don't remove the labels.

If a label comes off or becomes hard to read, contact your dealer for a replacement.

There is a specific symbol on each label. The meanings of each symbol and label are as follows.



Read instructions contained in Owner's Manual carefully.



Read instructions contained in Shop Manual carefully. In the interest of safety, take the vehicle to be serviced only by your dealer.



DANGER (with RED background)

You **WILL** be KILLED or SERIOUSLY HURT if you don't follow instructions.

WARNING (with ORANGE background)

You **CAN** be KILLED or SERIOUSLY HURT if you don't follow instructions.

CAUTION (with YELLOW background)

You **CAN** be HURT if you don't follow instructions.

Sample

**BATTERY LABEL
DANGER**

- Keep flame and spark away from the battery. Battery produce explosive gas that can cause explosion.
- Wear the eye protection and rubber gloves when handling the battery, or you can get burned or lose your eyesight by the battery electrolyte.
- Do not allow children and other people to touch a battery unless they understand proper handling and hazards of the battery very well.
- Handle the battery electrolyte with extreme care as it contains dilute sulfuric acid. Contact with your skin or eyes can burn you or cause loss of your eyesight.
- Read this manual carefully and understand it before handling the battery. Neglect of the instructions can cause personal injury and damage to the vehicle.
- Do not use a battery with the electrolyte at or below the lower level mark. It can explode causing serious injury.

Safety Precautions

Safety Precautions

- Ride cautiously and keep your hands on the handlebar and feet on the floor.
- Instruct your passenger to keep their hands on the grab rails or your waist and their feet on the footpegs while riding.
- Always consider the safety of your passenger, as well as other drivers and riders.

Protective Apparel

Make sure that you and any passenger are wearing an approved helmet, eye protection, and high-visibility protective clothing. Be sure to avoid loose clothes that could get caught on any part of your vehicle. Ride defensively in response to weather and road conditions.

■ Helmet

Safety-standard certified, high-visibility, correct size for your head.

- Must fit comfortably but securely, with the chin strap fastened.

- Face shield with unobstructed field of vision or other approved eye protection.

WARNING

Not wearing a helmet increases the chance of serious injury or death in a crash.

Make sure that you and any passenger always wear an approved helmet and protective apparel.

■ Gloves

Full-finger leather gloves with high abrasion resistance.

■ Boots or Riding Shoes

Sturdy boots with non-slip soles and ankle protection.

■ Jacket and Trousers

Protective, highly visible, long-sleeved jacket and durable trousers for riding (or a protective suit).

Riding Precautions

Running-in Period

During the first 500 km (300 miles) of running, follow these guidelines to ensure your vehicle's future reliability and performance.

- Avoid full-throttle starts and rapid acceleration.
- Avoid hard braking.
- Ride conservatively.

Brakes

Observe the following guidelines:

- Avoid excessively hard braking.
 - ▶ Sudden braking can reduce the vehicle's stability.
 - ▶ Where possible, reduce speed before turning; otherwise you risk sliding out.
- Exercise caution on low traction surfaces.
 - ▶ The tyres slip more easily on such surfaces and braking distances are longer.
- Avoid continuous braking.

- ▶ Repeated braking, such as when descending long, steep slopes can seriously overheat the brakes, reducing their effectiveness.

- For full braking effectiveness, operate both the front and rear brakes together.

Combi Brake

Your vehicle is equipped with a brake system that distributes the braking force between the front and rear brakes.

The distribution of the braking force applied to the front and rear brakes when operating the front brake lever only and when operating the rear brake lever only is different.

For full braking effectiveness, operate both the front and rear brakes together.

Riding Precautions

Wet or Rainy Conditions

Road surfaces are slippery when wet, and wet brakes further reduce braking efficiency. Exercise extra caution when braking in wet conditions.

If the brakes get wet, apply the brakes while riding at low speed to help them dry.


Parking

- Park on a firm, level surface.
- If you must park on a slight incline or loose surface, park so that the vehicle cannot move or fall over.
- Make sure that high-temperature parts cannot come into contact with flammable materials.
- Do not touch the engine, muffler, brakes and other high-temperature parts until they cool down.
- To reduce the likelihood of theft, always lock the handlebar and remove the key and close the shutter when leaving the vehicle unattended.

Use of an anti-theft device is also recommended.

I Parking with the Centre Stand

1. Stop the engine.
2. To lower the centre stand, stand on the left side of the vehicle.
Hold the left handle grip and the left grab rail.
Press down on the tip of the centre stand with your right foot and, simultaneously, pull up and back.

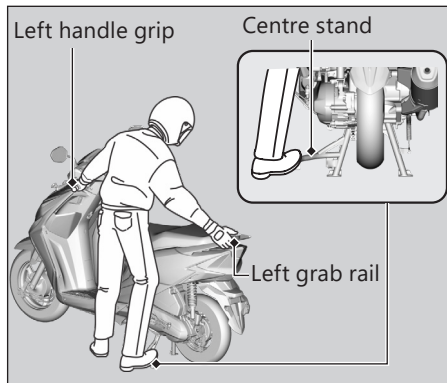

3. Turn the handlebar fully to the left.
4. Turn the ignition switch to the LOCK position (➤P. 58), remove the key and close the shutter (➤P. 59).

Refuelling and Fuel Guidelines

Follow these guidelines to protect the engine, fuel system and catalytic converter:

- Use only unleaded petrol.
- Use the recommended octane number. Using lower octane petrol will result in decreased engine performance.
- Do not use fuels containing a high concentration of alcohol. ➤P. 139
- Do not use stale or contaminated petrol or an oil/petrol mixture.
- Avoid getting dirt or water in the fuel tank.

Accessories & Modifications

We strongly advise that you do not add any accessories that were not specifically designed for your vehicle by Honda or make modifications to your vehicle from its original design. Doing so can make it unsafe.

Modifying your vehicle may also void your warranty and make your vehicle illegal to operate on public roads. Before deciding to install accessories on your vehicle, be certain the modification is safe and legal.

WARNING

Improper accessories or modifications can cause a crash in which you can be seriously hurt or killed.

Follow all instructions in this owner's manual regarding accessories and modifications.

Do not pull a trailer with, or attach a sidecar to, your vehicle. Your vehicle was not designed for these attachments, and their use can seriously impair your vehicle's handling.

Loading

- Carrying extra weight affects your vehicle's handling, braking and stability.
Always ride at a safe speed for the load you are carrying.

- Avoid carrying an excessive load and keep within specified load limits.

Maximum weight capacity / Maximum luggage weight ➤ P. 141

- Tie all luggage securely, evenly balanced, and close to the centre of the vehicle.
- Do not place objects near the lights or the muffler.

WARNING


Overloading or improper loading can cause a crash and you can be seriously hurt or killed.

Follow all load limits and other loading guidelines in this manual.

Basic Operation Flow

Pre-ride Inspection ➡ P. 84

Carefully inspect your vehicle to make sure that it is safe to ride.



How to use basic features.

- Instruments ➡ P. 18
- Indicators ➡ P. 55
- Switches ➡ P. 57
- Steering Lock ➡ P. 59
- Shutter ➡ P. 60
- Rear Brake Lock ➡ P. 61
- Idling Stop System ➡ P. 62

Acceleration ➡ P. 69

Apply throttle gradually.
Obey the speed limit.



Starting the Engine ➡ P. 65


Start and warm the engine.
Avoid revving the engine.



Starting the Vehicle ➡ P. 69

Before pulling away, indicate your direction with the turn signal switch, and check for oncoming traffic.



| Braking ➡ P. 69

Close the throttle and apply the front and rear brakes together.

- ▶ The brakelight will indicate that you have applied the brakes.

| Stopping

If pulling off the road, signal early enough to show traffic that you are pulling over, and pull over smoothly.

**| Turning Corners**

Do your braking before entering corners.




Gradually reapply throttle when exiting turn.


| Parking ➡ P. 10

Park on a firm level surface. Use the stand, set the parking brake, lock the steering. Close the shutter.

**| Refuelling** ➡ P. 70

Parts Location

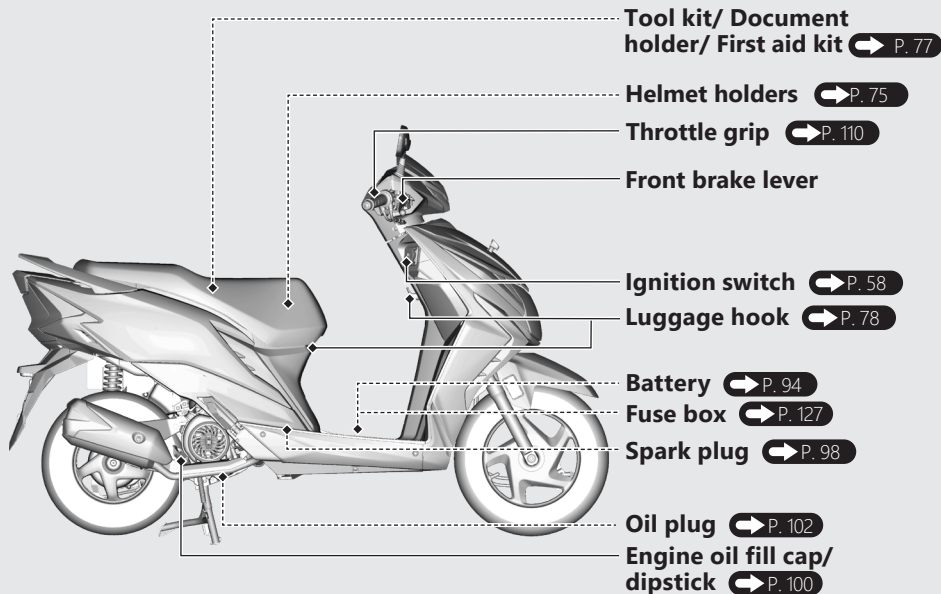


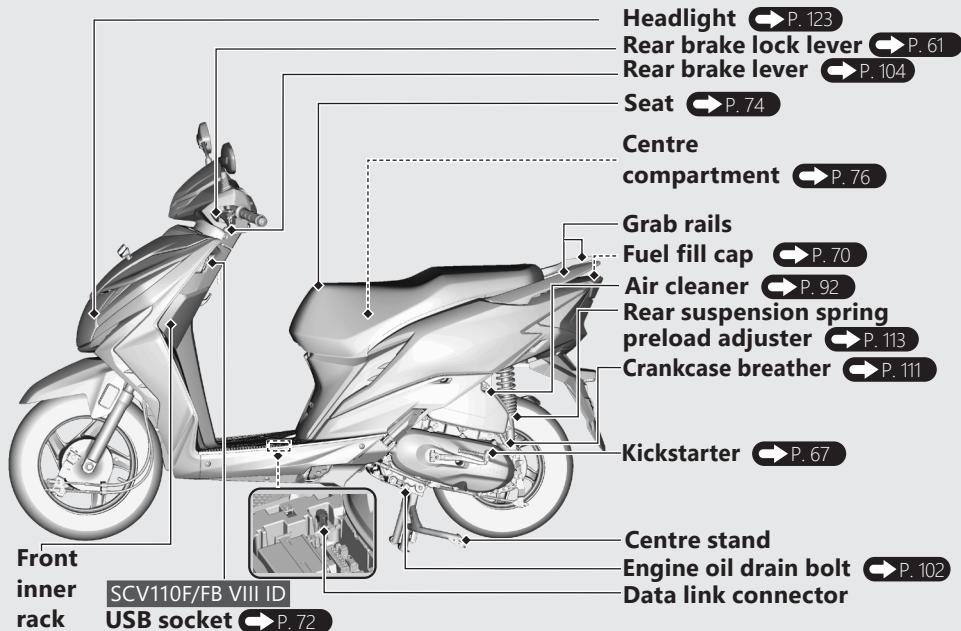


Instruments

SCV110F/FB VIII ID

You can change the fuel mileage meter units. ➡ P. 45

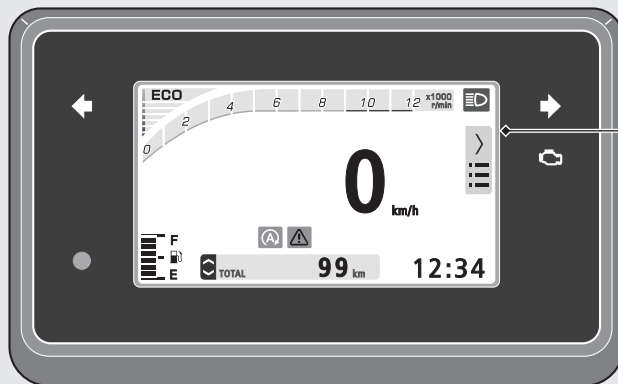


Do not operate the display functions for a long time with the engine stopped. It may result in a low (or dead) battery.

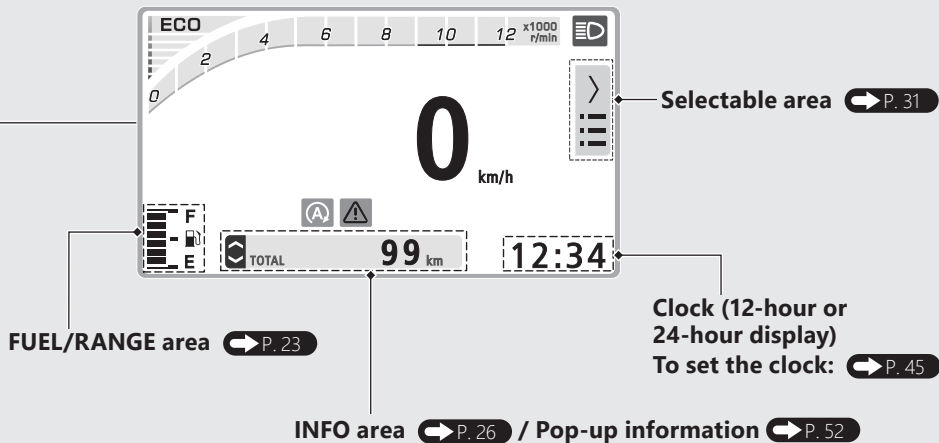

Instruments (Continued)

Speedometer/Tachometer area ➡ P. 21

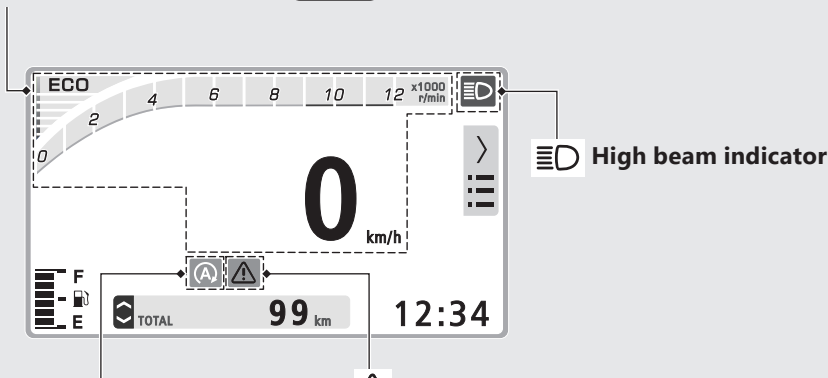

Idling Stop indicator

Comes on briefly when the Idling Stop switch is in the  (Idling Stop) position with the ignition switch turned on.

Idling Stop System: ➡ P. 62

Warning indicator

Comes on when your vehicle has warning information.

Also it is displayed as pop-up information in the INFO area. ➡ P. 53

Speedometer/Tachometer area

Tachometer

Tachometer is available when display type is BAR.


DISPLAY TYPE setting: ➡ P. 41

NOTICE

Do not operate the engine in the tachometer red zone. Excessive engine speed can adversely affect engine life.

Tachometer red zone

(Excessive engine rpm range)

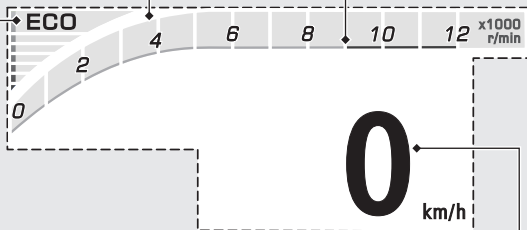

ECO ECO indicator

When the fuel consumption improves, the ECO indicator bars will come on.

To set the ECO indicator: ➡ P. 40

Instruments (Continued)

The meter has two display types.


The display and arrangement change depending on each display type.

Initial setting is BAR.


- ▶ Tachometer is available when display type is BAR.

To change the display type: ➡ P. 41

Display type: BAR

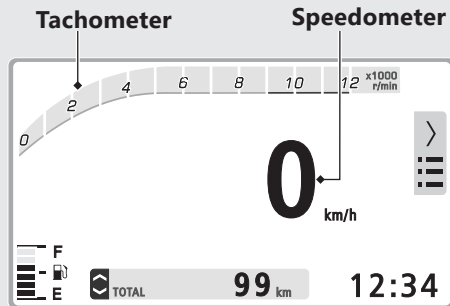

Display type: SIMPLE

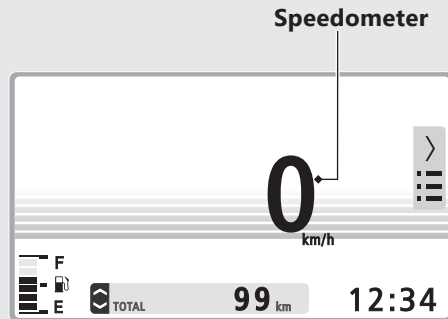

FUEL/RANGE area

This area displays fuel gauge or available driving distance information.

To change the FUEL/RANGE mode: ➡ P. 33

FUEL



Fuel gauge

Remaining fuel when only 1st (E) segment starts flashing approximately:
1.18 L (0.312 US gal, 0.26 Imp gal)

NOTICE

You should refuel when the reading approaches the E (1st) segment. Running out of fuel can cause the engine to misfire, damaging the catalytic converter.

If the fuel gauge indicator flashes in a repeat pattern or turns off: ➡ P. 118

Instruments (Continued)

RANGE



Displays the estimated distance you can travel on the remaining fuel. The indicated available driving distance is calculated based on driving conditions, and the indicated figure may not always be the actual available distance.

Display range: 999 to 5 km

When the calculated distance is below 5 km or the 1st E segment of the fuel gauge is flashing "---" is displayed.

For a while after resetting the tripmeter: "---" is displayed.


When "---" is displayed except for the above-mentioned cases, go to your dealer for service.

Instruments (Continued)

Basic Operations

You can operate and set the various functions of the display using the switches on the left handle cover.

When switching or setting the display, refer to the switch operation guide is displayed.

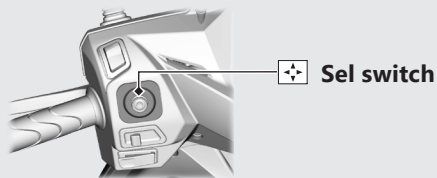

Type of the switch operation guide:

⤴	: Push the sel  switch in the direction of 
⤵	: Push the sel  switch in the direction of 
⤶	: Push the sel  switch in the direction of 
⤷	: Push the sel  switch in the direction of 
⤴⤴	: Push and hold the sel  switch in the direction of 
⤵⤵	: Push and hold the sel  switch in the direction of 
⤶⤶	: Push and hold the sel  switch in the direction of 
⤷⤷	: Push and hold the sel  switch in the direction of 

Instruments (Continued)

INFO area


The INFO area displays various vehicle information.

Push the sel  switch in the direction of  or  to switch between the information display items.

The information item displayed in the INFO area can be changed arbitrarily.

FAVORITE INFORMATION setting:

 P. 44

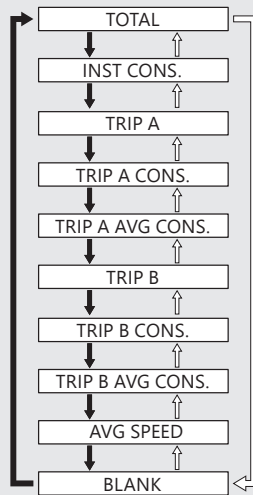

 Push the sel  switch in the direction of 

 Push and hold the sel  switch in the direction of 


You can select from below items as display information.

If no item is selected, the INFO area is not displayed.

- Odometer [TOTAL]
- Current fuel mileage [INST CONS.]
- Tripmeter A [TRIP A]
- Tripmeter A fuel consumption [TRIP A CONS.]
- Tripmeter A average fuel mileage [TRIP A AVG CONS.]
- Tripmeter B [TRIP B]
- Tripmeter B fuel consumption [TRIP B CONS.]
- Tripmeter B average fuel mileage [TRIP B AVG CONS.]
- Average speed [AVG SPEED]
- BLANK display.

Odometer [TOTAL]

Total distance ridden.




When "-----" is displayed, go to your dealer for service.

Instruments (Continued)

Current fuel mileage [INST CONS.]


Displays the current instant fuel mileage.

Display range: 0 to 80 km/L or
0 to 4 L/100 km



Zero segment

- Current fuel mileage is calculated when your speed is more than 5 km/h (3 mph): zero segment is displayed.



When current fuel mileage is not displayed except for the above-mentioned case, go to your dealer for service.

Tripmeter [TRIP A/B]

Distance ridden since tripmeter was reset.



When "----.-" is displayed, go to your dealer for service.

To reset the tripmeter:  P. 34.

Fuel consumption [TRIP A/B CONS.]

Displays the fuel consumption since the selected tripmeter was reset.

The fuel consumption will be calculated based on value of the tripmeter A or B.

Display range: 0.0 to 299.9 L.



TRIP A
CONS

2.0 L



TRIP B
CONS

1.8 L

When "---.-" is displayed, go to your dealer for service.

To reset the fuel consumption: ➡ P. 34

Average fuel mileage [TRIP A/B AVG CONS.]

Displays the average fuel mileage since the selected tripmeter A or B was reset.

The average fuel mileage will be calculated based on value of the tripmeter A or B.

Display range: 0.0 to 299.9 km/L or
0.0 to ---.-/100 km

- When the average fuel mileage A or B is reset: "---.-" is displayed.



TRIP A
AVG CONS

51.0 km/L



TRIP B
AVG CONS

65.8 km/L

When "---.-" is displayed except for the above mentioned cases, go to your dealer for service.

To reset the average fuel mileage:



➡ P. 34


Instruments (Continued)

| Average speed [AVG SPEED]

Displays the average speed since the average speed was reset.

Display range: 0 to 199 km/h

- Initial display: "---" is displayed.
- When your vehicle has traveled less than 0.2 km since the engine was started: "---" is displayed.
- When your vehicle operating time is less than about 16 seconds since the engine was started: "---" is displayed.




When "---" is displayed except for the above mentioned cases, go to your dealer for service.

| BLANK display

Displays the blank.

Selectable area

You can select the following:

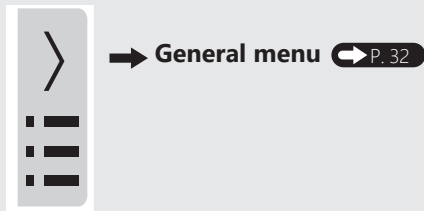

→ Push the sel  switch in the direction of 


Instruments *(Continued)*

General menu

To open the general menu

Push the sel  switch in the direction of  .
Push the sel  switch in the direction of  or  to select the fuel mode, tripmeter reset, and setting mode, push the sel  switch in the direction of  opens each display.

- Push the sel  switch in the direction of  to return to the upper hierarchy.
- Pressing none of switch for about 10 seconds also closes the general menu except when the status display is selected.

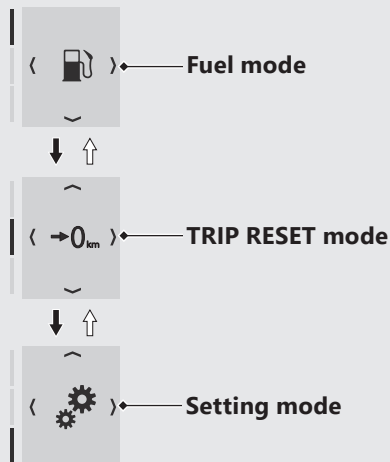

- ➔ Push the sel  switch in the direction of 
- ⇒ Push and hold the sel  switch in the direction of 


FUEL mode

You can select whether to display FUEL or RANGE in the FUEL/RANGE area. ➡ P. 23


► If button is not pressed for 10 seconds, display switches to ordinary display.

1. Select the Fuel mode and Push the sel  switch in the direction of .

➡ P. 33



2. Select the FUEL or RANGE by Push the sel  switch in the direction of  or .




3. Return to the ordinary display to complete the setting. ➡ P. 35
To continue setting, push the sel  switch in the direction of  to return to the upper hierarchy.
► The set value is retained.

Instruments (Continued)

TRIP RESET mode

1. Select the TRIP RESET mode and push the sel  switch in the direction of .

 P. 40



2. Select the tripmeter A or B by pushing the sel  switch in the direction of  or .



3. Push the sel  switch in the direction of  and hold.
 - ▶ When the tripmeter A/B is reset, fuel consumption [TRIP A/B CONS] and average fuel mileage [AVG CONS. A/B] based on each tripmeter are reset at the same time.



Also, the tripmeter A, tripmeter A fuel consumption, and tripmeter A average fuel mileage can be automatically reset when the fuel gauge increases over 2 segments after refuelling.

You can turn on or off this function.

TRIP A AUTO RESET:  P. 40

Setting mode


To shift to the setting mode

Push the sel  switch in the direction of  when the selectable area displays setting mode


 P. 32

- ▶ To shift to setting mode, stop the vehicle.
- ▶ The clock, indicators, and speedometer are displayed at the top of the screen while the setting mode is displayed.

Ordinary display

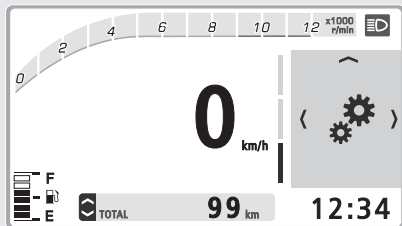

Setting mode

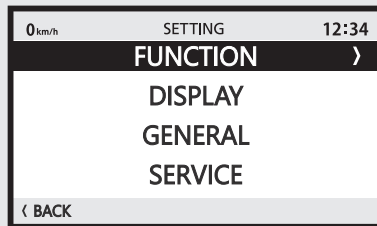


To return to the ordinary display


- Push the sel  switch in the direction of  during selecting FUNCTION, DISPLAY, GENERAL, or SERVICE.
- Turn the electrical system off and on again.

Instruments *(Continued)*

Setting flow

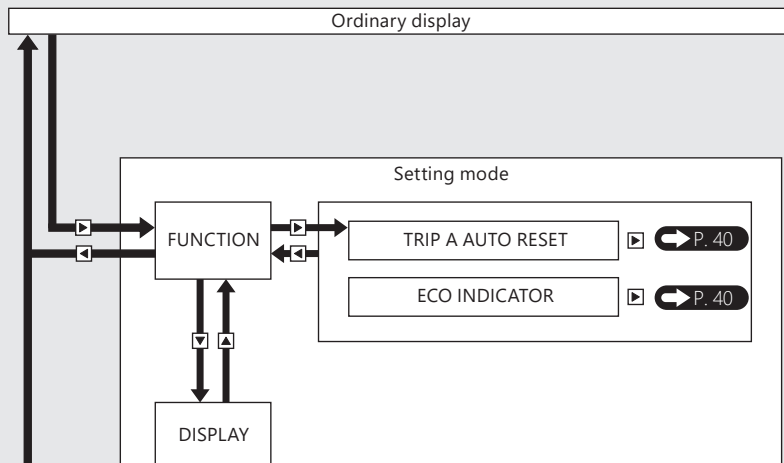


→ Push the Sel  switch in the direction

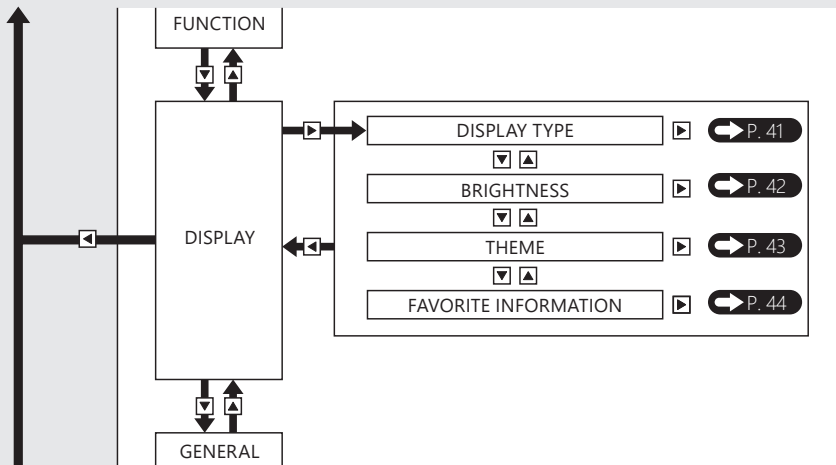


→ Push the Sel  switch in the direction

Instruments (Continued)

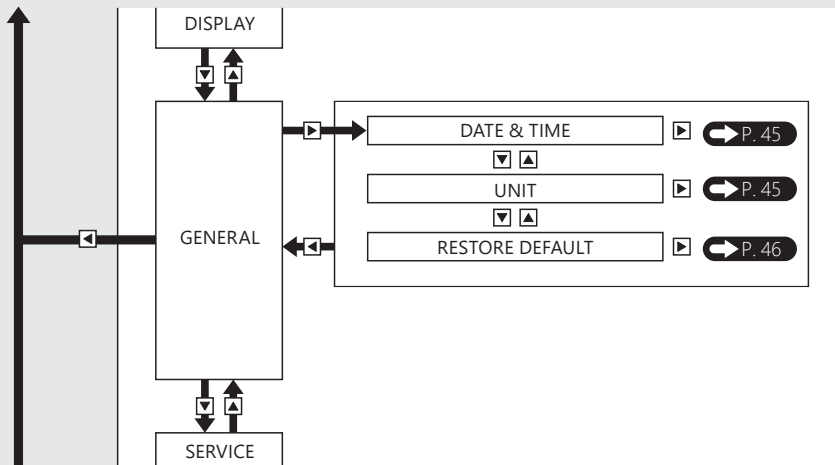

→ Push the Sel  switch in the direction

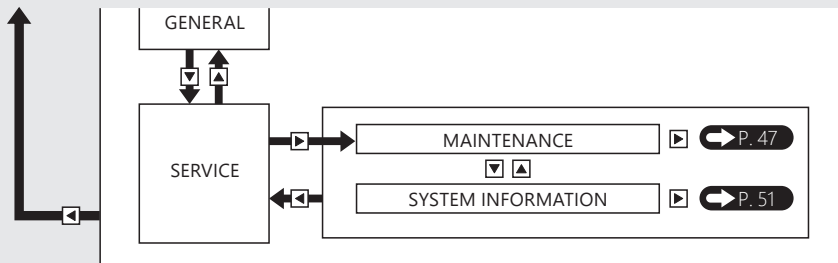

→ Push the Sel  switch in the direction


Instruments (Continued)

TRIP A AUTO RESET


You can enable or disable the tripmeter A automatic reset mode. ➡ P. 34

- 1 Enable or disable by pushing the sel  switch in the direction of .

Enable



Disable




- 2 Return to the ordinary display to complete the setting. ➡ P. 35
To continue setting, push the sel  switch in the direction of  to return to the upper hierarchy.
▶ The set value is retained.

ECO INDICATOR


You can enable or disable the eco indicator.

- 1 Enable or disable by pushing the sel  switch in the direction of .

Enable



Disable




- 2 Return to the ordinary display to complete the setting. ➡ P. 35
To continue setting, push the sel  switch in the direction of  to return to the upper hierarchy.
▶ The set value is retained.

DISPLAY

■ DISPLAY TYPE

You can change the display type of the instrument area. ➡ P. 22

- ① Select the display type ("BAR", or "SIMPLE") by pushing the sel  switch in the direction of  or .



- ② Return to the ordinary display to complete the setting. ➡ P. 35

To continue setting, push the sel  switch in the direction of  to return to the upper hierarchy.

▶ The set value is retained.

Instruments (Continued)


| BRIGHTNESS

You can adjust the backlight brightness to one of the eight levels or select the auto adjustment.


Automatic brightness control: ➡ P. 132

The display can become dark when the display is very hot. If it does not restore the original brightness, contact your dealer.

- ① Select the backlight brightness mode ("AUTO", or "MANUAL") by pushing the sel  switch in the direction of  or .



- ② If you select "MANUAL," you can switch to the backlight brightness setting by pushing the sel  switch in the direction of .
- ③ Change the backlight brightness by pushing the sel  switch in the direction of  or .




- ④ Return to the ordinary display to complete the setting. ➡ P. 35
To continue setting, push the sel  switch in the direction of  to return to the upper hierarchy.
▶ The set value is retained.

THEME

You can change the theme of the instrument area.

- ① Select the theme type ("LIGHT," "DARK," or "AUTO") by pushing the sel  switch in the direction of  or .
- ▶ In "AUTO" type, light or dark theme is automatically selected by system based on backlight brightness.



- ② Return to the ordinary display to complete the setting.  P. 35

To continue setting, push the sel  switch in the direction of  to return to the upper hierarchy.


- ▶ The set value is retained.

Instruments (Continued)

FAVORITE INFORMATION

You can change the information items displayed in the INFO area. ➡ P. 26

- ① Select the desired information item by pushing the sel  switch in the direction of  or .
- ② Enable or disable display of selected information item by pushing the sel  switch in the direction of .
 - ▶ When the bar turns to green, the item is displayed in INFO area.

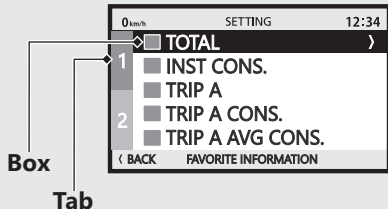

- ③ Return to the ordinary display to complete the setting. ➡ P. 35


To continue setting, push the sel  switch in the direction of  to return to the upper hierarchy.

▶ The set value is retained.

GENERAL

DATE & TIME

- 1 Select the 12/24, Hour, Minutes, Day, Month, or Year by pushing the sel  switch in the direction of  or .
- 2 Select the desired setting by pushing the sel  switch in the direction of  or .




- 3 Return to the ordinary display to complete the setting. ➡ P. 35
To continue setting, push the sel  switch in the direction of  to return to the upper hierarchy.
▶ The set value is retained.

UNIT

You can change the fuel mileage meter units.

- 1 Select the desired setting by pushing the sel  switch in the direction of  or .



- 2 Return to the ordinary display to complete the setting. ➡ P. 35
To continue setting, push the sel  switch in the direction of  to return to the upper hierarchy.
▶ The set value is retained.

Instruments (Continued)

RESTORE DEFAULT

The set values can be returned to the default settings.

Reset the setting according to the switch operation guide. ➡ P. 25



The following items are restored to their default values:




- DISPLAY TYPE
- ECO INDICATOR
- BRIGHTNESS
- THEME
- FAVORITE INFORMATION
- UNIT
- TRIP A AUTO RESET

SERVICE

MAINTENANCE

You can select the following:

- PERIODIC MAINTENANCE ➡ P. 48
- OIL CHANGE ➡ P. 48
- WARNING INFORMATION ➡ P. 50

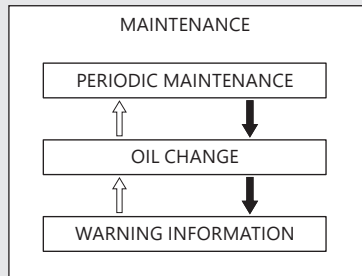

➡ Push the sel  switch in the direction of 


➡ Push and hold the sel  switch in the direction of 

Instruments (Continued)

PERIODIC MAINTENANCE

You can check the next periodic maintenance timing.

You can change the setting of the next periodic inspection timing. ➡ P. 49



Display range:

DISTANCE:

-----, 6,000 to -99,999 km

► Pass 0 km: "--" mark is displayed.


Month: ---, JAN to DEC

Year: ----, 2020 to 2099

OIL CHANGE

You can check the engine oil change timing.

You can change the setting of the next engine oil change timing. ➡ P. 49



Display range:

DISTANCE:

-----, 6,000 to -99,999 km


► Pass 0 km: "--" mark is displayed.

Month: ---, JAN to DEC

Year: ----, 2020 to 2099

Next inspection setting

- ① Select "PERIODIC MAINTENANCE" or "OIL CHANGE" by pushing the sel  switch in the direction of  or .




- ② Select the desired setting according to switch operation guide.
 - ▶ If you push and hold the sel  switch in the direction of  while setting the "Distance", it will move every 1000.
 - ▶ Available setting range of the Distance: -----, 100 to 6,000 km
 - ▶ Available setting range of the Date:
 Month:---, JAN to DEC
 Initial setting:---
 Year:----, 2020 to 2099
 Initial setting:---
 - ▶ Maintenance information  P. 35 will not be displayed if the distance and date are set to the initial settings.
- ③ Return to the ordinary display to complete the setting.  P. 35
 To continue setting, push the sel  switch in the direction of  to return to the upper hierarchy.

Instruments (Continued)

The pop-up information appears in the ordinary display when it reaches either of the following. ➡ P. 52

- 500 km from the next periodic inspection.
- 100 km from the next engine oil change.
- One month before the set month.

Periodic maintenance

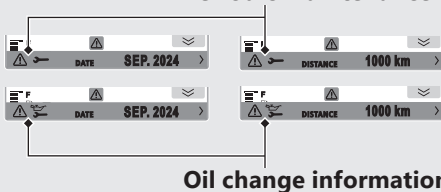


Oil change information

WARNING INFORMATION

Displays each warning information and maintenance information.

- ▶ If there is no warning information to display, it displays nothing.
- ▶ If there is a warning information, see your dealer for service.

Warning information




Maintenance information

BATTERY VOLTAGE


Displays the current voltage.

► "BATTERY VOLTAGE" cannot be selected.



SYSTEM INFORMATION

Displays the system information.



Instruments (Continued)

Pop-up information

In the following cases, pop-up information appear at the INFO area

- Maintenance information:
When the inspection timing of your vehicle is approaching.
- Warning information:
When your vehicle has warning information.

When your vehicle has multiple pieces of information, pop-up information display appears alternately.

| Maintenance Information

Indication	Explanation	Remedy
 	When the periodic maintenance time or distance of your vehicle is approaching.	Have your vehicle inspected by your dealer.
 	When the oil change time or distance of your vehicle is approaching.	Have your vehicle inspected by your dealer..


Warning Information

Indication	Explanation	Remedy
	Appears when vehicle has low battery voltage or battery performance degradation	Refer to “Battery Charging condition indicator”. ➡ P. 117

You can hide the pop-up information by pushing either in the direction of     sel  switch while the pop-up information is displayed.

Instruments (Continued)

SCV110F/FB VII ID

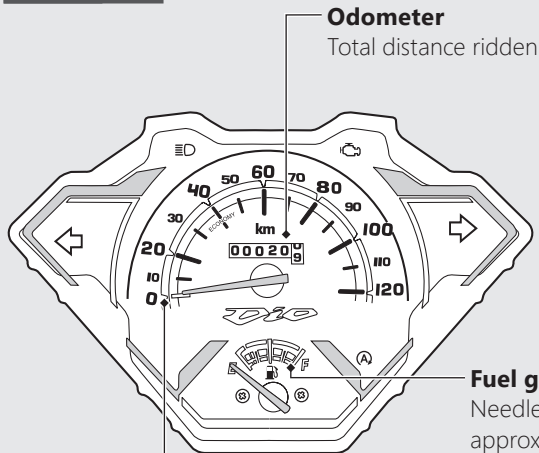

Odometer

Total distance ridden

Speedometer

This shows riding speed in kilometer per hour (km/h)

Fuel gauge

Needle in the red mark, remaining fuel approximately: 1.1 L (0.29 US gal, 0.24 Imp gal)


NOTICE

You should refuel when the reading approaches the red mark. Running out of fuel can cause the engine to misfire, damaging the catalytic converter.

Indicators

SCV110F/FB VIII ID

If one of these indicators does not come on when it should, have your dealer check for problems.

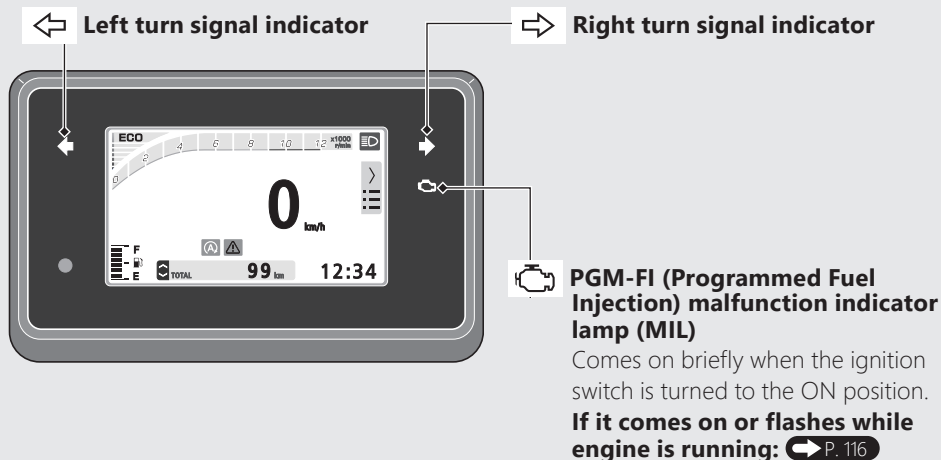


Indicators (Continued)

SCV110F/FB VII ID

If one of these indicators does not come on when it should, have your dealer check for problems.



Left turn signal indicator

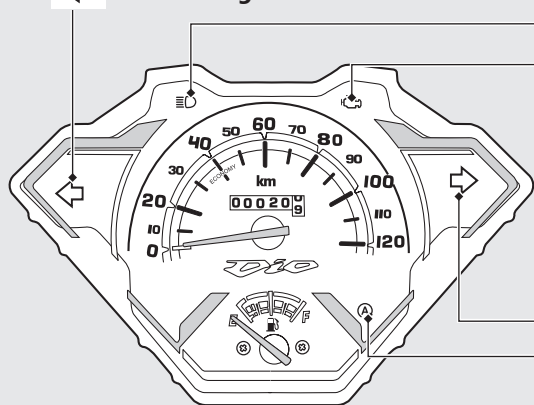

High beam indicator



PGM-FI (Programmed Fuel Injection) malfunction indicator lamp (MIL)

Comes on briefly when the ignition switch is turned to the ON position.

If it comes on or flashes while engine is running:

➡ P. 116



Right turn signal indicator




Idling Stop indicator

Comes on briefly when the Idling Stop switch is in the (A) (Idling Stop) position with the ignition switch turned on.

Idling Stop System: ➡ P. 62

Switches

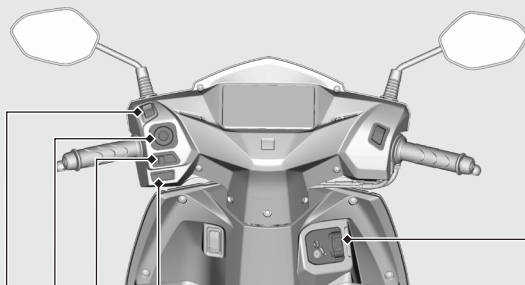

Horn button



Turn signal switch

▶ Pressing the switch turns the turn signal off.

SCV110F/FB VIII ID



Sel switch

Used to operate and set the various functions of display. ➞ P. 25

Fuel lid / Seat opener switch

Pressing the switch opens the fuel lid and seat.


To open the fuel lid: ➞ P. 70

To open the seat: ➞ P. 74

Headlight dimmer / Passing light control switch

- ≡D: High beam
- ≡D: Low beam
- ≡D PASS: Flashes the high beam headlight.

Switches (Continued)

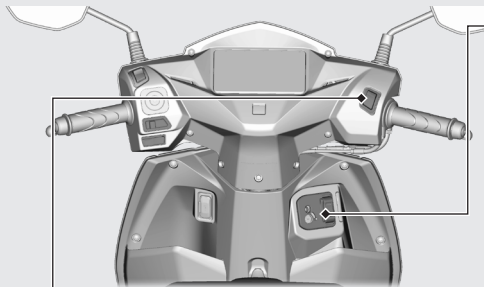

Start button/Idling Stop switch

- (A) : The Idling Stop system is on
- (A) OFF : The Idling Stop system is off

Should normally remain in the (A) (Idling Stop) position.

- ▶ Push the button lower side to start the engine.
- ▶ Start button will be returned automatically to (A) (Idling Stop) position.

Idling Stop system: ➡ P. 62



Ignition switch

Switches the electrical system on/off, locks the steering, and operates the fuel lid and seat opener switch.

- ▶ Key can be removed when in the OFF or LOCK position.

ON

Turns electrical system on for starting/riding.

FUEL SEAT


Operates the seat/fuel lid opener switch.

OFF

Turns engine off.

LOCK


Locks steering.



Steering Lock

Lock the steering when parking to help prevent theft.

A U-shaped wheel lock or similar device is also recommended.

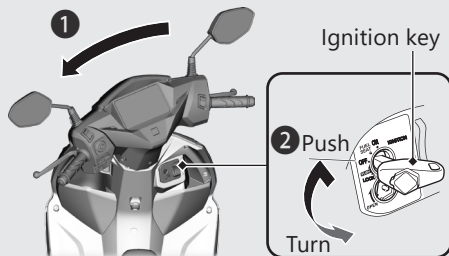

Locking


- 1 Turn the handlebar all the way to the left.
- 2 Push the key down, and turn the ignition switch to the LOCK position.
 - Jiggle the handlebar if the lock is difficult to engage.
- 3 Remove the key.

Unlocking

Insert the key, push it in, and turn the ignition switch to the OFF position.

Shutter

The ignition switch for this vehicle is equipped with a shutter. After parking the vehicle, close the shutter for theft prevention.

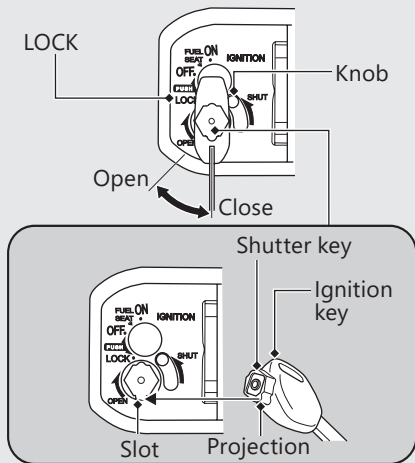

Close

- 1 Remove the ignition key from the ignition switch.
- 2 Align the projection of the shutter key with the slot of the shutter, and turn the shutter key counterclockwise.
 - You can also close the shutter by moving the knob upward without the shutter key.
- 3 Remove the key.

Open

Align the projection of the shutter key with the slot of the shutter, and turn the shutter key clockwise.


Rear Brake Lock

Be sure the rear brake lock is applied while starting and warming up the engine.

Locking

Squeeze the rear brake lever and set the rear brake lock lever.


- ▶ The rear brake lock will not function if the rear brake is not adjusted properly. ➡ P. 104

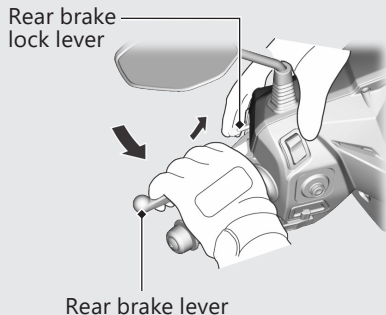

Unlocking

Squeeze the rear brake lever.

- ▶ Before riding, make sure that the rear brake lock is fully released so there is no drag on the rear wheel.



Idling Stop System

Idling Stop system is designed to help reduce the fuel consumption and noise, by idling stop while making a stop such as waiting at an intersection.

Switching the Idling Stop System On or Off

Switches the Idling Stop system on or off using the Start button/ Idling Stop switch.

- ON:  (**Idling Stop**)
 - ▶ Idling Stop indicator comes on when the Idling Stop system becomes ready to stop the engine while riding. Idling Stop indicator flashes when the engine is stopped by the Idling Stop system.
- OFF:  (**Idling**)
 - ▶ Idling Stop indicator does not come on when the Idling Stop system is off.


Activation of the Idling Stop System

The Idling Stop system becomes ready to stop the engine and Idling Stop indicator comes on when the following requirements are satisfied with the Start button/ Idling Stop switch in the  (Idling Stop) position:


- Start the engine by pressing the start button
- Warm up the engine enough
- Ride the vehicle at speeds over 10 km/h (6 mph)

Idling Stop Indicator Does Not Come On: P. 119

Start button/Idling Stop switch



Idling Stop indicator




Stopping the engine by the Idling Stop System

The engine stops and Idling Stop indicator changes to flash after you close the throttle completely and stop the vehicle while the Idling Stop indicator is on.

- ▶ The headlight will dim while the engine is stopped by the Idling Stop system.
- ▶ While the vehicle is stopped and activated the Idling Stop system, if you press the Idling Stop switch to  (Idling), the Idling Stop system will be cancelled. The engine will not restart even when you open the throttle.

Idling Stop indicator

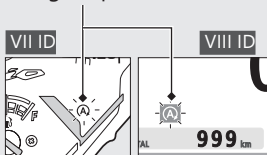

- ▶ While the driving the vehicle and activated the Idling Stop system, if you press the Idling Stop switch to  (Idling), the Idling stop system still activated until next vehicle stopping.

Safety Precaution for the Idling Stop System

Do not go away from the vehicle while the Idling Stop indicator is flashing. When you go away from the vehicle, always turn the ignition switch to the OFF position.

- ▶ The engine may start unexpectedly if the throttle is opened.

| Engine is Not Stopped by the Idling Stop System While the Idling Stop Indicator is On: P. 120

NOTICE

Stopping by the Idling Stop system for a long time may cause battery discharge.

Idling Stop System *(Continued)*

Restarting the Engine

Check that the Idling Stop indicator is flashing, and then open the throttle.

- ▶ If it is not flashing, you can't restart the engine with the Idling Stop system, even if you open the throttle.

| Engine Does Not Start Even If the Throttle is Opened: ➡ P. 120

NOTICE

Headlight stays on after the engine is stopped by the Idling Stop system. The battery may discharge and you may not be able to restart engine.

When the battery is weak, switch the Idling Stop switch to  (Idling) and do not use the Idling Stop system. See your dealer to check the battery.

Always replace the battery with another maintenance-free battery of the same type. See your dealer for checking the battery as specified in the maintenance schedule.

| Maintenance Schedule: ➡ P. 81


Starting the Engine

Start your engine using the following procedure, regardless of whether the engine is cold or warm.

NOTICE

- If the engine does not start within 5 seconds, turn the ignition switch to the OFF position and wait 10 seconds before trying to start the engine again to recover battery voltage.
- Extended fast idling and revving the engine can damage the engine and the exhaust system.
- Do not operate the kickstarter while the engine is running as engine damage could result. Do not apply excessive force on the kickstarter.
- Fold up the kickstarter after the kickstarter is returned to the pedal stop.


- 1 Place the vehicle on its centre stand.
- 2 Turn the ignition switch to the ON position.

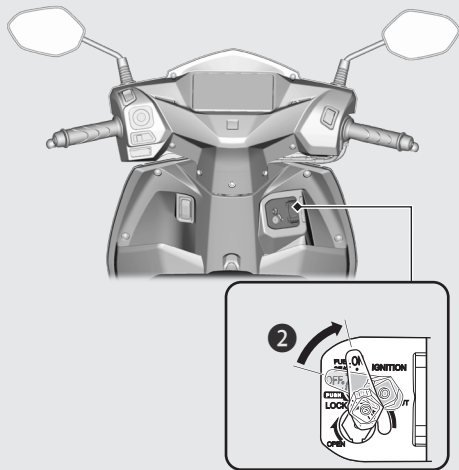

Starting the Engine *(Continued)*


3 Squeeze the rear brake lever.

- The starter motor will only work when the brake lever is squeezed.




To Start the Engine with Electric Starter

- 4** With the throttle closed, press the start button.
Release the start button as soon as the engine starts



To Start the Engine with Kickstarter


- 4** With the throttle completely closed, operate the kickstarter starting from the top of the stroke, kick through to the bottom with a rapid, continuous motion.

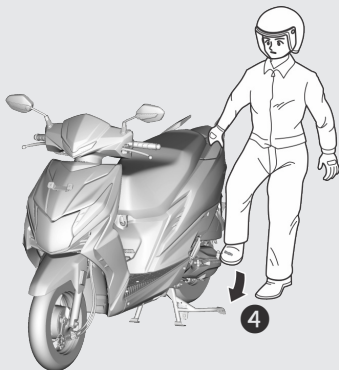

If you cannot start the engine:

Open the throttle slightly (about 3 mm, without freeplay) while starting the engine.

About 3 mm, without freeplay



Starting the Engine *(Continued)*

If the engine does not start: Using the start button

- ① Open the throttle fully and press the start button for 5 seconds.
 - ▶ The engine will not start at this time. (When the throttle is fully open, the engine will not start when the start button is pressed.) Release the throttle and start button after 5 seconds and proceed to step 2.
- ② Follow the normal starting procedure.
- ③ If the engine starts with unstable idle, open the throttle slightly.
- ④ If the engine does not start, wait 10 seconds before trying steps ① - ③ again.

Using the kickstarter


- ① Turn off the ignition switch.
- ② Open the throttle fully and crank the engine several times with the kickstarter.
- ③ Turn the ignition switch to the ON position.
- ④ Follow the normal starting procedure.
- ⑤ If the engine starts with unstable idle, open the throttle slightly.

| If Engine Will Not Start ➡ P. 115

Riding

Starting the vehicle


- 1 Push the vehicle forward off the centre stand.
 - ▶ Lock the rear brake lock.
 - ▶ Keep throttle closed.
- 2 Get on the vehicle.
 - ▶ Mount the vehicle from the left side, keeping at least one foot on the ground.
- 3 Release the rear brake lock.
- 4 Acceleration and deceleration
To accelerate: Open the throttle slowly.
To decelerate: Close the throttle.

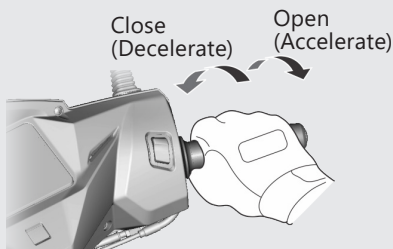

Braking

Close the throttle and apply the front and rear brake levers together.

Do not apply the brake lock while riding. It may cause the wheel to lock, reducing control of the vehicle.

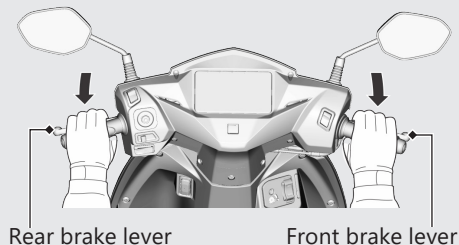

Refuelling

Fuel type: Unleaded petrol only




Fuel octane number: Your vehicle is designed to use Research Octane Number (RON) 91 or higher.

Tank capacity: 5.3 litres (1.4 US gal, 1.17 Imp gal)



Refuelling and Fuel Guidelines ➡ P. 11

Opening the Fuel Fill Cap

- ➊ Insert the ignition key and turn it to the FUEL SEAT position.
 - ▶ To unlock the sutter and steering lock.
 - ➡ P. 60
 - ➡ P. 59
- ➋ Press the FUEL side of the fuel lid / seat opener switch.
 - ▶ The fuel lid opens.
- ➌ Turn the fuel fill cap counterclockwise until it stops and remove the cap.

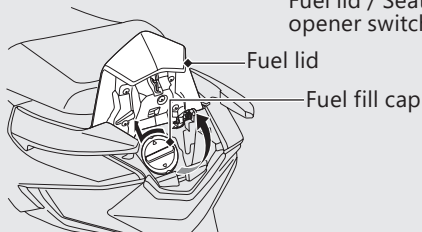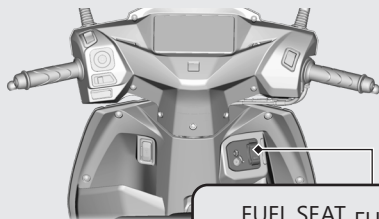

Do not fill with fuel above the lower edge of the filler neck.

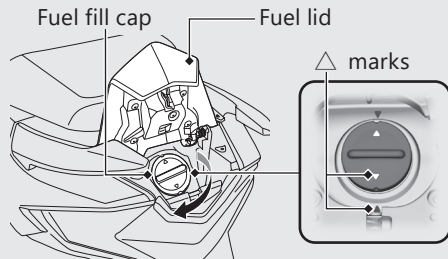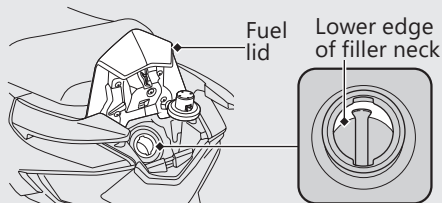

Closing the Fuel Fill Cap

- 1 Install and tighten the fuel fill cap firmly by turning it clockwise.
 - ▶ Make sure that the $\triangle$ marks on the fuel fill cap and fuel tank are aligned.
- 2 Close and push down the fuel lid until it locks.
 - ▶ Make sure that the fuel lid is locked securely by pulling it up lightly.

⚠ WARNING

Petrol is highly flammable and explosive. You can be burned or seriously injured when handling fuel.

- Stop the engine, and keep heat, sparks, and flames away.
- Only handle fuel outdoors.
- Wipe up spills immediately.

USB Socket

SCV110F/FB VIII ID

The USB socket is located above the front inner rack. Use USB devices at your own risk. In no event shall Honda be liable for any damage to your USB device when in use.

Only USB devices within the following specifications can be connected.

USB type-C connectors can be used.

Rated capacity is

15 W (5 V, 3.0 A).


► The USB socket is for charging only.

Do not connect USB devices that exceed the rated capacity. They may not be charged or work properly even if connected.

For information on usage or malfunction of the USB device you connect, refer to its instruction manual.

To connect your USB device

- 1 Open the cover to access the USB socket.

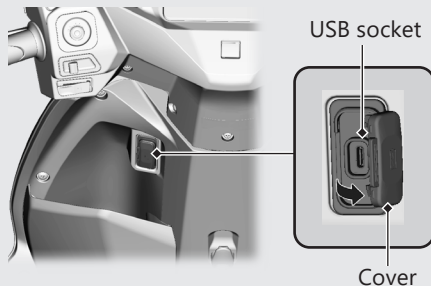


- 2 Connect a certified USB cable to the USB socket.

- ▶ To prevent the battery from becoming weak (or dead), keep the engine running while drawing current from the USB socket.
- ▶ To prevent entry of foreign matter into the USB socket, be sure to close the cover when the USB socket is not used.
- ▶ Carefully secure all connected devices, as vibration may cause damage to them or they could shift unexpectedly.

NOTICE

- Using any heat-generating USB devices or improperly rated USB devices can damage the USB socket.
- Do not use the USB socket in wet conditions, when or while washing or any other wet conditions as these will damage the USB socket.
- Do not allow the USB's harness to become pinched or trapped.

Storage Equipment

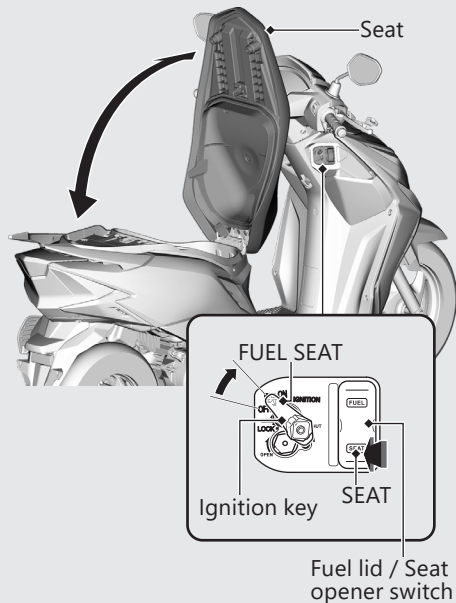

Seat Open

- 1 Insert the ignition key and turn it to the FUEL SEAT position.
▶ To unlock the shutter and steering lock
➡ P. 60 , ➡ P. 59
- 2 Turn the handlebar pointed straight ahead.
- 3 Press the SEAT side of the fuel lid / seat opener switch.
- 4 Open the seat.

Seat Close


Close and push down on the rear of the seat until locks. Make sure that the seat is locked securely to pull it up lightly.

Take care not to lock your key in the centre compartment under the seat.

Helmet Holders

The helmet holders are located under the seat.

► Use the helmet holder only when parked.

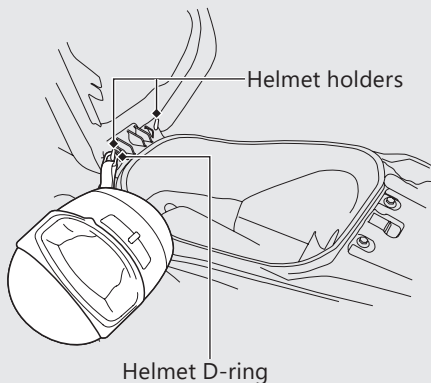

⚠ WARNING


Riding with a helmet attached to the holder can interfere with your ability to safely operate the vehicle and could lead to a crash in which you can be seriously hurt or killed.

Use the helmet holder only while parked. Do not ride with a helmet secured by the holder.

Storage Equipment *(Continued)*

Front inner rack

The front inner racks are provided below the handlebar.

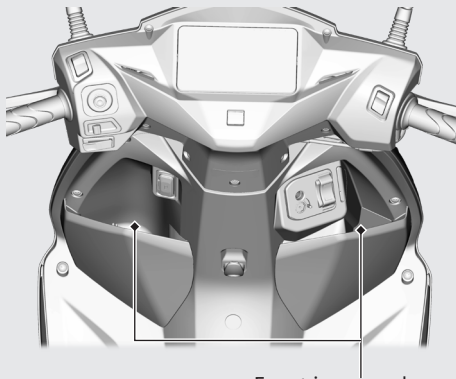

Front inner racks

Never exceed the maximum weight limit.


Maximum Weight: 1 kg (2 lb)

Centre compartment

Never exceed the maximum weight limit.


Maximum Weight: 10 kg (22 lb)

- ▶ Do not store any items that are flammable or susceptible to heat damage.
- ▶ Do not store valuables or fragile articles.

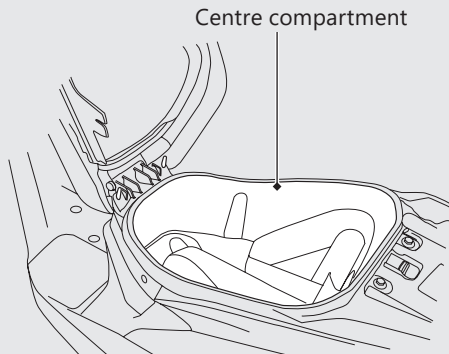

Tool Kit/ Document Holder/ First Aid Kit

Tool kit, document holder and first aid kit are available in the centre compartment.

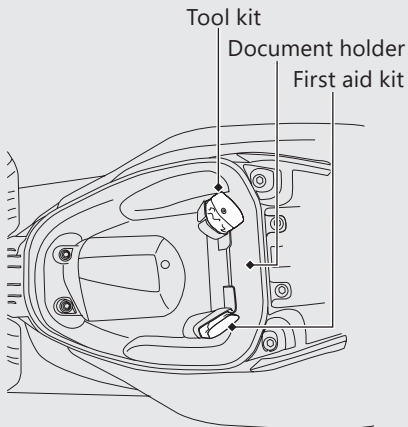

Storage Equipment *(Continued)*

Luggage Hooks


The luggage hooks are provided below the handlebar and the seat.

- Do not attach large luggage to the hook that would hang out from the vehicle and/or interfere with the movement of your feet and handle operation.

Never exceed the maximum weight limit.

Maximum Weight: 1.5 kg (3 lbs)

Luggage hooks

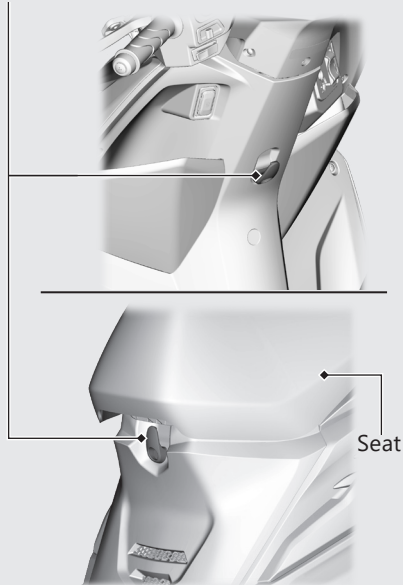

Maintenance

Please read "Importance of Maintenance" and "Maintenance Fundamentals" carefully before attempting any maintenance. Refer to "Specifications" for service data.

Importance of Maintenance	P. 80
Maintenance Schedule	P. 81
Maintenance Fundamentals	P. 84
Tools	P. 93
Removing & Installing Body Components	P. 94
Battery.....	P. 94
Battery Lid.....	P. 95
Center Cover	P. 96
Front Centre cover.....	P. 97
Spark Plug	P. 98

Engine Oil	P. 100
Brakes	P. 104
Throttle	P. 110
Crankcase Breather	P. 111
Other Adjustments	P. 112
Adjusting the Headlight Aim	P. 112
Adjusting the Rear Suspension.....	P. 113

Importance of Maintenance

Importance of Maintenance

Keeping your vehicle well-maintained is absolutely essential to your safety and to protect your investment, obtain maximum performance, avoid breakdowns, and reduce air pollution. Maintenance is the owner's responsibility. Be sure to inspect your vehicle before each ride and perform the periodic checks specified in the Maintenance Schedule. ➔ P. 81

WARNING

Improperly maintaining your vehicle or failing to correct a problem before you ride can cause a crash in which you can be seriously hurt or killed.

Always follow the inspection and maintenance recommendations and schedules in this owner's manual.

Maintenance Safety

Always read the maintenance instructions before you begin each task and make sure that you have the tools, parts, and skills required. We cannot warn you of every conceivable hazard that can arise in performing maintenance. Only you can decide whether or not you should perform a given task.

Follow these guidelines when performing maintenance.

- Stop the engine and remove the key.
- Place your vehicle on a firm, level surface using the centre stand to provide support.
- Allow the engine, muffler, brakes, and other high-temperature parts to cool before servicing as you can get burned.
- Run the engine only when instructed, and do so in a well-ventilated area.

Maintenance Schedule

The maintenance schedule specifies the maintenance requirements necessary to ensure safe, dependable performance, and proper emission control.

Maintenance work should be performed in accordance with Honda's standards and specifications by properly trained and equipped technicians. Your dealer meets all of these requirements. Keep an accurate record of maintenance to help ensure that your vehicle is properly maintained. Make sure that whomever performs the maintenance completes this record.

All scheduled maintenance is considered a normal owner operating cost and will be charged to you by your dealer. Retain all receipts. If you sell the vehicle, these receipts should be transferred with the vehicle to the new owner.

Honda recommends that your dealer should road test your vehicle after each periodic maintenance is carried out.

Maintenance Schedule

Items	Pre-ride Check P. 84	Frequency *1								Annual Check	Regular Replace	Refer to page
		× 1,000 km	1	6	12	18	24	30	36			
		× 1,000 mile	0.6	4	8	12	16	20	24			
		Months	1	6	12	18	24	30	36			
Honda Diagnostic System				I		I		I				–
Fuel Line				I	I	I	I	I	I	I		–
Fuel Level		I										–
Throttle Operation		I		I	I	I	I	I	I	I		110
Air Cleaner *2						R			R			92
Crankcase Breather*3				C	C	C	C	C	C			111
Spark Plug				I	R	I	R	I	R			98
Valve Clearance				I	I	I	I	I	I			–
Engine Oil		I	R	R	R	R	R	R	R	R		100
Engine Oil Strainer Screen					C		C		C			101
Engine Idle Speed			I	I	I	I	I	I	I	I		–
Evaporative Emission Control System						I			I			–
Drive Belt					I		R		I			–
Final Drive Oil *4											2 Years	–

Maintenance Level

 : Intermediate. We recommend service by your dealer, unless you have the necessary tools and are mechanically skilled. Procedures are provided in an official Honda Shop Manual.

 : Technical. In the interest of safety, have your vehicle serviced by your dealer.

Maintenance Legend

I : Inspect (clean, adjust, lubricate, or replace, if necessary)
R : Replace
C : Clean

Items		Pre-ride Check P. 84	Frequency ^{*1}								Annual Check	Regular Replace	Refer to page
			× 1,000 km	1	6	12	18	24	30	36			
			× 1,000 mile	0.6	4	8	12	16	20	24			
			Months	1	6	12	18	24	30	36			
Battery					I	I	I	I	I	I	I		-
Brake Shoes Wear		I			I	I	I	I	I	I	I		109
Brake System		I		I	I	I	I	I	I	I	I		-
Brake Lock Operation					I	I	I	I	I	I			-
Headlight Aim					I	I	I	I	I	I	I		112
Lights / Horn		I											-
Clutch Shoes Wear						I		I		I			-
Suspension					I	I	I	I	I	I	I		-
Nuts, Bolts, Fasteners				I		I		I		I	I		-
Wheels / Tires		I			I	I	I	I	I	I	I		90
Steering Head Bearings						I		I		I	I		-

Service according to odometer reading or months, whichever is earlier.

Notes:

- *1: At higher odometer reading, repeat at the frequency interval established here.
- *2: Service more frequently when riding in unusually wet or dusty areas.
- *3: Service more frequently when riding in rain or at full throttle.
- *4: Replacement requires mechanical skill.

Pre-ride Inspection

To ensure safety, it is your responsibility to perform a pre-ride inspection and make sure that any problem you find is corrected. A pre-ride inspection is a must, not only for safety, but because having a breakdown, or even a flat tyre, can be a major inconvenience.

Check the following items before you get on your vehicle:

- Fuel level - Fill fuel tank when necessary ➡ P. 70
- Throttle - Check for smooth opening and full closing in all steering positions ➡ P. 110
- Engine oil level - Add engine oil if necessary. Check for leaks ➡ P. 100
- Brakes - Check operation;
Front and Rear: check shoes wear and freeplay, adjust if necessary ➡ P. 109, ➡ P. 104

- Lights and horn - Check that lights, indicators and horn function properly
- Wheels and tyres - Check condition, air pressure and adjust if necessary ➡ P. 90

Replacing Parts

Always use Honda Genuine Parts or their equivalents to ensure reliability and safety.

WARNING

Installing non-Honda parts may make your vehicle unsafe and cause a crash in which you can be seriously hurt or killed.

Always use Honda Genuine Parts or equivalents that have been designed and approved for your vehicle.

Battery

Your vehicle has a maintenance-free type battery. You do not have to check the battery electrolyte level or add distilled water. Clean the battery terminals if they become dirty or corroded.

Do not remove the battery cap seals. There is no need to remove the cap when charging.

NOTICE

Your battery is a maintenance-free type and can be permanently damaged if the cap strip is removed.



This symbol on the battery means that this product must not be treated as household waste.

NOTICE

An improperly disposed of battery can be harmful to the environment and human health.

Always confirm local regulations for proper battery disposal instruction.

What to do in an emergency

If any of the following occur, immediately see your doctor.

- Electrolyte splashes into your eyes:
 - ▶ Wash your eyes repeatedly with cool water for at least 15 minutes. Using water under pressure can damage your eyes.
- Electrolyte splashes onto your skin:
 - ▶ Remove affected clothing and wash your skin thoroughly using water.
- Electrolyte splashes into your mouth:
 - ▶ Rinse mouth thoroughly with water, and do not swallow.

WARNING


The battery gives off explosive hydrogen gas during normal operation.

A spark or flame can cause the battery to explode with enough force to kill or seriously hurt you.

Wear protective clothing and a face shield, or have a skilled mechanic do the battery servicing.

I Cleaning the Battery Terminals

1. Remove the battery. ➡ P. 94
2. If the terminals are starting to corrode and are coated with a white substance, wash with warm water and wipe clean.
3. If the terminals are heavily corroded, clean and polish the terminals with a wire brush or sandpaper. Wear safety glasses.

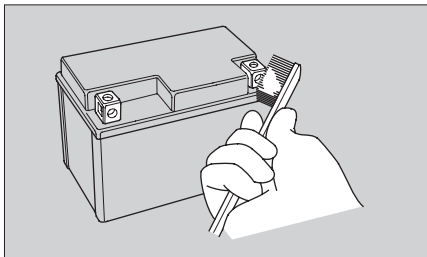

4. After cleaning, reinstall the battery.

The battery has a limited life span. Consult your dealer about when you should replace the battery. Always replace the battery with another maintenance-free battery of the same type.

NOTICE

Installing non-Honda electrical accessories can overload the electrical system, discharging the battery and possibly damaging the system.


Fuses

Fuses protect the electrical circuits on your vehicle. If something electrical on your vehicle stops working, check for and replace any blown fuses. ➤ P. 127

Inspecting and Replacing Fuses

Turn the ignition switch to the OFF position to remove and inspect fuses.

If a fuse is blown, replace with a fuse of the same rating. For fuse ratings, see "Specifications." ➤ P. 143



NOTICE

Replacing a fuse with one that has a higher rating greatly increases the chance of damage to the electrical system.

If a fuse fails repeatedly, you likely have an electrical fault. Have your vehicle inspected by your dealer.

Engine Oil

Engine oil consumption varies and oil quality deteriorates according to riding conditions and time elapsed.

Check the engine oil level regularly, and add the recommended engine oil if necessary. Dirty oil or old oil should be changed as soon as possible.


Selecting the Engine Oil

For recommended engine oil, see "Specifications." ➤ P. 142


If you wish to use other than recommended engine oil, check the label to make sure that the oil satisfies all of the following standards:

- JASO T 903 standard*¹: MB
- SAE standard*²: 10W-30
- API classification*³: SJ or higher

- *1. The JASO T 903 standard is an index for engine oils for 4-stroke motorcycle engines. There are two classes: MA and MB. For example, the following label shows the MB classification.

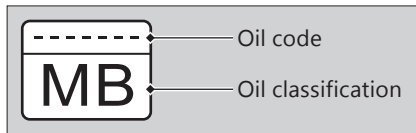

- *2. The SAE standard grades oils by their viscosity.
- *3. The API classification specifies the quality and performance rating of engine oils. Use SJ or higher oils, excluding oils marked as "Energy Conserving" or "Resource Conserving" on the circular API service symbol.

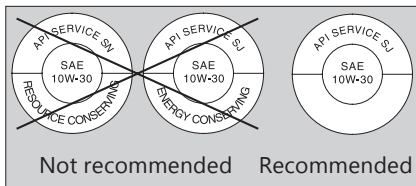

Crankcase Breather

Service more frequently when riding in rain, at full throttle, or after the vehicle is washed or overturned. Service if the deposit level can be seen in the transparent section of the drain tube.

If the drain tube overflows, the air filter may become contaminated with engine oil, causing poor engine performance. ➤ P. 111

Tyres (Inspecting/Replacing)


■ Checking the Air Pressure

Visually inspect your tyres and use an air pressure gauge to measure the air pressure at least once a month or any time you think the tyres look low. Always check air pressure when your tyres are cold.

■ Inspecting for Damage


Inspect the tyres for cuts, slits, or cracks that exposes fabric or cords, or nails or other foreign objects embedded in the side of the tyre or the tread. Also

inspect for any unusual bumps or bulges in the side walls of the tyres.




■ Inspecting for Abnormal Wear

Inspect the tyres for signs of abnormal wear on the contact surface.



Inspecting Tread Depth

Inspect the tread wear indicators. If they become visible, replace the tyres immediately.

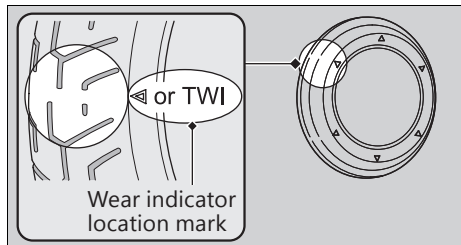

⚠ WARNING

Riding on tyres that are excessively worn or improperly inflated can cause a crash in which you can be seriously hurt or killed.

Follow all instructions in this owner's manual regarding tyre inflation and maintenance.

Have your tyres replaced by your dealer. For recommended tyres and air pressure, see "Specifications." ➡ P. 142

Follow these guidelines whenever you replace tyres:

- Use the recommended tyres or their equivalents of the same size, construction, speed rating, and load range.

Maintenance Fundamentals

- Do not install a tube inside a tubeless tyre on this vehicle. Excessive heat build-up can cause the tube to burst.
- Use only tubeless tyres on this vehicle. The rims are designed for tubeless tyres, and during hard acceleration or braking, a tube-type tyre could slip on the rim and cause the tyre to rapidly deflate.

WARNING

Installing improper tyres on your vehicle can adversely affect handling and stability, and can cause a crash in which you can be seriously hurt or killed.


Always use the size and type of tyres recommended in this owner's manual.

Air Cleaner

This vehicle is equipped with a viscous type air cleaner element.

Air blow cleaning or any other cleaning can degrade the viscous element performance and cause the intake of dust.

Do not perform the maintenance. Should be serviced by your dealer.

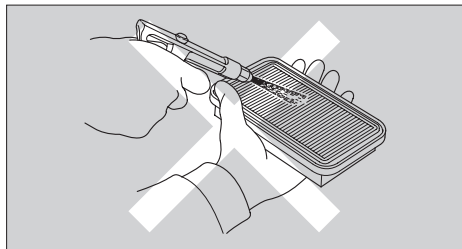


Tools

The tool kit is stored in the centre compartment. ➡ P. 77

You can perform some roadside repairs, minor adjustments and parts replacement with the provided tools.

- Spark plug wrench
- 12 x 14 mm Open end wrench
- Standard / Philips Screwdriver


When using the screwdriver, use the spark plug wrench as a screwdriver handle.

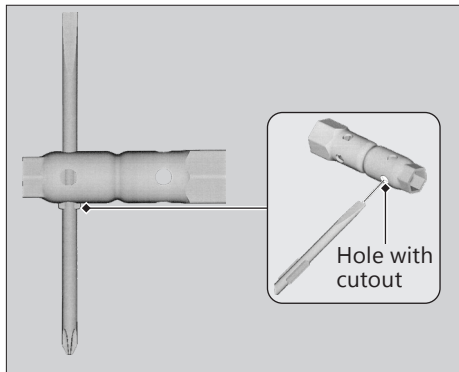

Battery

Removal

Make sure the ignition switch is in the OFF position.

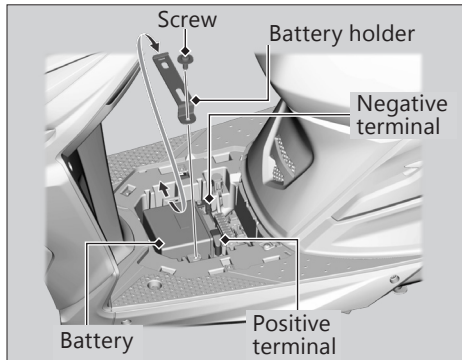

1. Remove the battery lid. ➡ P. 95
2. Remove the battery holder by removing the screw.
3. Disconnect the negative $\ominus$ terminal from the battery.
4. Disconnect the positive $\oplus$ terminal from the battery.
5. Remove the battery, taking care not to drop the terminal nuts.

Installation

Install the parts in the reverse order of removal. Always connect the positive $\oplus$ terminal first. Make sure bolts and nuts are tight.

SCV110F/FB VIII ID


Make sure clock information is correct after the battery is reconnected.

For proper handling of the battery, see "Maintenance Fundamentals." ➡ P. 84
"Battery Goes Dead." ➡ P. 122

Battery Lid

Removal

Remove the screws and battery lid.
Use cloth to avoid any scratches or damage.

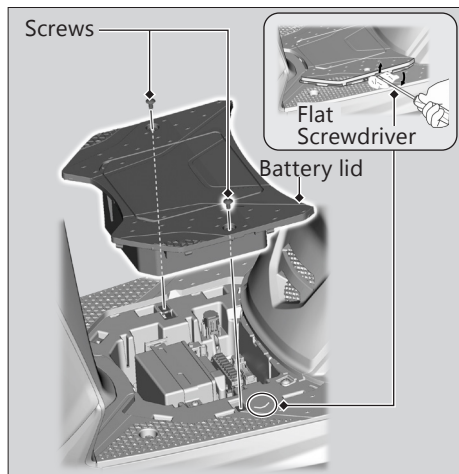

Installation

Install the parts in the reverse order of removal.


Centre Cover

Removal


1. Open the seat. ► P. 74
2. Remove the battery lid. ► P. 95
3. Remove the bolt and the luggage hook.
4. Remove the screws A and screws B.
5. Pull the bottom of the centre cover up and forward, remove the tabs from their slots.
6. Remove the centre cover.

Installation

Install the parts in the reverse order of removal.

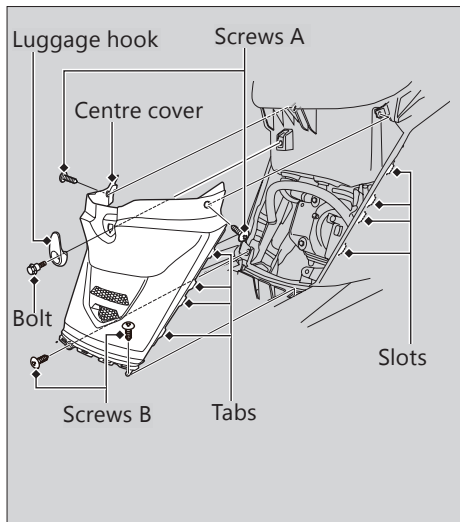

Front Centre Cover

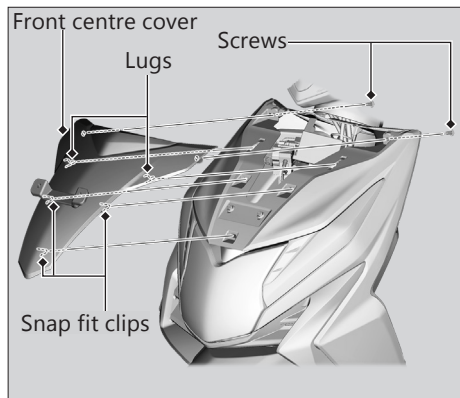

Removal

1. Remove the screws.
2. Remove the front centre cover by releasing the snap fit clips.

Installation

Install the parts in the reverse order of removal.

Checking Spark Plug

For the recommended spark plug, see "Specifications." ➤ P. 142

Use only the recommended type of spark plug in the recommended heat range.


NOTICE

Using a spark plug with an improper heat range can cause engine damage.

1. Remove the centre cover. ➤ P. 96
2. Disconnect the spark plug cap from the spark plug.
3. Clean any dirt from around the spark plug base.
4. Remove the spark plug using provided spark plug wrench. ➤ P. 93

Spark plug wrench

Spark plug cap

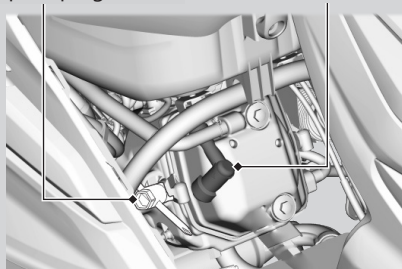


5. Inspect the electrodes and centre porcelain for deposits, erosion or carbon fouling.
 - ▶ If the erosion or deposit is heavy, replace the plug.
 - ▶ Clean a carbon or wet-fouled plug with a plug cleaner, otherwise use a wire brush.

6. Check the spark plug gap using a wire type feeler gauge.
► If adjustment is necessary, bend the side electrode carefully.

The gap should be:

0.8 to 0.9 mm (0.031 to 0.035 in)

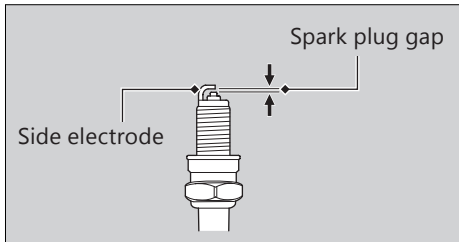

7. Make sure the plug washer is in good condition.
8. Install the spark plug. With the plug washer attached, thread the spark plug in by hand to prevent cross-threading.

9. Tighten the spark plug:
- If the old plug is good:
1/8 turn after it seats.
 - If installing a new plug, tighten it twice to prevent loosening:
 - a) First, tighten the plug:
1/2 turn after it seats.
 - b) Then loosen the plug.
 - c) Next, tighten the plug again:
1/8 turn after it seats.

NOTICE


An improperly tightened spark plug can damage the engine. If a plug is too loose, a piston may be damaged. If a plug is too tight, the threads may be damaged.

10. Install the parts in the reverse order of removal.
- When reinstalling the spark plug cap, take care to avoid pinching any cables or wires.

Checking the Engine Oil

Check the engine oil with the Idling Stop switch at  (Idling).

1. If the engine is cold, idle the engine for 3 to 5 minutes.
2. Turn the ignition switch to the OFF position and wait for 2 to 3 minutes.
3. Place your vehicle on its centre stand on a firm, level surface.
4. Remove the oil fill cap/dipstick and wipe it clean.
5. Insert the oil fill cap/dipstick until it seats, but don't screw it in.
6. Check that the oil level is between the upper level and lower level marks on the oil fill cap/dipstick.
7. Securely install the oil fill cap/dipstick.

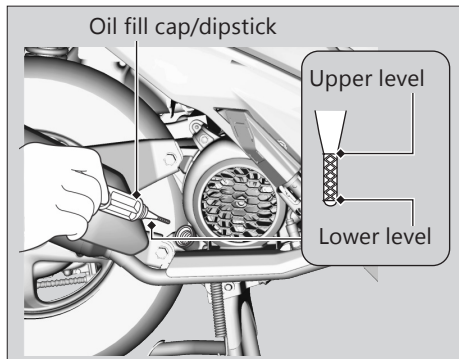

Adding Engine Oil

If the engine oil is below or near the lower level mark, add the recommended engine oil. ► P. 88

1. Remove the oil fill cap/dipstick. Add the recommended oil until it reaches the upper level mark.
 - Place your vehicle on its centre stand on a firm, level surface when checking the oil level.
 - Do not overfill above the upper level mark.
 - Make sure no foreign objects enter the oil filler opening.
 - Wipe up any spills immediately.
2. Securely reinstall the oil fill cap/dipstick.

NOTICE

Overfilling with oil or operating with insufficient oil can cause damage to your engine. Do not mix different brands and grades of oil.

For the recommended oil and oil selection guidelines, see "Maintenance Fundamentals." ► P. 84

Changing Engine Oil, Cleaning Strainer Screen

Changing the oil and cleaning strainer screen requires special tools. We recommend that you have your vehicle serviced by your dealer.



Check the engine oil with the Idling Stop switch at  (Idling).

1. If the engine is cold, idle the engine for 3 to 5 minutes.
2. Turn the ignition switch to the OFF position and wait for 2 to 3 minutes.
3. Place your vehicle on its centre stand on a firm, level surface.
4. Place a drain pan under the drain bolt and oil plug.

Engine Oil ► Changing Engine Oil, Cleaning Strainer Screen

5. Remove the oil fill cap/dipstick, drain bolt, and sealing washer to drain the oil.
6. Remove the oil plug, O-ring, spring and oil strainer screen and let the remaining oil drain out.
 - Discard the oil at an approved recycling centre.
7. Clean the oil strainer screen.
8. Check that the oil strainer screen and sealing rubber are in good condition.
9. Replace the O-ring and apply a thin coat of engine oil to the new O-ring before installing it.
10. Install the oil strainer screen, spring and oil plug and tighten.

Torque: 20 N·m (2.0 kgf·m, 15 lbf·ft).

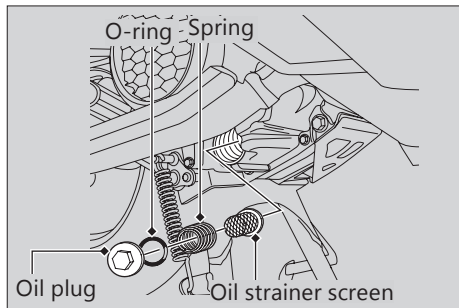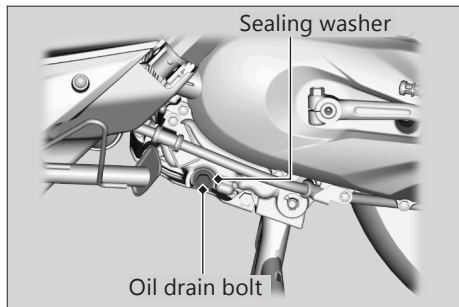

11. Install a new sealing washer onto the drain bolt. Tighten the drain bolt.

Torque: 24 N·m (2.4 kgf·m, 18 lbf·ft).

12. Fill the crankcase with the recommended oil (►P. 88, ►P. 142) and install the oil fill cap/dipstick.

Required oil

When changing oil & cleaning the strainer screen:

0.60 litres (0.65 US qt, 0.53 Imp qt)

When changing oil only:


0.55 litres (0.60 US qt, 0.48 Imp qt)

13. Check the oil level. ►P. 100
14. Check that there are no oil leaks.

Inspecting the Brake Lever Freeplay


1. Place your vehicle on its centre stand on a firm, level surface.
2. Measure the distance the front and rear brake levers move before each brake takes hold.

Freeplay at the tip of the brake lever: 10 to 20 mm (0.4 to 0.8 in)

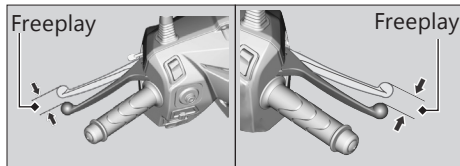

Adjusting the Brake Lever Freeplay

Adjust the freeplay of the brake levers with the front wheel pointed straight ahead in the order of front brake followed by rear brake. Make sure the cut-out on the adjusting nut is seated on the brake arm pin when adjusting the freeplay.

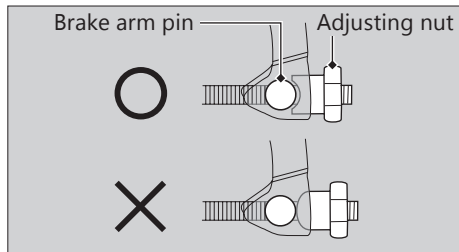


If proper adjustment cannot be obtained by this method, see your dealer.

Brakes ► Adjusting the Brake Lever Freeplay

1. Turn No.1 adjusting nut a half-turn at a time while firmly pushing the brake arm. Check the freeplay of the front brake lever after turning the adjusting nut clockwise (less freeplay) by hand until the nut no longer turns.


► If the freeplay of the front brake lever is out of the specified range, readjust the freeplay by rotating the No.1 adjusting nut.

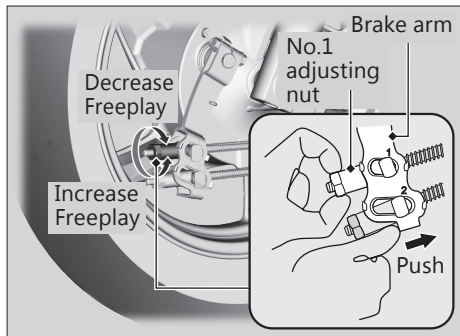

2. Without pushing the brake arm, adjust No.2 adjusting nut so that the gaps between the brake arm and brake arm pin for No.1 and No.2 are as follows.


Gap of No.1 : no gap

Gap of No.2 : approximately 1 mm (0.04 in)

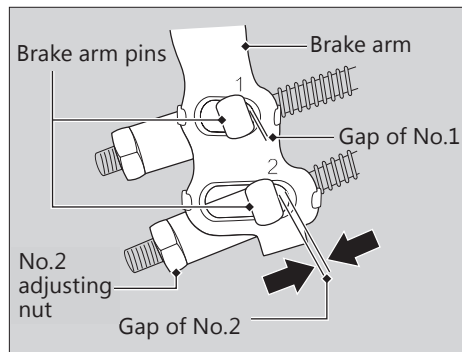


Brakes ► Adjusting the Brake Lever Freeplay


To adjust No.2 adjusting nut, turn the No.2 adjusting nut a half-turn at a time while firmly pushing the brake arm.

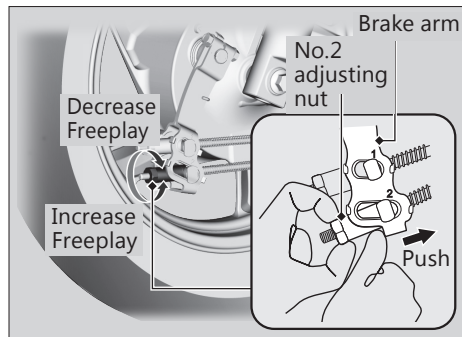


3. While pushing the front brake arm, confirm there is a gap between the brake arm and brake arm pin for No.1 and No.2.

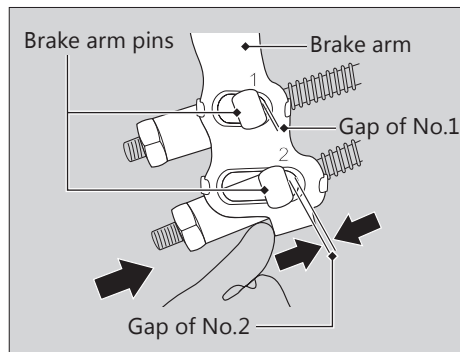

4. Apply the brakes several times and check for free wheel rotation after the front and rear brake levers are released.

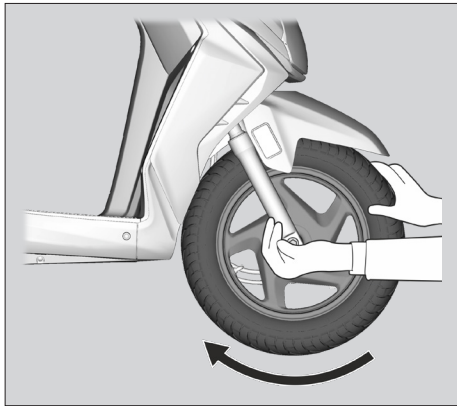


5. Adjust the freeplay of the rear brake lever by turning the rear brake adjusting nut a half-turn at a time.

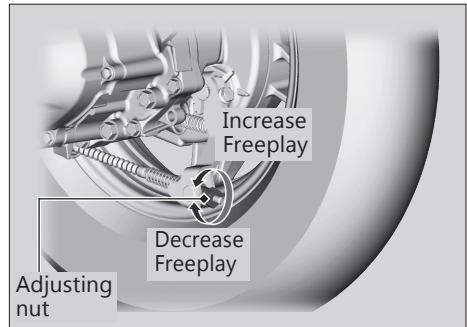


Brakes ► Adjusting the Brake Lever Freeplay

6. Push the brake arm to confirm that there is a gap between the rear brake adjusting nut and brake arm pin.

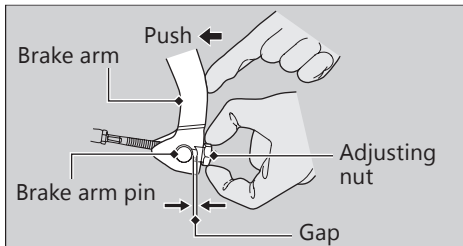

7. Apply the brake several times and check for free wheel rotation after the brake lever is released.

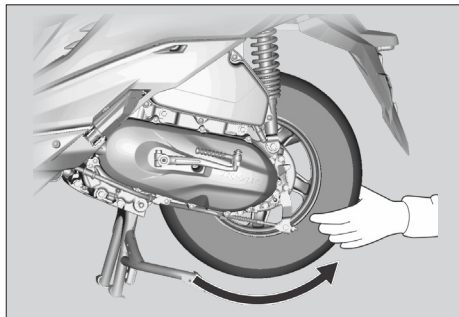

After adjustment, confirm the freeplay of the brake levers.


NOTICE

Do not turn the adjuster beyond its natural limits.

Make sure the brake arm, spring and fastener are in good condition.

Inspecting the Brake Shoe Wear

The front and rear brake are equipped with a brake wear indicator.

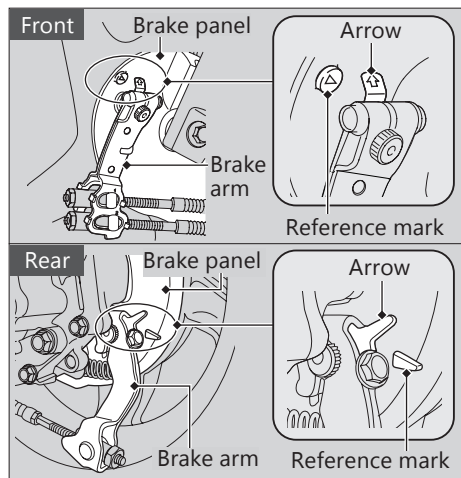

When the brake is applied, an arrow attached to the brake arm moves toward a reference mark on the brake panel. If the arrow aligns with the reference mark on full application of the brake, the brake shoes must be replaced. See your dealer for this service.


When brake service is necessary, see your dealer. Use only Honda Genuine Parts or their equivalent.

Checking the Throttle


With the engine off, check that the throttle rotates smoothly from fully closed to fully open in all steering positions and throttle freeplay is correct. If the throttle does not move smoothly or close automatically, or if the cable is damaged, have the vehicle inspected by your dealer.

Freeplay at the throttle grip flange:

2 to 6 mm (0.1 to 0.2 in).

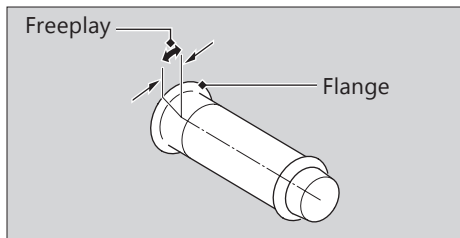

Cleaning the Crankcase Breather

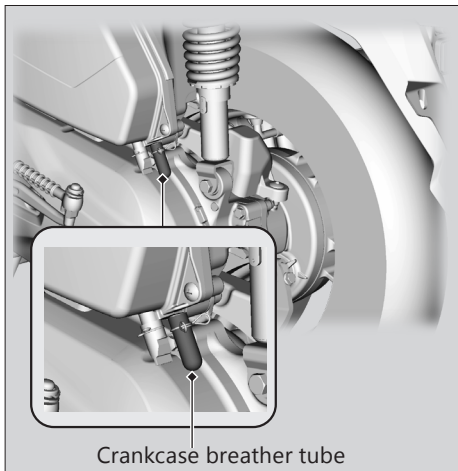


1. Place a suitable container to receive deposits.
2. Remove the crankcase breather tube and drain deposits.
3. Reinstall the crankcase breather tube.

Adjusting the Headlight Aim

You can adjust vertical aim of the headlight for proper alignment. To move the headlight, loosen the bolt.

Tighten the bolt after adjustment.

Obey local laws and regulations.

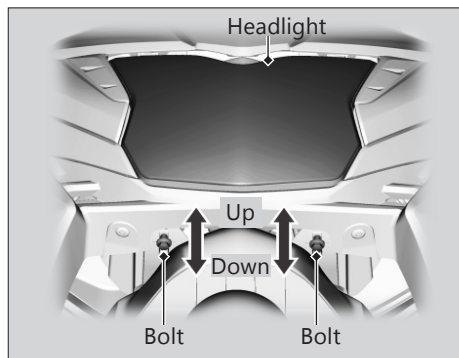

Adjusting the Rear Suspension

Adjusting the suspension requires a pin spanner, we recommend that you have your vehicle serviced by your dealer.

Spring Preload


You can adjust the spring preload by the adjuster to suit the load or the road surface. Use the pin spanner to turn the adjuster. Position 1 is for a decrease spring preload (soft), or turn the position 3 increase spring preload (hard). The standard position is 2.

NOTICE

Attempting to adjust directly from 1 to 3 or 3 to 1 may damage the shock absorber.

NOTICE

Do not turn the adjuster beyond its limits.

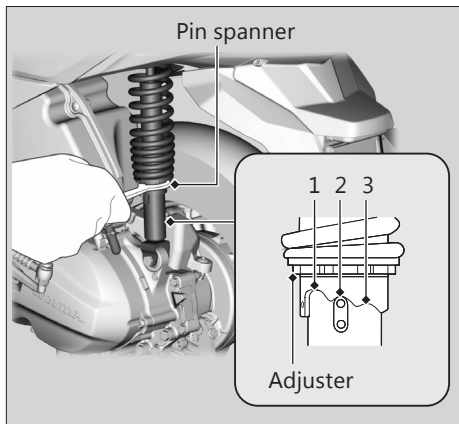

Troubleshooting

Engine Will Not Start P. 115

Warning Indicators On or Flashing P. 116

PGM-FI (Programmed Fuel Injection)

Malfunction Indicator Lamp (MIL) P. 116

Battery Charging Condition Indicator P. 117

Other Warning Indications P. 118

Fuel Gauge Failure Indication P. 118

When the Idling Stop System Does Not

Operate Properly P. 119

Tyre Puncture P. 121

Electrical Trouble..... P. 122

Battery Goes Dead..... P. 122

Burned-out Light Bulb..... P. 122

Blown Fuse..... P. 127

Unstable Engine Operation Occurs

Intermittently..... P. 128

Engine Will Not Start

Starter Motor Operates But Engine Does Not Start

Check the following items:

- Check the correct engine starting sequence. ➡P. 65
- Check that there is petrol in the fuel tank.
- Check if the PGM-FI malfunction indicator lamp (MIL) is on.
 - ▶ If the indicator lamp is on, contact your dealer as soon as possible.

Starter Motor Does Not Operate

Check the following items:

- Check the correct engine starting sequence. ➡P. 65
- Check for a blown fuse. ➡P. 127
- Check for a loose battery connection (➡P. 94) or battery terminal corrosion (➡P. 87).

- Check the condition of the battery. ➡P. 122
If the problem continues, have your vehicle inspected by your dealer.

If the electric starter does not work and you can start the engine with kickstarting.

WARNING

When you kickstart the engine, check if the lights, horn, and turn signals operate normally. If they do not work normally, do not ride the vehicle as the battery is not charged.

If the battery is not charged, lights, horn and turn signals may not operate properly.

As a result, other vehicles may not be able to see you or you may not be able to see other vehicles or road hazards, increasing the risk of a crash resulting in injury or death.

PGM-FI (Programmed Fuel Injection) Malfunction Indicator Lamp (MIL)

Reasons for the indicator lamp to come on or blink

- Comes on if there is a problem with the engine emissions control system.
- Blinks when engine misfiring is detected.

What to do when the indicator lamp comes on

Avoid high speeds and immediately get your vehicle inspected at a dealer.

NOTICE

If you drive with the malfunction indicator lamp on, the emissions control system and the engine could be damaged.

What to do when the indicator lamp blinks

Park the vehicle in a safe place with no flammable items and wait at least 10 minutes with the engine stopped until it cools.

NOTICE

If the malfunction indicator lamp blinks again when restarting the engine, drive to the nearest dealer at 50 km/h (31 mph) or less. Have your vehicle inspected.

Battery Charging Condition indicator

SCV110F/FB VIII ID

If the indicator comes, you may have a condition of low battery voltage or battery performance degradation. Have your vehicle inspected by your dealer.

The indicator may not come on:

- If the battery does not have enough voltage to drive the indicator system.
- If the vehicle was started with external power source.
- If the vehicle has an unspecified battery.




Other Warning Indications

Fuel Gauge Failure Indication

SCV110F/FB VIII ID

If the fuel system has an error, the fuel gauge indicators will be displayed as shown in the illustration.

If these occur, see your dealer as soon as possible.

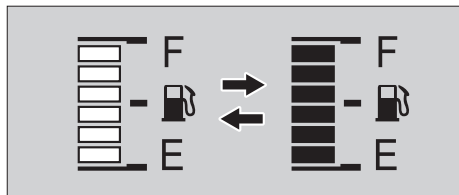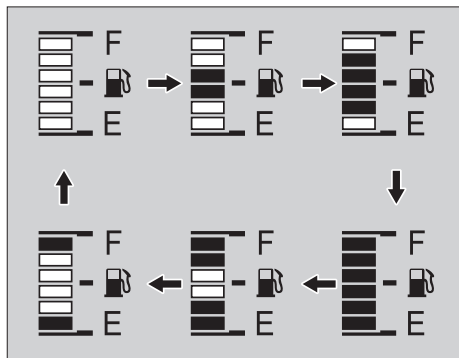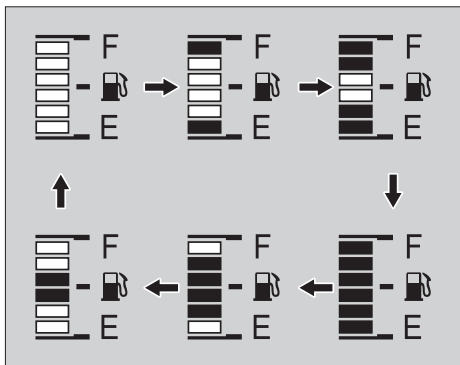

When the Idling Stop System Does Not Operate Properly

Idling Stop Indicator Does Not Come On

When the Idling Stop indicator does not come on, perform the followings.

If the Idling Stop switch is at  (Idling):

Press the Idling Stop switch to  (Idling Stop).

If you started the engine with the kickstarter:

If you started the engine with the kickstarter, the Idling Stop system may not operate. Restart the engine with the start button, referring to the starting procedure (➡P. 65) for standard engine starting.

If the engine is cold:

Warm up the engine.
The Idling Stop system does not operate when the engine is cold.

If you did not ride the vehicle after engine starts:

Ride the vehicle at speeds of over 10 km/h (6 mph). The Idling Stop system does not operate until you ride once.

If PGM-FI malfunction indicator lamp (MIL) lights:

When the PGM-FI malfunction indicator lamp (MIL) lights, the Idling Stop system does not operate for protection of the engine. See your dealer.

If the battery voltage is low:

Ride the vehicle awhile, then stop the engine and then restart the engine with start button, referring to the starting procedure (➡P. 65) for standard engine starting. The Idling Stop system may not operate if the battery voltage is low.
If this occurs frequently, contact your dealer.

Engine is Not Stopped by the Idling Stop System While the Idling Stop Indicator is On

When the engine is not stopped by the Idling Stop system while the Idling Stop indicator is on, perform the followings.

If the vehicle does not stop completely:

Stop the vehicle completely. The Idling Stop system operates if the speed is only at 0 km/h (0 mph).

If the throttle is not closed completely:

Close the throttle completely.

Engine Does Not Start Even If the Throttle is Opened

Engine does not start even if the throttle is opened, perform the followings.

If the Idling Stop switch is at (Idling):

While the engine is stopping by the Idling Stop system, if you press the Idling Stop switch to  (Idling), the Idling Stop system will be cancelled. Restart the engine with start button referring to the starting procedure (► P. 65) for standard engine starting.

If the Idling Stop indicator flashes (the Idling Stop switch is at  (Idling Stop) position), but engine does not start even if the throttle is opened, perform the followings.

Low (or dead) battery or battery lead is loose:

Check the battery and battery terminals. If the battery is weak, contact your dealer.

Tyre Puncture

Repairing a puncture or removing a wheel requires special tools and technical expertise. We recommend you have this type of service performed by your dealer.

After an emergency repair, always have the tyre inspected/replaced by your dealer.

Emergency Repair Using a Tyre Repair Kit

If your tyre has a minor puncture, you can make an emergency repair using a tubeless tyre repair kit.

Follow the instructions provided with the emergency tyre repair kit.

Riding your vehicle with a temporary tyre repair is very risky. Do not exceed 50 km/h (30 mph). Have the tyre replaced by your dealer as soon as possible.

WARNING

Riding your vehicle with a temporary tyre repair can be risky. If the temporary repair fails, you can crash and be seriously injured or killed.

If you must ride with a temporary tyre repair, ride slowly and carefully and do not exceed 50 km/h (30 mph) until the tyre is replaced.

Battery Goes Dead

Charge the battery using a motorcycle battery charger.

Remove the battery from the vehicle before charging.

Do not use an automobile-type battery charger, as these can overheat a motorcycle battery and cause permanent damage.

If the battery does not recover after recharging, contact your dealer.

NOTICE

Jump starting using an automobile battery can damage your vehicle's electrical system and is not recommended.

Burned-out Light Bulb

Follow the procedure below to replace a burned-out light bulb.

Turn the ignition switch to the OFF or LOCK position.

Allow the bulb to cool before replacing it.


Do not use bulbs other than those specified.

Check the replacement bulb for correct operation before riding.

For the light bulb wattage, see "Specifications." ➤ P. 143

I Headlight Bulb

SCV110F/FB VII ID type

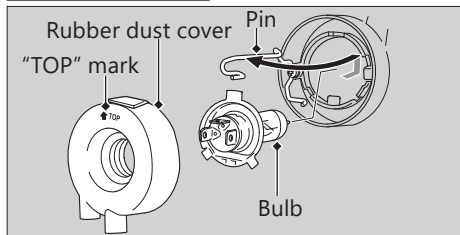


1. Remove the front centre cover. ► P. 97
2. Remove the rubber dust cover.
3. Press the pin down and pull out the bulb without turning it.
4. Install a new bulb and parts in the reverse order of removal.
 - Install the dust cover with its "TOP" mark facing up.

Do not touch the glass surface with your fingers. If you touch the bulb with your bare hands, clean it with a cloth moistened with alcohol.


I Headlight

SCV110F/FB VIII ID type

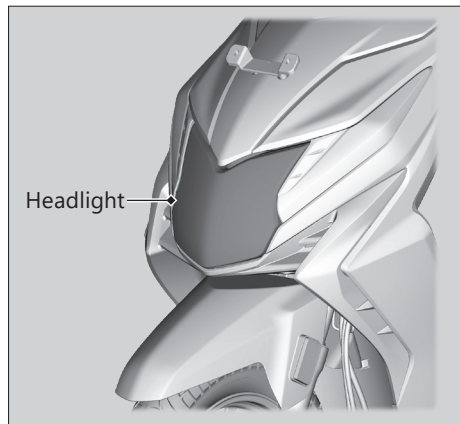


The headlight uses several LEDs. If there is an LED which is not turned on, see your dealer for servicing.

| Position Light

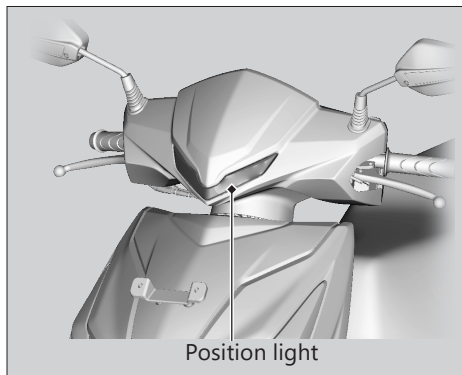


The position light uses several LEDs. If there is an LED which is not turned on, see your dealer for servicing.

| Brakelight/Taillight Bulb

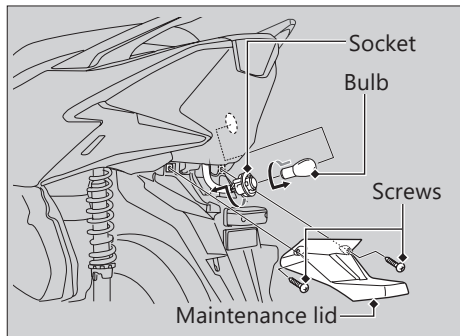


1. Remove the screws and maintenance lid.
2. Insert the hand from rear side to reach behind the brakelight/taillight assembly.
3. Turn the socket counterclockwise and pull it out.
4. Slightly press the bulb and turn it counterclockwise.
5. Install a new bulb and parts in the reverse order of removal.

License Plate Light Bulb

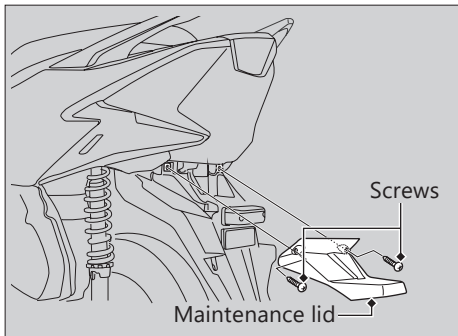


1. Remove the screws and maintenance lid.

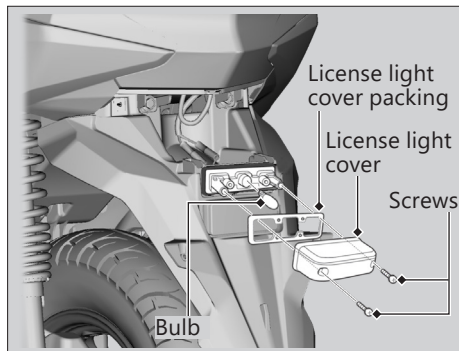


2. Remove the screws, license light cover and license light cover packing.
3. Pull out the bulb without turning it.
4. Install a new bulb and parts in reverse order of removal.

Front Turn Signal Bulb

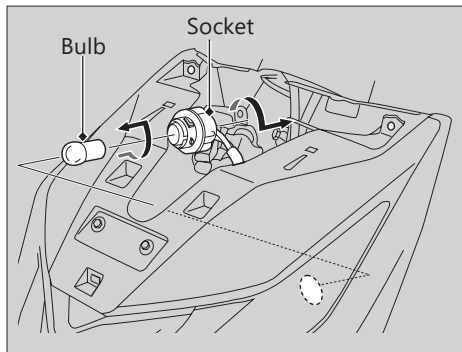

1. Remove the front centre cover. ► P. 97
2. Turn the socket counterclockwise and pull it out.
3. Slightly press the bulb and turn it counterclockwise.
4. Install a new bulb and parts in the reverse order of removal.
► Use only the amber bulb

Rear Turn Signal Bulb

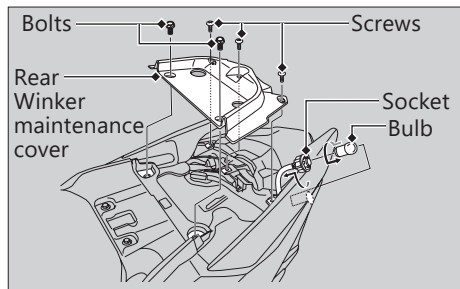


1. Remove the screws, bolts and rear winker maintenance cover.
2. Insert the hand from rear side to reach behind the brakelight/taillight assembly.
3. Turn the socket counterclockwise and pull it out.
4. Slightly press the bulb and turn it counterclockwise.
5. Install a new bulb and parts in the reverse order of removal
► Use only the amber bulb

Blown Fuse

Before handling fuses, see "Inspecting and Replacing Fuses." ► P. 88

I Main Fuse & FI Fuse

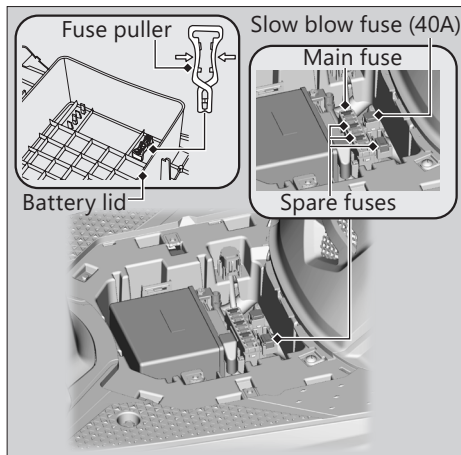

1. Remove the battery lid. ► P. 95
2. Pull the fuses out one by one with the fuse puller and check for a blown fuse. Always replace a blown fuse with a spare fuse of the same rating.
► Fuse puller is provided in the battery lid.
3. Reinstall parts in the reverse order of removal.

NOTICE

If a fuse fails repeatedly, you likely have an electrical problem. Have your vehicle inspected by your dealer.

Unstable Engine Operation Occurs Intermittently

If the fuel pump filter is clogged, unstable engine operation will occur intermittently while riding.

Even if this symptom occurs, you can continue to ride your vehicle.

If unstable engine operation occurs even if sufficient fuel is available, have your vehicle inspected by your dealer as soon as possible.

Information

Service Diagnostic Recorders	P. 130
Keys	P. 130
Ignition Key.....	P. 130
Instruments, Controls, &	
Other Features	P. 131
Caring for Your Vehicle	P. 133
Storing Your Vehicle	P. 136
Transporting Your Vehicle	P. 136
You & the Environment	P. 137
Serial Numbers	P. 138
Fuels Containing Alcohol	P. 139
Catalytic Converters	P. 140

Service Diagnostic Recorders

Your vehicle is equipped with service-related devices that record information about powertrain performance and riding conditions. The data can be used to help technicians diagnose, repair and maintain the vehicle. This data may not be accessed by anyone else except as legally required or with the permission of the vehicle owner. However this data may be accessed by Honda, its authorised dealers and authorised repairers, employees, representatives and contractors only for the purpose of the technical diagnosis, research and development of the vehicle.

Keys


Ignition key

Be sure to record the key number provided with the key number plate. Store the spare key and key number in a safe location.

To make a duplicate, take the spare key or the key number to your dealer.

If you lose all ignition keys and the key number, the ignition switch and key shutter set will need to be replaced.

A metal key holder may cause damage to the area surrounding the ignition switch.

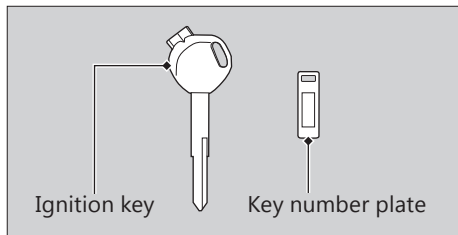

Instruments, Controls, & Other Features

Ignition Switch

Leaving the ignition switch in the ON position with the engine stopped will drain the battery. Do not turn the key while riding.

Odometer

SCV110F/FB VII ID

The odometer resets to 0 when the odometer mileage exceeds 99,999.9.

SCV110F/FB VIII ID

The display remains at 999,999 when the odometer exceeds 999,999.

Tripmeter

SCV110F/FB VIII ID

Each tripmeter resets to 0.0 when the trip mileage exceeds 9,999.9. Also fuel consumption is reset at the same time.

Document Holder

Document holder is available in the centre compartment. ➡ P. 76


Automatic Brightness Control

SCV110F/FB VIII ID

The backlight brightness and background of the meter will be controlled automatically when "AUTO" is selected on the BRIGHTNESS or the THEME setting  P. 42  P. 43.

Ambient brightness is detected by the photosensor.

Do not damage or cover the photosensor. Otherwise, the automatic brightness control may not work properly.

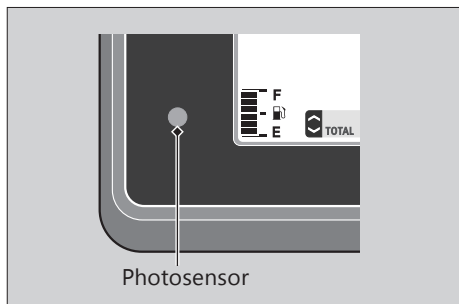

Caring for Your Vehicle

Frequent cleaning and polishing is important to ensure the life of your Honda. A clean vehicle makes it easier to spot potential problems. In particular, seawater and salts used to prevent ice on roads promote the formation of corrosion. Also, mud and dust may accelerate front suspension wear and cause oil leaks. Always wash your vehicle thoroughly after riding on coastal, treated, muddy or dusty roads.

Washing

Allow the engine, muffler, brakes, and other high-temperature parts to cool before washing.

1. Rinse your vehicle thoroughly using a low pressure garden hose to remove loose dirt.
2. If necessary, use a sponge or a soft towel with mild cleaner to remove road grime.
 - Clean the headlight lens, panels, and other plastic components with extra care

to avoid scratching them. Avoid directing water into the air cleaner, muffler, and electrical parts.

3. Thoroughly rinse your vehicle with plenty of clean water and dry with a soft, clean cloth.
4. After the vehicle dries, lubricate any moving parts.
 - Make sure that no lubricant spills onto the brakes or tyres. Brake discs, pads, drum or shoes contaminated with oil will suffer greatly reduced braking effectiveness and can lead to a crash.
5. Apply a coat of wax to prevent corrosion.
 - Avoid products that contain harsh detergents or chemical solvents. These can damage the metal, paint, and plastic on your vehicle. Keep the wax clear of the tyres and brakes.
 - If your vehicle has any matte painted parts, do not apply a coat of wax to the matte painted surface.

Washing Precautions

Follow these guidelines when washing:

- Do not use high-pressure washers:
 - ▶ High-pressure water cleaners can damage moving parts and electrical parts, rendering them inoperable.
 - ▶ Water in the air intake can be drawn into the throttle body and/or enter the air cleaner.
- Do not direct water at the muffler:
 - ▶ Water in the muffler can prevent starting and causes rust in the muffler.
- Dry the brakes:
 - ▶ Water adversely affects braking effectiveness. After washing, apply the brakes intermittently at low speed to help dry them.
- Do not direct water under the seat:
 - ▶ Water in the under seat compartment can damage your documents and other belongings.

- Do not direct water at the air cleaner:
 - ▶ Water in the air cleaner can prevent the engine from starting.
- Do not direct water near the headlight:
 - ▶ The headlight's inside lens may fog temporarily after washing or while riding in rain. This does not impact the headlight function.

SCV110F/FB VII ID type

- ▶ Any condensation inside the headlight should dissipate after a few minutes of running the engine with the headlight(s) on.
However, if you see a large amount of water or ice accumulated inside the lens(es), have your vehicle inspected by your dealer.
- Do not use wax or polishing compounds on matte painted surfaces:
 - ▶ Use a soft cloth or sponge, plenty of water, and a mild detergent to clean matte painted surfaces. Dry with a soft clean cloth.

Aluminium Components

Aluminium will corrode from contact with dirt, mud, or road salt. Clean aluminium parts regularly and follow these guidelines to avoid scratches:

- Do not use stiff brushes, steel wool, or cleaners containing abrasives.
- Avoid riding over or scraping against curbs.

Panels

Follow these guidelines to prevent scratches and blemishes:

- Wash gently using a soft sponge and plenty of water.
- To remove stubborn stains, use diluted detergent and rinse thoroughly with plenty of water.
- Avoid getting petrol or detergents on the instruments, panels, or headlight.

Exhaust Pipe and Muffler

If the exhaust pipe and muffler are painted, do not use a commercially available abrasive kitchen cleaning compound. Use a neutral detergent to clean the painted surface on the exhaust pipe and muffler. If you are not sure if your exhaust pipe and muffler are painted, contact your dealer.

Storing Your Vehicle

If you store your vehicle outdoors, you should consider using a full-body cover.

If you won't be riding for an extended period, follow these guidelines:

- Wash your vehicle and wax all painted surfaces (except matte painted surfaces). Coat chrome pieces with rust-inhibiting oil.
- Place your vehicle on its centre stand and position a block so that both tyres are off the ground.
- After rain, remove the body cover and allow the vehicle to dry.
- Remove the battery (➤ P. 94) to prevent discharge. Fully charge the battery and then place it in a shaded, well-ventilated area.
 - ▶ If you leave the battery in place, disconnect the negative $\ominus$ terminal to prevent discharge.

After removing your vehicle from storage, inspect all maintenance items required by the Maintenance Schedule.

Transporting Your Vehicle

If your vehicle needs to be transported, it should be carried on a motorcycle trailer or a flatbed truck or trailer that has a loading ramp or lifting platform and motorcycle tie-down straps. Never try to tow your vehicle with a wheel or wheels on the ground.

NOTICE

Towing your vehicle with a wheel or wheels on the ground can cause serious damage to the transmission.

You & the Environment

Owning and riding a vehicle can be enjoyable, but you must do your part to protect the environment.

Choose Sensible Cleaners

Use a biodegradable detergent when you wash your vehicle. Avoid aerosol spray cleaners that contain chlorofluorocarbons (CFCs) which damage the atmosphere's protective ozone layer.



Recycle Wastes

Put oil and other toxic wastes in approved containers and take them to a recycling centre. Call your local or state office of public works or environmental services to find a recycling centre in your area and to get instructions on how to dispose of non-recyclable wastes. Do not place used engine oil in the trash or pour it

down a drain or on the ground. Used oil, petrol, and cleaning solvents contain poisons that can hurt refuse workers and contaminate drinking water, lakes, rivers, and oceans.

Serial Numbers

The frame and engine serial numbers uniquely identify your vehicle and are required in order to register your vehicle. They may also be required when ordering replacement parts. You should record these numbers and keep them in a safe place.

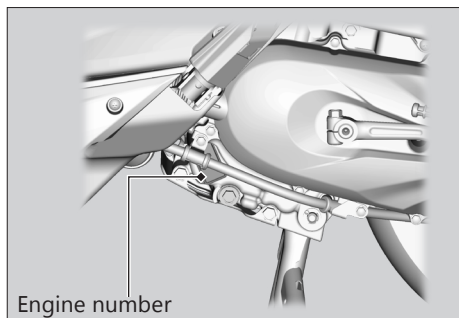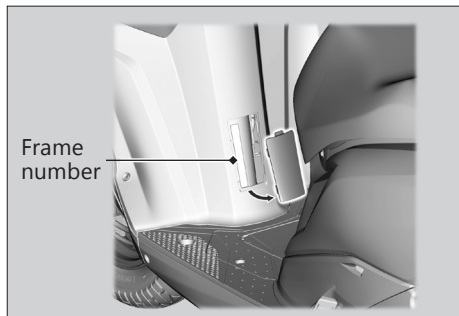

Fuels Containing Alcohol

Some conventional fuels blended with alcohol are available in some locales to help reduce emissions to meet clean air standards. If you plan to use blended fuel, check that it is unleaded and meets the minimum octane rating requirement.

The following fuel blends can be used in your vehicle:

- Ethanol (ethyl alcohol) up to 20% by volume.
 - ▶ Petrol containing ethanol may be marketed under the name Gasohol.

The use of petrol containing more than 20% ethanol may:

- Damage the painting of the fuel tank.
- Damage the rubber tubes of the fuel line.
- Cause corrosion of the fuel tank.
- Cause poor drivability.

NOTICE

Use of blended fuels containing higher than approved percentages can damage metal, rubber, plastic parts of your fuel system.

If you notice any undesirable operating symptoms or performance problems, try a different brand of petrol.

Catalytic Converters

This vehicle is equipped with a three-way catalytic converter. The catalytic converter contains precious metals that serve as catalysts in high temperature chemical reactions that convert hydrocarbons (HC), carbon monoxide (CO), and oxides of nitrogen (NOx) in the exhaust gases into safe compounds.

A defective catalytic converter contributes to air pollution and can impair your engine's performance. A replacement unit must be an original Honda part or equivalent.

Follow these guidelines to protect your vehicle's catalytic converter:

- Always use unleaded petrol. Leaded petrol will damage the catalytic converter.
- Keep the engine in good running condition.
- Have your vehicle serviced if your engine is misfiring, backfiring, stalling, or otherwise not running properly, stop riding and turn off the engine.

Specifications

■ Main Components

Overall length	1808 mm (71.2 in)	
Overall width	677 mm (26.7 in)	
Overall height	1151 mm (45.3 in)	
Wheelbase	1260 mm (49.6 in)	
Minimum ground clearance	160 mm (6.3 in)	
Caster angle	27° 30'	
Trail	72 mm (2.8 in)	
Curb weight	VII ID	106 kg (234 lbs)
	VIII ID	105 kg (231 lbs)
Maximum weight capacity ^{*1}	172 kg (379 lb)	
Maximum luggage weight ^{*2}	Centre compartment	10 kg (22 lb)
	Front inner rack	1 kg (2 lb)
	Luggage hook	1.5 kg (3 lb)
Passenger capacity	Rider and 1 passenger	
Minimum turning radius	1.96 m (6.43 ft)	

*1 Including rider, passenger, all luggage, and accessories

*2 Includes the weight of the luggage and added accessories.

Displacement	109.51 cm ³ (6.680 cu-in)
Bore x stroke	47.000 x 63.121 mm (1.8504 x 2.4851 in)
Compression ratio	10.0:1
Fuel	Unleaded petrol Recommended: 91 RON or higher
Fuel containing alcohol	ETHANOL up to 20% by volume
Tank capacity	5.3 litres (1.40 US gal, 1.17 Imp gal)
Battery	YTZ6V/ ATZ6/ ETZ6 12 V - 5 Ah (10 HR)
Primary reduction	A/T 2.55:1 to 0.80:1
Final reduction	10.208

Specifications

■ Service Data

Tyre size	Front	90/90-12 54J
	Rear	90/100-10 53J
Tyre type		Bias-ply, Tubeless
Recommended tyres	Front	VII ID NYLOGRIP ZAPPER-FG (MRF) ZOOM-Hi (CEAT) M-6000-X (MAXXIS)
		VIII ID NYLOGRIP ZAPPER-FG (MRF) ZOOM-Hi (CEAT)
		M-6000-X (MAXXIS)
	Rear	VII ID NYLOGRIP ZAPPER (MRF) ZOOM-D H/LR (CEAT)
		VIII ID NYLOGRIP ZAPPER (MRF) ZOOM-D H/LR (CEAT)
Front	150 kPa (1.50 kgf/cm ² , 22 psi)	
Tyre air pressure	Rear	(Driver only) 200 kPa (2.00 kgf/cm ² , 29 psi) (Driver and passenger) 250 kPa (2.50 kgf/cm ² , 36 psi)
Spark plug		MR8E-9 (NGK) UR5DE0 (BOSCH)
Spark plug gap		0.8 to 0.9 mm (0.031 to 0.035 in)
Idle speed		1600 ± 100 rpm

Recommended engine oil		Honda 4-stroke motorcycle oil API Service Classification SJ or higher, excluding oils marked as "Energy Conserving" or "Resource Conserving," SAE 5W-30, JASO T 903 standard MB
Engine oil capacity	After draining	0.55 litres (0.60 US qt, 0.48 Imp qt)
	After draining & cleaning strainer screen	0.60 litres (0.65 US qt, 0.53 Imp qt)
	After disassembly	0.75 litres (0.80 US qt, 0.66 Imp qt)
Transmission Oil capacity	After draining	0.09 litres (0.10 US qt, 0.08 Imp qt)
	After disassembly	0.10 litres (0.11 US qt, 0.09 Imp qt)

■ Bulbs

Headlight	VII ID	12 V - 35/35 W
	VIII ID	LED
Brakelight/Taillight		12 V- 21/5 W
License plate light		12 V- 5 W
Front turn signal		12 V- 10 W x 2
Rear turn signal		12 V- 10 W x 2
Position light		LED

■ Fuses

Main fuse	20 A
Other fuse	7.5 A, 40 A

■ Torque Specifications

Engine oil plug	20 N·m (2.0 kgf·m, 15 lbf·ft)
Engine oil drain bolt	24 N·m (2.4 kgf·m, 18 lbf·ft)

Warranty Policy (Valid in India only)

Honda Motorcycle & Scooter India (Pvt.) Ltd. (HMSI) gives the following warranty in respect of vehicle "**DIO**" manufactured by them.

Proper care and precaution has been taken to ensure the best quality in respect of the material and workmanship in manufacturing of every vehicle.

HMSI would repair or replace at its discretion, those part(s) found to have manufacturing defects during examination. This repair or replacement of part(s) would be done free of charge at their authorised workshop, within a warranty period of 36 months from the date of sale or until the vehicle has covered 36000kms, whichever comes first.

Warranty claims in respect of proprietary parts like tyres and battery are warranted by their respective manufacturers and should be claimed on them directly by customer.

NOTE: Battery Warranty is applicable from 21 months from Date Of Charging at manufacturer or 18 Months from the Date Of Sale or 20000 Kms whichever is earlier.

In all such cases the decision of the respective manufacturer will be final and binding.

HMSI shall not be liable in any manner to replace them though their dealers will give full assistance in preferring such claims on their manufacturers.

HMSI undertake no liability in the matter of consequential loss or damage caused due to the failure of the parts. Delay, if any, at the repairing workshop in carrying out repair to vehicle shall not be a ground for extending the warranty period nor shall it give any right to the customer for claiming any compensation for damages.

HMSI reserves the right either to repair or replace the defective part.

Where a defective part can be replaced by part/s of alternative brand/s, which are normally used by HMSI in the course of manufacturing, HMSI reserves the right to carry out the replacement by a part or parts of any such alternative brands.

This warranty and any claim arising there from is subject to Gurugram jurisdiction only.

No claim for exchange or repair can be considered unless the customer:

- a. Ensures that immediately upon discovery of the defect, he approaches any nearest authorised dealer of HMSI with the concerned vehicle and enables him to remove and dispatch the part/parts attributing to manufacturing defect to the company.
- b. It must be expressly understood that claims forwarded directly to us by the owner/customer will not be entertained at all and such defective part/parts thus forwarded by them will lie at our factory at their own risk, and this warranty shall not be enforceable.

Further this warranty is not applicable to:

1. Any vehicle on which any free and paid services has not been carried out, as per schedule given in Owner's Manual.
2. Normal maintenance operations like valve adjustment, cleaning of fuel system or such other adjustments.
3. HMSI does not warrant normal wear and tear items like Clutch Weight, Clutch Disc, Brake shoe, Brake Pads, Brake Disc, Drive belt, Drive Chain, Drive Chain Sprocket, Wheel Rim (in case of misalignment and bent), Bushes, Fasteners, Shims, Washers and Electrical items like Bulbs, Fuses, Rubber and Plastic Components like Grommets, O-Rings, Bellows, Packings, Gaskets, Oil Seals and Consumables like Fuel Filter, Air Cleaner Element, Engine Oil, Grease, Suspension Oil, and other items as specified by HMSI.
4. Fasteners and clips which need replacement during maintenance/service will not be covered under warranty.

Warranty Policy (Valid in India Only)

5. If there is any damage to the painted surface due to industrial pollution or other extraneous factors.
6. Any damage resulting from unavoidable natural disaster i.e fire, collision, earthquake, flood etc.
7. Any damage caused by exposure of the product to soot and smoke, chemical agents, bird-droppings, sea water, sea breeze, or other environmental phenomenon.
8. If there is any damage caused due to usage of improper oil/grease, non genuine parts.
9. For two-wheelers, which have been used for any commercial purposes as taxi etc.
10. For maintenance repairs required due to misuse while driving or due to adulteration of oil, petrol or due to bad road conditions.
11. Recommended fuel quality not used.
12. Parts of the vehicle that have been subjected to misuse, accident, negligent treatment or which have been used in conjunction with parts and an equipment not manufactured or recommended for use by HMSI if in the sole judgment of HMSI, such use prematurely affects the performance and reliability of the vehicle.
13. Parts of the vehicle that have been altered or modified or replaced in unauthorised manner, and which in the sole judgment of HMSI affect its performance and reliability.
14. The vehicle that has not been serviced by HMSI authorised dealer as per the service schedule or which have not been operated or maintained in accordance with instructions mentioned in the Owner's Manual.
15. The vehicles used for any competition or race and/or for attempting to set up any kind of record HMSI reserves the right to make any changes in design or to add any improvement on the vehicle at any time without incurring any obligations to install the same on a vehicle previously supplied and sold. Also the conditions of this warranty are subject to alteration without any notice.

This warranty is entirely written warranty given by HMSI and no other person, including the dealer or its or his agent or employee is authorised to extend or enlarge this warranty.

This warranty is given in lieu of and excludes every condition or warranty whether statutory or otherwise not herein expressly set out.

EMISSION WARRANTY

Subject to other terms of the warranty policy and other conditions and obligations laid down hereunder, the manufacturer certifies that the components liable to affect the emission of the gaseous pollutants in the vehicle in normal use despite the use to which it may be subjected, comply with provisions of rule 115(2) of the Central Motor Vehicle Rules, 1989 and further warrants that if on examination by a service center duly authorized by the manufacturer, the vehicle is discovered to be failing to meet the emission standard as specified in the said rule,

the authorized service center shall take such corrective measures as may be necessary and shall at its sole discretion replace free of charge such components of emission control system as are specified in schedule.

A. Conditions

1. This warranty will be in addition to and run parallel to the product warranty given by the manufacturer and will apply to components as mentioned later. This warranty is applicable in Delhi, Mumbai, Kolkata and Chennai with effective from 1st July 2001. Other places when included will be covered under warranty accordingly.
2. The period of the vehicle's emission warranty will be determined starting from the date of the vehicle sale. The period of time and kilometers that are covered under the provisions of warranty may vary but should not be less than the minimum warranty period based on the vehicle category.

For a two-wheeler the emission warranty period is 30,000 kms or 3 years whichever is earlier.

Warranty Policy (Valid in India Only)

3. Warranty claim for the components under Emission warranty will be admitted, for a prima facie examination, in the event of failure of the vehicle to meet the emission standard as specified in sub-rule (2) of Rule No 115 of the Central Motor vehicle Rules.
4. The warranty claim will be accepted only after the examinations carried out by Authorized Service Centers leads to a firm conclusion that none of the original settings have been tampered with and that the components has/have a manufacturing defect, and/or, that the vehicle is unable to meet the in-use emission standard, in spite of the vehicle being maintained and used in accordance with the instructions in the owner's manual.
5. The methods of examination to determine the warrantable condition of the components will be at the sole discretion of manufacturers and or their Authorized service centers and results of such examination will be final and binding. If, on examination, a warrantable condition is not established, the manufacturers will have to charge all, or part, of the cost of such examination.
6. In case of a vehicle in which the components covered under Emission warranty, the manufacturer will replace, at Authorized centers free of charge, the components which are covered, but the consumables as mentioned in Owner's Manual shall be charged as per actuals.
7. In case of a vehicle in which the components covered under Emission warranty or the associated parts are not independently replaceable on account of their being integral parts of a complete assembly, the manufacturer will have the sole discretion to replace either the entire assembly or by using some of the parts of the system through suitable repairs or modifications.

8. Any consequential repairs or replacement of parts which may be found necessary to establish compliance to in-use emission standards, in addition to replacement of the parts covered under emission warranty, will not be made free of cost unless such parts are also found to be in a warrantable condition within the scope and limit of the product warranty. The consumables shall be charged as per actual during such repairs or replacement of parts.
9. All the parts removed for replacement under warranty will be the property of the manufacturer.
10. The manufacturer will not be responsible for the cost of transportation of the vehicle to the nearest Authorized Service center or any loss due to non-availability of the vehicle during the period of lodging of a warranty claim and examination by the manufacturer and repairs.
11. The manufacturer will not be responsible for any penalties that may be charged by statutory authorities on account of failure to comply with the in use emission standards.
12. Emission warranty will be applicable irrespective of the change of ownership of the vehicle provided all the conditions as laid down in this document are met from the date of original sale of the vehicle.
13. The emission warranty will be applicable only if:
 - a. Observes all the important instructions and any other precautions listed in the Owner's Manual for use of the vehicle.
 - b. Under all circumstances uses lubricants and fuel as recommended by manufacturer.
 - c. Regularly obtains and carries out maintenance in accordance with the manufacturers guidelines and enters the details in the Logbook.
 - d. Immediately approaches the nearest authorized service center upon discovery of failure to comply with the

in use emission standards in spite of having maintained and used the vehicle in accordance with the instructions in the Owner's Manual and having carried out such repairs and adjustments as may be required with a view to establish such compliance.

- e. Produces the 'Pollution Under Control' certificate valid for the period immediately preceding the test during which the failure is discovered, the test having been carried out either for obtaining a new certificate, or pursuant upon being directed by an officer as referred to in sub-rule(2) of Rule 116 of the Central Motor Vehicle Rules.
- f. Produces receipts covering maintenance of the vehicle as specified in the Owner's Manual from the date of original purchase of the vehicle.

- g. Produces valid certificate of insurance and RTO registration.

14. Conditions under which warranty is not applicable:

A valid 'Pollution Under Control' certificate as described in customer obligation D(6) above is not produced.

A vehicle which is not serviced by Authorized service center as per the service schedule described in the maintenance chart given in the Owner's Manual.

A vehicle, which has been subjected to abnormal use, abuse, neglect and improper maintenance or has met with an accident. Use of replacement parts not specified and approved by the manufacturer.

A vehicle, or parts thereof, which has been altered, tampered with or modified or replaced in an unauthorized manner.

A vehicle on which the odometer is not functioning or the odometer has been changed/tampered with so that the actual mileage cannot be readily determined.

A vehicle which has been used for competitions, races, rallies or for the purpose of establishing records.

Examination by the manufacturers or his Authorized Service Centers of the vehicle shows that any of the conditions stipulated in the Owner's Manual with regard to use and maintenance have been violated.

A vehicle, which has been run on, adulterated fuel, leaded fuel or lubricant or fuel/lubricants other than those specified by the manufacturer in the Owner's Manual with regard to use and maintenance have been violated.

SCOPE AND LIMITS

1. This emission warranty is in addition to product warranty and shall run parallel to the product warranty for the vehicle as per the scope and limit described in the Owner's Manual and all conditions described there in will apply in addition to those exclusively stipulated in this warranty.

2. The emission warranty covers only compliance with the emission standard as specified in the sub rule (2) of rule 115 of CMVR. It does not cover any other performance of these parts or routine test and consequent maintenance or adjustments to establish compliance to the in use emission standard as applicable to the state, in which the vehicle is registered and is in use.

The parts, which are covered under emission warranty, are throttle body, fuel injector, ignition coil, muffler etc.

NOTE: The emission warranty is applicable only when a customer enters into emission warranty contract.

A

Accessories.....	12
Average Speed.....	30

B

Basic Operation Flow.....	14
Battery.....	85, 94
Battery Charging Condition indicator	117
Brakes	
Brake Lever Freeplay	104
Shoe Wear.....	109

Braking.....	9
--------------	---

Bulb

Brake/Tail Light	124
Front Turn Signal	126
Headlight.....	123
License Plate Light.....	125
Position Light.....	124
Rear Turn Signal.....	126

C

Caring for Your Vehicle.....	133
Catalytic Converter	140
Clock	19

Compartment

Document Holder.....	77, 131
Tool Kit.....	77

Crankcase Breather.....	111
-------------------------	-----

E

Electrical Trouble.....	122
-------------------------	-----

Engine

Number.....	138
Oil	88, 100
Starting	65

Environment.....	137
------------------	-----

F

Frame Number.....	138
-------------------	-----

Fuel

Gauge.....	23,54
Recommended	70
Remaining	19
Tank Capacity.....	70

Fuels Containing Alcohol	139
--------------------------------	-----

Fuses.....	88, 127
------------	---------

G

Gasohol139

H

Headlight Aim112

Headlight Dimmer Switch.....57

Helmet Holders75

High Beam Indicator20

Horn Button57

I

Ignition Key130

Ignition Switch58, 131

Indicators.....55

Instruments18

K

Keys.....130

L

Load Limits13

Loading Guidelines13

M

Maintenance

Fundamentals.....84

Importance80

Safety.....80

Schedule81

Maximum Weight Limit.....13, 141

Modifications.....12

O

Odometer54, 131

P

Parking10

Parts Location16

Petrol11, 70, 141

PGM-FI (Programmed Fuel Injection)

Malfunction Indicator Lamp (MIL).....55, 116

Protective Apparel.....8

R**Recommended**

Fuel.....	70
Oil.....	88, 142

Refueling.....	70
----------------	----

Removal

Battery.....	94
Battery Lid.....	95
Centre Cover.....	96
Front Centre Cover.....	97

Riding Precautions.....	9
-------------------------	---

S

Safety Precautions.....	8
-------------------------	---

Seat.....	74
-----------	----

Serial Numbers.....	138
---------------------	-----

Service Diagnostic recorders.....	130
-----------------------------------	-----

Shutter.....	60
--------------	----

Spark Plug.....	98
-----------------	----

Specifications.....	141
---------------------	-----

Speedometer.....	20
------------------	----

Start Button.....	58
-------------------	----

Starting the Engine.....	65
--------------------------	----

Starting the Vehicle.....	69
---------------------------	----

Steering Lock.....	59
--------------------	----

Storage Equipment.....	74
------------------------	----

Storing Your Vehicle.....	136
---------------------------	-----

Switches.....	57
---------------	----

T

Throttle.....	110
---------------	-----

Tools.....	93
------------	----

Transporting Your Vehicle.....	136
--------------------------------	-----

Tripmeter.....	28
----------------	----

Troubleshooting.....	114
----------------------	-----

Turn signal indicators.....	55, 56
-----------------------------	--------

Tyres

Air Pressure.....	90, 141
-------------------	---------

Puncture.....	121
---------------	-----

Replacing.....	90, 141
----------------	---------

W

Warning Indicator On.....	20, 53
---------------------------	--------

Warranty Policy.....	144
----------------------	-----

Washing Your Vehicle.....	133
---------------------------	-----

HONDA

Registered office:

Honda Motorcycle & Scooter India Pvt. Ltd.

Plot No. 1, Sector - 03, IMT Manesar, Distt. Gurugram, (Haryana) – 122050

customercare@honda.hmsi.in, www.honda2wheelersindia.com

32K0YA40
00X32-K0Y-A400