

TEST REPORT**IEC/AS/NZS 62368-1****Audio/video, information and communication technology equipment****Part 1: Safety requirements****Report Number**..... :

Date of issue..... : May 07, 2021

Total number of pages..... : 71

Applicant's name..... : Nebra Ltd

Address..... : Unit 4 Bells Yew Green Business Court, Bells Yew Green, Tunbridge Wells TN3 9BJ

Test specification:Standard : IEC 62368-1:2014 (Second Edition)
AS/NZS 62368.1:2018

Test procedure..... : Test Report

Non-standard test method : N/A

Test Report Form No...... : IEC62368_1B

Test Report Form(s) Originator : UL(US)

Master TRF : 2014-03

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval by Jianyan Testing Group Shenzhen Co., Ltd.

The authenticity of this Test Report and its contents can be verified by Jianyan Testing Group Shenzhen Co., Ltd., responsible for this Test Report.

Test item description..... : Nebra Smart Indoor LoRa Gateway, Nebra HNT Indoor Hotspot Miner

Trade Mark : N/A

Manufacturer..... : Nebra Ltd

Address..... : Unit 4 Bells Yew Green Business Court, Bells Yew Green, Tunbridge Wells TN3 9BJ

Model/Type reference..... : HNTIN-470-G, HNTIN-868-G, HNTIN-915-G, HNTIN-433-G, HNTIN-470, HNTIN-868, HNTIN-915, HNTIN-433

Ratings..... : For adapter output: 12.0V---, 1.5A

Testing procedure and testing location:

Testing Laboratory..... : Jianyan Testing Group Shenzhen Co., Ltd.

Testing location/ address..... : No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Prepare by (name + signature) :

Reviewed by (name + signature) .. :

Approved by (name + signature) ... :

Summary of testing:**Tests performed (name of test and test clause):**

The submitted samples were tested and found to comply with the requirements of:

- IEC 62368-1:2014 (Second Edition)
- AS/NZS 62368.1: 2018.

Testing location:

Jianyan Testing Group Shenzhen Co., Ltd.
No.101, Building 8, Innovation Wisdom Port, No.155
Hongtian Road, Huangpu Community, Xinqiao Street,
Bao'an District, Shenzhen, Guangdong, People's
Republic of China.

Summary of compliance with National Differences:

List of countries addressed: National Differences and Group Differences as per CB bulletin.

The product fulfils the requirements of AS/NZS 62368.1:2018.

Copy of marking plate:

The artwork below may be only a draft. Until approval by National Certification Bodies and they shall not be affixed to products.



Representative marking for all models. Marking plates of other models are identical except model name.

Test item particulars.....	
Classification of use by	<input checked="" type="checkbox"/> Ordinary person <input checked="" type="checkbox"/> Instructed person <input checked="" type="checkbox"/> Skilled person <input checked="" type="checkbox"/> Children likely to be present
Supply Connection.....	<input type="checkbox"/> AC Mains <input type="checkbox"/> DC Mains <input checked="" type="checkbox"/> External Circuit - not Mains connected - <input checked="" type="checkbox"/> ES1 <input type="checkbox"/> ES2 <input type="checkbox"/> ES3
Supply % Tolerance	<input type="checkbox"/> +10%/-10% <input type="checkbox"/> +20%/-15% <input type="checkbox"/> + ____ % / - ____ % <input checked="" type="checkbox"/> None
Supply Connection – Type	<input type="checkbox"/> pluggable equipment type A - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> direct plug-in <input type="checkbox"/> mating connector <input type="checkbox"/> pluggable equipment type B - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> permanent connection <input type="checkbox"/> mating connector <input checked="" type="checkbox"/> other: <u>N/A</u>
Considered current rating of protective device as part of building or equipment installation.....	<u>16</u> A;
	Installation location: <input checked="" type="checkbox"/> building; <input type="checkbox"/> equipment
Equipment mobility	<input checked="" type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input checked="" type="checkbox"/> stationary <input type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in <input type="checkbox"/> rack-mounting <input type="checkbox"/> wall-mounted
Over voltage category (OVC)	<input type="checkbox"/> OVC I <input type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input checked="" type="checkbox"/> other: <u>N/A</u>
Class of equipment	<input type="checkbox"/> Class I <input type="checkbox"/> Class II <input checked="" type="checkbox"/> Class III
Access location	<input checked="" type="checkbox"/> Operator accessible <input type="checkbox"/> Restricted access location <input type="checkbox"/> N/A
Pollution degree (PD)	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
Manufacturer's specified maximum operating ambient	<u>-40</u> °C
IP protection class	<input checked="" type="checkbox"/> IPX0 <input type="checkbox"/> IP_____
Power Systems	<input checked="" type="checkbox"/> TN <input checked="" type="checkbox"/> TT <input checked="" type="checkbox"/> IT - 230V L-L (for Norway only) <input type="checkbox"/> other: N/A
Altitude during operation (m)	<input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> _____ m
Altitude of test laboratory (m)	<input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> _____ m
Mass of equipment (kg)	<input checked="" type="checkbox"/> 0.403 kg

Possible test case verdicts :	
- test case does not apply to the test object : N/A	
- test object does meet the requirement : P (Pass)	
- test object does not meet the requirement : F (Fail)	
Testing	
Date of receipt of test item..... : Mar. 12, 2021	
Date (s) of performance of tests : Mar. 12, 2021 to Apr. 16, 2021	
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report.	
"(See appended table)" refers to a table appended to the report.	
Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	
Manufacturer's Declaration per sub-clause 4.2.5 of IECEE 02:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies) : SUNSOAR TECH CO., LIMITED 4/F, Block E, Fengze Building, Huafeng No.2 Industrial Park, Hangkong Road, XiXiang Town, BaoAn District, Shenzhen, China	
General product information:	
Product description – The Nebra Smart Indoor LoRa Gateway power supply by external adapter. The enclosures of product are plastic. The enclosures of product are secured together by screws. Maximum operation ambient: 40°C. Unless otherwise specified, all of tests power supply by adapter.	
Model differences – All of model are same except for model names and frequency band.	
Additional application considerations – (Considerations used to test a component or sub-assembly) – N/A	

Energy Source Identification And Classification Table:

(Note 1: Identify the following six (6) energy source forms based on the origin of the energy.)

(Note 2: The identified classification e.g., ES2, TS1, should be with respect to its ability to cause pain or injury on the body or its ability to ignite a combustible material. Any energy source can be declared Class 3 as a worse case classification e.g. PS3, ES3.

Electrically-caused injury (Clause 5):

(Note: Identify type of source, list sub-assembly or circuit designation and corresponding energy source classification)

Example: +5 V dc input ES1

Source of electrical energy	Corresponding classification (ES)
DC input port	ES1

Electrically-caused fire (Clause 6):

(Note: List sub-assembly or circuit designation and corresponding energy source classification)

Example: Battery pack (maximum 85 watts) PS2

Source of power or PIS	Corresponding classification (PS)
All circuits	PS2

Injury caused by hazardous substances (Clause 7)

(Note: Specify hazardous chemicals, whether produces ozone or other chemical construction not addressed as part of the component evaluation.)

Example: Liquid in filled component Glycol

Source of hazardous substances	Corresponding chemical
N/A	N/A

Mechanically-caused injury (Clause 8)

(Note: List moving part(s), fan, special installations, etc. & corresponding MS classification based on Table 35.)

Example: Wall mount unit MS2

Source of kinetic/mechanical energy	Corresponding classification (MS)
Sharp edges and corners	MS1
Equipment mass (<7kg)	MS1

Thermal burn injury (Clause 9)

(Note: Identify the surface or support, and corresponding energy source classification based on type of part, location, operating temperature and contact time in Table 38.)

Example: Hand-held scanner – thermoplastic enclosure TS1

Source of thermal energy	Corresponding classification (TS)
External surfaces	TS1

Radiation (Clause 10)

(Note: List the types of radiation present in the product and the corresponding energy source classification.)

Example: DVD – Class 1 Laser Product RS1

Type of radiation	Corresponding classification (RS)
Indicator LED	RS1

Energy source diagram

Indicate which energy sources are included in the energy source diagram. Insert diagram below

ES PS MS TS RS



Overview of employed safeguards				
Clause	Possible Hazard			
5.1	Electrically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (ES3: Primary Filter circuit)	Safeguards		Reinforced (Enclosure)
		Basic	Supplementary	
Ordinary; Instructed; Skilled	ES1: DC input port	N/A	N/A	N/A
6.1	Electrically-caused fire			
Material part (e.g. mouse enclosure)	Energy Source (PS2: 100 Watt circuit)	Safeguards		Reinforced
		Basic	Supplementary	
All combustible materials within equipment	PS2: All circuits	(N): Material does not exceed ignition temperature	(S): - Reduce the likelihood of ignition; - Fire enclosure	N/A
7.1	Injury caused by hazardous substances			
Body Part (e.g., skilled)	Energy Source (hazardous material)	Safeguards		Reinforced
		Basic	Supplementary	
N/A	N/A	N/A	N/A	N/A
8.1	Mechanically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (MS3: High Pressure Lamp)	Safeguards		Reinforced (Enclosure)
		Basic	Supplementary	
Ordinary; Instructed; Skilled	MS1: Sharp edges and corners	N/A	N/A	N/A
Ordinary; Instructed; Skilled	MS1: Equipment mass (<7kg)	N/A	N/A	N/A
9.1	Thermal Burn			
Body Part (e.g., Ordinary)	Energy Source (TS2)	Safeguards		Reinforced
		Basic	Supplementary	
Ordinary; Instructed; Skilled	TS1: External surfaces	N/A	N/A	N/A
10.1	Radiation			
Body Part (e.g., Ordinary)	Energy Source (Output from audio port)	Safeguards		Reinforced
		Basic	Supplementary	
Ordinary; Instructed; Skilled	Lamps and LEDs (Indicator LED)	N/A	N/A	N/A

Supplementary Information:

- (1) See attached energy source diagram for additional details.
- (2) "N" – Normal Condition; "A" – Abnormal Condition; "S" Single Fault



IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
4	GENERAL REQUIREMENTS		P
4.1.1	Acceptance of materials, components and subassemblies		P
4.1.2	Use of components		P
4.1.3	Equipment design and construction		P
4.1.15	Markings and instructions.....: (See Annex F)		P
4.4.4	Safeguard robustness		P
4.4.4.2	Steady force tests.....: (See Annex T.4, T.5)		N/A
4.4.4.3	Drop tests: (See Annex T.7)		N/A
4.4.4.4	Impact tests: (See Annex T.6)		N/A
4.4.4.5	Internal accessible safeguard enclosure and barrier tests	(See Annex T.3)	N/A
4.4.4.6	Glass Impact tests.....: (See Annex T.9, Annex U)		N/A
4.4.4.7	Thermoplastic material tests: (See Annex T.8)		N/A
4.4.4.8	Air comprising a safeguard.....: (See Annex T)		N/A
4.4.4.9	Accessibility and safeguard effectiveness		P
4.5	Explosion		N/A
4.6	Fixing of conductors		P
4.6.1	Fix conductors not to defeat a safeguard		P
4.6.2	10 N force test applied to: Considered		P
4.7	Equipment for direct insertion into mains socket - outlets		N/A
4.7.2	Mains plug part complies with the relevant standard.....		N/A
4.7.3	Torque (Nm).....:		N/A
4.8	Products containing coin/button cell batteries	No coin/ button cell batteries	N/A
4.8.2	Instructional safeguard		N/A
4.8.3	Battery Compartment Construction		N/A
	Means to reduce the possibility of children removing the battery.....:		—
4.8.4	Battery Compartment Mechanical Tests: (See Table 4.8.4)		N/A
4.8.5	Battery Accessibility		N/A
4.9	Likelihood of fire or shock due to entry of conductive object.....:	(See Annex P)	N/A

5	ELECTRICALLY-CAUSED INJURY		P
5.2.1	Electrical energy source classifications: (See appended table 5.2)		P
5.2.2	ES1, ES2 and ES3 limits	Power supply by ES1 circuit	P

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
5.2.2.2	Steady-state voltage and current	: See appended table 5.2)	P
5.2.2.3	Capacitance limits.....	: (See appended table 5.2)	N/A
5.2.2.4	Single pulse limits	: (See appended table 5.2)	N/A
5.2.2.5	Limits for repetitive pulses	: (See appended table 5.2)	N/A
5.2.2.6	Ringing signals	: (See Annex H)	N/A
5.2.2.7	Audio signals	: (See Clause E.1)	N/A
5.3	Protection against electrical energy sources		P
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons		P
5.3.2.1	Accessibility to electrical energy sources and safeguards		P
5.3.2.2	Contact requirements		N/A
	a) Test with test probe from Annex V.....	:	N/A
	b) Electric strength test potential (V)	:	N/A
	c) Air gap (mm)	:	N/A
5.3.2.4	Terminals for connecting stripped wire		N/A
5.4	Insulation materials and requirements		P
5.4.1.2	Properties of insulating material		N/A
5.4.1.3	Humidity conditioning	: No hygroscopic insulating material used	N/A
5.4.1.4	Maximum operating temperature for insulating materials	: (See appended table 5.4.1.4)	P
5.4.1.5	Pollution degree	: Pollution degree 2	—
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling		N/A
5.4.1.6	Insulation in transformers with varying dimensions		N/A
5.4.1.7	Insulation in circuits generating starting pulses		N/A
5.4.1.8	Determination of working voltage		N/A
5.4.1.9	Insulating surfaces		N/A
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted		N/A
5.4.1.10.2	Vicat softening temperature.....	: (See appended table 5.4.1.10.2)	N/A
5.4.1.10.3	Ball pressure	: (See appended table 5.4.1.10.3)	N/A
5.4.2	Clearances		N/A
5.4.2.2	Determining clearance using peak working voltage	: (See appended table 5.4.2.2)	N/A
5.4.2.3	Determining clearance using required withstand	: (See appended table 5.4.2.3)	N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	voltage		
	a) a.c. mains transient voltage.....		—
	b) d.c. mains transient voltage		—
	c) external circuit transient voltage.....		—
	d) transient voltage determined by measurement..		—
5.4.2.4	Determining the adequacy of a clearance using an electric strength test	(See appended table 5.4.2.4)	N/A
5.4.2.5	Multiplication factors for clearances and test voltages	The multiplication factor for altitude up to 2000m is 1.0	N/A
5.4.3	Creepage distances.....	(See appended table 5.4.3)	N/A
5.4.3.1	General		N/A
5.4.3.3	Material Group	Assume to group IIIb	—
5.4.4	Solid insulation		N/A
5.4.4.2	Minimum distance through insulation	(See appended table 5.4.4.2)	N/A
5.4.4.3	Insulation compound forming solid insulation		N/A
5.4.4.4	Solid insulation in semiconductor devices		N/A
5.4.4.5	Cemented joints		N/A
5.4.4.6	Thin sheet material		N/A
5.4.4.6.1	General requirements		N/A
5.4.4.6.2	Separable thin sheet material		N/A
	Number of layers (pcs)		N/A
5.4.4.6.3	Non-separable thin sheet material		N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material.....	(See appended Table 5.4.9)	N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components		N/A
5.4.4.9	Solid insulation at frequencies >30 kHz.....	(See appended Table 5.4.4.9)	N/A
5.4.5	Antenna terminal insulation		N/A
5.4.5.1	General		N/A
5.4.5.2	Voltage surge test		N/A
	Insulation resistance ($M\Omega$)		—
5.4.6	Insulation of internal wire as part of supplementary safeguard.....	(See appended table 5.4.4.2)	N/A
5.4.7	Tests for semiconductor components and for cemented joints		N/A
5.4.8	Humidity conditioning		N/A
	Relative humidity (%)		—
	Temperature ($^{\circ}C$)		—

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	Duration (h)		—
5.4.9	Electric strength test.....: (See appended table 5.4.9)		N/A
5.4.9.1	Test procedure for a solid insulation type test		N/A
5.4.9.2	Test procedure for routine tests		N/A
5.4.10	Protection against transient voltages between external circuit		N/A
5.4.10.1	Parts and circuits separated from external circuits	(See appended table 5.4.9)	N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test.....: (See appended table 5.4.9)		N/A
5.4.10.2.3	Steady-state test: (See appended table 5.4.9)		N/A
5.4.11	Insulation between external circuits and earthed circuitry	(See appended table 5.4.9)	N/A
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	Rated operating voltage U_{op} (V)		—
	Nominal voltage U_{peak} (V)		—
	Max increase due to variation U_{sp}		—
	Max increase due to ageing ΔU_{sa}		—
	$U_{op} = U_{peak} + \Delta U_{sp} + \Delta U_{sa}$		—
5.5	Components as safeguards		N/A
5.5.1	General		N/A
5.5.2	Capacitors and RC units		N/A
5.5.2.1	General requirement		N/A
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector.....: (See appended table 5.5.2.2)		N/A
5.5.3	Transformers	(See Annex G.5.3)	N/A
5.5.4	Optocouplers	(See sub-clause 5.4 or Annex G.12)	N/A
5.5.5	Relays	(See Annex G.2)	N/A
5.5.6	Resistors	(See Annex G.10)	N/A
5.5.7	SPD's	(See Annex G.8)	N/A
5.5.7.1	Use of an SPD connected to reliable earthing		N/A
5.5.7.2	Use of an SPD between mains and protective earth		N/A
5.5.8	Insulation between the mains and external circuit consisting of a coaxial cable	(See Annex G.10.3)	N/A
5.6	Protective conductor		N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
5.6.2	Requirement for protective conductors	No such protective conductors	N/A
5.6.2.1	General requirements		N/A
5.6.2.2	Colour of insulation		N/A
5.6.3	Requirement for protective earthing conductors		N/A
	Protective earthing conductor size (mm ²) :		—
5.6.4	Requirement for protective bonding conductors		N/A
5.6.4.1	Protective bonding conductors		N/A
	Protective bonding conductor size (mm ²) :		—
	Protective current rating (A) :		—
5.6.4.3	Current limiting and overcurrent protective devices		N/A
5.6.5	Terminals for protective conductors		N/A
5.6.5.1	Requirement		N/A
	Conductor size (mm ²), nominal thread diameter (mm) :		N/A
5.6.5.2	Corrosion		N/A
5.6.6	Resistance of the protective system		N/A
5.6.6.1	Requirements		N/A
5.6.6.2	Test Method Resistance (Ω) : (See appended table 5.6.6.2)		N/A
5.6.7	Reliable earthing		N/A
5.7	Prospective touch voltage, touch current and protective conductor current		N/A
5.7.2	Measuring devices and networks		N/A
5.7.2.1	Measurement of touch current : (See appended table 5.7.4)		N/A
5.7.2.2	Measurement of prospective touch voltage		N/A
5.7.3	Equipment set-up, supply connections and earth connections		N/A
	System of interconnected equipment (separate connections/single connection) :		—
	Multiple connections to mains (one connection at a time/simultaneous connections) :		—
5.7.4	Earthed conductive accessible parts : (See appended Table 5.7.4)		N/A
5.7.5	Protective conductor current		N/A
	Supply Voltage (V) :		—
	Measured current (mA) :		—
	Instructional Safeguard : (See F.4 and F.5)		N/A
5.7.6	Prospective touch voltage and touch current due to external circuits		N/A
5.7.6.1	Touch current from coaxial cables		N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
5.7.6.2	Prospective touch voltage and touch current from external circuits		N/A
5.7.7	Summation of touch currents from external circuits		N/A
	a) Equipment with earthed external circuits Measured current (mA) :		N/A
	b) Equipment whose external circuits are not referenced to earth. Measured current (mA)..... :		N/A

6	ELECTRICALLY- CAUSED FIRE		P
6.2	Classification of power sources (PS) and potential ignition sources (PIS)		P
6.2.2	Power source circuit classifications		P
6.2.2.1	General		P
6.2.2.2	Power measurement for worst-case load fault ... : (See appended table 6.2.2)		P
6.2.2.3	Power measurement for worst-case power source fault..... : (See appended table 6.2.2)		P
6.2.2.4	PS1 : (See appended table 6.2.2)		P
6.2.2.5	PS2 : (See appended table 6.2.2)		P
6.2.2.6	PS3 : (See appended table 6.2.2)		N/A
6.2.3	Classification of potential ignition sources		P
6.2.3.1	Arcing PIS : (See appended table 6.2.3.1)		N/A
6.2.3.2	Resistive PIS : (See appended table 6.2.3.2)		P
6.3	Safeguards against fire under normal operating and abnormal operating conditions		P
6.3.1 (a)	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials : (See appended table 5.4.1.5, 6.3.2, 9.0, B.2.6)		P
6.3.1 (b)	Combustible materials outside fire enclosure	No such parts	N/A
6.4	Safeguards against fire under single fault conditions		P
6.4.1	Safeguard Method	Control flame spread	P
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits		N/A
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits		N/A
6.4.3.1	General		N/A
6.4.3.2	Supplementary Safeguards		N/A
	Special conditions if conductors on printed boards are opened or peeled		N/A
6.4.3.3	Single Fault Conditions..... : (See appended table 6.4.3)		N/A
	Special conditions for temperature limited by fuse		N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
6.4.4	Control of fire spread in PS1 circuits		P
6.4.5	Control of fire spread in PS2 circuits		P
6.4.5.2	Supplementary safeguards : (See appended tables 4.1.2 and Annex G)		P
6.4.6	Control of fire spread in PS3 circuit		N/A
6.4.7	Separation of combustible materials from a PIS		N/A
6.4.7.1	General..... : (See tables 6.2.3.1 and 6.2.3.2)		N/A
6.4.7.2	Separation by distance		N/A
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers		N/A
6.4.8.1	Fire enclosure and fire barrier material properties		N/A
6.4.8.2.1	Requirements for a fire barrier		N/A
6.4.8.2.2	Requirements for a fire enclosure		N/A
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		N/A
6.4.8.3.1	Fire enclosure and fire barrier openings		N/A
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top Openings in Fire Enclosure: dimensions (mm)		N/A
	Needle Flame test		N/A
6.4.8.3.4	Bottom Openings in Fire Enclosure, condition met a), b) and/or c) dimensions (mm)		N/A
	Flammability tests for the bottom of a fire enclosure		N/A
6.4.8.3.5	Integrity of the fire enclosure, condition met: a), b) or c)		N/A
6.4.8.4	Separation of PIS from fire enclosure and fire barrier distance (mm) or flammability rating..... :		N/A
6.5	Internal and external wiring		P
6.5.1	Requirements		P
6.5.2	Cross-sectional area (mm ²)		—
6.5.3	Requirements for interconnection to building wiring	(See Annex Q.)	N/A
6.6	Safeguards against fire due to connection to additional equipment		N/A
	External port limited to PS2 or complies with Clause Q.1		N/A

7	INJURY CAUSED BY HAZARDOUS SUBSTANCES	N/A
---	---------------------------------------	-----

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
7.2	Reduction of exposure to hazardous substances		N/A
7.3	Ozone exposure		N/A
7.4	Use of personal safeguards (PPE)		N/A
	Personal safeguards and instructions		—
7.5	Use of instructional safeguards and instructions		N/A
	Instructional safeguard (ISO 7010)		—
7.6	Batteries	(See Annex M)	N/A

8	MECHANICALLY-CAUSED INJURY	P
8.1	General	P
8.2	Mechanical energy source classifications	Sharp edges and corners and equipment mass are both classified as MS1
8.3	Safeguards against mechanical energy sources	P
8.4	Safeguards against parts with sharp edges and corners	N/A
8.4.1	Safeguards	N/A
8.5	Safeguards against moving parts	No moving parts
8.5.1	MS2 or MS3 part required to be accessible for the function of the equipment	N/A
8.5.2	Instructional Safeguard.....:	—
8.5.4	Special categories of equipment comprising moving parts	N/A
8.5.4.1	Large data storage equipment	N/A
8.5.4.2	Equipment having electromechanical device for destruction of media	N/A
8.5.4.2.1	Safeguards and Safety Interlocks	(See Annex F.4 and Annex K)
8.5.4.2.2	Instructional safeguards against moving parts	N/A
	Instructional Safeguard.....:	—
8.5.4.2.3	Disconnection from the supply	N/A
8.5.4.2.4	Probe type and force (N)	N/A
8.5.5	High Pressure Lamps	N/A
8.5.5.1	Energy Source Classification	N/A
8.5.5.2	High Pressure Lamp Explosion Test.....:	(See appended table 8.5.5.2)
8.6	Stability	Equipment mass < 7.0kg and is classified as MS1
8.6.1	Product classification	N/A
	Instructional Safeguard.....:	—

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
8.6.2	Static stability		N/A
8.6.2.2	Static stability test		N/A
	Applied Force:		—
8.6.2.3	Downward Force Test		N/A
8.6.3	Relocation stability test		N/A
	Unit configuration during 10° tilt:		—
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test (Applied Force).....:		N/A
	Position of feet or movable parts.....:		—
8.7	Equipment mounted to wall or ceiling	No wall mounting means	N/A
8.7.1	Mounting Means (Length of screws (mm) and mounting surface):		N/A
8.7.2	Direction and applied force.....:		N/A
8.8	Handles strength	No handle	N/A
8.8.1	Classification		N/A
8.8.2	Applied Force:		N/A
8.9	Wheels or casters attachment requirements	No wheels or casters attachment	N/A
8.9.1	Classification		N/A
8.9.2	Applied force:		—
8.10	Carts, stands and similar carriers	No carts, stands or similar carriers	N/A
8.10.1	General		N/A
8.10.2	Marking and instructions		N/A
	Instructional Safeguard.....:		—
8.10.3	Cart, stand or carrier loading test and compliance		N/A
	Applied force.....:		—
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Applied horizontal force (N):		—
8.10.6	Thermoplastic temperature stability (°C).....:		N/A
8.11	Mounting means for rack mounted equipment		N/A
8.11.1	General		N/A
8.11.2	Product Classification		N/A
8.11.3	Mechanical strength test, variable N:		N/A
8.11.4	Mechanical strength test 250N, including end stops		N/A
8.12	Telescoping or rod antennas.....:	(See Annex T)	N/A
	Button/Ball diameter (mm):		—

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

9	THERMAL BURN INJURY		P
9.2	Thermal energy source classifications	External surfaces classified as TS1	P
9.3	Safeguard against thermal energy sources	No safeguard required	N/A
9.4	Requirements for safeguards		N/A
9.4.1	Equipment safeguard		N/A
9.4.2	Instructional safeguard		N/A

10	RADIATION		P
10.2	Radiation energy source classification		P
10.2.1	General classification		P
10.3	Protection against laser radiation		N/A
	Laser radiation that exists equipment:		—
	Normal, abnormal, single-fault : (See attached laser test report)		N/A
	Instructional safeguard :		—
	Tool..... :		—
10.4	Protection against visible, infrared, and UV radiation		P
10.4.1	General		P
10.4.1.a)	RS3 for Ordinary and instructed persons..... :		N/A
10.4.1.b)	RS3 accessible to a skilled person :		N/A
	Personal safeguard (PPE) instructional safeguard..... :		—
10.4.1.c)	Equipment visible, IR, UV does not exceed RS1.		P
10.4.1.d)	Normal, abnormal, single-fault conditions : (See appended table B.3 & B.4)		N/A
10.4.1.e)	Enclosure material employed as safeguard is opaque :		N/A
10.4.1.f)	UV attenuation :		N/A
10.4.1.g)	Materials resistant to degradation UV :		N/A
10.4.1.h)	Enclosure containment of optical radiation :		N/A
10.4.1.i)	Exempt Group under normal operating conditions :	Indicator LED	P
10.4.2	Instructional safeguard		N/A
10.5	Protection against x-radiation		N/A
10.5.1	X- radiation energy source that exists equipment	(See appended table B.3 & B.4)	N/A
	Normal, abnormal, single fault conditions		N/A
	Equipment safeguards..... :		N/A
	Instructional safeguard for skilled person		N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
10.5.3	Most unfavourable supply voltage to give maximum radiation		—
	Abnormal and single-fault condition : (See appended table B.3 & B.4)		N/A
	Maximum radiation (pA/kg) :		N/A
10.6	Protection against acoustic energy sources		N/A
10.6.1	General		N/A
10.6.2	Classification		N/A
	Acoustic output, dB(A)..... :		N/A
	Output voltage, unweighted r.m.s. :		N/A
10.6.4	Protection of persons		N/A
	Instructional safeguards :		N/A
	Equipment safeguard prevent ordinary person to RS2..... :		—
	Means to actively inform user of increase sound pressure..... :		—
	Equipment safeguard prevent ordinary person to RS2		—
10.6.5	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.5.1	Corded passive listening devices with analog input		N/A
	Input voltage with 94 dB(A) L_{Aeq} acoustic pressure output :		—
10.6.5.2	Corded listening devices with digital input		N/A
	Maximum dB(A)..... :		—
10.6.5.3	Cordless listening device		N/A
	Maximum dB(A)..... :		—

B	NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS	P
B.2	Normal Operating Conditions	P
B.2.1	General requirements..... : (See Test Item Particulars and appended test tables)	P
	Audio Amplifiers and equipment with audio amplifiers	N/A
B.2.3	Supply voltage and tolerances	P
B.2.5	Input test..... : (See appended table B.2.5)	P
B.3	Simulated abnormal operating conditions	P
B.3.1	General requirements..... : (See appended table B.3)	P
B.3.2	Covering of ventilation openings	N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
B.3.3	D.C. mains polarity test		N/A
B.3.4	Setting of voltage selector	:	N/A
B.3.5	Maximum load at output terminals	:	(See appended table B.3)
B.3.6	Reverse battery polarity	No battery	N/A
B.3.7	Abnormal operating conditions as specified in Clause E.2.		N/A
B.3.8	Safeguards functional during and after abnormal operating conditions	During an abnormal operating condition that does not lead to a single fault condition, all safeguards are remained effective. After restoration of normal operating conditions, all safeguards are compliance with applicable requirements	P
B.4	Simulated single fault conditions		P
B.4.2	Temperature controlling device open or short-circuited	:	No such device
B.4.3	Motor tests		N/A
B.4.3.1	Motor blocked or rotor locked increasing the internal ambient temperature	:	(See Clause G.5)
B.4.4	Short circuit of functional insulation		P
B.4.4.1	Short circuit of clearances for functional insulation		P
B.4.4.2	Short circuit of creepage distances for functional insulation		P
B.4.4.3	Short circuit of functional insulation on coated printed boards	No coated printed board	N/A
B.4.5	Short circuit and interruption of electrodes in tubes and semiconductors		P
B.4.6	Short circuit or disconnect of passive components		P
B.4.7	Continuous operation of components	No such components	N/A
B.4.8	Class 1 and Class 2 energy sources within limits during and after single fault conditions	During and after a single fault condition, a class 1 or class 2 energy sources did not become a class 3 energy source. For a class 3 energy source, during and after a single fault condition, at least one safeguard continued to comply with the relevant safeguard requirements.	P
B.4.9	Battery charging under single fault conditions ..	:	(See Annex M)
			N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
C	UV RADIATION		N/A
C.1	Protection of materials in equipment from UV radiation	No UV radiation	N/A
C.1.2	Requirements		N/A
C.1.3	Test method		N/A
C.2	UV light conditioning test		N/A
C.2.1	Test apparatus		N/A
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure apparatus		N/A
C.2.4	Xenon-arc light exposure apparatus		N/A

D	TEST GENERATORS	N/A
D.1	Impulse test generators	N/A
D.2	Antenna interface test generator	N/A
D.3	Electronic pulse generator	N/A

E	TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS	N/A
E.1	Audio amplifier normal operating conditions	N/A
	Audio signal voltage (V) :	—
	Rated load impedance (Ω) :	—
E.2	Audio amplifier abnormal operating conditions	N/A

F	EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS	P
F.1	General requirements	P
	Instructions – Language : English	—
F.2	Letter symbols and graphical symbols	P
F.2.1	Letter symbols according to IEC60027-1	P
F.2.2	Graphic symbols IEC, ISO or manufacturer specific	P
F.3	Equipment markings	P
F.3.1	Equipment marking locations	Equipment marking is located on its exterior surface and is readily visible
F.3.2	Equipment identification markings	P
F.3.2.1	Manufacturer identification : See marking plate	—
F.3.2.2	Model identification : Ditto	—
F.3.3	Equipment rating markings	P

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
F.3.3.1	Equipment with direct connection to mains		N/A
F.3.3.2	Equipment without direct connection to mains		P
F.3.3.3	Nature of supply voltage..... :		—
F.3.3.4	Rated voltage :		—
F.3.3.4	Rated frequency :		—
F.3.3.6	Rated current or rated power :		—
F.3.3.7	Equipment with multiple supply connections	No multiple supply connections	N/A
F.3.4	Voltage setting device	No voltage setting device	N/A
F.3.5	Terminals and operating devices	No terminals and operating devices	N/A
F.3.5.1	Mains appliance outlet and socket-outlet markings..... :	No mains appliance outlet and socket-outlet	N/A
F.3.5.2	Switch position identification marking :	No switches	N/A
F.3.5.3	Replacement fuse identification and rating markings..... :		N/A
F.3.5.4	Replacement battery identification marking :		N/A
F.3.5.5	Terminal marking location		N/A
F.3.6	Equipment markings related to equipment classification		N/A
F.3.6.1	Class I Equipment		N/A
F.3.6.1.1	Protective earthing conductor terminal		N/A
F.3.6.1.2	Neutral conductor terminal		N/A
F.3.6.1.3	Protective bonding conductor terminals		N/A
F.3.6.2	Class II equipment (IEC60417-5172)		N/A
F.3.6.2.1	Class II equipment with or without functional earth		N/A
F.3.6.2.2	Class II equipment with functional earth terminal marking		N/A
F.3.7	Equipment IP rating marking :		—
F.3.8	External power supply output marking		N/A
F.3.9	Durability, legibility and permanence of marking		P
F.3.10	Test for permanence of markings	After each test, the marking shall remain legible, shall show no curling and shall not be removable by hand.	P
F.4	Instructions		P
	a) Equipment for use in locations where children not likely to be present - marking		N/A
	b) Instructions given for installation or initial use		P
	c) Equipment intended to be fastened in place		N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	d) Equipment intended for use only in restricted access area		N/A
	e) Audio equipment terminals classified as ES3 and other equipment with terminals marked in accordance F.3.6.1		N/A
	f) Protective earthing employed as safeguard		N/A
	g) Protective earthing conductor current exceeding ES 2 limits		N/A
	h) Symbols used on equipment		P
	i) Permanently connected equipment not provided with all-pole mains switch		N/A
	j) Replaceable components or modules providing safeguard function		N/A
F.5	Instructional safeguards		P
	Where "instructional safeguard" is referenced in the test report it specifies the required elements, location of marking and/or instruction		P

G	COMPONENTS		P
G.1	Switches		N/A
G.1.1	General requirements	No switches	N/A
G.1.2	Ratings, endurance, spacing, maximum load		N/A
G.2	Relays		N/A
G.2.1	General requirements	No relays	N/A
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supply power		N/A
G.2.4	Mains relay, modified as stated in G.2		N/A
G.3	Protection Devices		N/A
G.3.1	Thermal cut-offs	No thermal cut-offs	N/A
G.3.1.1a) &b)	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A
G.3.1.1c)	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Thermal cut-off connections maintained and secure		N/A
G.3.2	Thermal links		N/A
G.3.2.1a)	Thermal links separately tested with IEC 60691	No thermal links	N/A
G.3.2.1b)	Thermal links tested as part of the equipment		N/A
	Aging hours (H) :		—
	Single Fault Condition :		—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Test Voltage (V) and Insulation Resistance (Ω) :		—
G.3.3	PTC Thermistors	No PTC thermistors	N/A
G.3.4	Overcurrent protection devices		N/A
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.5		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions..... : (See appended Table B.4)		N/A
G.4	Connectors		N/A
G.4.1	Spacings	No connectors used.	N/A
G.4.2	Mains connector configuration :		N/A
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely		N/A
G.5	Wound Components		N/A
G.5.1	Wire insulation in wound components..... : (See Annex J)		N/A
G.5.1.2 a)	Two wires in contact inside wound component, angle between 45° and 90°		N/A
G.5.1.2 b)	Construction subject to routine testing		N/A
G.5.2	Endurance test on wound components		N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Time (s)		—
	Temperature (°C)		—
G.5.2.3	Wound Components supplied by mains		N/A
G.5.3	Transformers		N/A
G.5.3.1	Requirements applied (IEC61204-7, IEC61558-1/-2, and/or IEC62368-1)..... :		N/A
	Position..... :		—
	Method of protection		—
G.5.3.2	Insulation		N/A
	Protection from displacement of windings..... :		—
G.5.3.3	Overload test	(See appended table B.3)	N/A
G.5.3.3.1	Test conditions		N/A
G.5.3.3.2	Winding Temperatures testing in the unit		N/A
G.5.3.3.3	Winding Temperatures - Alternative test method		N/A
G.5.4	Motors		N/A
G.5.4.1	General requirements		N/A
	Position		—

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
G.5.4.2	Test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4	Locked-rotor overload test		N/A
	Test duration (days)		—
G.5.4.5	Running overload test for d.c. motors in secondary circuits		N/A
G.5.4.5.2	Tested in the unit		N/A
	Electric strength test (V)		—
G.5.4.5.3	Tested on the Bench - Alternative test method; test time (h)		N/A
	Electric strength test (V)		—
G.5.4.6	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature		N/A
	Electric strength test (V)		N/A
G.5.4.6.3	Tested on the bench - Alternative test method; test time (h)		N/A
	Electric strength test (V)		N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage		—
G.6	Wire Insulation		N/A
G.6.1	General		N/A
G.6.2	Solvent-based enamel wiring insulation		N/A
G.7	Mains supply cords		N/A
G.7.1	General requirements	No mains supply cords	N/A
	Type.....		—
	Rated current (A).....		—
	Cross-sectional area (mm ²), (AWG).....		—
G.7.2	Compliance and test method		N/A
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N)		—
G.7.3.2.2	Strain relief mechanism failure		N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
G.7.3.2.3	Cord sheath or jacket position, distance (mm) ... :		—
G.7.3.2.4	Strain relief comprised of polymeric material		N/A
G.7.4	Cord Entry : (See appended table 5.4.11.1)		N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Mass (g) :		—
	Diameter (m) :		—
	Temperature (°C) :		—
G.7.6	Supply wiring space		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Test with 8 mm strand		N/A
G.8	Varistors		N/A
G.8.1	General requirements	No Varistors used	N/A
G.8.2	Safeguard against shock		N/A
G.8.3	Safeguard against fire		N/A
G.8.3.2	Varistor overload test : (See appended table B.3)		N/A
G.8.3.3	Temporary overvoltage : (See appended table B.3)		N/A
G.9	Integrated Circuit (IC) Current Limiters		N/A
G.9.1 a)	Manufacturer defines limit at max. 5A.	No IC current limiters	N/A
G.9.1 b)	Limiters do not have manual operator or reset		N/A
G.9.1 c)	Supply source does not exceed 250 VA		—
G.9.1 d)	IC limiter output current (max. 5A)		—
G.9.1 e)	Manufacturers' defined drift		—
G.9.2	Test Program 1		N/A
G.9.3	Test Program 2		N/A
G.9.4	Test Program 3		N/A
G.10	Resistors		N/A
G.10.1	General requirements	No such resistors	N/A
G.10.2	Resistor test		N/A
G.10.3	Test for resistors serving as safeguards between the mains and an external circuit consisting of a coaxial cable		N/A
G.10.3.1	General requirements		N/A
G.10.3.2	Voltage surge test		N/A
G.10.3.3	Impulse test		N/A
G.11	Capacitor and RC units		N/A
G.11.1	General requirements	No capacitor and RC units	N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
G.11.2	Conditioning of capacitors and RC units		N/A
G.11.3	Rules for selecting capacitors		N/A
G.12	Optocouplers		N/A
	Optocouplers comply with IEC 60747-5-5:2007 Spacing or Electric Strength Test (specify option and test results)	No optocouplers used	N/A
	Type test voltage Vini		—
	Routine test voltage, Vini,b		—
G.13	Printed boards		N/A
G.13.1	General requirements		N/A
G.13.2	Uncoated printed boards	The insulation between conductors on the outer surfaces of an uncoated printed board is compliant with the minimum requirements of clearances (5.4.2) and creepage distances (5.4.3).	N/A
G.13.3	Coated printed boards		N/A
G.13.4	Insulation between conductors on the same inner surface		N/A
	Compliance with cemented joint requirements (Specify construction)		—
G.13.5	Insulation between conductors on different surfaces		N/A
	Distance through insulation	(See appended table 5.4.4.5)	N/A
	Number of insulation layers (pcs)		—
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2a)	Thermal conditioning		N/A
G.13.6.2b)	Electric strength test		N/A
G.13.6.2c)	Abrasion resistance test		N/A
G.14	Coating on components terminals		N/A
G.14.1	Requirements	(See G.13)	N/A
G.15	Liquid filled components		N/A
G.15.1	General requirements	No LFC	N/A
G.15.2	Requirements		N/A
G.15.3	Compliance and test methods		N/A
G.15.3.1	Hydrostatic pressure test		N/A
G.15.3.2	Creep resistance test		N/A
G.15.3.3	Tubing and fittings compatibility test		N/A
G.15.3.4	Vibration test		N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
G.15.3.5	Thermal cycling test		N/A
G.15.3.6	Force test		N/A
G.15.4	Compliance		N/A
G.16	IC including capacitor discharge function (ICX)		N/A
a)	Humidity treatment in accordance with sc5.4.8 – 120 hours	No ICX	N/A
b)	Impulse test using circuit 2 with $U_c =$ to transient voltage		N/A
C1)	Application of ac voltage at 110% of rated voltage for 2.5 minutes		N/A
C2)	Test voltage		—
D1)	10,000 cycles on and off using capacitor with smallest capacitance resistor with largest resistance specified by manufacturer		N/A
D2)	Capacitance		—
D3)	Resistance		—

H	CRITERIA FOR TELEPHONE RINGING SIGNALS	N/A
H.1	General	N/A
H.2	Method A	N/A
H.3	Method B	N/A
H.3.1	Ringing signal	N/A
H.3.1.1	Frequency (Hz)	—
H.3.1.2	Voltage (V)	—
H.3.1.3	Cadence; time (s) and voltage (V)	—
H.3.1.4	Single fault current (mA):.....	—
H.3.2	Tripping device and monitoring voltage	N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage complied with	N/A
H.3.2.2	Tripping device	N/A
H.3.2.3	Monitoring voltage (V)	—

J	INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION	N/A
	General requirements	(See separate test report)

K	SAFETY INTERLOCKS	N/A
K.1	General requirements	N/A
K.2	Components of safety interlock safeguard	(See Annex G)

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	mechanism :		
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
	Compliance :	(See appended table B.4)	N/A
K.6	Mechanically operated safety interlocks		N/A
K.6.1	Endurance requirement		N/A
K.6.2	Compliance and Test method :		N/A
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements (type and circuit location) :		N/A
K.7.2	Overload test, Current (A) :		N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test :	(See appended table 5.4.11)	N/A

L	DISCONNECT DEVICES		N/A
L.1	General requirements	No connection to mains supply.	N/A
L.2	Permanently connected equipment		N/A
L.3	Parts that remain energized		N/A
L.4	Single phase equipment		N/A
L.5	Three-phase equipment		N/A
L.6	Switches as disconnect devices		N/A
L.7	Plugs as disconnect devices		N/A
L.8	Multiple power sources		N/A

M	EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS		N/A
M.1	General requirements		N/A
M.2	Safety of batteries and their cells		N/A
M.2.1	Requirements		N/A
M.2.2	Compliance and test method (identify method). :		N/A
M.3	Protection circuits		N/A
M.3.1	Requirements		N/A
M.3.2	Tests		N/A
	- Overcharging of a rechargeable battery		N/A
	- Unintentional charging of a non-rechargeable battery		N/A
	- Reverse charging of a rechargeable battery		N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	- Excessive discharging rate for any battery		N/A
M.3.3	Compliance : (See appended Tables and Annex M and M.4)	(See appended Tables and Annex M and M.4)	N/A
M.4	Additional safeguards for equipment containing secondary lithium battery		N/A
M.4.1	General		N/A
M.4.2	Charging safeguards		N/A
M.4.2.1	Charging operating limits		N/A
M.4.2.2a)	Charging voltage, current and temperature : (See Table M.4)	(See Table M.4)	—
M.4.2.2 b)	Single faults in charging circuitry..... : (See Annex B.4)	(See Annex B.4)	—
M.4.3	Fire Enclosure		N/A
M.4.4	Endurance of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation		N/A
M.4.4.3	Drop and charge/discharge function tests		N/A
	Drop		N/A
	Charge		N/A
	Discharge		N/A
M.4.4.4	Charge-discharge cycle test		N/A
M.4.4.5	Result of charge-discharge cycle test		N/A
M.5	Risk of burn due to short circuit during carrying		N/A
M.5.1	Requirement		N/A
M.5.2	Compliance and Test Method (Test of P.2.3)		N/A
M.6	Prevention of short circuits and protection from other effects of electric current		N/A
M.6.1	Short circuits		N/A
M.6.1.1	General requirements		N/A
M.6.1.2	Test method to simulate an internal fault		N/A
M.6.1.3	Compliance (Specify M.6.1.2 or alternative method) :		N/A
M.6.2	Leakage current (mA) :		N/A
M.7	Risk of explosion from lead acid and NiCd batteries		N/A
M.7.1	Ventilation preventing explosive gas concentration		N/A
M.7.2	Compliance and test method		N/A
M.8	Protection against internal ignition from external spark sources of lead acid batteries		N/A
M.8.1	General requirements		N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
M.8.2	Test method		N/A
M.8.2.1	General requirements		N/A
M.8.2.2	Estimation of hypothetical volume V_z (m^3/s) :		—
M.8.2.3	Correction factors :		—
M.8.2.4	Calculation of distance d (mm) :		—
M.9	Preventing electrolyte spillage		N/A
M.9.1	Protection from electrolyte spillage		N/A
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	Instructions to prevent reasonably foreseeable misuse (Determination of compliance: inspection, data review; or abnormal testing) ... :		N/A

N	ELECTROCHEMICAL POTENTIALS	N/A
	Metal(s) used..... : Pollution degree considered	—

O	MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES	N/A
	Figures O.1 to O.20 of this Annex applied : Considered	—

P	SAFEGUARDS AGAINST ENTRY OF FOREIGN OBJECTS AND SPILLAGE OF INTERNAL LIQUIDS	N/A
P.1	General requirements	N/A
P.2.2	Safeguards against entry of foreign object	N/A
	Location and Dimensions (mm) :	—
P.2.3	Safeguard against the consequences of entry of foreign object	N/A
P.2.3.1	Safeguards against the entry of a foreign object	N/A
	Openings in transportable equipment	N/A
	Transportable equipment with metallized plastic parts..... :	N/A
P.2.3.2	Openings in transportable equipment in relation to metallized parts of a barrier or enclosure (identification of supplementary safeguard) :	N/A
P.3	Safeguards against spillage of internal liquids	N/A
P.3.1	General requirements	N/A
P.3.2	Determination of spillage consequences	N/A
P.3.3	Spillage safeguards	N/A
P.3.4	Safeguards effectiveness	N/A
P.4	Metallized coatings and adhesive securing parts	N/A
P.4.2 a)	Conditioning testing	N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	T _c (°C)	:	—
	T _r (°C).....	:	—
	T _a (°C).....	:	—
P.4.2 b)	Abrasion testing	: (See G.13.6.2)	N/A
P.4.2 c)	Mechanical strength testing.....	: (See Annex T)	N/A

Q	CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING		N/A
Q.1	Limited power sources	(See Table Annex Q.1)	N/A
Q.1.1 a)	Inherently limited output		N/A
Q.1.1 b)	Impedance limited output		N/A
	- Regulating network limited output under normal operating and simulated single fault condition		N/A
Q.1.1 c)	Overcurrent protective device limited output		N/A
Q.1.1 d)	IC current limiter complying with G.9		N/A
Q.1.2	Compliance and test method		N/A
Q.2	Test for external circuits – paired conductor cable	No such external circuits	N/A
	Maximum output current (A)	:	—
	Current limiting method	:	—

R	LIMITED SHORT CIRCUIT TEST		N/A
R.1	General requirements		N/A
R.2	Determination of the overcurrent protective device and circuit		N/A
R.3	Test method Supply voltage (V) and short-circuit current (A)).	:	N/A

S	TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
S.1	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material.....	:	—
	Wall thickness (mm)	:	—
	Conditioning (°C)	:	—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrier integrity		N/A
	Samples, material..... :		—
	Wall thickness (mm) :		—
	Conditioning (°C) :		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	Test specimen does not show any additional hole		N/A
S.3	Flammability test for the bottom of a fire enclosure		N/A
	Samples, material..... :		—
	Wall thickness (mm) :		—
	Cheesecloth did not ignite		N/A
S.4	Flammability classification of materials		N/A
S.5	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material..... :		—
	Wall thickness (mm) :		—
	Conditioning (test condition), (°C) :		—
	Test flame according to IEC 60695-11-20 with conditions as set out		N/A
	After every test specimen was not consumed completely		N/A
	After fifth flame application, flame extinguished within 1 min		N/A

T	MECHANICAL STRENGTH TESTS		N/A
T.1	General requirements		N/A
T.2	Steady force test, 10 N :	(See appended table T.2)	N/A
T.3	Steady force test, 30 N :	(See appended table T3)	N/A
T.4	Steady force test, 100 N :	(See appended table T4)	N/A
T.5	Steady force test, 250 N :	(See appended table T5)	N/A
T.6	Enclosure impact test	(See appended table T6)	N/A
	Fall test		N/A
	Swing test		N/A
T.7	Drop test :	(See appended table T7)	N/A

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
T.8	Stress relief test..... : (See appended table T8)		N/A
T.9	Impact Test (glass)		N/A
T.9.1	General requirements		N/A
T.9.2	Impact test and compliance		N/A
	Impact energy (J): _____		—
	Height (m).....: _____		—
T.10	Glass fragmentation test.....: (See sub-clause 4.4.4.9)		N/A
T.11	Test for telescoping or rod antennas		N/A
	Torque value (Nm): _____		—

U	MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION	N/A
U.1	General requirements	No CRTs
U.2	Compliance and test method for non-intrinsically protected CRTs	
U.3	Protective Screen.....: (See Annex T)	N/A

V	DETERMINATION OF ACCESSIBLE PARTS (FINGERS, PROBES AND WEDGES)	P
V.1	Accessible parts of equipment	
V.2	Accessible part criterion	

IEC 62368-1

Clause	Requirement + Test		Result - Remark		Verdict
4.1.2	TABLE: List of critical components				
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹
External Power Adapter	Dongguan Turnmax Electronic Co., Ltd.	TM-K018VP-01201500PE-Z	Input: 100-240Vac, 50/60Hz, 0.45A Output: 12.0Vdc, 1.5A, LPS, 40°C	IEC 62368-1: 2014 (Second Edition)	Intertek (Report No.: 200907181G ZU-001)
LoRaWAN Module	MAXLLOTLTD	GL5712-EX, GL5712-EA	Input: 3.3Vdc, 2.0A	EN 62368-1	Tested with appliance
WiFi Module	Blupont Limited	WL-700N-XS	DC 5V powered by USB port	EN 62368-1	Tested with appliance
Bluetooth Module	Shenzhen Hongxin Technology Co., Ltd.	CSR4.0	DC 5V powered by USB port	EN 62368-1	Tested with appliance
GPS Module	Ublox	NEO-6M-0-001	Input: 5.0Vdc	EN 62368-1	Tested with appliance
Master Module	Raspberry Pi	RPI-CM3	Input: 3.3Vdc	EN 62368-1	Tested with appliance
PCB	GuangDong Kingshine Electronic Technology Co Ltd	XY-K	V-0, 130°C	UL 796	UL E358874
(Alternative)	Interchangeable	Interchangeable	V-1 or better, min. 130°C	UL 796	UL
Plastic enclosure	SHENZHEN HALCYON NEW MATERIALS CO LTD	PC201 VG-20R (a)	V-0, 80°C, min. 0.8mm	EN 62368-1	UL E233919
Supplementary information:					
¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.					
²⁾ Description line content is optional. Main line description needs to clearly detail the component used for testing					

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
4.8.4, 4.8.5	TABLE: Lithium coin/button cell batteries mechanical tests		
(The following mechanical tests are conducted in the sequence noted.)			
4.8.4.2	TABLE: Stress Relief test		—
Part	Material	Oven Temperature (°C)	Comments
--	--	--	--
4.8.4.3	TABLE: Battery replacement test		
Battery part no.....:			—
Battery Installation/withdrawal	Battery Installation/Removal Cycle	Comments	
	1	—	
	2	—	
	3	—	
	4	—	
	5	—	
	6	—	
	8	—	
	9	—	
	10	—	
4.8.4.4	TABLE: Drop test		
Impact Area	Drop Distance	Drop No.	Observations
--	--	1	—
--	--	2	—
--	--	3	—
4.8.4.5	TABLE: Impact		
Impacts per surface	Surface tested	Impact energy (Nm)	Comments
--	--	--	—
--	--	--	—
--	--	--	—
4.8.4.6	TABLE: Crush test		
Test position	Surface tested	Crushing Force (N)	Duration force applied (s)
--	--	--	—
--	--	--	—
Supplementary information:			

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
4.8.5	TABLE: Lithium coin/button cell batteries mechanical test result		N/A
Test position	Surface tested	Force (N)	Duration force applied (s)
--	--	--	--
--	--	--	--

Supplementary information:

5.2 Table: Classification of electrical energy sources						P	
5.2.2.2 – Steady State Voltage and Current conditions							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				U (Vrms or Vpk)	I (Apk or Arms)	Hz	
1	12Vdc for DC Input port	All internal parts	Normal	12.0Vdc	--	--	ES1
			Abnormal	--	--	--	
			Single fault – SC/OC	--	--	--	
--	--	--	Normal	--	--	--	--
			Abnormal	--	--	--	
			Single fault – SC/OC	--	--	--	
5.2.2.3 - Capacitance Limits							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Capacitance, nF	Upk (V)		
--	--	--	Normal	--	--	--	--
			Abnormal	--	--	--	
			Single fault – SC/OC	--	--	--	
5.2.2.4 - Single Pulses							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Duration (ms)	Upk (V)	Ipk (mA)	
--	--	--	Normal	--	--	--	--
			Abnormal	--	--	--	
			Single fault – SC/OC	--	--	--	

IEC 62368-1

Clause	Requirement + Test		Result - Remark			Verdict		
5.2.2.5 - Repetitive Pulses								
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters				
--	--	--	Normal	--	--	--		
			Abnormal	--	--	--		
			Single fault – SC/OC	--	--	--		
Test Conditions:								
Normal -								
Abnormal -								
Supplementary information: SC=Short Circuit, OC=Short Circuit								

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements							
	Supply voltage (V)	12.57Vdc	12.57Vdc	--	--	--		
	Ambient T _{min} (°C)	25.0	40.0	--	--	--		
	Ambient T _{max} (°C)	25.0	40.0	--	--	--		
	T _{ma} (°C)			40.0		--		
Maximum measured temperature T of part/at:						Allowed T _{max} (°C)		
Power connection port	--	49.8	--	--	--	Ref.		
L1 Inductance	--	58.8	--	--	--	120		
PCB near U1 for V12-15-2020-1614	--	70.4	--	--	--	130		
PCB near U3 for V12-15-2020-1614	--	77.2	--	--	--	130		
PCB near IC3 for CM3-VAVGHTERBOARD	--	65.3	--	--	--	130		
PCB near U1 for Raspberry Pi	--	83.0	--	--	--	130		
PCB for MAXII07	--	54.1	--	--	--	130		
PCB for NEO-6M-0-001	--	60.8	--	--	--	130		
Top plastic enclosure	36.7	--	--	--	--	#77		
Bottom plastic enclosure	35.5	--	--	--	--	#77		
Ambient	25.0	40.0	--	--	--	--		
Supplementary information:								
#: External surfaces touched in normal use: 1s < t < 10s.								
Note 1: T _{ma} should be considered as directed by applicable requirement								
Note 2: T _{ma} is not included in assessment of Touch Temperatures (Clause 9)								
Temperature T of winding:		t ₁ (°C)	R ₁ (Ω)	t ₂ (°C)	R ₂ (Ω)	T (°C)	Allowed T _{max} (°C)	Insulation class
--		--	--	--	--	--	--	--

IEC 62368-1

Clause	Requirement + Test			Result - Remark			Verdict
--	--	--	--	--	--	--	--
Supplementary information:							

5.4.1.10.2	TABLE: Vicat softening temperature of thermoplastics			N/A
Penetration (mm)	--			—
Object/ Part No./Material	Manufacturer/trademark		T softening (°C)	
--	--		--	
supplementary information:				

5.4.1.10.3	TABLE: Ball pressure test of thermoplastics			N/A
Allowed impression diameter (mm)	≤ 2 mm			—
Object/Part No./Material	Manufacturer/trademark		Test temperature (°C)	Impression diameter (mm)
--	--		--	--
Supplementary information:				

5.4.2.2, 5.4.2.4 and 5.4.3	TABLE: Minimum Clearances/Creepage distance							N/A
Clearance (cl) and creepage distance (cr) at/of/between:	Up (V)	U r.m.s. (V)	Frequency (kHz) ¹	Required cl (mm) ²	cl (mm) ²	Required ³ cr (mm)	cr (mm)	
Functional:								
--	--	--	--	--	--	--	--	--
Basic/supplementary:								
--	--	--	--	--	--	--	--	--
Reinforced:								
--	--	--	--	--	--	--	--	--
Supplementary information:								
Note 1: Only for frequency above 30 kHz								
Note 2: See table 5.4.2.4 if this is based on electric strength test								
Note 3: Provide Material Group								
Note 4: Multiplication factors for Clearances is 1.0								
Note 5: BI: basic insulation; SI: supplementary insulation; DI: double insulation; RI: reinforced insulation; DP: different polarity								

IEC 62368-1

Clause	Requirement + Test	Result - Remark		Verdict		
5.4.2.3	TABLE: Minimum Clearances distances using required withstand voltage			N/A		
	Overvoltage Category (OV):			II		
	Pollution Degree:			2		
Clearance distanced between:		Required withstand voltage	Required cl (mm)	Measured cl (mm)		
Functional:						
--	--	--	--	--		
Basic/supplementary:						
--	--	--	--	--		
Reinforced:						
--	--	--	--	--		
Supplementary information:						

5.4.2.4	TABLE: Clearances based on electric strength test			N/A
Test voltage applied between:		Required cl (mm)	Test voltage (kV) peak/ r.m.s. / d.c.	Breakdown Yes / No
--	--	--	--	--
Supplementary information:				

5.4.4.2, 5.4.4.5 c) 5.4.4.9	TABLE: Distance through insulation measurements			N/A
Distance through insulation di at/of:	Peak voltage (V)	Frequency (kHz)	Material	Required DTI (mm)
--	--	--	--	--
Supplementary information:				

5.4.9	TABLE: Electric strength tests			N/A
Test voltage applied between:		Voltage shape (AC, DC)	Test voltage (V)	Breakdown Yes / No
Functional:				
--	--	--	--	--
Basic/supplementary:				
--	--	--	--	--
Reinforced:				
--	--	--	--	--
Routine Tests:				
--	--	--	--	--

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
5.4.9	TABLE: Electric strength tests		N/A
Test voltage applied between:	Voltage shape (AC, DC)	Test voltage (V)	Breakdown Yes / No
Supplementary information:			

5.5.2.2	TABLE: Stored discharge on capacitors					N/A
Supply Voltage (V), Hz	Test Location	Operating Condition (N, S)	Switch position On or off	Measured Voltage (after 2 seconds)	ES Classification	
--	--	--	--	--	--	--
Supplementary information:						
X-capacitors installed for testing are:						
bleeding resistor rating:						
ICX:						
Notes:						
A. Test Location:						
Phase to Neutral; Phase to Phase; Phase to Earth; and/or Neutral to Earth						
B. Operating condition abbreviations:						
N – Normal operating condition (e.g., normal operation, or open fuse); S –Single fault condition						

5.6.6.2	TABLE: Resistance of protective conductors and terminations					N/A
Accessible part	Test current (A)	Duration (min)	Voltage drop (V)	Resistance (Ω)		
--	--	--	--	--	--	--
Supplementary information:						

5.7.2.2, 5.7.4	TABLE: Earthing accessible conductive part			N/A
Supply voltage..... :			—	
Location	Test conditions specified in 6.1 of IEC 60990 or Fault Condition No in IEC 60990 clause 6.2.2.1 through 6.2.2.8, except for 6.2.2.7		Touch current (mA)	
	1			
	2*			
	3			
	4			
	5			
	6			
	8			
Supplementary Information:				

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
Notes:			
[1] Supply voltage is the anticipated maximum Touch Voltage			
[2] Earthed neutral conductor [Voltage differences less than 1% or more]			
[3] Specify method used for measurement as described in IEC 60990 sub-clause 4.3			
[4] IEC60990, sub-clause 6.2.2.7, Fault 7 not applicable.			
[5] (*) IEC60990, sub-clause 6.2.2.2 is not applicable if switch or disconnect device (e.g., appliance coupler) provided.			

6.2.2	Table: Electrical power sources (PS) measurements for classification				
Source	Description	Measurement	Max Power after 3 s	Max Power after 5 s*)	PS Classification
LAN &	Normal	Power (W) :	--	--	PS1
		V _A (V) :	--	--	
		I _A (A) :	--	--	
Adapter output	All circuit	Power (W) :	--	--	PS2
		V _A (V) :	--	--	
		I _A (A) :	--	--	

Supplementary Information:

(*) Measurement taken only when limits at 3 seconds exceed PS1 limits

SC: short circuit.

(&) Power measurement for worst-case fault.

6.2.3.1	Table: Determination of Potential Ignition Sources (Arcing PIS)				N/A
Location	Open circuit voltage After 3 s (V _p)	Measured r.m.s current (I _{rms})	Calculated value (V _p x I _{rms})	Arcing PIS? Yes / No	
--	--	--	--	--	--

Supplementary information:

An Arcing PIS requires a minimum of 50 V (peak) a.c. or d.c. An Arcing PIS is established when the product of the open circuit voltage (V_p) and normal operating condition rms current (I_{rms}) is greater than 15.

6.2.3.2	Table: Determination of Potential Ignition Sources (Resistive PIS)					P
Circuit Location (x-y)	Operating Condition (Normal / Describe Single Fault)	Measured wattage or VA During first 30 s (W / VA)	Measured wattage or VA After 30 s (W / VA)	Protective Circuit, Regulator, or PTC Operated? Yes / No (Comment)	Resistive PIS? Yes/No	
All circuits (include output terminal)	--	--	--	--	Yes	

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
Supplementary Information: A combination of voltmeter, VA and ammeter IA may be used instead of a wattmeter. If a separate voltmeter and ammeter are used, the product of (VA x IA) is used to determine Resistive PIS classification. A Resistive PIS: (a) dissipates more than 15 W, measured after 30 s of normal operation, or (b) under single fault conditions has either a power exceeding 100 W measured immediately after the introduction of the fault if electronic circuits, regulators or PTC devices are used, or has an available power exceeding 15 W measured 30 s after introduction of the fault.			

8.5.5 TABLE: High Pressure Lamp

N/A

Description	Values	Energy Source Classification
Lamp type	--	--
Manufacturer.....	--	--
Cat no.....	--	--
Pressure (cold) (MPa)	--	MS_
Pressure (operating) (MPa).....	--	MS_
Operating time (minutes).....	--	--
Explosion method	--	--
Max particle length escaping enclosure (mm)..	--	MS_
Max particle length beyond 1 m (mm)	--	MS_
Overall result	--	
Supplementary information:		

B.2.5 TABLE: Input test

D

TABLE: Input test							
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status
264V/50Hz	0.068	--	7.54	--	--	--	Max normal load (For adapter)
12.57Vdc	0.640	--	8.04	--	--	--	Max normal load

Supplementary information:

Equipment may be have rated current or rated power or both. Both should be measured

B.3 TABLE: Abnormal operating condition tests

N/A

B.3 TABLE: Abnormal operating condition tests									N/A
Ambient temperature (°C)						See below			—
Power source for EUT: Manufacturer, model/type, output rating ..:						See below			—
Component No.	Abnormal Condition	Supply voltage, (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-couple	Temp. (°C)	Observation	
--	--	--	--	--	--	--	--	--	

IEC 62368-1

Clause	Requirement + Test			Result - Remark			Verdict			
B.3	TABLE: Abnormal operating condition tests						N/A			
Ambient temperature (°C)	See below						—			
Power source for EUT: Manufacturer, model/type, output rating ...	See below						—			
Component No.	Abnormal Condition	Supply voltage, (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-couple	Temp. (°C)	Observation		
Supplementary information: Test table is provided to record abnormal and fault conditions for all applicable energy sources including Thermal burn injury. Column "Abnormal/Fault." Specify if test condition by indicating "Abnormal" then the condition for a Clause B.3 test or "Single Fault" then the condition for Clause B.4. 1) OL: overload. 2) Output terminal does not exceed ES1 limits. 3) Temperature limits under the fault condition: •Power Transformer: 165°C •Enclosure outside: 87°C										

B.4	TABLE: Fault condition tests								P
Ambient temperature (°C)	See below								—
Power source for EUT: Manufacturer, model/type, output rating ...	See below								—
Component No.	Fault Condition	Supply voltage, (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-couple	Temp. (°C)	Observation	
C11	SC	12.57V dc	10mins	--	--	--	--	After SC, EUT shut down immediately. Duration the test, no fire, no damage, no hazard	
D3	SC	12.57V dc	10mins	--	--	--	--	After SC, EUT shut down immediately. Duration the test, no fire, no damage, no hazard	
C24	SC	12.57V dc	10mins	--	--	--	--	After SC, EUT shut down immediately. Duration the test, no fire, no damage, no hazard	
U1 Pin 1-2	SC	12.57V dc	10mins	--	--	--	--	After SC, EUT shut down immediately. Duration the test, no fire, no damage, no hazard	
U2 Pin 1-2	SC	12.57V dc	10mins	--	--	--	--	After SC, EUT shut down immediately. Duration the test, no fire, no damage, no hazard	

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
Supplementary information:			
1) OL: overload. SC: short circuit.			
2) Output terminal does not exceed ES1 limits.			
3) #: Test repeated with all alternate sources and results were same.			
4) Temperature limits under the fault condition:			
•Power Transformer: 165°C			
•Enclosure outside: 87°C			

Annex M	TABLE: Batteries								N/A
The tests of Annex M are applicable only when appropriate battery data is not available									N/A
Is it possible to install the battery in a reverse polarity position?: No									N/A
	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging	
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.
Max. current during normal condition	--	--	--	--	--	--	--	--	--
Max. current during fault condition ¹⁾	--	--	--	--	--	--	--	--	--
1): Fault condition:									
Test results:									Verdict
- Chemical leaks								--	N/A
- Explosion of the battery								--	N/A
- Emission of flame or expulsion of molten metal								--	N/A
- Electric strength tests of equipment after completion of tests								--	N/A
Supplementary information:									
SC - Short-circuited, OC - Open-circuited									

Annex M.4	Table: Additional safeguards for equipment containing secondary lithium batteries					N/A
Battery/Cell No.	Test conditions	Measurements			Observation	
		U	I (A)	Temp (C)		
--	Normal	--	--	--	--	
--	Single fault:	--	--	--	--	
--	Single fault:	--	--	--	--	
Supplementary Information:						
SC - Short-circuited, OC - Open-circuited						

IEC 62368-1

Clause	Requirement + Test		Result - Remark		Verdict
Battery identification	Charging at T_{lowest} (°C)	Observation	Charging at T_{highest} (°C)	Observation	
--	--	--	--	--	--
Supplementary Information:					

Annex Q.1	TABLE: Circuits intended for interconnection with building wiring (LPS)					N/A
Note: Measured UOC (V) with all load circuits disconnected:						
Output Circuit	Components	U_{oc} (V)	I_{sc} (A)		S (VA)	
			Meas.	Limit	Meas.	Limit
--	--	--	--	--	--	--
--	--	--	--	--	--	--
Supplementary Information:						
SC=Short circuit, OC=Open circuit						

T.2, T.3, T.4, T.5	TABLE: Steady force test					N/A
Part/Location	Material	Thickness (mm)	Force (N)	Test Duration (sec)	Observation	
--	--	--	--	--	--	
--	--	--	--	--	--	
--	--	--	--	--	--	
Supplementary information:						

T.6, T.9	TABLE: Impact tests					N/A
Part/Location	Material	Thickness (mm)	Vertical distance (mm)		Observation	
--	--	--	--		--	
--	--	--	--		--	
--	--	--	--		--	
Supplementary information:						

T.7	TABLE: Drop tests					N/A
Part/Location	Material	Thickness (mm)	Drop Height (mm)	Observation		
--	--	--	--	--		
--	--	--	--	--		
--	--	--	--	--		

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
Supplementary information:			

T.8	TABLE: Stress relief test					N/A
Part/Location	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation	
--	--	--	--	--	--	--
Supplementary information:						



EN 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT			
IEC 62368-1 (AUSTRALIA / NEW ZEALAND) NATIONAL DIFFERENCES (Audio/video, information and communication technology equipment)			
Differences according to : AS/NZS 62368.1:2018			
Attachment Form No. : AU_NZ_ND_IEC62368_1B			
Attachment Originator : JAS-ANZ			
Master Attachment : 2019-02-04			
Copyright © 2019 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	National Differences		P
Appendix ZZ	Variations to IEC 62368-1:2014 (ED. 2.0) for Australia and New Zealand		P
ZZ1 Scope	This Appendix lists the normative variations to IEC 62368-1:2014 (ED. 2.0)		P
ZZ2 Variations	The following modifications are required for Australian/New Zealand conditions:		P
2	<p>Add the following to the list of normative references:</p> <p>The following normative documents are referenced in Appendix ZZ:</p> <ul style="list-style-type: none"> -AS/NZS 3112, <i>Approval and test specification—Plugs and socket-outlets</i> -AS/NZS 3123, <i>Approval and test specification—Plugs, socket-outlets and couplers for general industrial application</i> -AS/NZS 3191, <i>Electric flexible cords</i> -AS/NZS 60065, <i>Audio, video and similar electronic apparatus—Safety requirements</i> (IEC 60065:2015 (ED.8.0) MOD) -AS/NZS 60320.1, <i>Appliance couplers for household and similar general purposes</i>, Part 1: General requirements (IEC 60320-1, Ed.2.1 (2007) MOD) -AS/NZS 60320.2.2, <i>Appliance couplers for household and similar general purposes</i> <i>Part 2.2: Interconnection couplers for household and similar equipment (IEC 60320-2-2, Ed.2.0 (1998) MOD)</i> -AS/NZS 60695.2.11, <i>Fire hazard testing, Part 2.11: Glowing/hot wire based test methods—Glow-wire flammability test method for end-products</i> -AS/NZS 60695.11.5, <i>Fire hazard testing, Part 11.5: Test flames—Needle-flame test method—Apparatus, confirmatory test arrangement and guidance</i> -AS/NZS 60695.11.10, <i>Fire hazard testing, Part 11.10: Test flames—50 W horizontal and vertical flame test methods</i> 		

EN 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	<p>-AS/NZS 60884.1, <i>Plugs and socket-outlets for household and similar purposes, Part 1: General requirements</i></p> <p>-AS/NZS 60950.1:2015, <i>Information technology equipment—Safety, Part 1: General requirements (IEC 60950-1, Ed.2.2 (2013), MOD)</i></p> <p>IEC 61032:1997, <i>Protection of persons and equipment by enclosures—Probes for verification</i></p> <p>-AS/NZS 61558.1:2008 (including Amendment 2:2015), <i>Safety of Power Transformers, Power Supplies, Reactors and Similar Products, Part 1: General requirements and tests (IEC 61558-1 Ed 2.1, MOD)</i></p> <p>-AS/NZS 61558.2.16, <i>Safety of transformers, reactors, power supply units and similar products for voltages up to 1 100 V, Part 2.16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units.</i></p>		
4.1.1	<p>Application of requirements and acceptance of materials, components and subassemblies</p> <p>1 Replace the text 'IEC 60950-1' with 'AS/NZS 60950.1:2015'.</p> <p>2 Replace the text 'IEC 60065' with 'AS/NZS 60065'.</p>		N/A
4.7	Equipment for direct insertion into mains socket-outlets		N/A
4.7.2	<p>Requirements</p> <p>Delete the text of the second paragraph and replace with the following:</p> <p>Equipment with a plug portion, suitable for insertion into a 10 A 3-pin flat-pin socket-outlet complying with AS/NZS 3112 shall comply with the requirements in AS/NZS 3112 for equipment with integral pins for insertion into socket-outlets.</p>		N/A
4.7.3	<p>Compliance Criteria</p> <p>Delete the first paragraph and Note 1 and Note 2 and replace with the following:</p> <p>Compliance is checked by inspection and, if necessary, by the tests in AS/NZS 3112.</p>		N/A
4.8	<p>Delete existing clause title and replace with the following:</p> <p>4.8 Products containing coin/button cell batteries</p>		N/A
4.8.1	<p>General</p> <p>1 Second dashed point, delete the text and replace with the following:</p> <ul style="list-style-type: none"> – include coin/button cell batteries with a diameter of 32 mm or less. <p>2 After the second dashed point, insert the following</p>		N/A

EN 62368-1

Clause	Requirement + Test	Result - Remark		Verdict		
	Note: NOTE 1: Batteries are specified in IEC 60086-2. 3 After the third dashed point, <i>renumber</i> the existing Note as 'NOTE 2'. 4 Fifth dashed point, <i>delete</i> the word 'lithium'.					
4.8.2	Instructional Safeguard First line, <i>delete</i> the word 'lithium'.			N/A		
4.8.3	Construction First line, after the word 'Equipment' <i>insert</i> the words 'containing one or more coin/button batteries and'			N/A		
4.8.5	Compliance criteria <i>Delete</i> the first paragraph and <i>replace</i> with the following: <i>Compliance is checked by applying a force of 30 N +/- 1 N for 10 s to the battery compartment door/cover by a rigid test finger according to test probe 11 of IEC 61032:1997 at the most unfavourable place and in the most unfavourable direction. The force shall be applied in one direction at a time.</i>			N/A		
5.4.10.2	Test methods			N/A		
5.4.10.2.1	General <i>Delete</i> the first paragraph and <i>replace</i> with the following: In Australia only, the separation is checked by the test of both Clause 5.4.10.2.2 and Clause 5.4.10.2.3. In New Zealand, the separation is checked by the test of either Clause 5.4.10.2.2 or Clause 5.4.10.2.3.			N/A		
Table 29	<i>Replace</i> the table with the following:					
Parts		Impulse test		Steady state test		
		New Zealand	Australia	New Zealand		
Parts indicated in Clause 5.4.10.1 a) ^a		2.5 kV 10/700 µs	7.0 kV for hand-held telephones and headsets, 2.5 kV for other equipment. 10/700 µs	1.5 kV 3 kV		
Parts indicated in Clause 5.4.10.1 b) and c) ^b		1.5 kV 10/700 µs ^c		1.0 kV 1.5 kV		
<p>^a Surge suppressors shall not be removed.</p> <p>^b Surge suppressors may be removed, provided that such devices pass the impulse test of Clause 5.4.10.2.2 when tested as components outside the equipment.</p> <p>^c During this test, it is allowed for a surge suppressor to operate and for a sparkover to occur in a GDT.</p>						
5.4.10.2.2	After the first paragraph, <i>insert</i> new Notes 201 and			N/A		

EN 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	<p>202 as follows:</p> <p>NOTE 201 For Australia, the 7kV impulse simulates lightning surges on typical rural and semi-rural network lines.</p> <p>NOTE 202 For Australia, the value of 2.5 kV for Clause 5.4.10.1 a) was chosen to ensure the adequacy of the insulation concerned and does not necessarily simulate likely overvoltages.</p>		
5.4.10.2.3	<p>After the first paragraph, <i>insert</i> new Notes 201 and 202 as follows:</p> <p>NOTE 201 For Australia, where there are capacitors across the insulation under test, it is recommended that d.c. test voltages are used.</p> <p>NOTE 202 The 3 kV and 1.5 kV values for Australia have been determined considering the low frequency induced voltages from the power supply distribution system.</p>		N/A
6	Electrically-caused fire		P
6.1	<p>General</p> <p>After the first paragraph, <i>insert</i> the following new paragraph:</p> <p>Alternatively, the requirements of Clauses 6.2 to 6.5.2 are considered to be fulfilled if the equipment complies with the requirements of Clause 6.202</p>		P
6.6	<p>After Clause 6.6, <i>add</i> the new Clauses 6.201 and 6.202 as follows:</p> <p>6.201 External power supplies, docking stations and other similar devices and 6.202 Resistance to fire—Alternative tests (see special national conditions)</p>		N/A
8.5.4	Special categories of equipment comprising moving parts		N/A
8.5.4.1	<p>Large data storage equipment</p> <p>In the first dashed row and the second dashed rows <i>replace</i> 'IEC 60950-1:2005' with 'AS/NZS 60950.1:2015'.</p>		N/A
8.6	Stability of equipment		N/A
8.6.1 and Table 36	<p>Requirements</p> <ol style="list-style-type: none"> 1. Table 36, <i>insert</i> Footnote c at the end of the 'Glass slide' heading, and <i>add</i> a new Footnote c after the text of Footnote b in the last row of Table 36 as follows: c The glass slide test is not applicable to floor standing equipment, even though the equipment may have controls or a display. 2. Table 36, fifth row, <i>insert</i> '201' at the end of 'No stability requirements' 3. Table 36, ninth row, <i>insert</i> '201' at the end of 'No stability requirements' 4. Table 36, <i>add</i> the following new footnote: 201 MS2 and MS3 television sets and display 		N/A

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>devices, designed only for fixing to a wall, ceiling or equipment rack, are not subjected to stability requirements only if the instructional safeguard of Clause 8.6.1.201 is provided. Otherwise, the glass slide requirements of Clause 8.6.4 and horizontal force requirements of Clause 8.6.5 apply.</p> <p>5. Second paragraph beneath Table 36, <i>delete</i> the words 'MS2 and MS3 television sets' and <i>replace</i> with 'MS2 and MS3 television sets and display devices'</p>		
8.6.1	<p>After Clause 8.6.1 <i>add</i> the following new clauses:</p> <p>8.6.1.201 Instructional safeguard for fixed-mount television sets (see special national conditions)</p>		N/A
Annex F Paragraph F.3.5.1	<p>Mains appliance outlet and socket-outlet markings <i>Replace</i> 'IEC 60320-2-2' with 'AS/NZS 60320.2.2'.</p>		P
Annex G Paragraph G.4.2	<p>Mains connectors</p> <ol style="list-style-type: none"> 1 In the second line <i>insert</i> 'or AS/NZS 3123' after 'IEC 60906-1'. 2 In the second line <i>insert</i> 'or AS/NZS 60320 series' after 'IEC 60320 series' 3 <i>Add</i> the following new paragraph: 10 A or 15 A 250 V flat pin plugs for the connection of equipment to mains-powered socket-outlets for household or similar general use <i>shall comply with AS/NZS 3112 or AS/NZS 60884.1</i>. 		N/A
Paragraph G.5.3.1	<p>Transformers, General</p> <ol style="list-style-type: none"> 1 In the third dashed point <i>replace</i> 'IEC 61558-1 and the relevant parts of IEC 61558-2' with 'AS/NZS 61558-1 and the relevant parts of AS/NZS 61558.2' 2 In the fourth dashed point <i>replace</i> 'IEC 61558-2-16' with 'AS/NZS 61558.2.16'. 		N/A
Paragraph G.7.1	<p>Mains supply cords, General</p> <p>In the fourth dashed paragraph, <i>replace</i> 'IEC 60320-1' with 'AS/NZS 60320.1'</p>		N/A
Table G.5	<p>Sizes of conductors</p> <ol style="list-style-type: none"> 1 In the second row, first column, <i>delete</i> '6' and <i>replace</i> with '7.5' 2 In the second row, second column, <i>delete</i> '0,75' and <i>replace</i> with '0.75^b' 3 <i>Delete Note 1.</i> 4 <i>Replace</i> 'NOTE 2' with 'NOTE:'. 5 <i>Delete</i> the text of 'Footnote b' and <i>replace</i> with the following: ^bThis nominal cross-sectional area is only allowed for Class II appliances if the length of the power supply cord, measured between the point where the cord, or cord guard, enters the appliance, and the 		N/A

EN 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	<p>entry to the plug does not exceed 2 m (0.5 mm² three-core supply flexible cords are not permitted; see AS/NZS 3191).</p> <p>6 In Footnote c replace 'IEC 60320-1' with 'AS/NZS 60320.1'</p> <p>7 In Footnote d replace 'IEC 60320-1' with 'AS/NZS 60320.1'</p>		
Annex M Paragraph M.3.2	<p>Protection circuits for batteries provided within the equipment, Test method</p> <p>After the first dashed point add the following Note:</p> <p>NOTE 201: In cases where the voltage source is provided by power from an unassociated power source, consideration should be given to the effects of possible single fault conditions in the unassociated equipment. If the power source is unknown then it should be assumed that the maximum limit of SELV may be applied to the source input under assumed single fault conditions in the source when assessing the charging circuit in the equipment under test.</p>		P
			N/A
	Special national conditions (if any)		N/A
6.201	<p>External power supplies, docking stations and other similar devices</p> <p>For external power supplies, docking stations and other similar devices, during and after abnormal operating conditions and during single fault conditions the output voltage—</p> <ul style="list-style-type: none"> – at all ES1 outlets or connectors shall not increase by more than 10% of its rated output voltage under normal operating condition; and – of a USB outlet or connector shall not increase by more than 3 V or 10% of its rated output voltage under normal operating conditions, whichever is higher. <p>For equipment with multiple rated output voltages, the requirements apply with the equipment configured for each rated output voltage in turn.</p> <p>NOTE: This is intended to reduce the possibility of battery fire or explosion in attached equipment or accessories when charging secondary lithium batteries.</p> <p><i>Compliance shall be checked by measurement, taking into account the abnormal operating conditions of Annex B.3 and the simulated single-fault conditions of Annex B.4</i></p>		N/A
6.202	Resistance to fire—Alternative tests		N/A
6.202.1	General		N/A
	Parts of non-metallic material shall be resistant to		

EN 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	<p>ignition and spread of fire.</p> <p>This requirement does not apply to decorative trims, knobs and other parts unlikely to be ignited or to propagate flames from inside the equipment, or the following:</p> <ul style="list-style-type: none"> a) Components that are contained in an enclosure having a flammability category of V-0 according to AS/NZS 60695.11.10 and having openings only for the connecting wires filling the openings completely, and for ventilation not exceeding 1 mm in width regardless of length. b) The following parts which would contribute negligible fuel to a fire: <ul style="list-style-type: none"> – small mechanical parts, the mass of which does not exceed 4 g, such as mounting parts, gears, cams, belts and bearings; – small electrical components, such as capacitors with a volume not exceeding 1 750 mm³, integrated circuits, transistors and optocoupler packages, if these components are mounted on material of flammability category V-1, or better, according to AS/NZS 60695.11.10. <p>NOTE: In considering how to minimize propagation of fire and what 'small parts' are, account should be taken of the cumulative effect of small parts adjacent to each other for the possible effect of propagating the fire from one part to another.</p>		
	<p><i>Compliance shall be checked by the tests of Clauses 6.202.2, 6.202.3 and 6.202.4.</i></p> <p>For the base material of printed boards, compliance shall be checked by the test of Clause 6.202.5.</p> <p>The tests shall be carried out on parts of non-metallic material which have been removed from the equipment. When the glow-wire test is carried out, the parts shall be placed in the same orientation as they would be in normal use.</p> <p>These tests are not carried out on internal wiring.</p>		N/A
6.202.2	<p>Testing of non-metallic materials</p> <p>Parts of non-metallic material shall be subject to the glow-wire test of AS/NZS 60695.2.11 which shall be carried out at 550°C.</p> <p>Parts for which the glow-wire test cannot be carried out, such as those made of soft or foamy material, shall meet the requirements specified in ISO 9772 for category FH-3 material. The glow-wire test shall be not carried out on parts of material classified at least FH-3 according to ISO 9772 provided that the relevant part is not thinner than the sample tested.</p>		N/A
6.202.3	<p>Testing of insulating materials</p> <p>Parts of insulating material supporting Potential</p>		N/A

EN 62368-1											
Clause	Requirement + Test	Result - Remark	Verdict								
	<p>Ignition Sources shall be subject to the glow-wire test of AS/NZS 60695.2.11 which shall be carried out at 750°C.</p> <p>The test shall be also carried out on other parts of insulating material which are within a distance of 3 mm of the connection.</p> <p>NOTE: Contacts in components such as switch contacts are considered to be connections</p>										
	<p>For parts which withstand the glow-wire test but produce a flame, other parts above the connection within the envelope of a vertical cylinder having a diameter of 20 mm and a height of 50 mm shall be subjected to the needle-flame test.</p> <p>However, parts shielded by a barrier which meets the needle-flame test need not be tested</p>		N/A								
	<p>The needle-flame test shall be made in accordance with AS/NZS 60695.11.5 with the following modifications:</p> <table border="1"> <thead> <tr> <th>Clause of AS/NZS 60695.11.5</th> <th>Change</th> </tr> </thead> <tbody> <tr> <td>9 Test procedure</td> <td></td> </tr> <tr> <td>9.2 Application of needle-flame</td> <td> <p><i>Delete the first and second paragraphs and replace with the following:</i></p> <p>The specimen shall be arranged so that the flame can be applied to a vertical or horizontal edge as shown in the examples of Figure 1. If possible the flame shall be applied at least 10 mm from a corner.</p> <p>The duration of application of the test flame shall be 30 s ± 1 s.</p> </td> </tr> <tr> <td>9.3 Number of test specimens</td> <td> <p><i>Replace with the following:</i></p> <p>The test shall be made on one specimen. If the specimen does not withstand the test, the test may be repeated on two further</p> </td> </tr> </tbody> </table>	Clause of AS/NZS 60695.11.5	Change	9 Test procedure		9.2 Application of needle-flame	<p><i>Delete the first and second paragraphs and replace with the following:</i></p> <p>The specimen shall be arranged so that the flame can be applied to a vertical or horizontal edge as shown in the examples of Figure 1. If possible the flame shall be applied at least 10 mm from a corner.</p> <p>The duration of application of the test flame shall be 30 s ± 1 s.</p>	9.3 Number of test specimens	<p><i>Replace with the following:</i></p> <p>The test shall be made on one specimen. If the specimen does not withstand the test, the test may be repeated on two further</p>		N/A
Clause of AS/NZS 60695.11.5	Change										
9 Test procedure											
9.2 Application of needle-flame	<p><i>Delete the first and second paragraphs and replace with the following:</i></p> <p>The specimen shall be arranged so that the flame can be applied to a vertical or horizontal edge as shown in the examples of Figure 1. If possible the flame shall be applied at least 10 mm from a corner.</p> <p>The duration of application of the test flame shall be 30 s ± 1 s.</p>										
9.3 Number of test specimens	<p><i>Replace with the following:</i></p> <p>The test shall be made on one specimen. If the specimen does not withstand the test, the test may be repeated on two further</p>										

EN 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	<p>specimens, both of which shall withstand the test.</p> <p>11 Evaluation of test results</p> <p>Replace with the following: The duration of burning (tb) shall not exceed 30 s. However, for printed circuit boards, it shall not exceed 15 s.</p> <p>The needle-flame test shall not be carried out on parts of material classified as V-0 or V-1 according to AS/NZS 60695.11.10, provided that the relevant part is not thinner than the sample tested.</p>		
6.202.4	<p>Testing in the event of non-extinguishing material</p> <p>If parts, other than enclosures, do not withstand the glow wire tests of Clause 6.202.3, by failure to extinguish within 30 s after the removal of the glowwire tip, the needle-flame test detailed in Clause 6.202.3 shall be made on all parts of non-metallic material which are within a distance of 50 mm or which are likely to be impinged upon by flame during the tests of Clause 6.202.3. Parts shielded by a separate barrier which meets the needle-flame test need not be tested.</p> <p>NOTE 1: If the enclosure does not withstand the glow-wire test the equipment is considered to have failed to meet the requirements of Clause 6.202 without the need for consequential testing.</p> <p>NOTE 2: If other parts do not withstand the glow-wire test due to ignition of the tissue paper and if this indicates that burning or glowing particles can fall onto an external surface underneath the equipment, the equipment is considered to have failed to meet the requirements of Clause 6.202 without the need for consequential testing.</p> <p>NOTE 3: Parts likely to be impinged upon by the flame are considered to be those within the envelope of a vertical cylinder having a radius of 10 mm and a height equal to the height of the flame, positioned above the point of the material supporting, in contact with, or in close proximity to, connections.</p>		N/A
6.202.5	<p>Testing of printed boards</p> <p>The base material of printed boards shall be subjected to the needle-flame test of Clause 6.202.3. The flame shall be applied to the edge of the board where the heat sink effect is lowest when the board is positioned as in normal use. The flame shall not be applied to an edge, consisting of broken perforations, unless the edge is less than 3 mm from a potential ignition source.</p>		N/A

EN 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	<p>The test is not carried out if—</p> <ul style="list-style-type: none"> – the printed board does not carry any potential ignition source; – the base material of printed boards, on which the available apparent power at a connection exceeds 15 VA operating at a voltage exceeding 50 V and equal or less than 400 V (peak) a.c. or d.c. under normal operating conditions, is of flammability category V-1 or better according to AS/NZS 60695.11.10, or the printed boards are protected by an enclosure meeting the flammability category V-0 according to AS/NZS 60695.11.10, or made of metal, having openings only for connecting wires which fill the openings completely; or – the base material of printed boards, on which the available equipment power at a connection exceeds 15 VA operating at a voltage exceeding 400 V (peak) a.c. or d.c. under normal operating conditions, and base material of printed boards supporting spark gaps which provides protection against overvoltages, is of flammability category V-0 according to AS/NZS 60695.11.10 or the printed boards are contained in a metal enclosure, having openings only for connecting wires which fill the openings completely. <p><i>Conformance shall be determined using the smallest thickness of the material.</i></p> <p>NOTE: Available apparent power is the maximum apparent power which can be drawn from the supplying circuit through a resistive load whose value is chosen to maximize the apparent power for more than 2 min when the circuit supplied is disconnected.</p>		
6.202.6	<p>For open circuit voltages greater than 4 kV</p> <p>Potential ignition sources with open circuit voltages exceeding 4 kV (peak) a.c. or d.c. under normal operating conditions shall be contained in a FIRE ENCLOSURE which shall comply with flammability category V-1 or better according to AS/NZS 60695.11.10.</p>		N/A
8.6.1.201	<p>8.6.1.201 Instructional safeguard for fixed-mount television sets</p> <p>MS2 and MS3 television sets and display devices designed only for fixed mounting to a wall or ceiling or equipment rack shall, where required in Table 36, footnote 201, have an instructional safeguard in accordance with Clause F.5</p> <p>which may be on the equipment or included in the installation instructions or equivalent document accompanying the equipment.</p> <p>The elements of the instructional safeguard shall be</p>		N/A

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>as follows:</p> <ul style="list-style-type: none"> – element 1a: not available; – element 2: ‘Stability Hazard’ or equivalent wording; – element 3: ‘The television set may fall, causing serious personal injury or death’ or equivalent text; – element 4: the following or equivalent text: To prevent injury, this television set must be securely attached to the floor/wall in accordance with the installation instructions 		
8.6.1.202	<p>Restraining device</p> <p>MS2 and MS3 television sets and display devices that are not solely fixed-mounted</p> <p>should be provided with a restraining device such as a fixing point to facilitate restraining the equipment from toppling forward. The restraining device shall be capable of withstanding a pull of 100 N in all directions without damage.</p> <p>Where a restraining device is provided, instructions shall be provided in the instructions for installation or instructions for use to ensure correct and safe installation.</p>		N/A

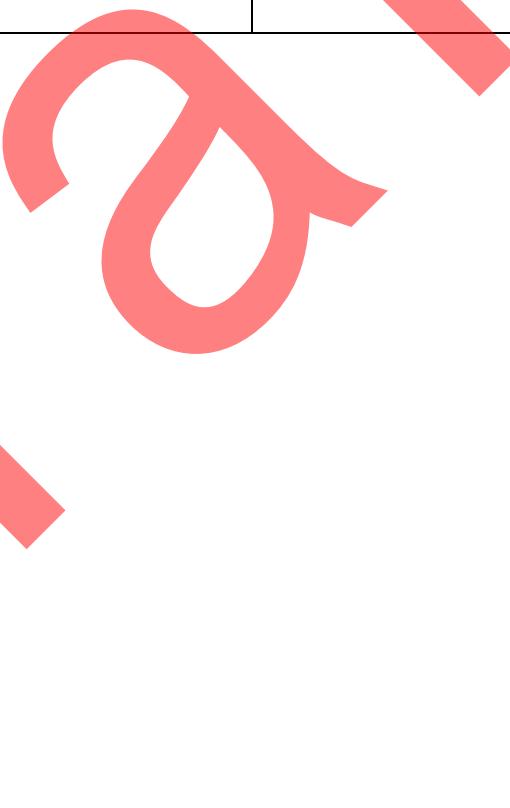


Photo documentation

Details of: Overview 01



Details of: Overview 02


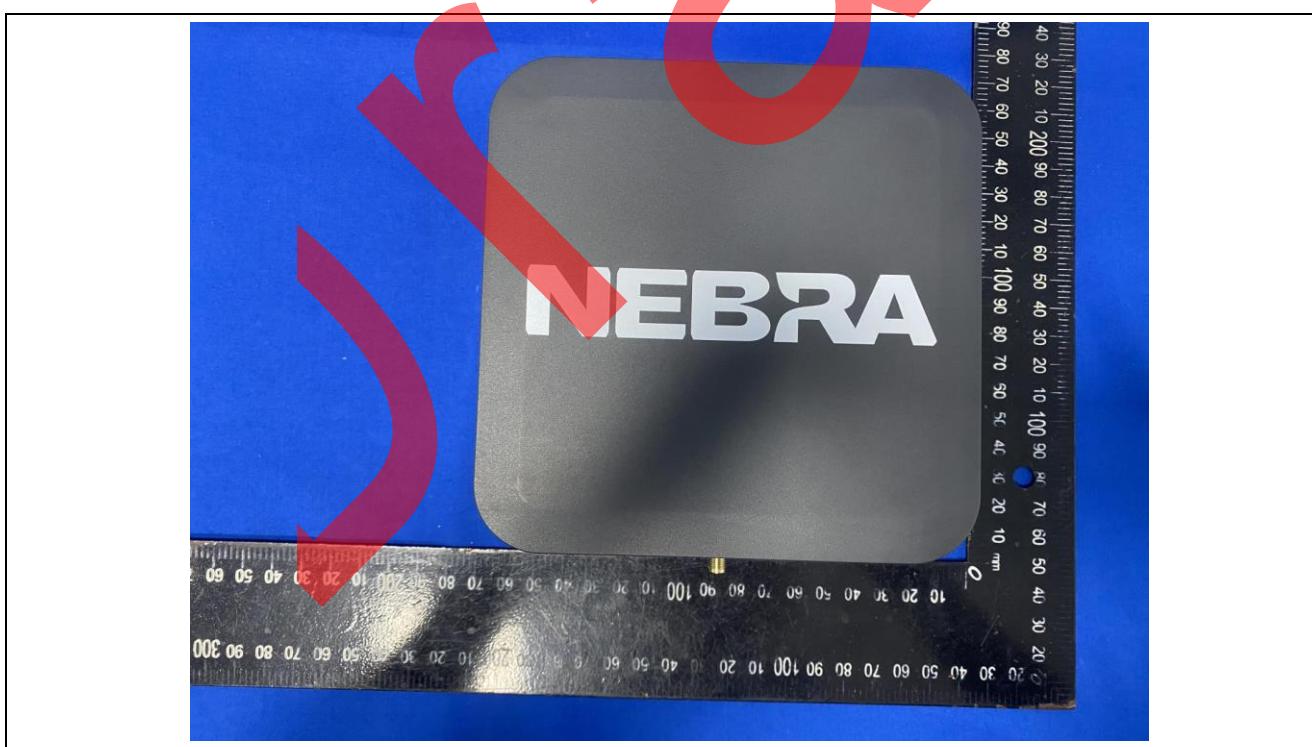


Photo documentation

Details of: Overview 03

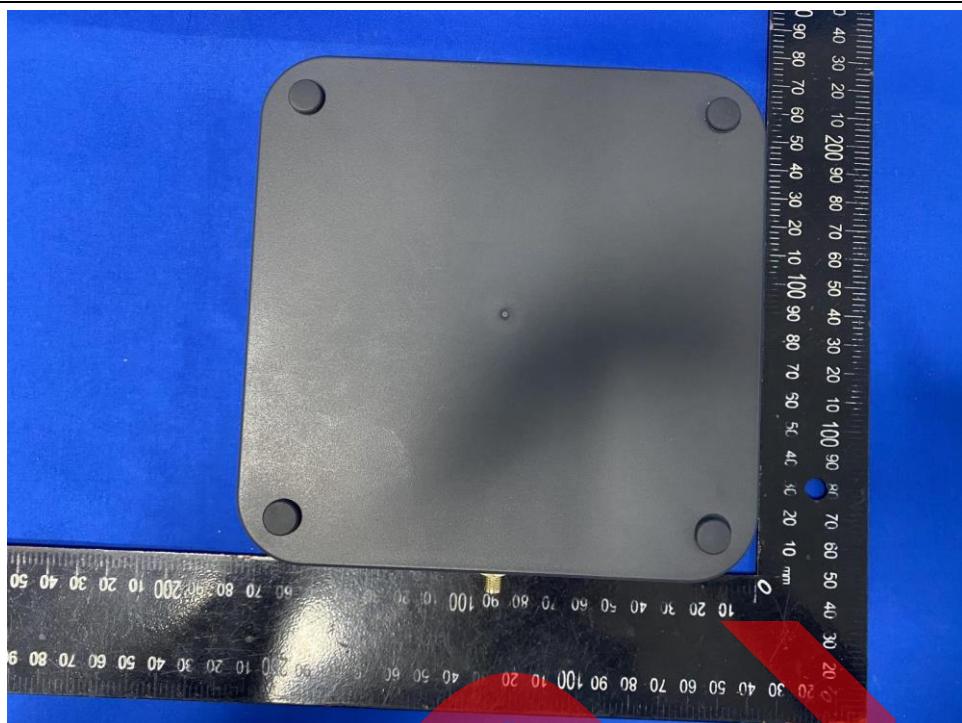

Details of: Overview 04



Photo documentation

Details of: Overview 05



Details of: Overview 06



Photo documentation

Details of: Overview 07




Details of: Overview 08



Photo documentation

Details of: Overview 09

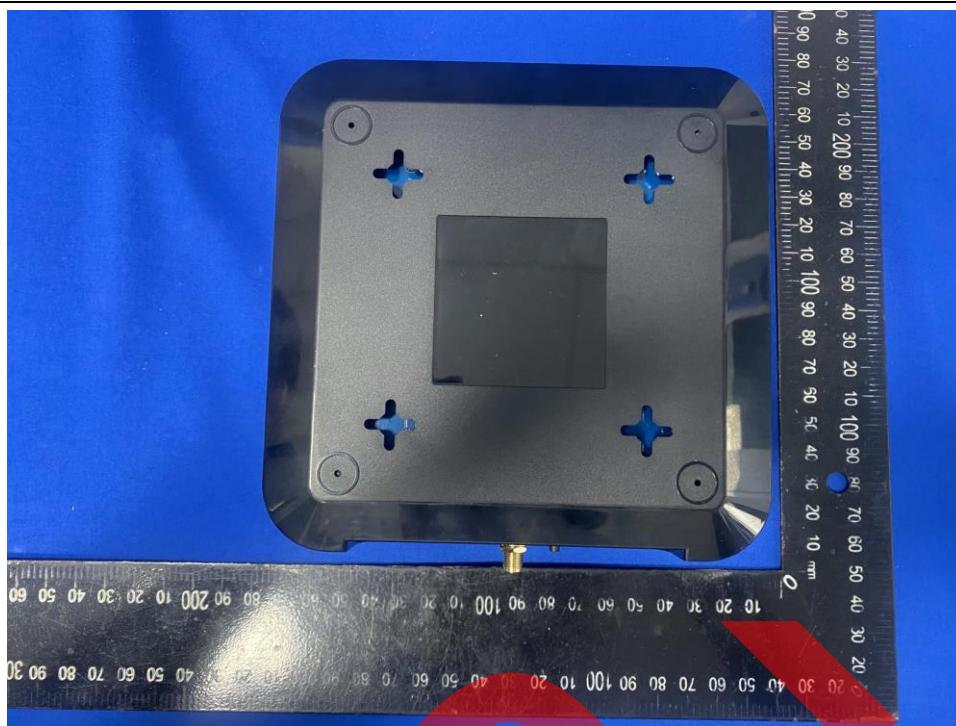


Details of: Overview 10



Photo documentation

Details of: Internal view 01

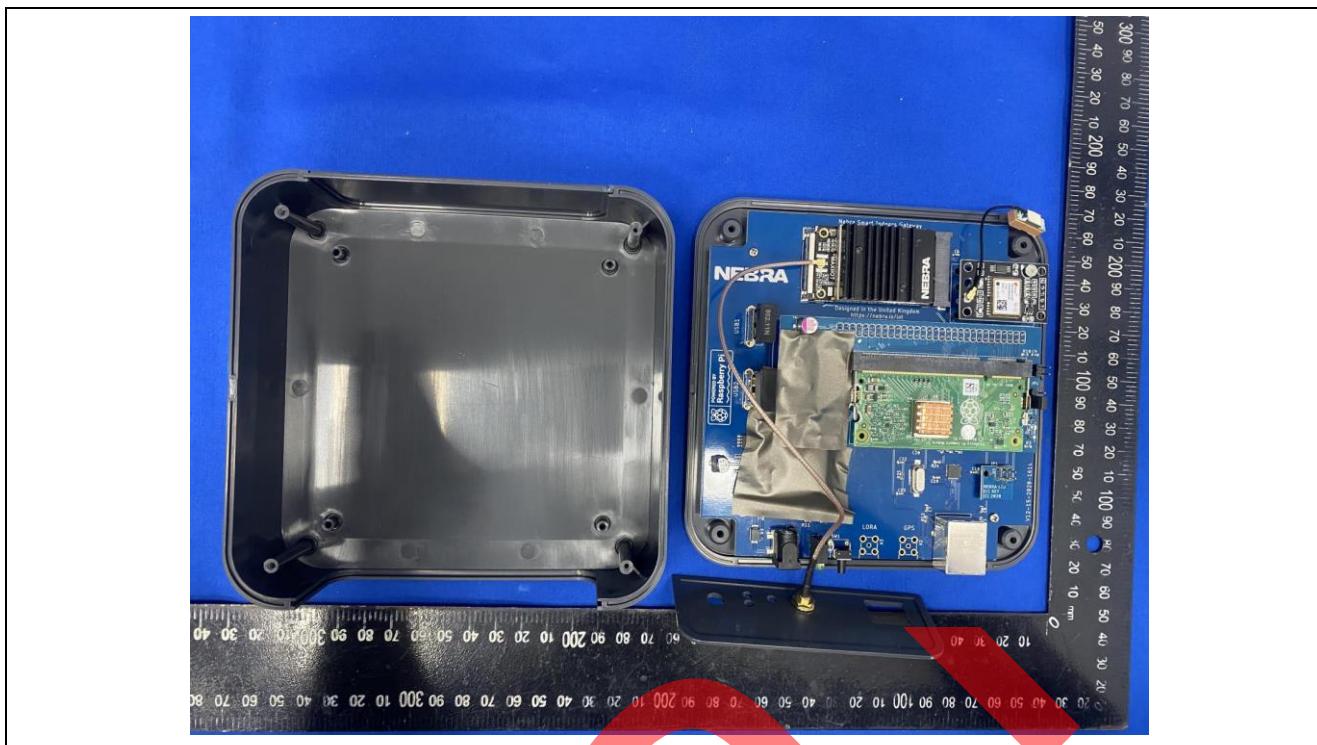

Details of: Internal view 02


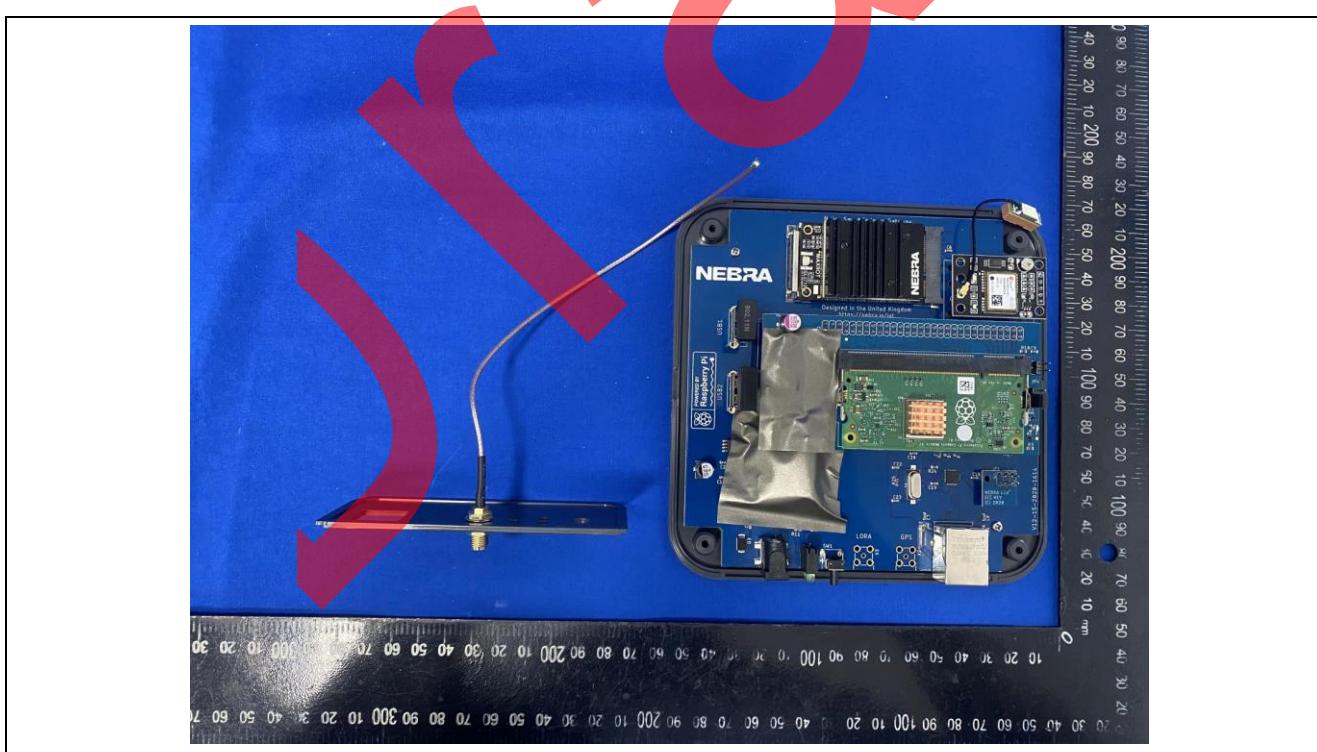


Photo documentation

Details of: Internal view 03

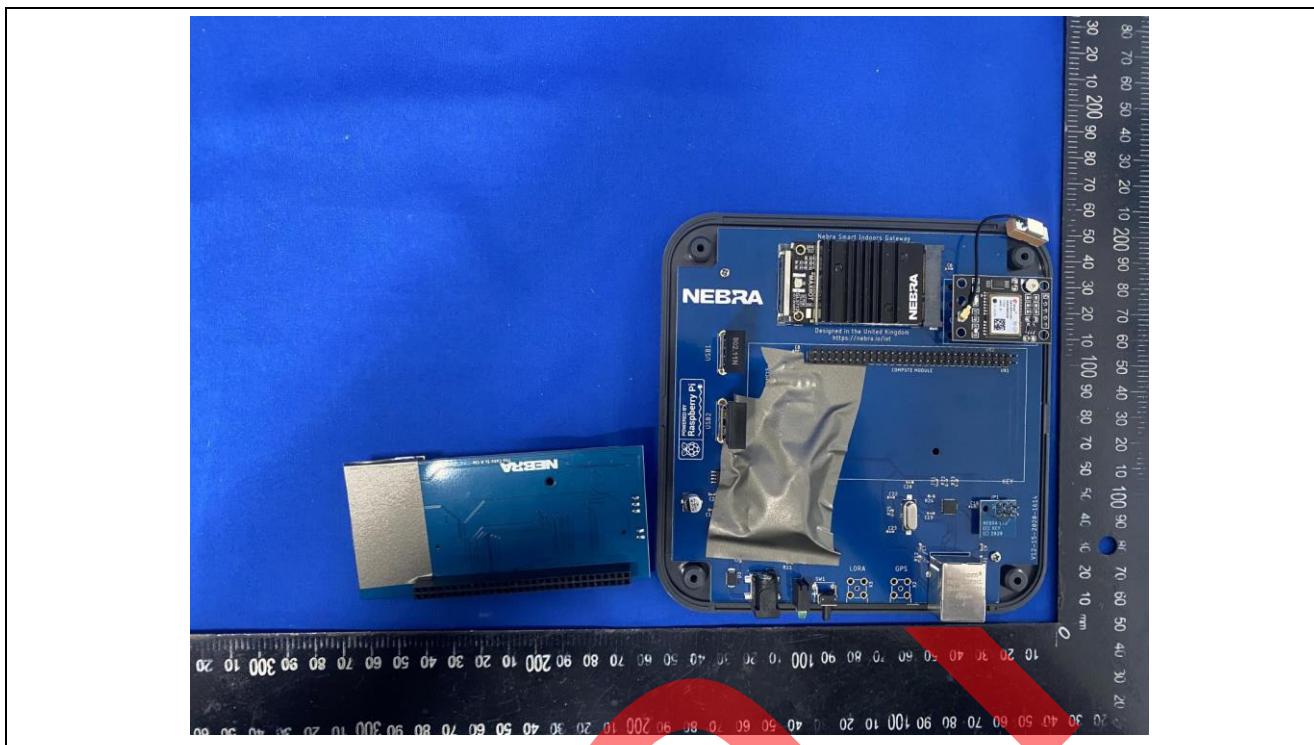


Details of: Internal view 04



Photo documentation

Details of: Internal view 05

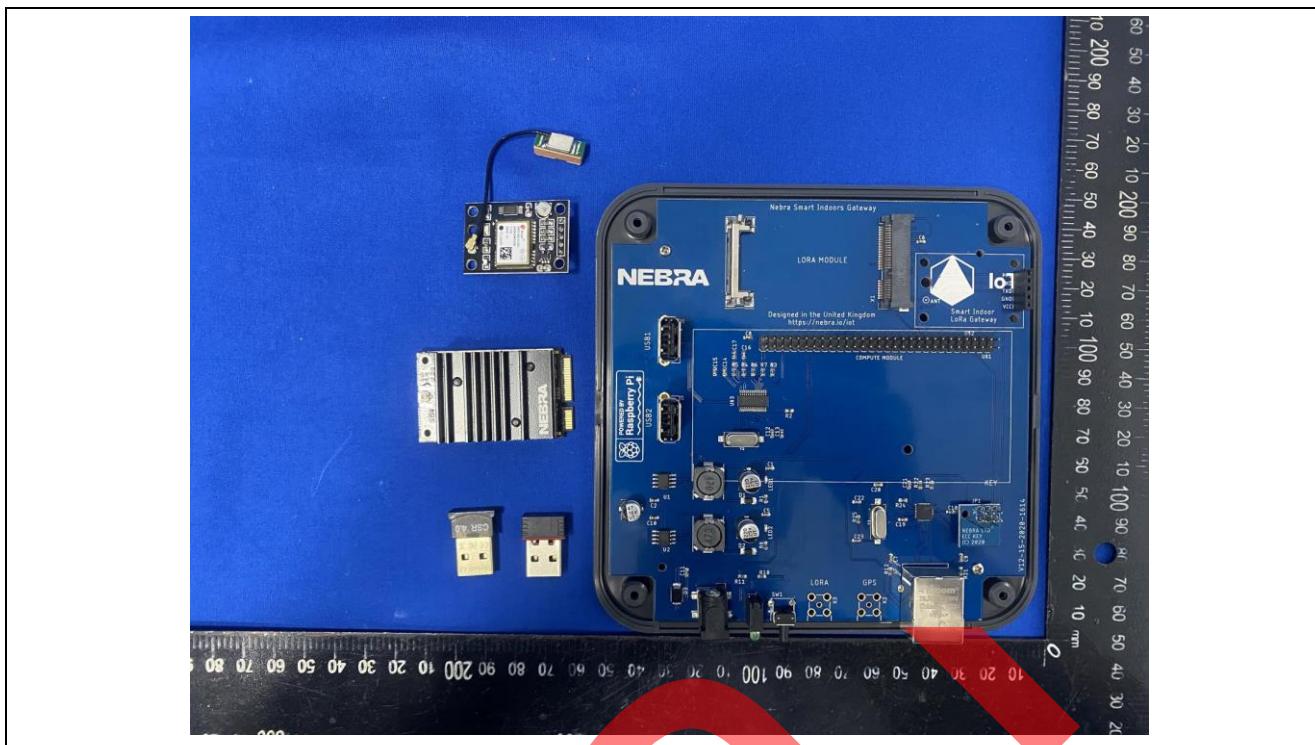


Details of: Internal view 06



Photo documentation

Details of: PCB view 01

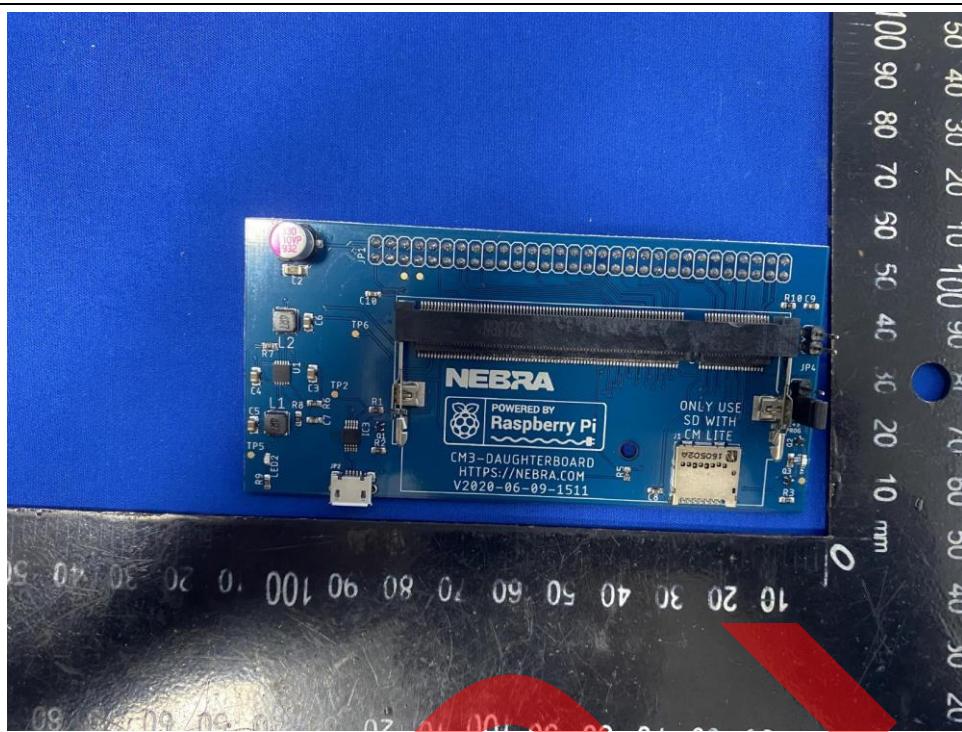

Details of: PCB view 02

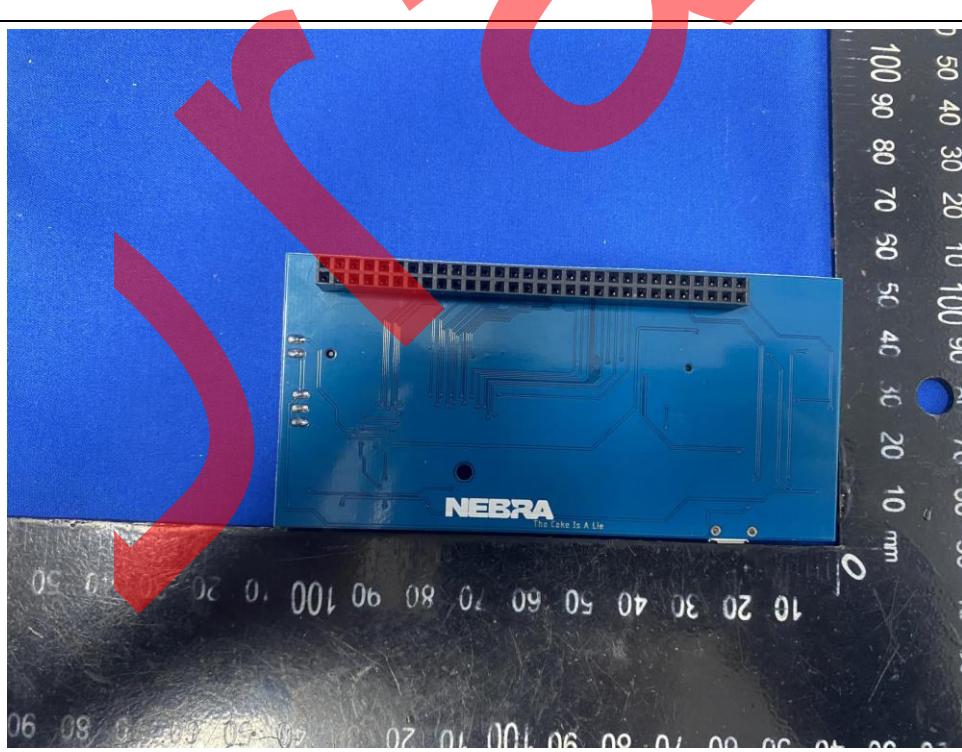


Photo documentation

Details of: PCB view 03



Details of: PCB view 04



Photo documentation

Details of: PCB view 05



Details of: PCB view 06


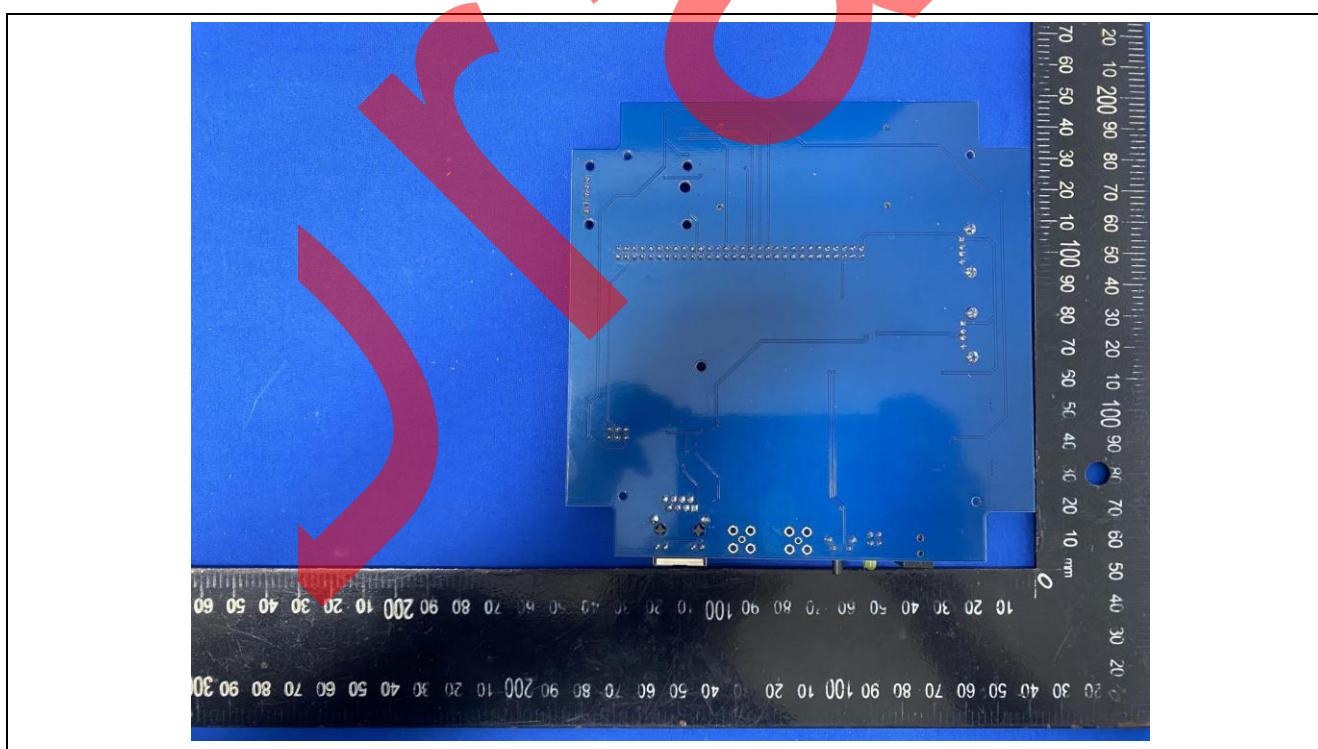


Photo documentation

Details of: PCB view 07

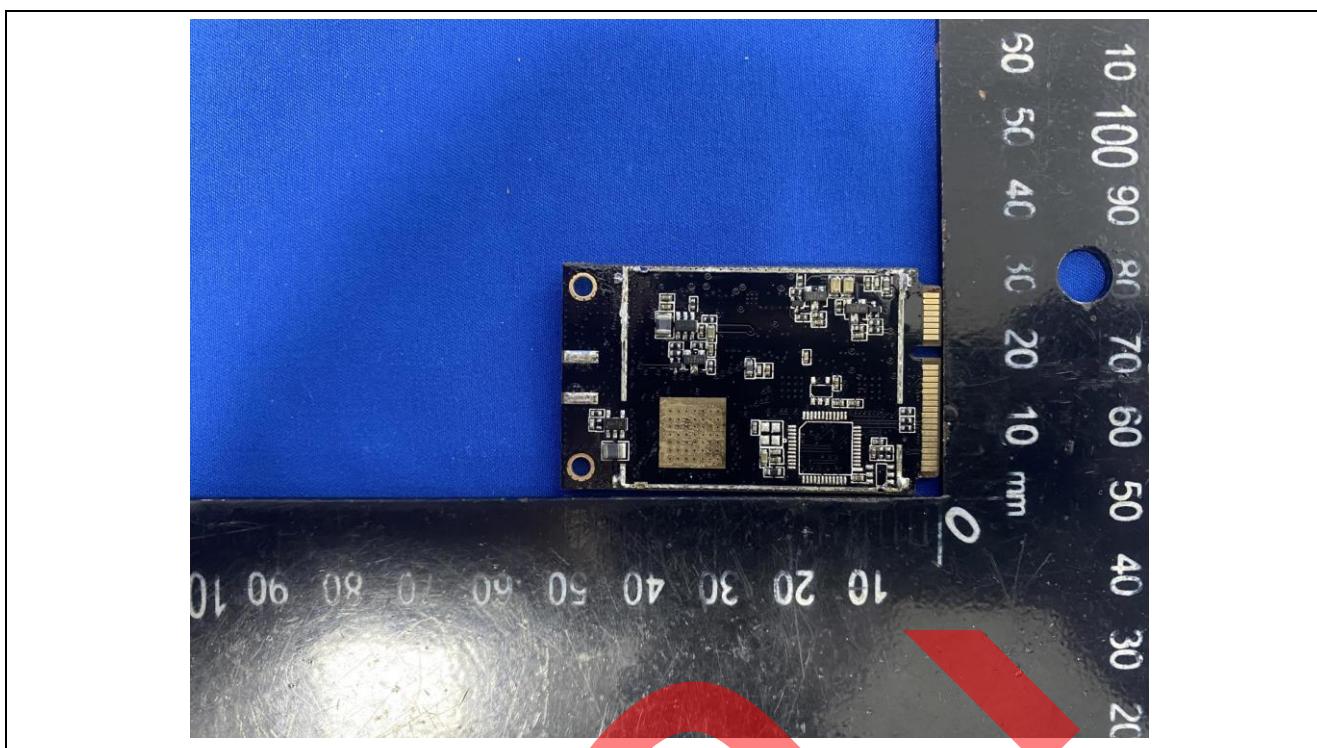

Details of: PCB view 08

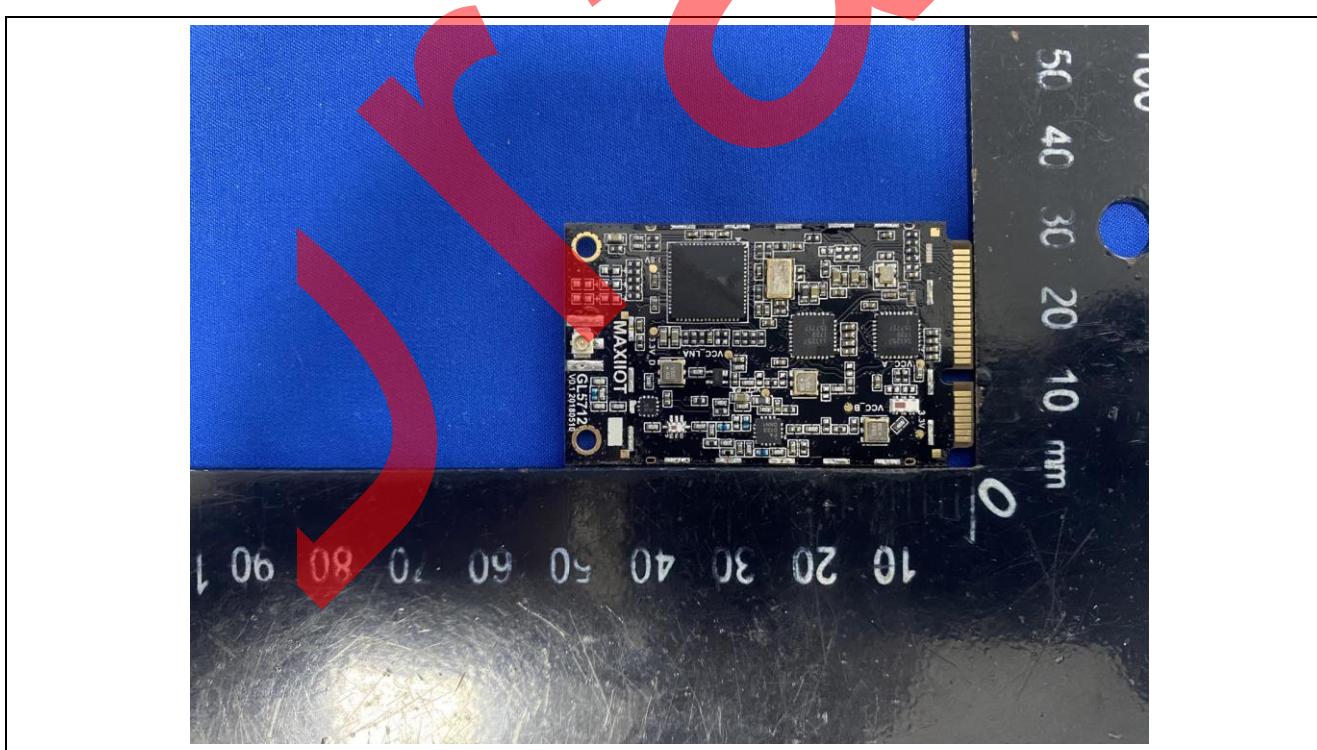
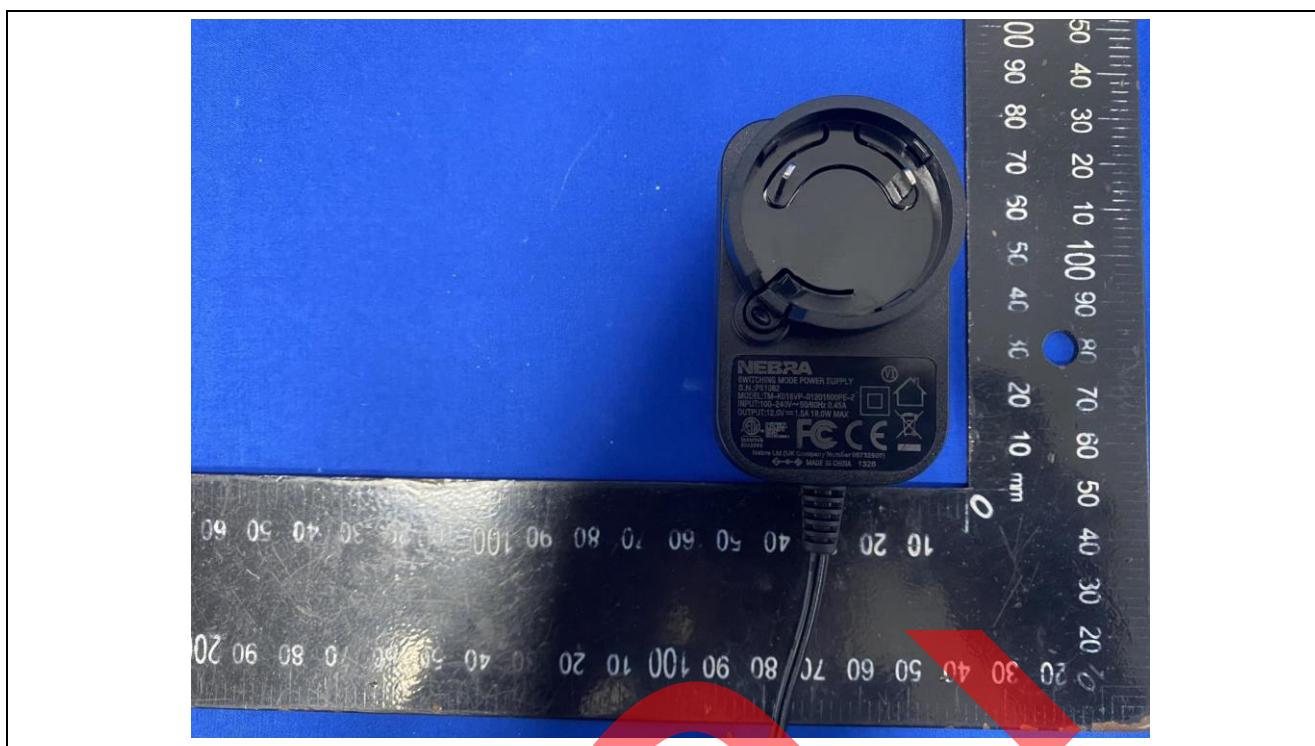


Photo documentation

Details of: Adapter view 01

**The report end**