


Bodysuit · Halter Neck · Closed Back

A stretch-fabric bodysuit with a snap-fastening gusset.

TECHNICAL DRAWING (from the same draft)

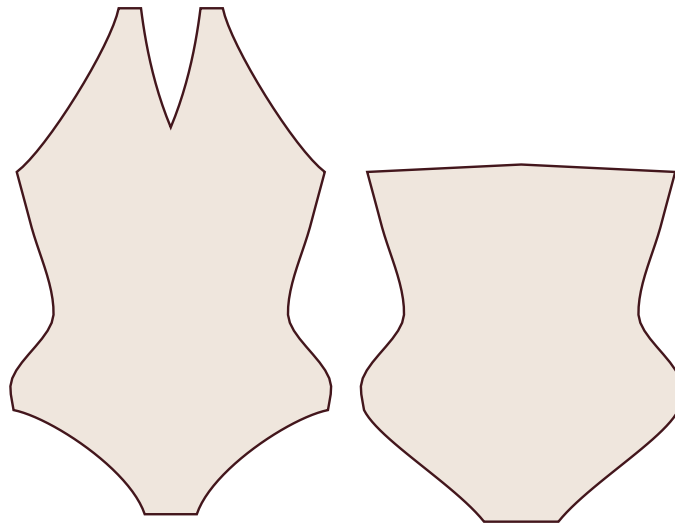

BODY MEASUREMENTS FOR THIS PATTERN

Bust (body)	92 cm (36.2 in)
Waist (body)	70 cm (27.6 in)
Hip (body)	98 cm (38.6 in)
Finished bust (10 % negative ease)	82.8 cm (32.6 in)
Front length, shoulder to crotch	68 cm (26.8 in)
Side height, underarm to leg	32 cm (12.6 in)

PATTERN PIECES

Front — 1 fabric
 Back — 1 fabric
 Snap gusset — 1 fabric + 1 cotton
 Neck tie — 2 fabric (folded in half lengthwise)

MATERIALS

Fabric: lycra, microfiber or stretch lace with good recovery (at least 40 % stretch across the width): 1 m (1.1 yd).
 Cotton lining for the gusset: 12 × 15 cm (4.7 × 6 in). 3 lingerie snap fasteners.
 Lingerie elastic, 8 mm (3/8 in): 2.5 m (2.7 yd) (legs, neckline and armholes). Neck tie in the same fabric.

HOW TO PRINT

A4: print at 100 % ("Actual size") with "Fit to page" turned off. Follow the assembly map.





Plotter: send the sheet at actual size as it is (the file is already at 1:1 scale).

Before cutting, measure the test square: 10 × 10 cm (3.94 × 3.94 in).

ORDER OF CONSTRUCTION

1. Cut with the greatest stretch running across. Check the torso length on a sample: it is the measurement that varies most from body to body.
2. Attach the straps or the neck tie at the fitting.
3. Close the side seams with a serger or zigzag.
4. Apply elastic to the neckline, armholes and legs, 10 % shorter than the edge.
5. Sew the gusset with its lining and the snap fasteners for the closure.

Pattern drafted with classic pattern-making formulas from the measurements above (one size), for stretch fabric. A 0.6 cm (1/4 in) allowance is included. Make a first sample in scrap fabric.

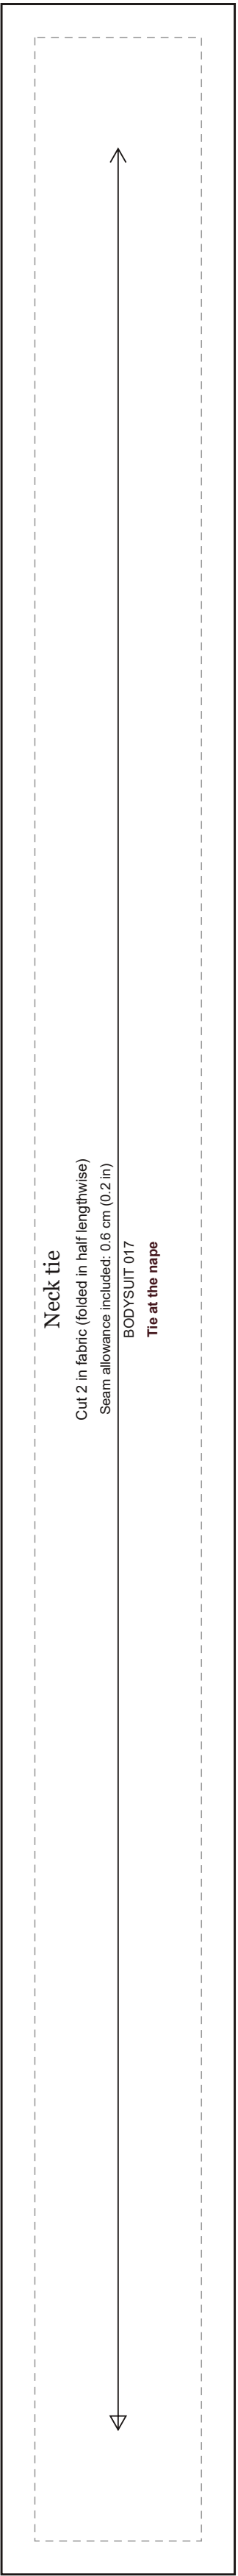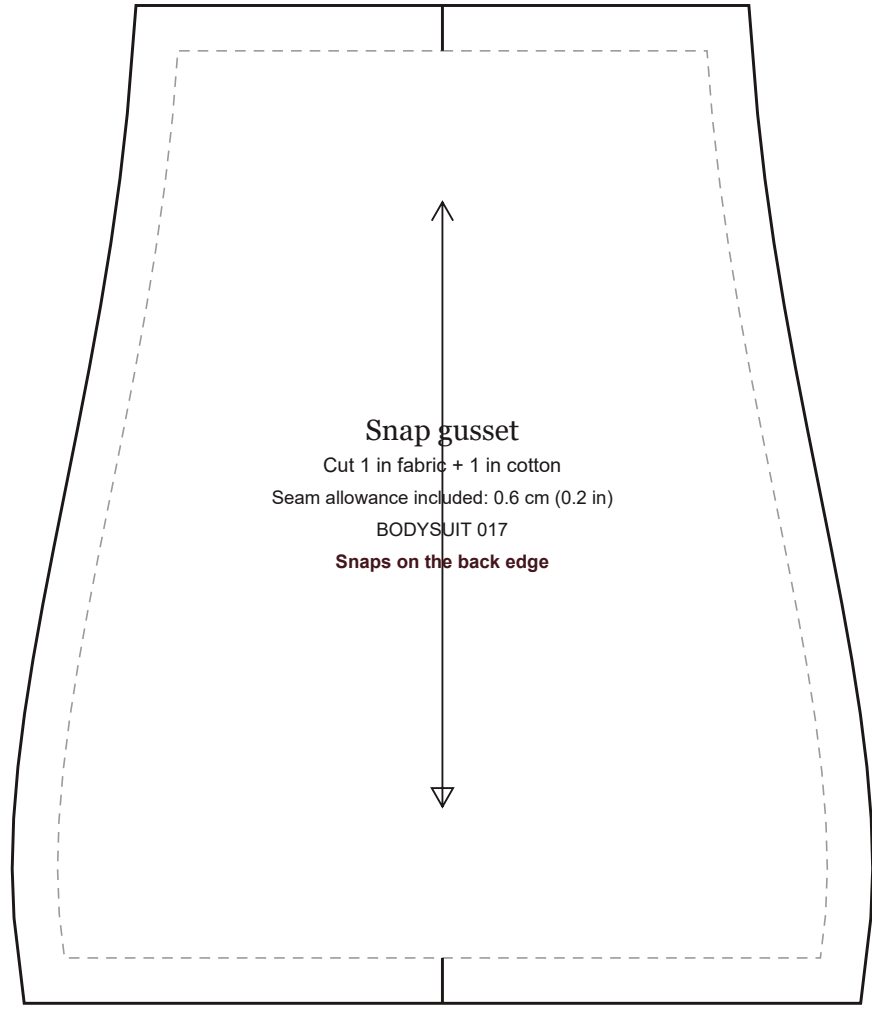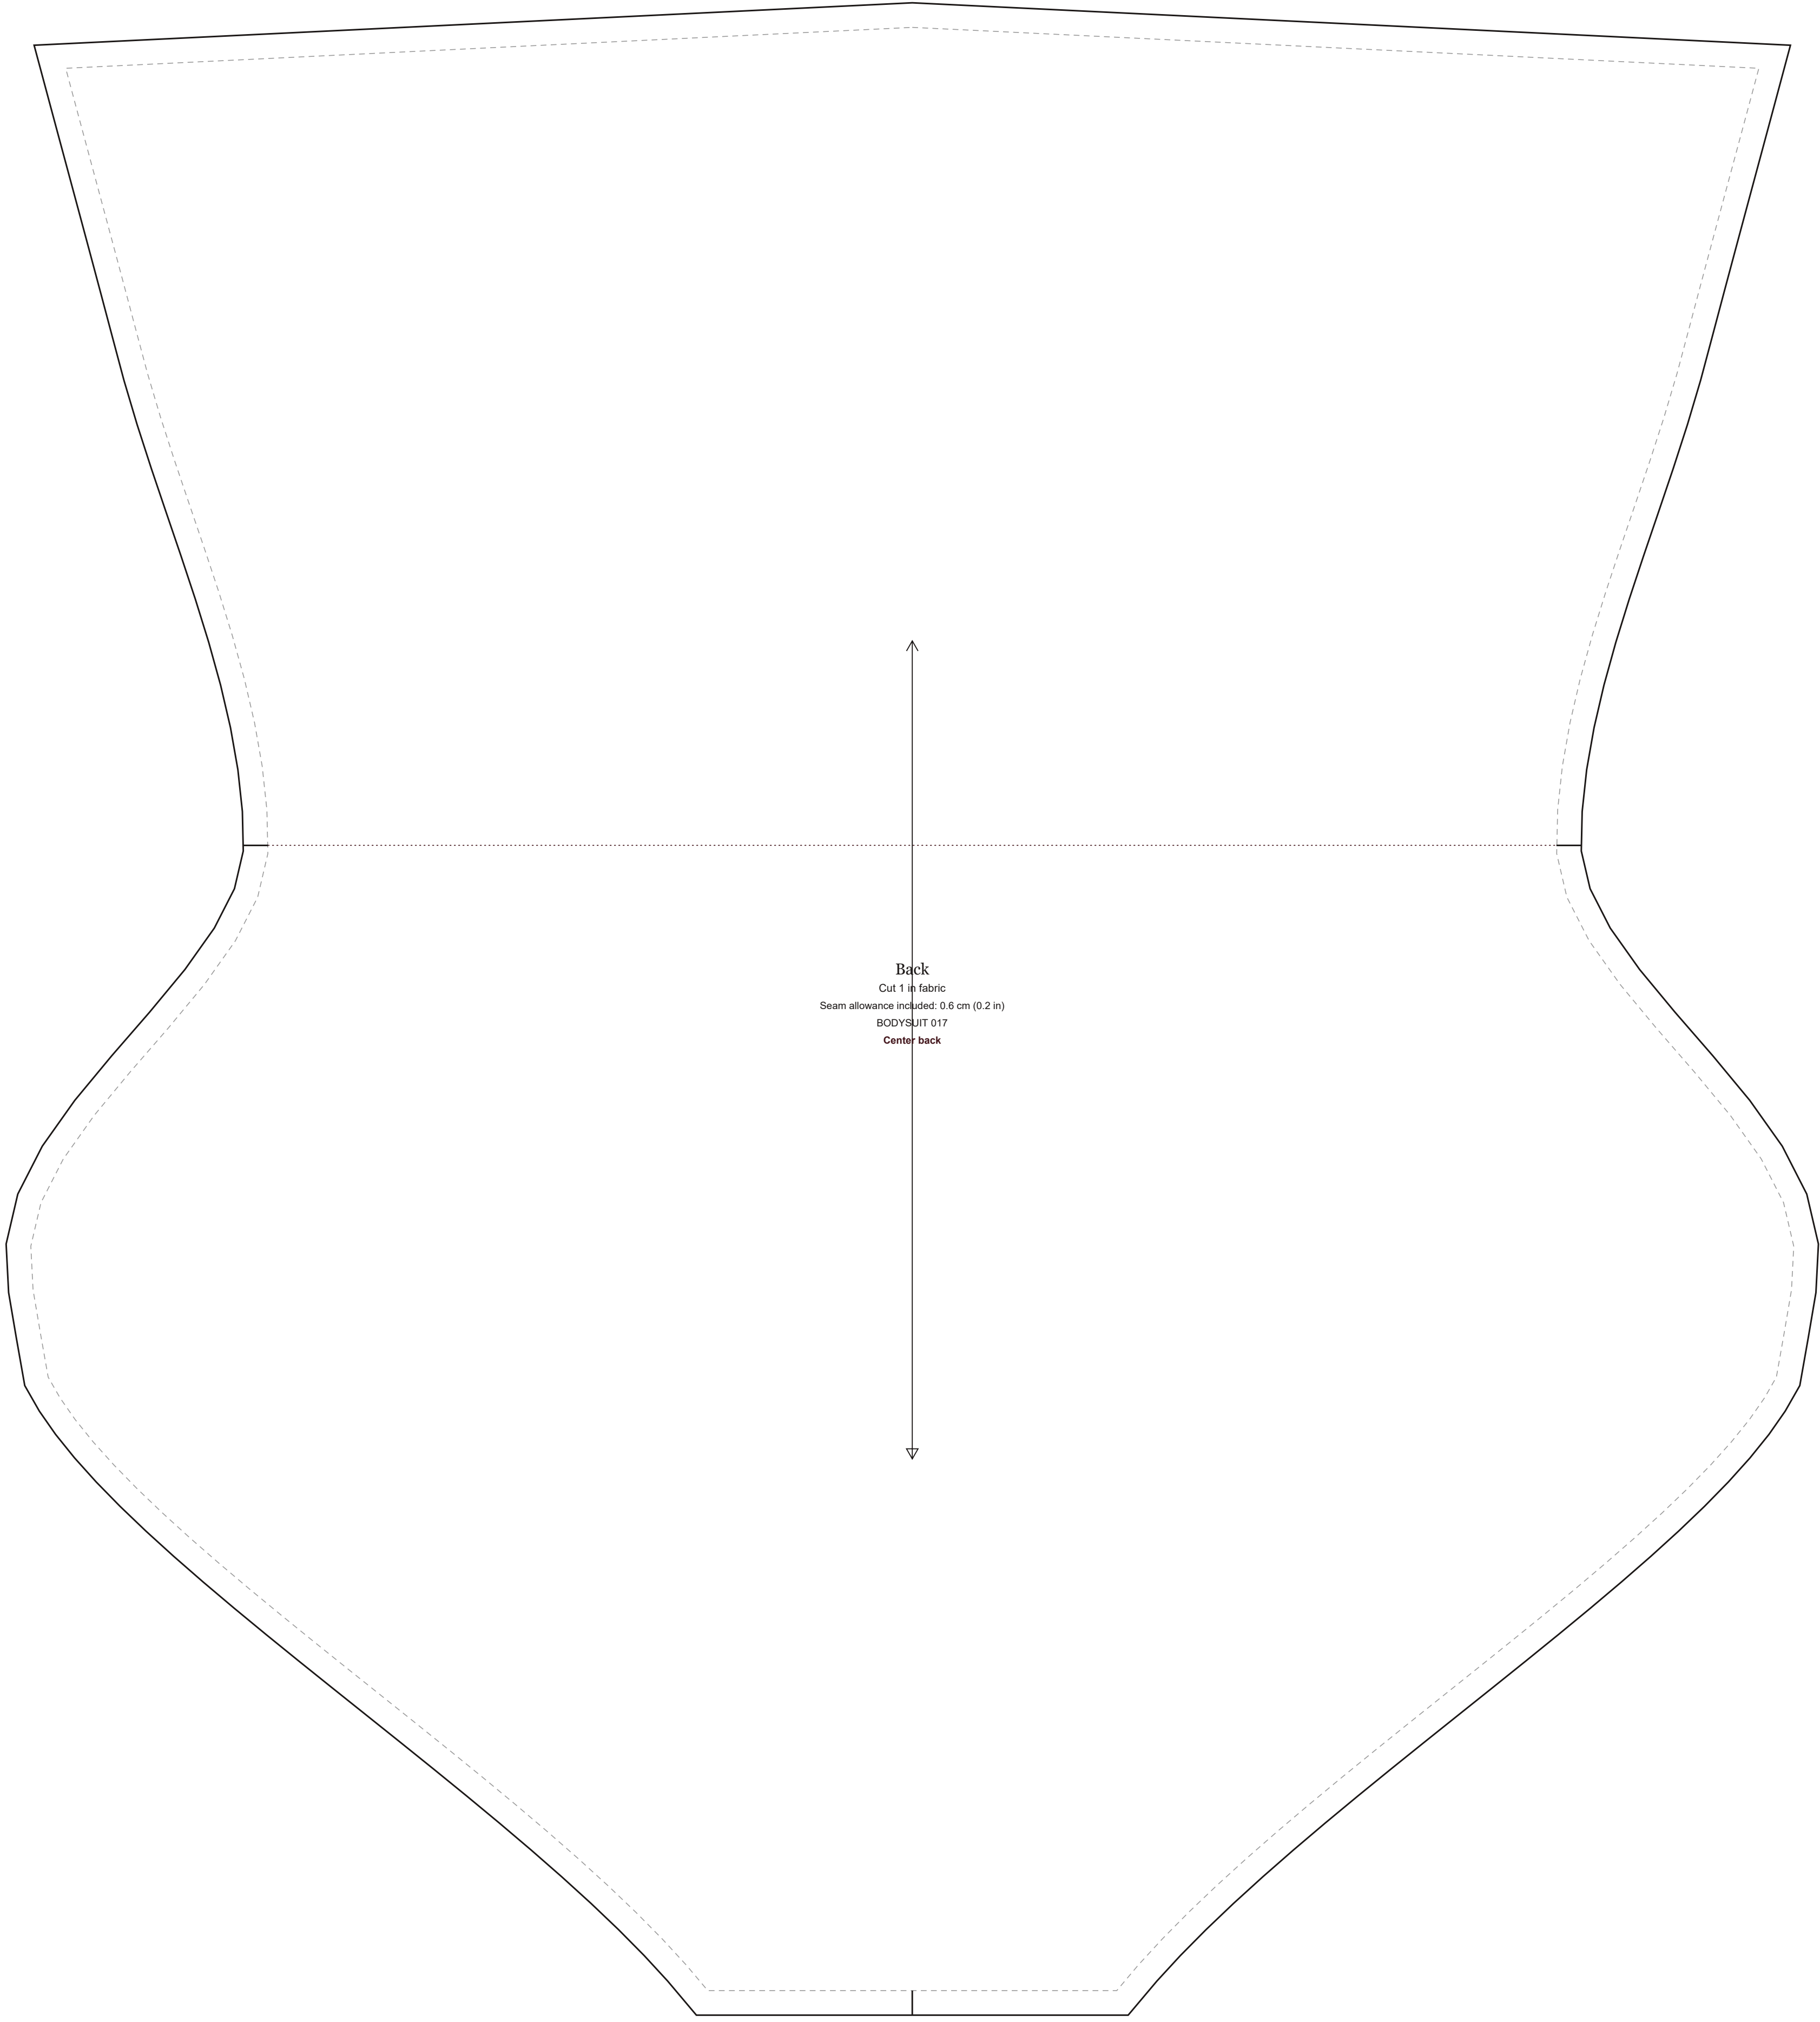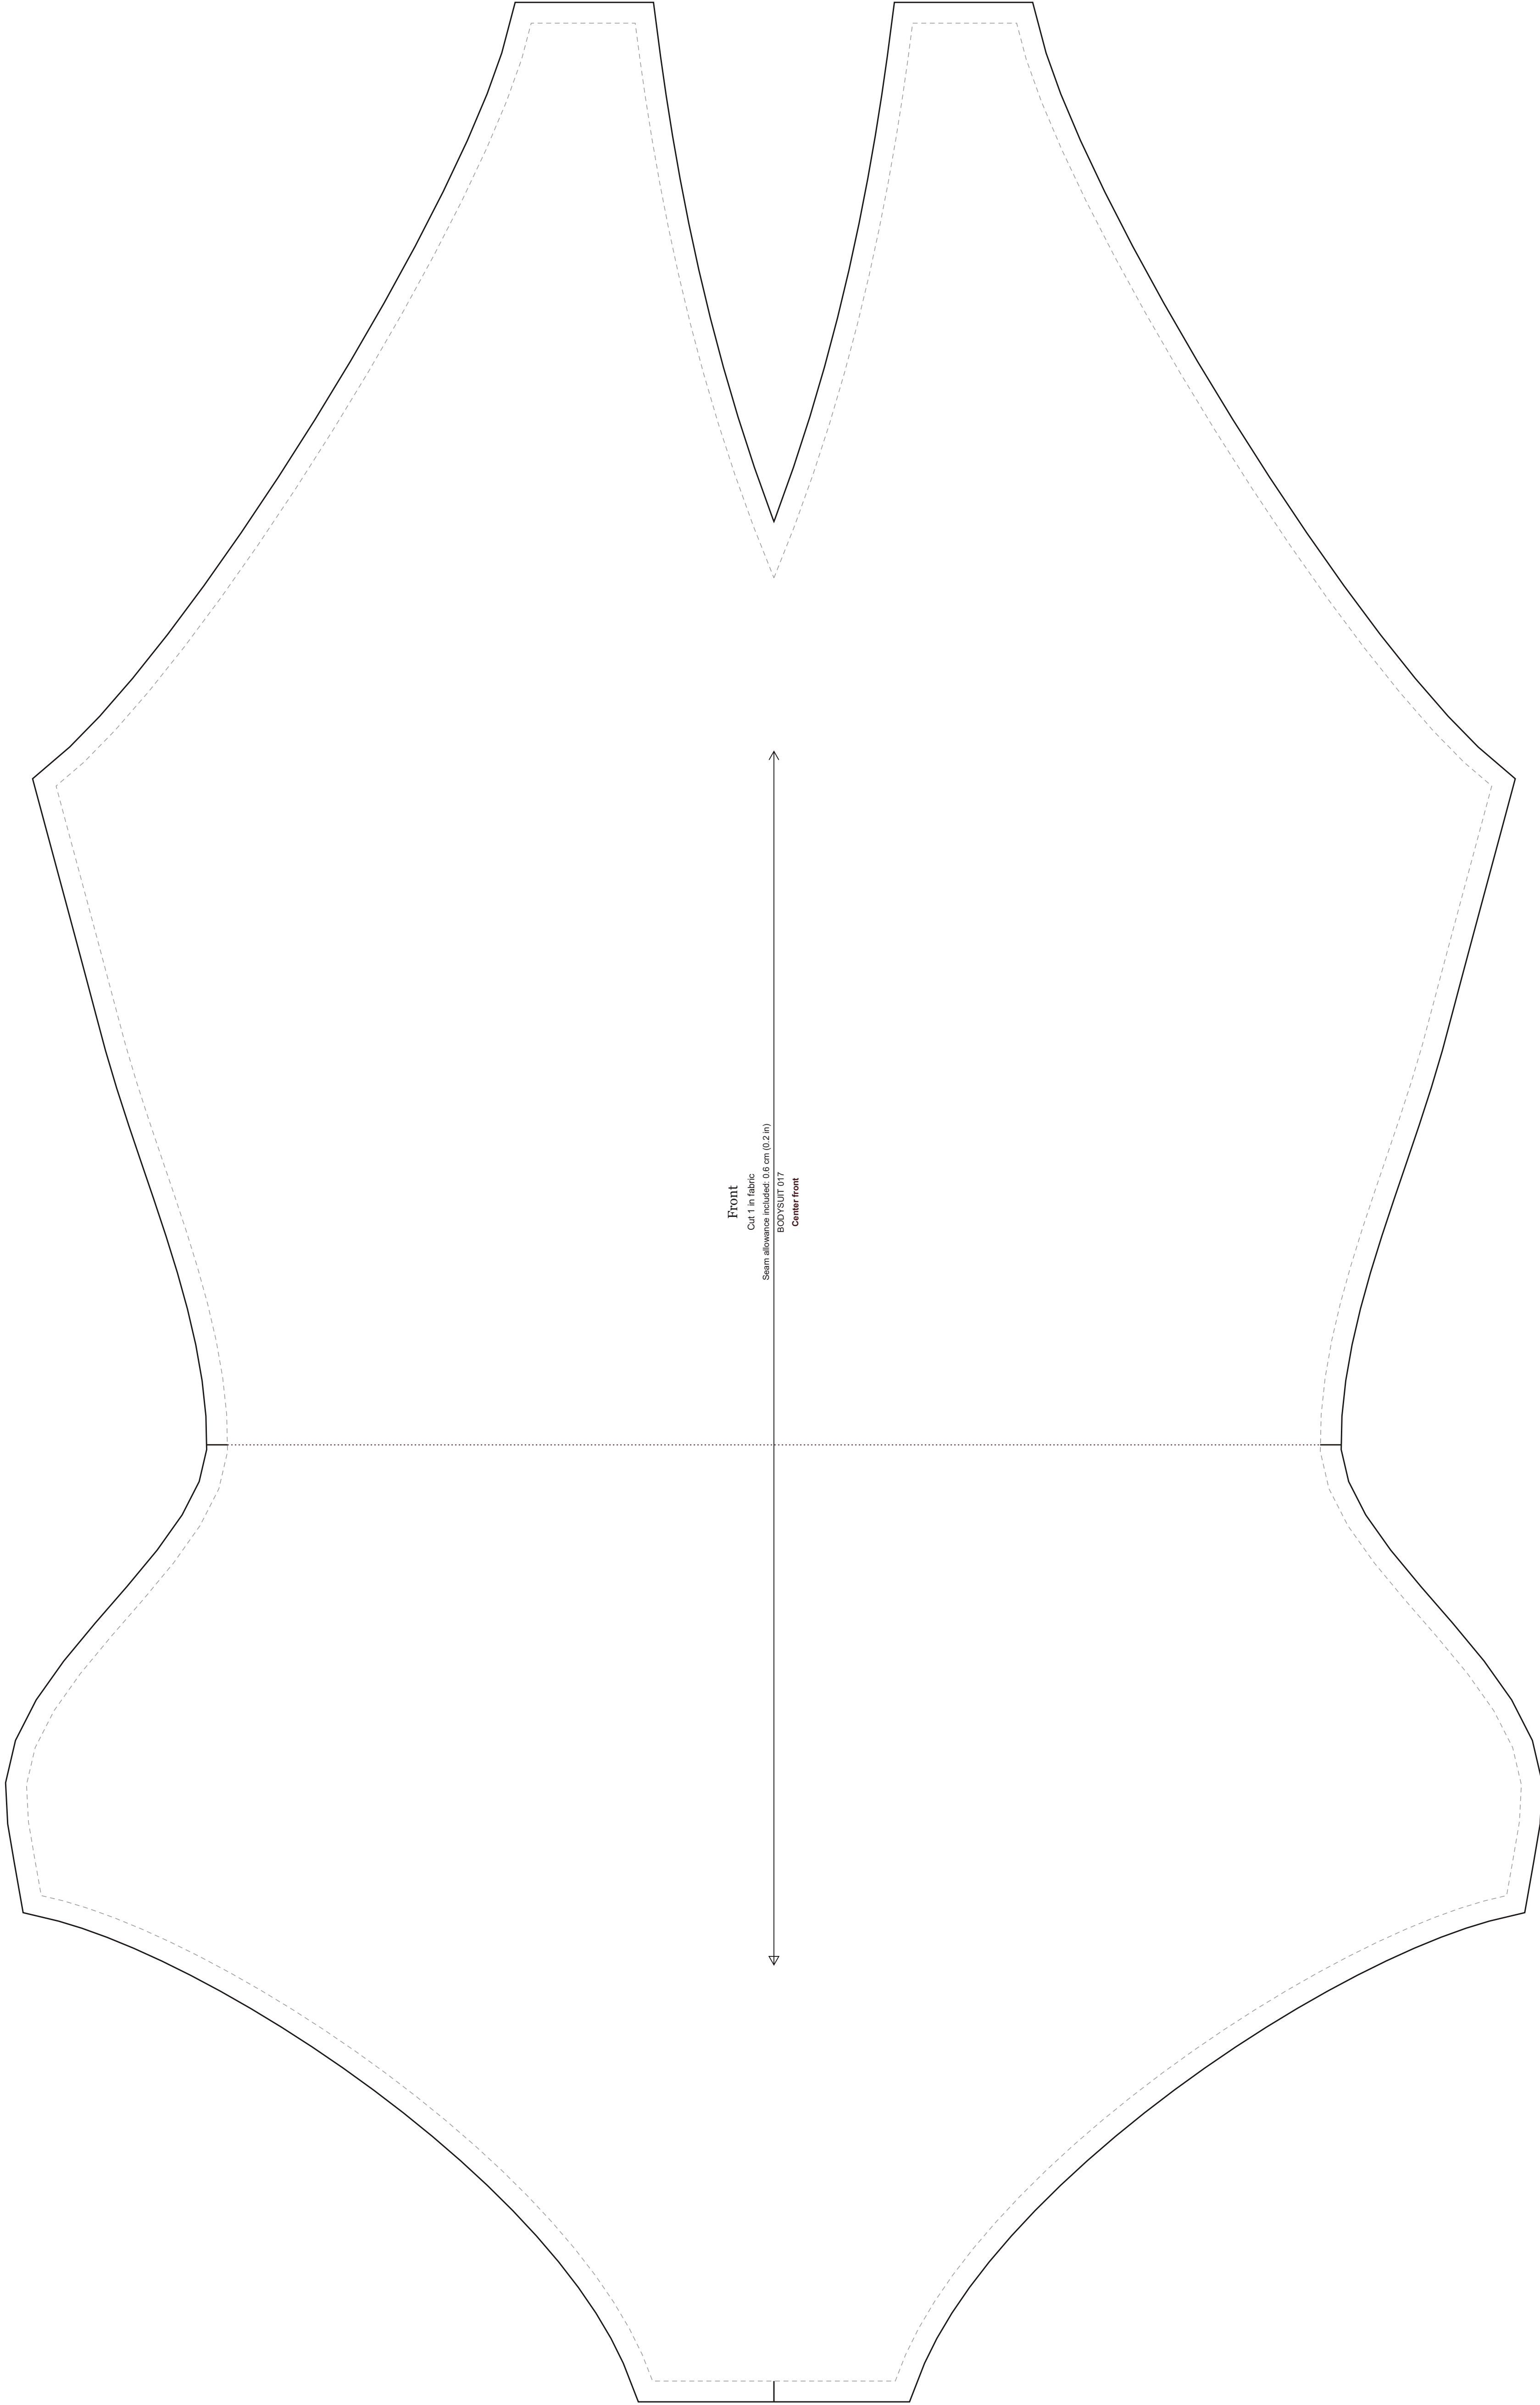

TEST SQUARE
It must measure 10 x 10 cm
(2.94 x 3.94 in). If it does not,
check you printed at 100 %
(*Actual size*, no scaling).

BODYSUIT 017