


Duke®

DY 2210N-PW

Automatic Pocket Welting Machine With Laser

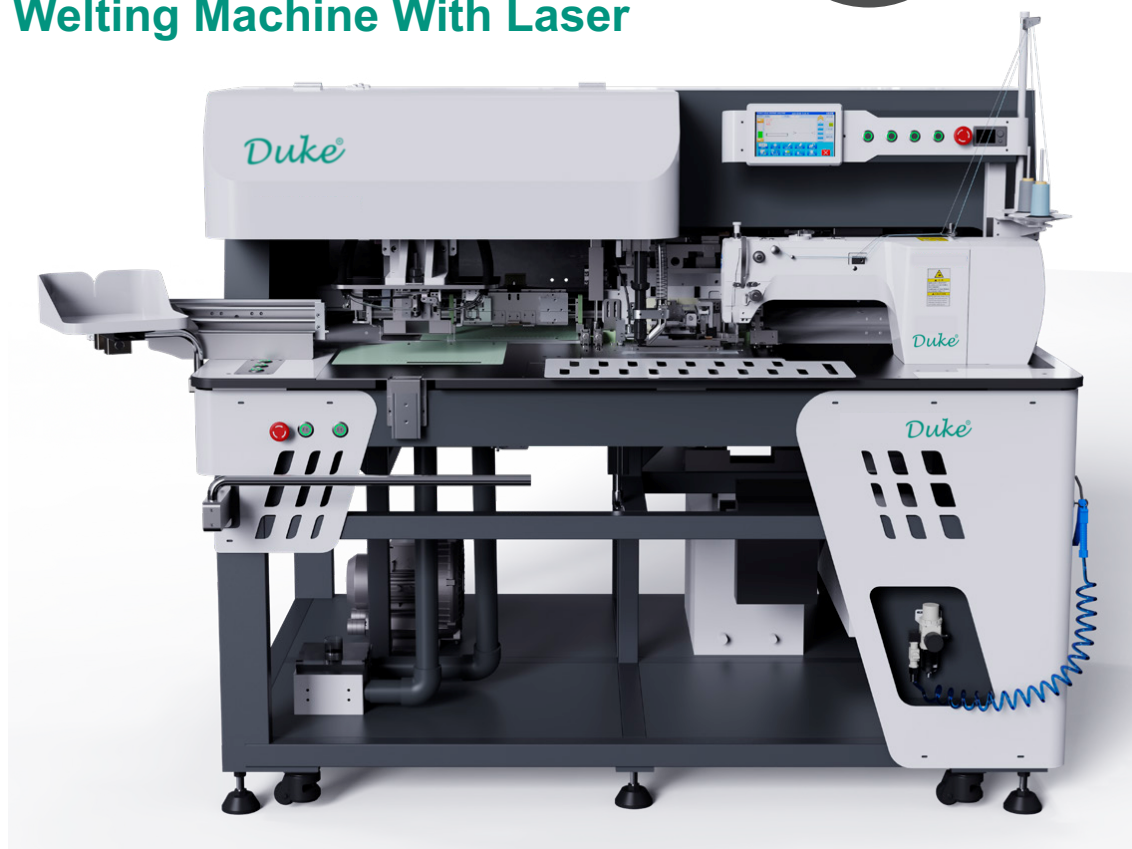

Application


- Pocket opening with laser, automatic folding, automatic feeding, automatic sewing process one-time completion, high-quality and efficient.
- 80-100w laser power adjustable, suitable for different fabrics.
- Infrared positioning function, accurate positioning, simple operation.
- The intelligent induction, automatic stopping function.

Scope of application:

- It is suitable for opening and sewing of all kinds of pockets such as single side pocket, double side pocket, zipper pocket, single side zipper pocket, double side zipper pocket etc.

Performance Advantage


- X and Y are driven by servo motors, which have the characteristics of fast speed, light sound and long service life. All key parts are imported parts.
- The automatic non-ironing pocket folding mechanism adopts automatic cylinder folding technology to improve production efficiency and save labor.
- The internal pressure frame automatically shrinks the mechanism, so that the edge stitch changes of the pocket are not limited, and the efficiency is 3 times that of ordinary pocket opening.

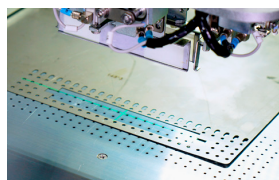

Infrared positioning




Pocket opening with laser

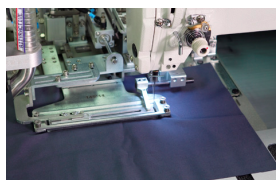

Automatic sewing

Range of application



Specification

Machine head	2210 Pattern Sewing Machine head
Needle	DPx17(12#14#)
Head sewing speed	1800-2800 rpm
Stitch programming storage capacity	Operation screen input mode
Trace programming storage capacity	Can store up to 999 input of pattens
Stitch distance	1.0mm-3.5mm
Presser foot rising height	60mm-80mm
Sewing pocket range	X:100mm-220mm:Y:10mm-35mm
Cloth positioning	Infrared spotlights
Sewing pocket speed	30-40 seconds/piece (depending on the speed of the worker)
Folding pocket mode	Fold the pocket simultaneously in all four directions
Pocket opening mode	80-100Wlaser cutting mode
Sewing working mode	Pocket opening /folding/sewing/cutting/ bartacking
Cloth feeding drive method	(750w) Servo motor driven(750W)
Power supply	AC 220V
Air pressure/air pressure consumption	0.6Mpa(6kg/cm);22dm/min
Weight	600 Kg
Thread broken induction	With intelligent wire break induction
Packing size	192*142*155cm



HARI CHAND ANAND & CO.

Corporate Head Office:

A-94/1, Okhla Industrial Area Phase II, New Delhi - 110020

 **+91-8584068564 , 8860086712**

 **enquiry@grouphca.com**