# Provisioning storage

## Cloud Manager 3.7

Aksel Davis, Ben Cammett
April 22, 2020

This PDF was generated from https://docs.netapp.com/us-en/occm37/task_provisioning_storage.html on April 25, 2020. Always check docs.netapp.com for the latest.

# Table of Contents

Provisioning storage . . . 1
- Creating FlexVol volumes . . . 1
- Creating FlexVol volumes on the second node in an HA configuration . . . 4
- Creating aggregates . . . 4
- Provisioning iSCSI LUNs . . . 5
- Using FlexCache volumes to accelerate data access . . . 5

# Provisioning storage

You can provision additional NFS and CIFS storage for your Cloud Volumes ONTAP systems from Cloud Manager by managing volumes and aggregates. If you need to create iSCSI storage, you should do so from System Manager.

> All disks and aggregates must be created and deleted directly from Cloud Manager. You should not perform these actions from another management tool. Doing so can impact system stability, hamper the ability to add disks in the future, and potentially generate redundant cloud provider fees.

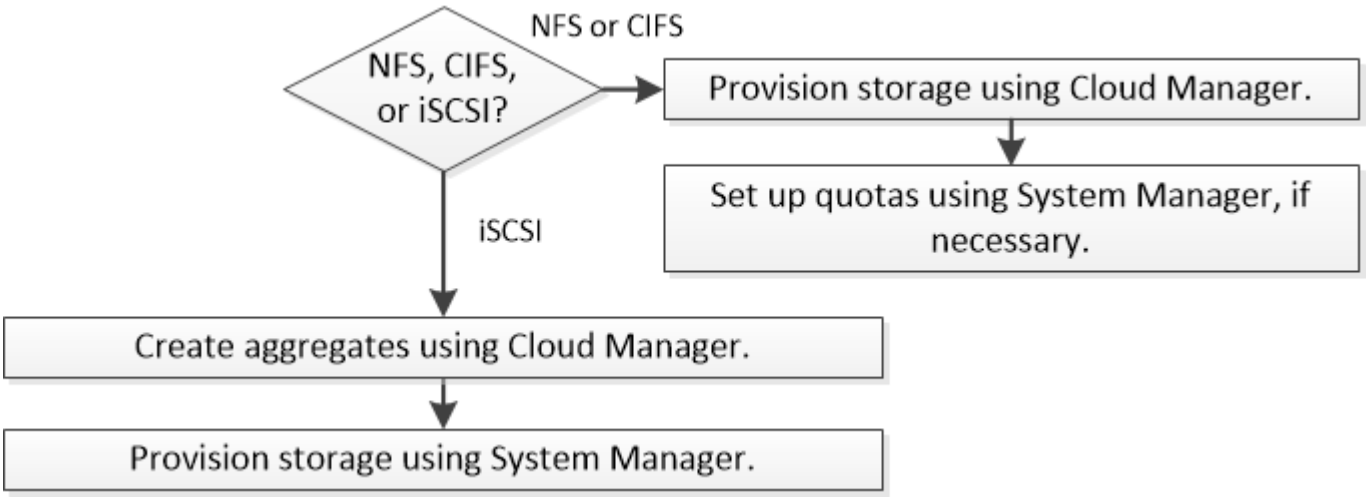


## Creating FlexVol volumes

If you need more storage after you launch a Cloud Volumes ONTAP system, you can create new FlexVol volumes for NFS or CIFS from Cloud Manager.

*Before you begin*

If you want to use CIFS in AWS, you must have set up DNS and Active Directory. For details, see Networking requirements for Cloud Volumes ONTAP for AWS.

*Steps*

1. On the Working Environments page, double-click the name of the Cloud Volumes ONTAP system on which you want to provision FlexVol volumes.
2. Create a new volume on any aggregate or on a specific aggregate:

| Action | Steps |
|---|---|
| Create a new volume and let Cloud Manager choose the containing aggregate | Click **Add New Volume**. |

| Action | Steps |
| --- | --- |
| Create a new volume on a specific aggregate | a. Click the menu icon, and then click **Advanced** > **Advanced allocation**.<br>b. Click the menu for an aggregate.<br>c. Click **Create volume**. |

3. Enter details for the new volume, and then click **Continue**.

   Some of the fields in this page are self-explanatory. The following table describes fields for which you might need guidance:

| Field | Description |
| --- | --- |
| Size | The maximum size that you can enter largely depends on whether you enable thin provisioning, which enables you to create a volume that is bigger than the physical storage currently available to it. |
| Access control (for NFS only) | An export policy defines the clients in the subnet that can access the volume. By default, Cloud Manager enters a value that provides access to all instances in the subnet. |
| Permissions and Users / Groups (for CIFS only) | These fields enable you to control the level of access to a share for users and groups (also called access control lists or ACLs). You can specify local or domain Windows users or groups, or UNIX users or groups. If you specify a domain Windows user name, you must include the user's domain using the format domain\username. |
| Snapshot Policy | A Snapshot copy policy specifies the frequency and number of automatically created NetApp Snapshot copies. A NetApp Snapshot copy is a point-in-time file system image that has no performance impact and requires minimal storage. You can choose the default policy or none. You might choose none for transient data: for example, tempdb for Microsoft SQL Server. |

4. If you chose the CIFS protocol and the CIFS server has not been set up, specify details for the server in the Create a CIFS Server dialog box, and then click **Save and continue**:

| Field | Description |
| --- | --- |
| DNS Primary and Secondary IP Address | The IP addresses of the DNS servers that provide name resolution for the CIFS server.<br><br>The listed DNS servers must contain the service location records (SRV) needed to locate the Active Directory LDAP servers and domain controllers for the domain that the CIFS server will join. |

| Field | Description |
| --- | --- |
| Active Directory Domain to join | The FQDN of the Active Directory (AD) domain that you want the CIFS server to join. |
| Credentials authorized to join the domain | The name and password of a Windows account with sufficient privileges to add computers to the specified Organizational Unit (OU) within the AD domain. |
| CIFS server NetBIOS name | A CIFS server name that is unique in the AD domain. |
| Organizational Unit | The organizational unit within the AD domain to associate with the CIFS server. The default is CN=Computers.<br>• To configure AWS Managed Microsoft AD as the AD server for Cloud Volumes ONTAP, you should enter **OU=Computers,OU=corp** in this field.<br>• To configure Azure AD Domain Services as the AD server for Cloud Volumes ONTAP, you should enter **OU=AADDC Computers** or **OU=AADDC Users** in this field.<br>Azure Documentation: Create an Organizational Unit (OU) in an Azure AD Domain Services managed domain |
| DNS Domain | The DNS domain for the Cloud Volumes ONTAP storage virtual machine (SVM). In most cases, the domain is the same as the AD domain. |
| NTP Server | Select **Use Active Directory Domain** to configure an NTP server using the Active Directory DNS. If you need to configure an NTP server using a different address, then you should use the API. See the Cloud Manager API Developer Guide for details. |

5. On the Usage Profile, Disk Type, and Tiering Policy page, choose whether you want to enable storage efficiency features, choose a disk type, and edit the tiering policy, if needed.

   For help, refer to the following:

   - Understanding volume usage profiles
   - Sizing your system in AWS
   - Sizing your system in Azure
   - Data tiering overview

6. Click **Go**.

*Result*

Cloud Volumes ONTAP provisions the volume.

*After you finish*

If you provisioned a CIFS share, give users or groups permissions to the files and folders and verify that those users can access the share and create a file.

If you want to apply quotas to volumes, you must use System Manager or the CLI. Quotas enable you to restrict or track the disk space and number of files used by a user, group, or qtree.

# Creating FlexVol volumes on the second node in an HA configuration

By default, Cloud Manager creates volumes on the first node in an HA configuration. If you need an active-active configuration, in which both nodes serve data to clients, you must create aggregates and volumes on the second node.

*Steps*

1. On the Working Environments page, double-click the name of the Cloud Volumes ONTAP working environment on which you want to manage aggregates.
2. Click the menu icon and then click **Advanced** > **Advanced allocation**.
3. Click **Add Aggregate** and then create the aggregate.
4. For Home Node, choose the second node in the HA pair.
5. After Cloud Manager creates the aggregate, select it and then click **Create volume**.
6. Enter details for the new volume, and then click **Create**.

*After you finish*

You can create additional volumes on this aggregate if required.

> For HA pairs deployed in multiple AWS Availability Zones, you must mount the volume to clients by using the floating IP address of the node on which the volume resides.

# Creating aggregates

You can create aggregates yourself or let Cloud Manager do it for you when it creates volumes. The benefit of creating aggregates yourself is that you can choose the underlying disk size, which enables you to size your aggregate for the capacity or the performance that you need.

*Steps*

1. On the Working Environments page, double-click the name of the Cloud Volumes ONTAP instance on which you want to manage aggregates.
2. Click the menu icon, and then click **Advanced** > **Advanced allocation**.
3. Click **Add Aggregate** and then specify details for the aggregate.

For help with disk type and disk size, see Planning your configuration.

4. Click **Go**, and then click **Approve and Purchase**.

# Provisioning iSCSI LUNs

If you want to create iSCSI LUNs, you need to do so from System Manager.

*Before you begin*

- The Host Utilities must be installed and set up on the hosts that will connect to the LUN.
- You must have recorded the iSCSI initiator name from the host. You need to supply this name when you create an igroup for the LUN.
- Before you create volumes in System Manager, you must ensure that you have an aggregate with sufficient space. You need to create aggregates in Cloud Manager. For details, see Creating aggregates.

*About this task*

These steps describe how to use System Manager for version 9.3 and later.

*Steps*

1. Log in to System Manager.
2. Click **Storage** > **LUNs**.
3. Click **Create** and follow the prompts to create the LUN.
4. Connect to the LUN from your hosts.

   For instructions, see the Host Utilities documentation for your operating system.

# Using FlexCache volumes to accelerate data access

A FlexCache volume is a storage volume that caches NFS read data from an origin (or source) volume. Subsequent reads to the cached data result in faster access to that data.

You can use FlexCache volumes to speed up access to data or to offload traffic from heavily accessed volumes. FlexCache volumes help improve performance, especially when clients need to access the same data repeatedly, because the data can be served directly without having to access the origin volume. FlexCache volumes work well for system workloads that are read-intensive.

Cloud Manager does not provide management of FlexCache volumes at this time, but you can use the ONTAP CLI or ONTAP System Manager to create and manage FlexCache volumes:

- FlexCache Volumes for Faster Data Access Power Guide
- Creating FlexCache volumes in System Manager

Starting with the 3.7.2 release, Cloud Manager generates a FlexCache license for all new Cloud Volumes ONTAP systems. The license includes a 500 GB usage limit.

> To generate the license, Cloud Manager needs to access https://ipa-signer.cloudmanager.netapp.com. Make sure that this URL is accessible from your firewall.

**Copyright Information**

Copyright © 2019–2020 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

**Trademark Information**

NETAPP, the NETAPP logo, and the marks listed at http://www.netapp.com/TM are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.