
ALINOX SERIES

Nominal Flow: 30 m³/h



6PS-30



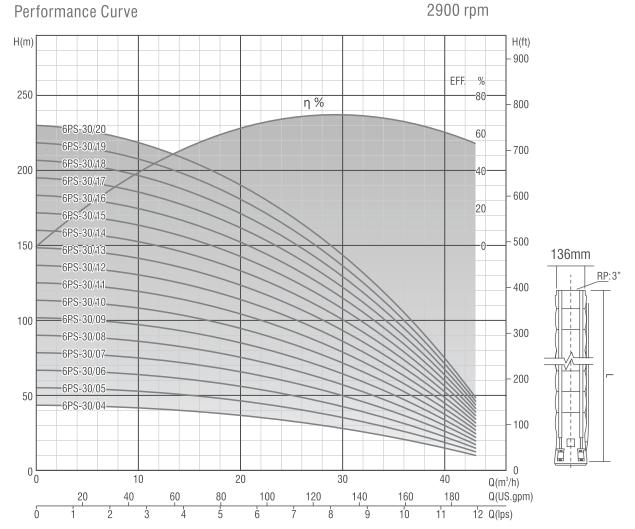

Model	Motor Power		Q(m³/h)	0	14.4	21.6	28.8	36	43.2	Height	Weight
	kW	HP	Q(lps)	0	4	6	8	10	12	L (mm)	(kg)
6PS-30/04	4	5.5	(п	43	39	35	29	20	10	649	13
6PS-30/05	5.5	7.5		55	50	45	37	25	12	744	15
6PS-30/06	5.5	7.5		67	60	54	44	31	15	839	17
6PS-30/07	7.5	10		78	71	63	52	36	17	934	19
6PS-30/08	7.5	10		90	82	73	59	42	19	1029	21
6PS-30/09	9.3	12.5		101	93	82	67	47	22	1124	23
6PS-30/10	9.3	12.5		112	103	92	75	52	24	1219	25
6PS-30/11	9.3	12.5		124	113	101	83	57	24	1314	27
6PS-30/12	11	15	Head(m)	137	124	110	90	62	29	1409	29
6PS-30/13	11	15	He	148	134	120	98	68	31	1504	31
6PS-30/14	13	17.5		160	146	129	105	73	34	1599	33
6PS-30/15	13	17.5		171	156	139	112	78	36	1694	36
6PS-30/16	15	20		183	166	147	120	83	39	1789	38
6PS-30/17	15	20		194	176	157	128	89	42	1884	40
6PS-30/18	18.5	25		207	187	166	135	94	44	1979	42
6PS-30/19	18.5	25		218	198	175	143	100	47	2074	44
6PS-30/20	18.5	25		229	208	185	151	105	49	2169	46


In view of continuous improvements in our design and process, the information, dimensions and specifications given herein are subject to change without notice.

STAINLESS STEEL SUBMERSIBLE PUMPS

www.algopumps.com

6PS-30

Nominal Flow: 30 m³/h	Outlet Size: 3"
Performance Curve	2900 rpm
H(m) 450 η %	EFF. η %
6PS=30/37	60

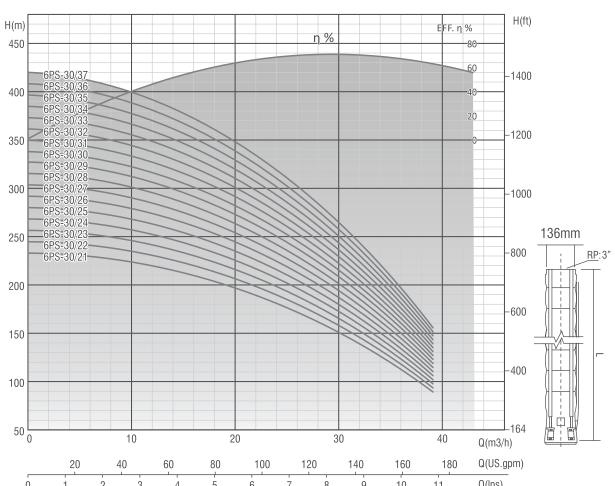

Model	Motor Power		Q(m³/h)	0	14.4	21.6	28.8	36.0	39	Height	Weight
	kW	HP	Q(lps)	0	4	6	8	10	10.8	L (mm)	(kg)
6PS-30/21	18.5	25		232	213	190	153	102	89	2264	48
6PS-30/22	22	30		244	223	200	165	108	93	2359	50
6PS-30/23	22	30		257	233	210	172	113	97	2454	52
6PS-30/24	22	30		268	243	219	180	119	101	2549	54
6PS-30/25	22	30		280	254	228	188	125	105	2644	56
6PS-30/26	22	30		291	265	238	196	130	109	2739	58
6PS-30/27	26	35		302	275	247	203	136	113	2834	60
6PS-30/28	26	35	Ē	314	286	255	211	142	117	2929	63
6PS-30/29	26	35	Head(m)	327	297	264	219	148	122	3024	65
6PS-30/30	26	35		339	306	273	225	154	126	3119	67
6PS-30/31	26	35		350	317	282	232	159	130	3214	69
6PS-30/32	30	40		360	328	391	240	165	135	3309	71
6PS-30/33	30	40		372	338	300	248	172	139	3404	73
6PS-30/34	30	40		383	345	310	254	178	144	3499	75
6PS-30/35	30	40		397	358	319	261	185	148	3594	77
6PS-30/36	37	50		408	369	328	269	192	152	3689	79
6PS-30/37	37	50		420	379	338	277	197	157	3784	81

In view of continuous improvements in our design and process, the information, dimensions and specifications given herein are subject to change without notice.